

Open in app ↗

Sign up

Sign in

Medium

 Search

The JSP CRUD operation App with Codes With Pankaj

7 min read · Aug 30, 2023



Codes With Pankaj

Follow



Listen



Share

CRUD stands for Create, Read, Update and Delete *operations* using a database and these are the *operations* which is the core of many applications.

What are JSP CRUD operations?

Create, Read/Retrieve, Update, and Delete are the four steps in the JSP CRUD process. The four basic roles of persistence storage are as follows.

The JSP CRUD operation can be defined as user interface conventions that allow the view, search, and modify information through computer-based forms and reports. JSP CRUD is a data-driven framework that makes use of HTTP action verbs in a consistent manner. There are a few key verbs in HTTP.

- **POST:** This method creates a new resource.
- **GET:** Retrieves information from a resource.
- **PUT:** Replaces/updates an existing resource with a new one.
- **DELETE:** Removes a resource from the system.

. . .

MySQL is an open-source relational database management system that can operate on various platforms. It is easy to manage.

Download my sql

<https://dev.mysql.com/downloads/installer/>

Download jstl.jar and mysql-connector.jar

[Download jstl1.2.jar file](#)

[Download mysql-connector.jar](#)

Creating MySQL Database

```
show databases;

create database cwp;

use cwp;


create table register(
  id int auto_increment primary key,
  name varchar(100),
  password varchar(100),
  email varchar(100),
  sex varchar(20),
  country varchar(100)
);

drop table register;


select * from register;

select * from users;
```


Directory Structure in Eclipse

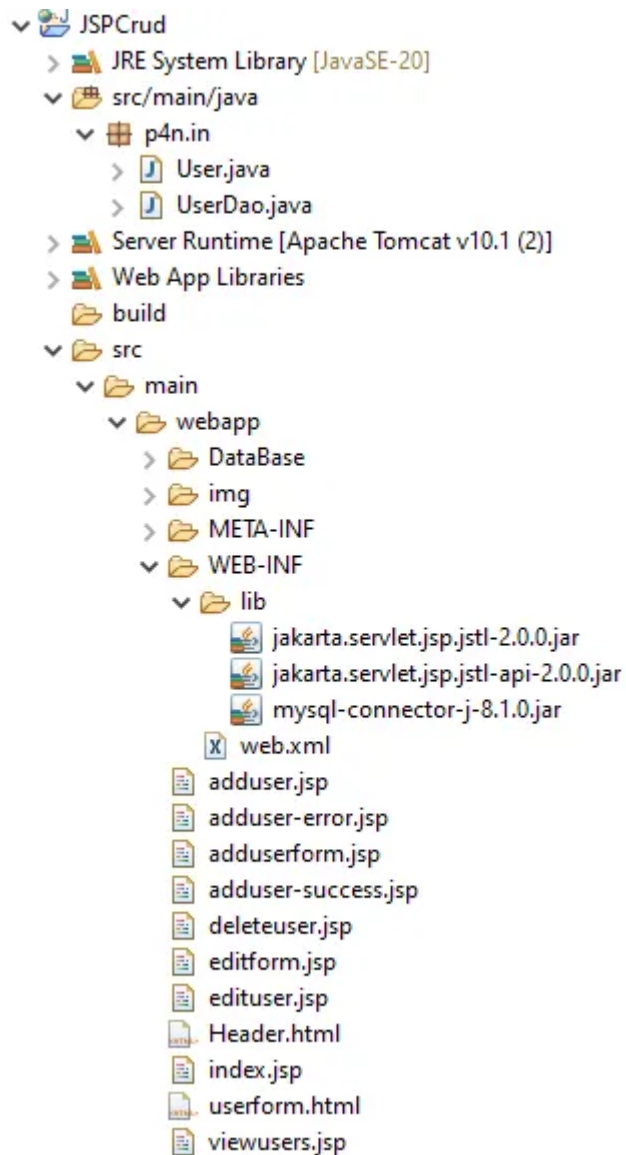

add library

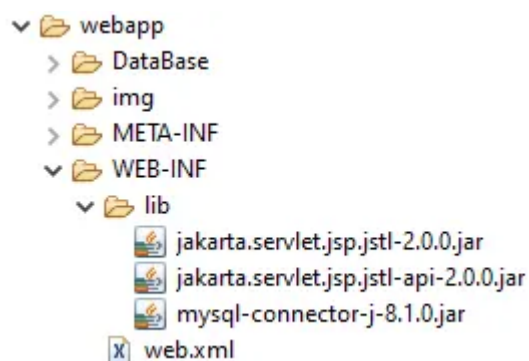

Create a package p4n.in



p4n.in/user.java

```
path = JSPCrud\src\main\java\p4n\in\User.java
```

```
package p4n.in;

public class User {
    private int id;
    private String name,password,email,sex,country;
    public int getId() {
        return id;
    }
    public void setId(int id) {
        this.id = id;
    }
    public String getName() {
        return name;
    }
    public void setName(String name) {
        this.name = name;
    }
    public String getPassword() {
        return password;
    }
    public void setPassword(String password) {
        this.password = password;
    }
    public String getEmail() {
        return email;
    }
    public void setEmail(String email) {
        this.email = email;
    }
    public String getSex() {
        return sex;
    }
    public void setSex(String sex) {
        this.sex = sex;
    }
    public String getCountry() {
        return country;
    }
    public void setCountry(String country) {
        this.country = country;
    }
}
```

p4n.in/UserDao.java

```
path = JSPCrud\src\main\java\p4n\in\UserDao.java
```

```
package p4n.in;
import java.sql.*;
import java.util.ArrayList;
import java.util.List;

public class UserDao {
    public static Connection getConnection(){
        Connection con=null;
        try{
            Class.forName("com.mysql.jdbc.Driver");
            con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cwp","root","adm
        }catch(Exception e){System.out.println(e);}
        return con;
    }
    public static int save(User u){
        int status=0;
        try{
            Connection con=getConnection();
            PreparedStatement ps=con.prepareStatement("insert into register(name,password
            ps.setString(1,u.getName());
            ps.setString(2,u.getPassword());
            ps.setString(3,u.getEmail());
            ps.setString(4,u.getSex());
            ps.setString(5,u.getCountry());
            status=ps.executeUpdate();
        }catch(Exception e){System.out.println(e);}
        return status;
    }
    public static int update(User u){
        int status=0;
        try{
            Connection con=getConnection();
            PreparedStatement ps=con.prepareStatement("update register set name=?,passwor
            ps.setString(1,u.getName());
            ps.setString(2,u.getPassword());
            ps.setString(3,u.getEmail());
            ps.setString(4,u.getSex());
            ps.setString(5,u.getCountry());
            ps.setInt(6,u.getId());
            status=ps.executeUpdate();
        }catch(Exception e){System.out.println(e);}
        return status;
    }
}
```


```
public static int delete(User u){
    int status=0;
    try{
        Connection con=getConnection();
        PreparedStatement ps=con.prepareStatement("delete from register where id=?");
        ps.setInt(1,u.getId());
        status=ps.executeUpdate();
    }catch(Exception e){System.out.println(e);}

    return status;
}

public static List<User> getAllRecords(){
    List<User> list=new ArrayList<User>();

    try{
        Connection con=getConnection();
        PreparedStatement ps=con.prepareStatement("select * from register");
        ResultSet rs=ps.executeQuery();
        while(rs.next()){
            User u=new User();
            u.setId(rs.getInt("id"));
            u.setName(rs.getString("name"));
            u.setPassword(rs.getString("password"));
            u.setEmail(rs.getString("email"));
            u.setSex(rs.getString("sex"));
            u.setCountry(rs.getString("country"));
            list.add(u);
        }
    }catch(Exception e){System.out.println(e);}
    return list;
}

public static User getRecordById(int id){
    User u=null;
    try{
        Connection con=getConnection();
        PreparedStatement ps=con.prepareStatement("select * from register where id=?");
        ps.setInt(1,id);
        ResultSet rs=ps.executeQuery();
        while(rs.next()){
            u=new User();
            u.setId(rs.getInt("id"));
            u.setName(rs.getString("name"));
            u.setPassword(rs.getString("password"));
            u.setEmail(rs.getString("email"));
            u.setSex(rs.getString("sex"));
            u.setCountry(rs.getString("country"));
        }
    }catch(Exception e){System.out.println(e);}
    return u;
}
}
```

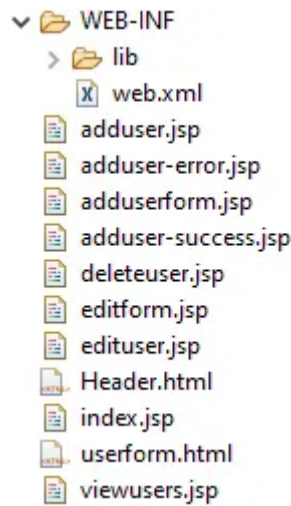

now create file

1. header.html

```
path = JSPCrud\src\main\webapp\header.html
```

```
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.1/dist/css/bootstrap.min.css" rel="stylesheet">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.1/dist/js/bootstrap.bundle.min.js" rel="script">
<title>Codes With Pankaj</title>

<div class="container">
  <header class="d-flex flex-wrap justify-content-center py-3 mb-4 border-bottom">
    <a href="https://www.codeswithpankaj.com/" class="d-flex align-items-center gap-2">
       &nbsp;
      <span class="fs-4">Codes With Pankaj - @p4n.in </span>
    </a>

    <ul class="nav nav-pills">
      <li class="nav-item"><a href="adduserform.jsp" class="nav-link active m-1">Add User</a>
      <li class="nav-item"><a href="viewusers.jsp" class="nav-link active m-1">View Users</a>
      <li class="nav-item"><a href="viewusers.jsp" class="nav-link active m-1">View Users</a>
    </ul>
  </header>
  <p> - JSP CRUD operations</p>
</div>
```

2. userform.html

```
path = JSPCrud\src\main\webapp\userform.jsp
```

```
<div class="container mt-5">
  <form action="adduser.jsp" method="post">
    <div class="mb-3">
      <label for="name" class="form-label">Name:</label>
      <input type="text" class="form-control" id="name" name="name">
    </div>
    <div class="mb-3">
      <label for="password" class="form-label">Password:</label>
      <input type="password" class="form-control" id="password" name="password">
    </div>
    <div class="mb-3">
      <label for="email" class="form-label">Email:</label>
      <input type="email" class="form-control" id="email" name="email">
    </div>
    <div class="mb-3">
      <label class="form-label">Sex:</label>
      <div class="form-check">
        <input type="radio" class="form-check-input" id="male" name="sex" value="male">
        <label class="form-check-label" for="male">Male</label>
      </div>
      <div class="form-check">
        <input type="radio" class="form-check-input" id="female" name="sex" value="female">
        <label class="form-check-label" for="female">Female</label>
      </div>
    </div>
    <div class="mb-3">
      <label for="country" class="form-label">Country:</label>
      <select class="form-select" id="country" name="country">
        <option value="India">India</option>
        <option value="Pakistan">Pakistan</option>
        <option value="Afghanistan">Afghanistan</option>
        <option value="Burma">Burma</option>
        <option value="Australia">Australia</option>
        <option value="Canada">Canada</option>
        <option value="Brazil">Brazil</option>
        <option value="France">France</option>
        <option value="Japan">Japan</option>
        <option value="Mexico">Mexico</option>
        <option value="South Africa">South Africa</option>
        <option value="Other">Other</option>
      </select>
    </div>
  </form>
</div>
```



```
<button type="submit" class="btn btn-primary">Add User</button>
</form>
</div>
```

3. index.jsp

```
path = JSPCrud\src\main\webapp\index.jsp
```

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.c
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.1/dist/css/bootstrap.min
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.1/dist/js/bootstrap.bur
<title>Codes With Pankaj</title>
</head>
<body>
    <jsp:include page="Header.html" />
</body>
</html>
```

4. adduser.jsp

```
path = JSPCrud\src\main\webapp\adduser.jsp
```

```
<%@page import="p4n.in.UserDao"%>
<jsp:useBean id="u" class="p4n.in.User"></jsp:useBean>
<jsp:setProperty property="*" name="u"/>

<%
int i=UserDao.save(u);
if(i>0){
response.sendRedirect("adduser-success.jsp");
}else{
```

```
response.sendRedirect("adduser-error.jsp");  
}  
%>
```

5. adduser-error.jsp

```
path = JSPCrud\src\main\webapp\adduser-error.jsp
```

```
<!DOCTYPE html>  
<html>  
<head>  
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">  
<title>Add User Success</title>  
</head>  
<body>  
  
<jsp:include page="Header.html"></jsp:include>  
  
<div class="px-4 py-5 my-5">  
  <div class="col-lg-6 mx-auto">  
    <h4 class="display-5 fw-bold text-body-emphasis">Add New User</h4>  
    <div class="alert alert-danger" role="alert">  
      Sorry, an error occured!  
    </div>  
    <jsp:include page="userform.html"></jsp:include>  
  </div>  
</div>  
  
</body>  
</html>
```

6. adduserform.jsp

```
path = JSPCrud\src\main\webapp\adduserform.jsp
```

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"  
    pageEncoding="ISO-8859-1"%>
```

```
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Add User Form</title>
</head>
<body>
<jsp:include page="Header.html"></jsp:include>
<div class="px-4 py-5 my-5">
  <div class="col-lg-6 mx-auto">
    <h4 class="display-5 fw-bold text-body-emphasis">Add New User</h4>

    <jsp:include page="userform.html"></jsp:include>
  </div>
</div>
</body>
</html>
```

7. adduser-success.jsp

```
path = JSPCrud\src\main\webapp\adduser-success.jsp
```

```
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Add User Success</title>
</head>
<body>

<jsp:include page="Header.html"></jsp:include>

<div class="px-4 py-5 my-5">
  <div class="col-lg-6 mx-auto">
    <h4 class="display-5 fw-bold text-body-emphasis">Add New User</h4>
    <div class="alert alert-success" role="alert">
      Record successfully saved!
    </div>
    <jsp:include page="userform.html"></jsp:include>
  </div>
</div>
</body>
</html>
```

8. deleteuser.jsp

```
path = JSPCrud\src\main\webapp\deleteuser.jsp
```

```
<%@page import="p4n.in.UserDao"%>
<jsp:useBean id="u" class="p4n.in.User"></jsp:useBean>
<jsp:setProperty property="*" name="u"/>

<%
UserDao.delete(u);
response.sendRedirect("viewusers.jsp");
%>
```

9. editform.jsp

```
path = JSPCrud\src\main\webapp\editform.jsp
```

```
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Edit Form</title>
</head>
<body>
<%@page import="p4n.in.UserDao,p4n.in.User"%>

<%
String id=request.getParameter("id");
User u=UserDao.getRecordById(Integer.parseInt(id));
%>
<jsp:include page="Header.html"></jsp:include>
<div class="col-lg-6 mx-auto">
<h4 class="display-5 fw-bold text-body-emphasis">Edit User</h4>
<form action="edituser.jsp" method="post">
<input type="hidden" name="id" value="<%=u.getId() %>" />
<div class="mb-3">
<label for="name" class="form-label">Name:</label>
<input type="text" class="form-control" id="name" name="name" value="<%=u.getName() %>" />
</div>
<div class="mb-3">
```

```

        <label for="password" class="form-label">Password:</label>
        <input type="password" class="form-control" id="password" name="password" value="" />
    </div>
    <div class="mb-3">
        <label for="email" class="form-label">Email:</label>
        <input type="email" class="form-control" id="email" name="email" value="" />
    </div>
    <div class="mb-3">
        <label class="form-label">Sex:</label>
        <div class="form-check">
            <input type="radio" class="form-check-input" id="male" name="sex" value="male" />
            <label class="form-check-label" for="male">Male</label>
        </div>
        <div class="form-check">
            <input type="radio" class="form-check-input" id="female" name="sex" value="female" />
            <label class="form-check-label" for="female">Female</label>
        </div>
    </div>
    <div class="mb-3">
        <label for="country" class="form-label">Country:</label>
        <select class="form-select" id="country" name="country">
            <option value="India">India</option>
            <option value="Pakistan">Pakistan</option>
            <option value="Afghanistan">Afghanistan</option>
            <option value="Burma">Burma</option>
            <option value="Australia">Australia</option>
            <option value="Canada">Canada</option>
            <option value="Brazil">Brazil</option>
            <option value="France">France</option>
            <option value="Japan">Japan</option>
            <option value="Mexico">Mexico</option>
            <option value="South Africa">South Africa</option>
            <option value="Other">Other</option>
        </select>
    </div>
    <button type="submit" class="btn btn-primary">Edit User</button>
</form>
</div>
</body>
</html>

```

10. edituser.jsp

```
path = JSPCrud\src\main\webapp\edituser.jsp
```

```

<%@page import="p4n.in.UserDao"%>
<jsp:useBean id="u" class="p4n.in.User"></jsp:useBean>
<jsp:setProperty property="*" name="u"/>

<%
int i=UserDao.update(u);
response.sendRedirect("viewusers.jsp");
%>

```

11. viewusers.jsp

```
path = JSPCrud\src\main\webapp\viewuser.jsp
```

```

<!DOCTYPE html>

<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>View Users</title>
</head>
<body>

<%@page import="p4n.in.UserDao,p4n.in.*,java.util.*"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c"%>

<jsp:include page="Header.html"></jsp:include>

<div class="px-4 py-5 my-5">
    <div class="col-lg-6 mx-auto">
        <h4 class="display-5 fw-bold text-body-emphasis">All Users</h4>

    </div>

    <%
List<User> list=UserDao.getAllRecords();
request.setAttribute("list",list);
%>

    <table class="table table-bordered border-dark table-striped">
    <tr><th>Id</th><th>Name</th><th>Password</th><th>Email</th><th>Sex</th><th>Cour
    <c:forEach items="${list}" var="u">
        <tr><td>${u.getId()}</td><td>${u.getName()}</td><td>${u.getPassword()}</td><td>
        <td><a class="btn btn-success" href="editform.jsp?id=${u.getId()}">Edit</a>
        </td><td><a class="btn btn-danger" href="deleteuser.jsp?id=${u.getId()}">Delet
        </td></tr>

```

```
</c:forEach>
</table>
</div>
</div>

</body>
</html>
```

Download all codes

localhost:8080/JSPCrud/adduserform.jsp

Codes With Pankaj - @p4n.in

Add User View Users View all Users

- JSP CRUD operations

Add New User

Name:

Password:

Email:

Sex: ☒ Male ☐ Female

Country:

Add User

Add user page

localhost:8080/JSPCrud/viewusers.jsp

Codes With Pankaj - @p4n.in

Add User View Users View all Users

- JSP CRUD operations

All Users

Id	Name	Password	Email	Sex	Country	Edit	Delete
28	Pankaj Chouhan	pankaj@123	codeswithpankaj@gmail.com	male	India	Edit	Delete

View User

localhost:8080/JSPCrud/editform.jsp?id=28

 Codes With Pankaj - @p4n.in

[Add User](#) [View Users](#) [View all Users](#)

- JSP CRUD operations

Edit User

Name:

Password:

Email:

Sex:
☐ Male
☐ Female

Country:

[Edit User](#)

Edit user

Jsp

Java

Jsp Crud

P4n

Jsp Crud

[Follow](#)

Written by Codes With Pankaj

132 followers · 4 following

@codeawithpankaj.com

No responses yet



Write a response

More from Codes With Pankaj

```
test preparation course  math score  reading score  writing score
0      completed        38          70          98
1      completed        56          98          71
2      completed        80          47          58
3      completed        33          17          51
4      none             40          15          46
```

Size: (1000, 8)

Details:

<class 'pandas.core.frame.DataFrame'>

RangeIndex: 1000 entries, 0 to 999

Data columns (total 8 columns):

#	Column	Non-Null Count	Dtype
0	gender	1000 non-null	object
1	race/ethnicity	1000 non-null	object



Codes With Pankaj

Mastering Exploratory Data Analysis (EDA) in Python

Hey there ! I'm Pankaj Chouhan, a data enthusiast who spends way too much time tinkering with Python and datasets. If you've ever wondered...




Mar 18



101



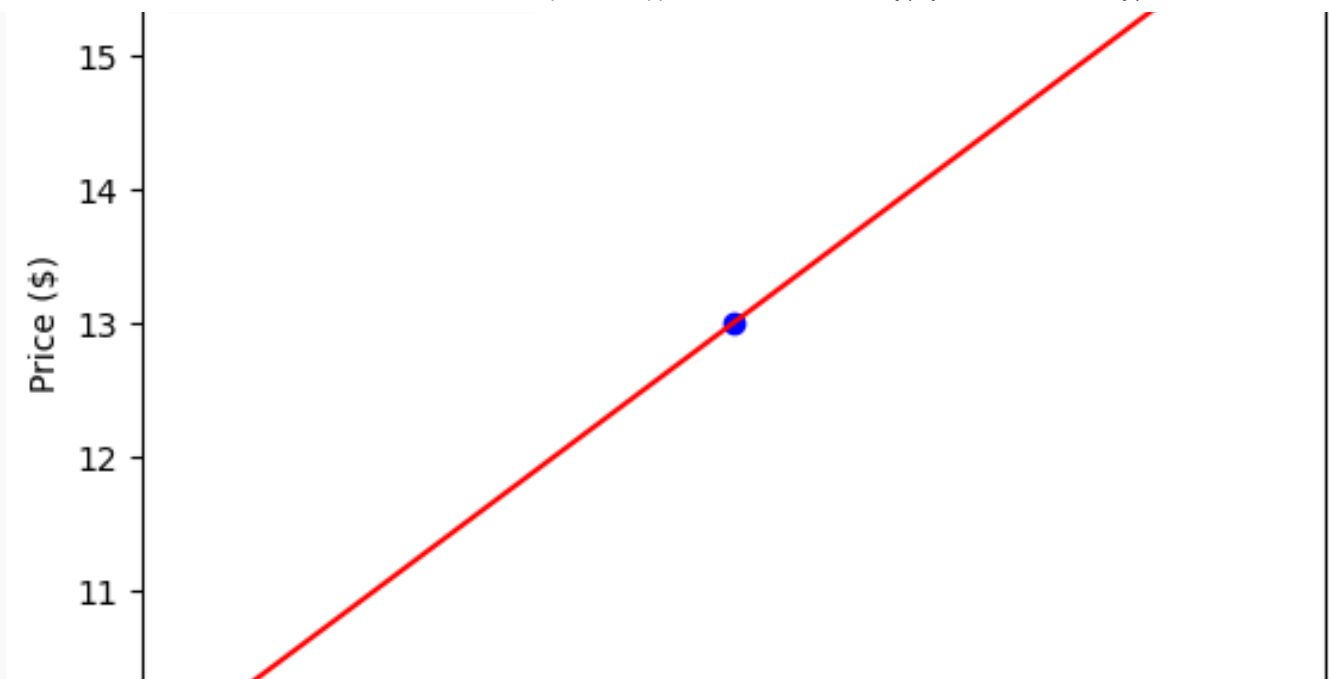

 Codes With Pankaj

Understanding Linear Regression with Pankaj Chouhan

Hello everyone ! My name is Pankaj Chouhan, and I run a website called Codes with Pankaj. My goal is to explain complex topics in a simple...

★ Mar 21 🖱 600 💬 5



 Codes With Pankaj

Mastering NumPy: A Comprehensive Guide—Codes With Pankaj

Introduction to NumPy

Sep 27, 2023 🖱 50



4	P3	2	1
5	P4	5	5
6	P5	5.5	5.5
7	P6	6	5
8	P7	5.5	6
9	P8	6.5	6.5

Codes With Pankaj

DBSCAN Clustering Tutorial for Beginners


What is DBSCAN?

★ May 13 🖱 300

[See all from Codes With Pankaj](#)

Recommended from Medium

★ 6d ago 🖱 447 💬 10

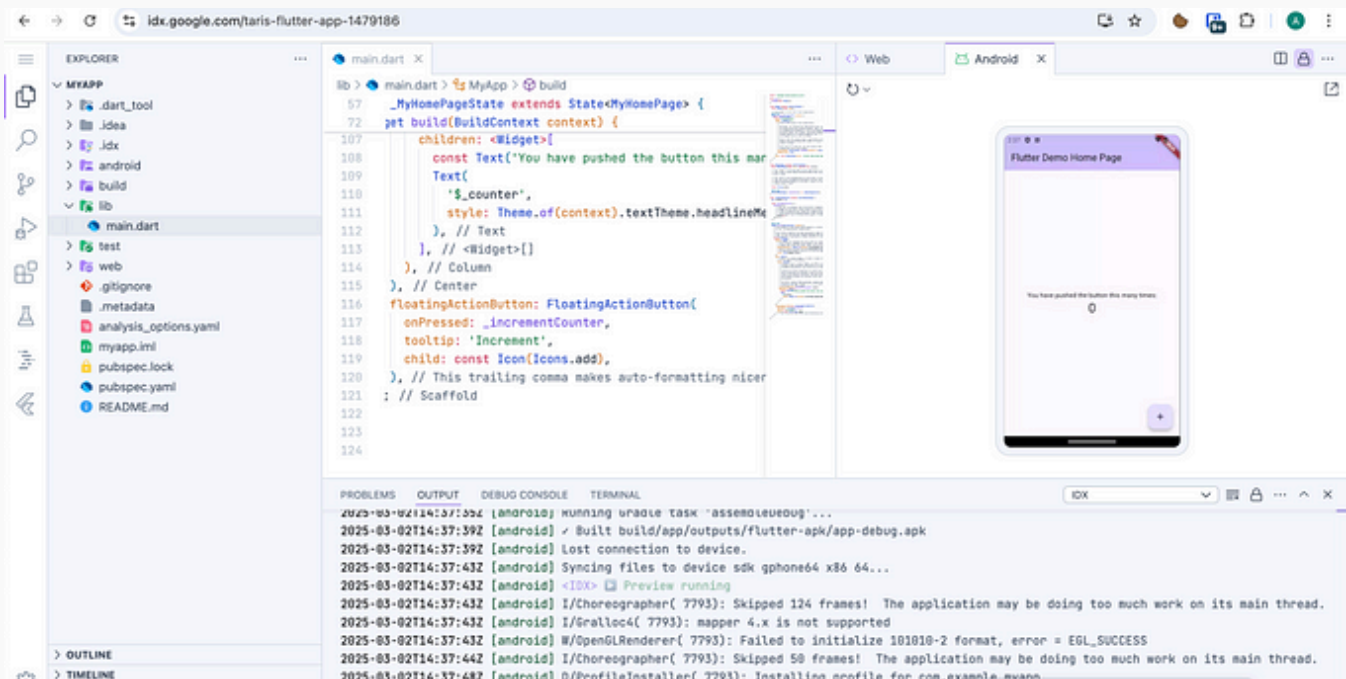 In Coding Beauty by Tari Ibaba

This new IDE from Google is an absolute game changer

This new IDE from Google is seriously revolutionary.

★ Mar 12 🖱 6.2K 💬 369

 Jordan Gibbs

ChatGPT Is Poisoning Your Brain...

Here's How to Stop It Before It's Too Late.


★ Apr 30 🖱 24K 💬 1216

 In Write A Catalyst by Adarsh Gupta

Coding vs VIBE Coding

Vibe Coding just replaced your job 🧑

★ Mar 16 🖱 4.6K 💬 194

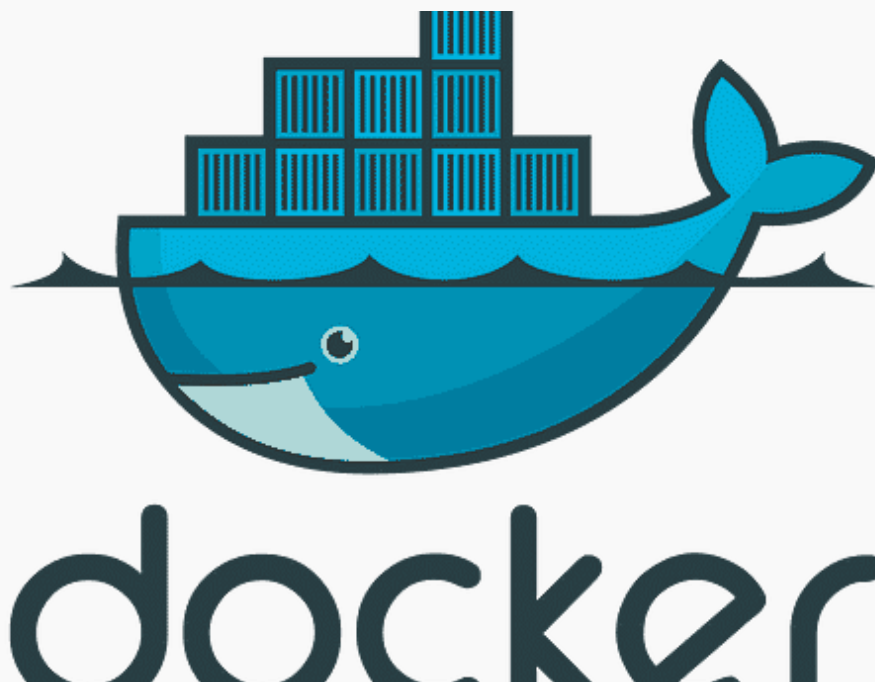 Abhinav

Docker Is Dead — And It's About Time

Docker changed the game when it launched in 2013, making containers accessible and turning “Dockerize it” into a developer catchphrase.



Jun 9



4.8K



119

[See more recommendations](#)