



Performance



Accessibility



Best Practices



SEO



PWA




### Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49

50–89

90–100

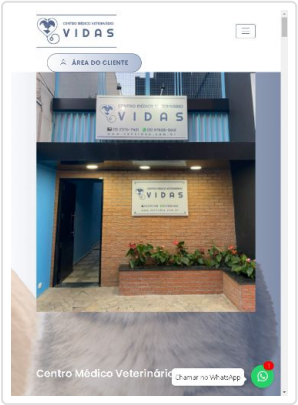

#### METRICS

Expand view

First Contentful Paint

1.1 s

Time to Interactive

1.6 s

Speed Index

1.4 s

Total Blocking Time

0 ms

Largest Contentful Paint

1.1 s



Cumulative Layout Shift

0

[View Original Trace](#)



[View Treemap](#)








Show audits relevant to: All [FCP](#) [TBT](#) [LCP](#) [CLS](#)

#### OPPORTUNITIES





Opportunity

Estimated Savings

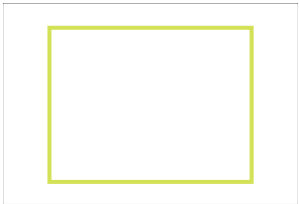Serve images that are appropriately-sized to save cellular data and improve load time. [Learn more.](#)

	URL	Resource Size	Potential Savings
 g.img-fluid	...clinica/IMG_6711.jpg (localhost)	2,996.1 KiB	2,994.1 KiB
img.img-fluid	...clinica/IMG_6704.jpg (localhost)	2,235.7 KiB	2,234.2 KiB
img.img-fluid	...clinica/IMG_6684.jpg (localhost)	2,215.8 KiB	2,214.3 KiB
 g.img-fluid	...clinica/IMG_6707.jpg (localhost)	2,173.9 KiB	2,172.4 KiB
 img.wow.fadeInLeft.animated	...clinica/IMG_6681.jpg (localhost)	1,701.9 KiB	1,653.5 KiB
 g.img-fluid	...clinica/IMG_6690.jpg (localhost)	1,599.7 KiB	1,598.6 KiB
 g.img-fluid	...clinica/IMG_6692.jpg (localhost)	1,574.1 KiB	1,573.0 KiB


	URL	Resource Size	Potential Savings
 g.img-fluid	...clinica/IMG_6693.jpg (localhost)	1,543.4 KiB	1,542.3 KiB
img.img-fluid	...clinica/IMG_6683.jpg (localhost)	1,521.2 KiB	1,520.1 KiB
 g.img-fluid	...clinica/IMG_6695.jpg (localhost)	1,143.7 KiB	1,142.9 KiB
 img	...team/draAdrianaCucomo.png (localhost)	1,501.3 KiB	1,077.6 KiB
 img	...team/draSimoneDevus.png (localhost)	1,049.3 KiB	704.6 KiB
 g-fluid	...clinica/clinica_montagem.jpg (localhost)	329.8 KiB	308.3 KiB
 g	...logo/Logo_texto_transparente-2.png (localhost)	111.9 KiB	110.8 KiB




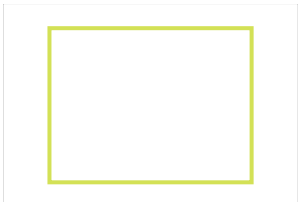
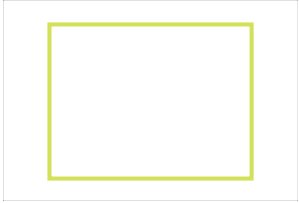
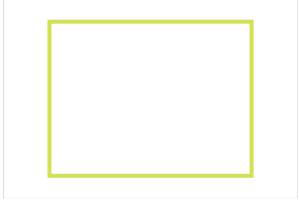

	URL	Resource Size	Potential Savings
 g-fluid	img g-fluid ...pets/vetepets.webp (localhost)	63.0 KiB	59.1 KiB
img	...logo/Logo_transparente.png (localhost)	33.8 KiB	33.5 KiB
 g	img g ...convenios/nofaro.jpg (localhost)	71.8 KiB	30.4 KiB
 img	img ...team/draRenataGomes.jpg (localhost)	129.7 KiB	29.9 KiB
 img	img ...team/draThamiresBrito.png (localhost)	425.4 KiB	15.0 KiB

▲ Serve images in next-gen formats5.94 s ^

Warnings: Unable to locate resource ...pets/pets\_big.png

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more](#).

	URL	Resource Size	Potential Savings
 img	img ...team/draAdrianaCucomo.png (localhost)	1,501.3 KiB	1,358.6 KiB

URL			Resource Size	Potential Savings
	img g.i m g- flu	...clinica/IMG_6711.jpg (localhost)	2,996.1 KiB	1,011.6 KiB
id				
	img	...team/draSimoneDevus.png (localhost)	1,049.3 KiB	926.8 KiB
	img.wow.fadeIn Left.animated	...clinica/IMG_6681.jpg (localhost)	1,701.9 KiB	785.0 KiB
	im g.i m g- flu	...clinica/IMG_6690.jpg (localhost)	1,599.7 KiB	750.8 KiB
id				
	im g.i m g- flu	...clinica/IMG_6693.jpg (localhost)	1,543.4 KiB	681.5 KiB
id				
	im g.i m g- flu	...clinica/IMG_6692.jpg (localhost)	1,574.1 KiB	675.7 KiB
id				
	img	...team/draThamiresBrito.png (localhost)	425.4 KiB	383.7 KiB

		URL	Resource Size	Potential Savings
img 		...clinica/IMG_6704.jpg (localhost)	2,235.7 KiB	251.2 KiB
img 		...clinica/IMG_6684.jpg (localhost)	2,215.8 KiB	231.3 KiB
	img g.i m g- flu id	...clinica/IMG_6707.jpg (localhost)	2,173.9 KiB	189.4 KiB
	img	...team/draRenataGomes.jpg (localhost)	129.7 KiB	77.4 KiB
	img	...convenios/nofaro.jpg (localhost)	71.8 KiB	25.0 KiB
	img	...convenios/healthlife.jpg (localhost)	26.0 KiB	20.7 KiB
	img	...convenios/planvet.jpg (localhost)	21.5 KiB	16.2 KiB
	img	...convenios/pethealth.jpg (localhost)	17.2 KiB	11.9 KiB
	img	...convenios/portopet.png (localhost)	16.0 KiB	10.8 KiB

URL		Resource Size	Potential Savings
	img	...convenios/petmaisvida.jpg (localhost)	15.0 KiB
	img	...convenios/anilife.png (localhost)	16.8 KiB
	img	...convenios/drpets.jpg (localhost)	14.3 KiB

Enable text compression

0.69 s ^

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more](#). FCP LCP

URL	Transfer Size	Potential Savings
...css/bootstrap.min.css (localhost)	137.6 KiB	117.0 KiB
...css/animate.css (localhost)	68.1 KiB	63.1 KiB
...js/jquery.min.js (localhost)	82.4 KiB	53.5 KiB
...js/owl.carousel.js (localhost)	51.6 KiB	43.0 KiB
...css/main.css (localhost)	47.9 KiB	40.6 KiB
...js/jquery.mixitup.js (localhost)	49.8 KiB	38.9 KiB
http://localhost:5000	44.0 KiB	36.3 KiB
...js/form-validator.min.js (localhost)	44.0 KiB	36.3 KiB
...js/contact-form-script.js (localhost)	44.0 KiB	36.3 KiB

URL	Transfer Size	Potential Savings
...js/bootstrap.min.js (localhost)	49.5 KiB	35.8 KiB
...js/jquery.magnific-popup.min.js (localhost)	19.7 KiB	12.6 KiB
...js/popper.min.js (localhost)	18.6 KiB	11.9 KiB
...css/line-icons.css (localhost)	14.5 KiB	11.9 KiB
...js/nivo-lightbox.js (localhost)	14.4 KiB	11.3 KiB
...css/responsive.css (localhost)	8.9 KiB	7.5 KiB
...css/magnific-popup.css (localhost)	7.1 KiB	5.3 KiB
...js/waypoints.min.js (localhost)	7.9 KiB	5.3 KiB
...css/nivo-lightbox.css (localhost)	5.6 KiB	4.5 KiB
...js/wow.js (localhost)	5.6 KiB	4.1 KiB
...js/main.js (localhost)	5.1 KiB	3.7 KiB
...js/jquery.easing.min.js (localhost)	5.4 KiB	3.6 KiB
...js/jquery.nav.js (localhost)	5.0 KiB	3.2 KiB
...css/owl.carousel.css (localhost)	2.3 KiB	1.5 KiB

Eliminate render-blocking resources

0.58 s ^

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn more.](#) FCP LCP

☒ Show 3rd-party resources (1)

URL	Transfer Size	Potential Savings
...css/bootstrap.min.css (localhost)	137.9 KiB	570 ms
...css/line-icons.css (localhost)	14.7 KiB	170 ms
...css/owl.carousel.css (localhost)	2.6 KiB	80 ms



URL	Transfer Size	Potential Savings
...css/owl.theme.css (localhost)	1.9 KiB	80 ms
...css/animate.css (localhost)	68.3 KiB	410 ms
...css/magnific-popup.css (localhost)	7.4 KiB	120 ms
...css/nivo-lightbox.css (localhost)	5.9 KiB	80 ms
...css/main.css (localhost)	48.1 KiB	290 ms
...css/responsive.css (localhost)	9.1 KiB	80 ms
...css/font-awesome.min.css (cdnjs.cloudflare.com)	5.8 KiB	280 ms

Reduce unused CSS0.53 s ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn more.](#) FCP LCP

URL	Transfer Size	Potential Savings
...css/bootstrap.min.css (localhost)	137.9 KiB	131.8 KiB
...css/animate.css (localhost)	68.3 KiB	67.8 KiB
...css/main.css (localhost)	48.1 KiB	34.4 KiB
...css/line-icons.css (localhost)	14.7 KiB	13.6 KiB

These suggestions can help your page load faster. They don't [directly affect](#) the Performance score.

DIAGNOSTICS

▲

Avoid enormous network payloads — Total size was 24,101 KiB^

Large network payloads cost users real money and are highly correlated with long load times. [Learn more.](#) LCP

URL	Transfer Size
-----	---------------

URL	Transfer Size
...clinica/IMG_6711.jpg (localhost)	2,996.4 KiB
...clinica/IMG_6704.jpg (localhost)	2,236.0 KiB
...clinica/IMG_6684.jpg (localhost)	2,216.0 KiB
...clinica/IMG_6707.jpg (localhost)	2,174.1 KiB
...clinica/IMG_6681.jpg (localhost)	1,702.1 KiB
...clinica/IMG_6690.jpg (localhost)	1,599.9 KiB
...clinica/IMG_6692.jpg (localhost)	1,574.3 KiB
...clinica/IMG_6693.jpg (localhost)	1,543.6 KiB
...clinica/IMG_6683.jpg (localhost)	1,521.4 KiB
...team/draAdrianaCucomo.png (localhost)	1,501.5 KiB

▲ Serve static assets with an efficient cache policy — 63 resources found

^

A long cache lifetime can speed up repeat visits to your page. [Learn more.](#)

URL	Cache TTL	Transfer Size
...clinica/IMG_6711.jpg (localhost)	None	2,996 KiB
...clinica/IMG_6704.jpg (localhost)	None	2,236 KiB
...clinica/IMG_6684.jpg (localhost)	None	2,216 KiB
...clinica/IMG_6707.jpg (localhost)	None	2,174 KiB
...clinica/IMG_6681.jpg (localhost)	None	1,702 KiB
...clinica/IMG_6690.jpg (localhost)	None	1,600 KiB
...clinica/IMG_6692.jpg (localhost)	None	1,574 KiB
...clinica/IMG_6693.jpg (localhost)	None	1,544 KiB

URL	Cache TTL	Transfer Size
...clinica/IMG_6683.jpg (localhost)	None	1,521 KiB
...team/draAdrianaCucomo.png (localhost)	None	1,502 KiB
...clinica/IMG_6695.jpg (localhost)	None	1,144 KiB
...team/draSimoneDevus.png (localhost)	None	1,050 KiB
...team/draThamiresBrito.png (localhost)	None	426 KiB
...pets/pets_big.png (localhost)	None	377 KiB
...clinica/clinica_montagem.jpg (localhost)	None	330 KiB
...css/bootstrap.min.css (localhost)	None	138 KiB
...team/draRenataGomes.jpg (localhost)	None	130 KiB
...logo/Logo_texto_transparente-2.png (localhost)	None	112 KiB
...fonts/Linelcons.ttf?ibaccn (localhost)	None	99 KiB
...js/jquery-min.js (localhost)	None	83 KiB
...convenios/nofaro.jpg (localhost)	None	72 KiB
...css/animate.css (localhost)	None	68 KiB
...pets/vetepets.webp (localhost)	None	63 KiB
...js/owl.carousel.js (localhost)	None	52 KiB
...js/jquery.mixitup.js (localhost)	None	50 KiB
...js/bootstrap.min.js (localhost)	None	50 KiB
...css/main.css (localhost)	None	48 KiB
...js/contact-form-script.js (localhost)	None	44 KiB
...js/form-validator.min.js (localhost)	None	44 KiB
...logo/Logo_transparente.png (localhost)	None	34 KiB

URL	Cache TTL	Transfer Size
...convenios/healthlife.jpg (localhost)	None	26 KiB
...pets/dogvet.jpg (localhost)	None	25 KiB
...convenios/planvet.jpg (localhost)	None	22 KiB
...js/jquery.magnific-popup.min.js (localhost)	None	20 KiB
...convenios/vitalpet.jpg (localhost)	None	19 KiB
...js/popper.min.js (localhost)	None	19 KiB
...convenios/pethealth.jpg (localhost)	None	17 KiB
...convenios/anilife.png (localhost)	None	17 KiB
...convenios/portopet.png (localhost)	None	16 KiB
...convenios/petmaisvida.jpg (localhost)	None	15 KiB
...css/line-icons.css (localhost)	None	15 KiB
...js/nivo-lightbox.js (localhost)	None	15 KiB
...convenios/drpet.jpg (localhost)	None	15 KiB
...img/logo_abhv-1.png (localhost)	None	14 KiB
...convenios/doglife.png (localhost)	None	13 KiB
...css/responsive.css (localhost)	None	9 KiB
...js/waypoints.min.js (localhost)	None	8 KiB
...css/magnific-popup.css (localhost)	None	7 KiB
...convenios/amigoo2.png (localhost)	None	7 KiB
...css/nivo-lightbox.css (localhost)	None	6 KiB
...js/wow.js (localhost)	None	6 KiB
...js/jquery.easing.min.js (localhost)	None	6 KiB

URL	Cache TTL	Transfer Size
...js/main.js (localhost)	None	5 KiB
...js/jquery.nav.js (localhost)	None	5 KiB
...css/owl.carousel.css (localhost)	None	3 KiB
...favicon/favicon-32x32.png (localhost)	None	2 KiB
...js/sendEmail.js (localhost)	None	2 KiB
...css/owl.theme.css (localhost)	None	2 KiB
...js/jquery.counterup.min.js (localhost)	None	1 KiB
...js/whatsapp_btn.js (localhost)	None	1 KiB
...js/scrolling-nav.js (localhost)	None	1 KiB
...css/social-media.css (localhost)	None	1 KiB
...js/myModal.js (localhost)	None	0 KiB

#### ▲ Ensure text remains visible during webfont load



Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more.](#) FCP LCP

☒ Show 3rd-party resources (4)

URL	Potential Savings
...fonts/Linelcons.ttf?ibaccn (localhost)	10 ms
...v20/pxiByp8kv....woff2 (fonts.gstatic.com)	20 ms
...v30/KFOmCnqEu....woff2 (fonts.gstatic.com)	30 ms
...fonts/fontawesome-webfont.woff2?v=4.7.0 (cdnjs.cloudflare.com)	100 ms
...v20/pxiEyp8kv....woff2 (fonts.gstatic.com)	30 ms

#### ▲ Does not use passive listeners to improve scrolling performance





Consider marking your touch and wheel event listeners as `passive` to improve your page's scroll performance. [Learn more.](#)

Source


jquery-min.js:3

▲ Image elements do not have explicit [width](#) and [height](#) ^

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn more](#) CLS

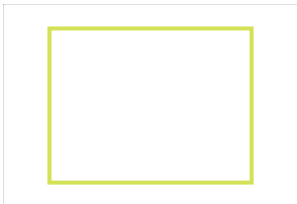URL	
	img.wow.fadeInLeft.animated ...clinica/IMG_6681.jpg (localhost)
	img.img-fluid ...clinica/IMG_6704.jpg (localhost)
	img.img-fluid ...clinica/IMG_6707.jpg (localhost)
	img.img-fluid ...clinica/IMG_6695.jpg (localhost)
	img.img-fluid ...clinica/IMG_6690.jpg (localhost)
	img.img-fluid ...clinica/IMG_6692.jpg (localhost)

URL



img.img-fluid

...clinica/IMG\_6693.jpg (localhost)



img.img-fluid


...clinica/IMG\_6711.jpg (localhost)

img.img-fluid

...clinica/IMG\_6683.jpg (localhost)


img.img-fluid

...clinica/IMG\_6684.jpg (localhost)




img.img-fluid

...pets/vetepets.webp (localhost)




img.img-fluid

...clinica/clinica\_montagem.jpg (localhost)




img

...logo/Logo\_texto\_transparente-2.png (localhost)



img

...team/draAdrianaCucomo.png (localhost)










img

...team/draSimoneDevus.png (localhost)

img

...logo/Logo\_transparente.png (localhost)

		URL
	img	...team/draRenataGomes.jpg (localhost)
	img	...convenios/nofaro.jpg (localhost)
	img	...team/draThamiresBrito.png (localhost)
	img.section- title.wow.fadeInDown	...pets/dogvet.jpg (localhost)
	img	...convenios/vitalpet.jpg (localhost)
	img	...convenios/doglife.png (localhost)
	img.wow.fadeInDown	...img/logo_abhv-1.png (localhost)
img		...img/logo_abhv-1.png (localhost)



		URL
	img	...convenios/anilife.png (localhost)
	img	...convenios/portopet.png (localhost)
	img	...convenios/drpet.jpg (localhost)
	img	...convenios/planvet.jpg (localhost)
	img	...convenios/pethealth.jpg (localhost)
	img	...convenios/healthlife.jpg (localhost)
	img	...convenios/petmaisvida.jpg (localhost)
	img	...convenios/amigoo2.png (localhost)

## ○ Avoid chaining critical requests — 25 chains found



The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn more.](#) FCP LCP

Maximum critical path latency: **670 ms**

### Initial Navigation

http://localhost:5000

- ...css/bootstrap.min.css (localhost) - **0 ms, 137.87 KiB**
- ...css/line-icons.css (localhost)
  - ...fonts/Linelcons.ttf?ibaccn (localhost) - **10 ms, 99.47 KiB**
- ...css/owl.carousel.css (localhost) - **0 ms, 2.59 KiB**
- ...css/owl.theme.css (localhost) - **10 ms, 1.87 KiB**
- ...css/animate.css (localhost) - **10 ms, 68.34 KiB**
- ...css/magnific-popup.css (localhost) - **10 ms, 7.38 KiB**
- ...css/nivo-lightbox.css (localhost) - **10 ms, 5.88 KiB**
- ...css/main.css (localhost)
  - /css?family=Poppins:400,600|Roboto (fonts.googleapis.com)
    - ...v20/pxiByp8kv....woff2 (fonts.gstatic.com) - **20 ms, 7.88 KiB**
    - ...v30/KFOmCnqEu....woff2 (fonts.gstatic.com) - **30 ms, 10.83 KiB**
    - ...v20/pxiEyp8kv....woff2 (fonts.gstatic.com) - **30 ms, 7.76 KiB**
- ...css/responsive.css (localhost) - **10 ms, 9.15 KiB**
- ...css/font-awesome.min.css (cdnjs.cloudflare.com)
  - ...fonts/fontawesome-webfont.woff2?v=4.7.0 (cdnjs.cloudflare.com) - **100 ms, 76.08 KiB**
- ...css/social-media.css (localhost) - **10 ms, 0.73 KiB**
- ...js/jquery-min.js (localhost) - **0 ms, 82.63 KiB**
- ...js/popper.min.js (localhost) - **0 ms, 18.85 KiB**
- ...js/bootstrap.min.js (localhost) - **10 ms, 49.80 KiB**
- ...js/owl.carousel.js (localhost) - **10 ms, 51.82 KiB**
- ...js/jquery.mixitup.js (localhost) - **10 ms, 50.05 KiB**
- ...js/jquery.nav.js (localhost) - **10 ms, 5.28 KiB**
- ...js/scrolling-nav.js (localhost) - **10 ms, 0.86 KiB**
- ...js/jquery.easing.min.js (localhost) - **10 ms, 5.69 KiB**
- ...js/wow.js (localhost) - **10 ms, 5.82 KiB**
- ...js/jquery.counterup.min.js (localhost) - **10 ms, 1.30 KiB**
- ...js/jquery.magnific-popup.min.js (localhost) - **10 ms, 20.00 KiB**
- ...js/main.js (localhost) - **10 ms, 5.31 KiB**

## ○ Keep request counts low and transfer sizes small — 86 requests • 24,101 KiB




To set budgets for the quantity and size of page resources, add a budget.json file. [Learn more](#).

Resource Type	Requests	Transfer Size
Total	86	24,101.4 KiB
Image	35	23,012.4 KiB
Script	25	533.9 KiB
Stylesheet	14	307.4 KiB
Font	5	202.0 KiB
Document	3	44.8 KiB
Other	4	0.8 KiB
Media	0	0.0 KiB
Third-party	22	237.6 KiB

Largest Contentful Paint element — 1 element found

This is the largest contentful element painted within the viewport. [Learn More](#) LCP


Element

img.wow.fadeInLeft.animated

Avoid large layout shifts — 1 element found

These DOM elements contribute most to the CLS of the page. CLS

Element	CLS Contribution
---------	------------------

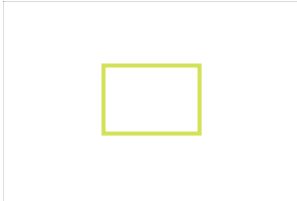Element	CLS Contribution
<div><div></div><div>button.navbar-toggler</div></div> <div></div>	0

Avoid long main-thread tasks — 1 long task found

^

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn more](#) TBT

URL	Start Time	Duration
http://localhost:5000	259 ms	88 ms

Avoid non-composited animations — 51 animated elements found







^




Animations which are not composited can be janky and increase CLS. [Learn more](#) CLS

Element	Name
<div><div></div><div>div.single-team.wow.bounceln</div></div> <div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>div.single-team.wow.bounceln</div></div> <div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>div.single-team.wow.bounceln</div></div> <div></div>	
Unsupported CSS Property: visibility	visibility

Element	Name
<div><div></div><div>div.single-team.wow.bounceln</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>input#email.form-control</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>a.btn.btn-common-wa.btn-border.btn-effect</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>span</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>span</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>a.fa.fa-twitter</div></div>	
Unsupported CSS Property: visibility	visibility





Element	Name
<div></div> <div>textarea#mensagem.form-control</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>a.btn.btn-common.btn-border.btn-effect.page-scroll</div>	
Unsupported CSS Property: visibility	visibility
button#send.btn.btn-common.btn-effect	
Unsupported CSS Property: visibility	visibility
<div></div> <div>span.icon</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>p.btn.btn-subtitle</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>a.fa.fa-facebook</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>span.icon</div>	
Unsupported CSS Property: visibility	visibility

Element	Name
<div></div>	input#nome.form-control
Unsupported CSS Property: visibility	visibility
<div></div>	p.btn.btn-subtitle
Unsupported CSS Property: visibility	visibility
<div></div>	span.icon
Unsupported CSS Property: visibility	visibility
<div></div>	input#assunto.form-control
Unsupported CSS Property: visibility	visibility
<div></div>	span
Unsupported CSS Property: visibility	visibility
<div></div>	span.icon
Unsupported CSS Property: visibility	visibility




Element	Name
<div></div> <div>a.fa.fa-instagram</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>span.icon</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>span.icon</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>span.icon</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>span.icon</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>a.fa.fa-linkedin</div>	
Unsupported CSS Property: visibility	visibility



Element		Name
<div><div></div></div>	i.Ini-apartment	
Unsupported CSS Property: visibility		visibility
<div><div></div></div>	i.Ini-users	
Unsupported CSS Property: visibility		visibility
<div><div></div></div>	i.Ini-frame-contract	
Unsupported CSS Property: visibility		visibility
<div><div></div></div>	i.Ini-heart-pulse	
Unsupported CSS Property: visibility		visibility
<div><div></div></div>	i.Ini-drop	
Unsupported CSS Property: visibility		visibility
<div><div></div></div>	i.Ini-tag	
Unsupported CSS Property: visibility		visibility

Element	Name
<div><div></div><div>i.ini-add-files</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>i.ini-pulse</div></div>	
Unsupported CSS Property: visibility	visibility
<div>div.col-lg-6 &gt; div.form-group &gt; button#send &gt; ::after</div> <div>&lt;::after&gt;</div>	
Unsupported CSS Property: visibility	visibility
<div>div.contents &gt; div.header-button &gt; a.btn &gt; ::after</div> <div>&lt;::after&gt;</div>	
Unsupported CSS Property: visibility	visibility
<div>div.contents &gt; div.header-button &gt; a.btn &gt; ::after</div> <div>&lt;::after&gt;</div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>div.team-details</div></div>	
Unsupported CSS Property: visibility	visibility
<div><div></div><div>div.team-details</div></div>	
Unsupported CSS Property: visibility	visibility

Element	Name
<div><div></div></div> <div>div.team-details</div>	
Unsupported CSS Property: visibility	visibility
<div><div></div></div> <div>div.team-details</div>	
Unsupported CSS Property: visibility	visibility
<div><div></div></div> <div>ul.social-list</div>	
Unsupported CSS Property: visibility	visibility
<div><div></div></div> <div>div.team-inner</div>	
Unsupported CSS Property: visibility	visibility
<div><div></div></div> <div>div.team-inner</div>	
Unsupported CSS Property: visibility	visibility
<div><div></div></div> <div>div.team-inner</div>	
Unsupported CSS Property: visibility	visibility

Element	Name
<div></div> <div>a</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>div.team-inner</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>a</div>	
Unsupported CSS Property: visibility	visibility
<div></div> <div>a</div>	
Unsupported CSS Property: visibility	visibility

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (24)

Hide

Defer offscreen images

^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn more](#).

Minify CSS — Potential savings of 32 KiB

^

Minifying CSS files can reduce network payload sizes. [Learn more](#). FCP LCP

URL	Transfer Size	Potential Savings
...css/animate.css (localhost)	68.3 KiB	13.8 KiB
...css/main.css (localhost)	48.1 KiB	13.7 KiB
...css/responsive.css (localhost)	9.1 KiB	2.4 KiB
...css/line-icons.css (localhost)	14.7 KiB	2.4 KiB

Minify JavaScript — Potential savings of 50 KiB



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn more.](#) FCP LCP

URL	Transfer Size	Potential Savings
...js/owl.carousel.js (localhost)	51.8 KiB	22.7 KiB
...js/jquery.mixitup.js (localhost)	50.0 KiB	15.4 KiB
...js/nivo-lightbox.js (localhost)	14.7 KiB	5.5 KiB
...js/main.js (localhost)	5.3 KiB	2.6 KiB
...js/jquery.easing.min.js (localhost)	5.7 KiB	2.1 KiB
...js/jquery.nav.js (localhost)	5.3 KiB	2.1 KiB

Reduce unused JavaScript — Potential savings of 170 KiB



Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn more.](#) LCP

☒ Show 3rd-party resources (1)

URL	Transfer Size	Potential Savings
...js/jquery.mixitup.js (localhost)	50.0 KiB	42.7 KiB
...js/bootstrap.min.js (localhost)	49.8 KiB	36.8 KiB
...js/jquery-min.js (localhost)	82.6 KiB	33.5 KiB

URL	Transfer Size	Potential Savings
...js/owl.carousel.js (localhost)	51.8 KiB	29.4 KiB
/gtag/js?id=G-7X0M5LJCVF (www.googletagmanager.com)	70.0 KiB	27.8 KiB

Efficiently encode images — Potential savings of 125 KiB



Optimized images load faster and consume less cellular data. [Learn more.](#)

	URL	Resource Size	Potential Savings
 img	...team/draRenataGomes.jpg (localhost)	129.7 KiB	51.3 KiB
 img .img-fluid	...clinica/IMG_6711.jpg (localhost)	2,996.1 KiB	19.4 KiB
 img	...convenios/healthlife.jpg (localhost)	26.0 KiB	18.1 KiB
 img	...convenios/planvet.jpg (localhost)	21.5 KiB	13.6 KiB
 img	...convenios/pethealth.jpg (localhost)	17.2 KiB	9.3 KiB

URL		Resource Size	Potential Savings
	img		
	...convenios/petmaisvida.jpg (localhost)	15.0 KiB	7.1 KiB
	img		
	...convenios/drpet.jpg (localhost)	14.3 KiB	6.4 KiB

Preconnect to required origins

Consider adding `preconnect` or `dns-prefetch` resource hints to establish early connections to important third-party origins. [Learn more.](#) FCP LCP

Initial server response time was short — Root document took 0 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more.](#) FCP LCP

URL	Time Spent
http://localhost:5000	0 ms

Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. [Learn more.](#) FCP LCP

Preload key requests

Consider using `` to prioritize fetching resources that are currently requested later in page load. [Learn more.](#) FCP LCP

Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more.](#)

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more](#) LCP

Remove duplicate modules in JavaScript bundles



Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. TBT

Avoid serving legacy JavaScript to modern browsers — Potential savings of 21 KiB




Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn More](#) TBT

URL	Potential Savings
...js/jquery.mixitup.js (localhost)	20.9 KiB
jquery.mixitup.js:342	Object.getPrototypeOf
...js/popper.min.js (localhost)	0.2 KiB
popper.min.js:7	@babel/plugin-transform-classes

Preload Largest Contentful Paint image



Preload the image used by the LCP element in order to improve your LCP time. [Learn more.](#) LCP

URL	Potential Savings
 img.wow.fadeInLeft.animated	
...clinica/IMG_6681.jpg (localhost)	0 ms



Avoids an excessive DOM size — 573 elements



A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn more.](#) TBT

Statistic	Element	Value
Total DOM Elements		573



Statistic	Element	Value
Maximum DOM Depth		h2.section-title.wow.fadeInDown 14
Maximum Child Elements		body 35

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more](#).

JavaScript execution time — 0.1 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn more](#). TBT

URL	Total CPU Time	Script Evaluation	Script Parse
http://localhost:5000	316 ms	74 ms	36 ms
Unattributable	104 ms	1 ms	0 ms

Minimizes main-thread work — 0.5 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn more](#) TBT

Category	Time Spent
Other	160 ms
Script Evaluation	155 ms
Rendering	94 ms

Category	Time Spent
Style & Layout	67 ms
Script Parsing & Compilation	45 ms
Parse HTML & CSS	22 ms
Garbage Collection	3 ms

Minimize third-party usage — **Third-party code blocked the main thread for 0 ms**



Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn more.](#) TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
<a href="#">Google Tag Manager</a>	102 KiB	0 ms
/gtag/js?id=G-7X0M5LJC VF (w w w.googletagmanager.com)	70 KiB	0 ms
/gtm.js?id=GTM-K4SWFV6 (w w w.googletagmanager.com)	32 KiB	0 ms
<a href="#">Cloudflare CDN</a>	82 KiB	0 ms
...fonts/fontawesome-webfont.woff2?v=4.7.0 (cdnjs.cloudflare.com)	76 KiB	0 ms
...css/font-awesome.min.css (cdnjs.cloudflare.com)	6 KiB	0 ms
<a href="#">Google Fonts</a>	27 KiB	0 ms
...v30/KFOmCnqEu....woff2 (fonts.gstatic.com)	11 KiB	0 ms
...v20/pxiByp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
...v20/pxiEyp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
<a href="#">Other Google APIs/SDKs</a>	0 KiB	0 ms
<a href="#">Amazon Web Services</a>	0 KiB	0 ms
<a href="#">Google Maps</a>	0 KiB	0 ms
<a href="#">Google Analytics</a>	0 KiB	0 ms

☐ Lazy load third-party resources with facades



Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn more](#). TBT

Largest Contentful Paint image was not lazily loaded



Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more](#).

Element



img.wow.fadeInLeft.animated

Avoids `document.write()`



For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn more](#).

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more](#). TBT

Avoids `unload` event listeners



The `unload` event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use `pagehide` or `visibilitychange` events instead. [Learn more](#)



## Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

### BEST PRACTICES

▲ `[user-scalable="no"]` is used in the `<meta name="viewport">` element or the `[maximum-scale]` attribute is less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more.](#)

Failing Elements

meta

These items highlight common accessibility best practices.

CONTRAST

▲

Background and foreground colors do not have a sufficient contrast ratio.

^

Low-contrast text is difficult or impossible for many users to read. [Learn more.](#)

Failing Elements

a

div.blog-item-wrapper

a

div.blog-item-wrapper


a

36/53


Failing Elements




div.blog-item-wrapper




a




div.blog-item-wrapper




a




div.blog-item-wrapper



a



div.blog-item-wrapper




a


Failing Elements




div.blog-item-wrapper



a




div.blog-item-wrapper




a




div.blog-item-wrapper



a



div.blog-item-wrapper



a

Failing Elements

div.blog-item-wrapper

a

body

These are opportunities to improve the legibility of your content.

NAMES AND LABELS

▲ <frame> or <iframe> elements do not have a title

Screen reader users rely on frame titles to describe the contents of frames. [Learn more.](#)

Failing Elements

iframe#gmap\_canvas

iframe#gb-waw-iframe

▲ Links do not have a discernible name

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn more.](#)

39/53

Falling Elements

a

a

a.facebook

a.instagram

a.twitter

a.linkedin






These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

<div><div><div></div></div><div>The page has a logical tab order</div><div></div></div>	<div></div>
<div>Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <a href="#">Learn more.</a></div>	
<div><div><div></div></div><div>Interactive controls are keyboard focusable</div><div></div></div>	<div></div>
<div>Custom interactive controls are keyboard focusable and display a focus indicator. <a href="#">Learn more.</a></div>	
<div><div><div></div></div><div>Interactive elements indicate their purpose and state</div><div></div></div>	<div></div>
<div>Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. <a href="#">Learn more.</a></div>	
<div><div><div></div></div><div>The user's focus is directed to new content added to the page</div><div></div></div>	<div></div>
<div>If new content, such as a dialog, is added to the page, the user's focus is directed to it. <a href="#">Learn more.</a></div>	
<div><div><div></div></div><div>User focus is not accidentally trapped in a region</div><div></div></div>	<div></div>
<div>A user can tab into and out of any control or region without accidentally trapping their focus. <a href="#">Learn more.</a></div>	
<div><div><div></div></div><div>Custom controls have associated labels</div><div></div></div>	<div></div>



 Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. <a href="#">Learn more.</a>	
 Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. <a href="#">Learn more.</a>	
 Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. <a href="#">Learn more.</a>	
 Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. <a href="#">Learn more.</a>	
 HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. <a href="#">Learn more.</a>	

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

## PASSED AUDITS (15)

Hide

<a href="#">[aria-*]</a> attributes match their roles	^
Each ARIA `role` supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. <a href="#">Learn more.</a>	
<a href="#">[aria-hidden="true"]</a> is not present on the document <code>&lt;body&gt;</code>	^
Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document <code>&lt;body&gt;</code> . <a href="#">Learn more.</a>	
<a href="#">[aria-*]</a> attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <a href="#">Learn more.</a>	
<a href="#">[aria-*]</a> attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <a href="#">Learn more.</a>	
Buttons have an accessible name	^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn more.](#)

#### ARIA IDs are unique

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn more.](#)

#### Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more.](#)

#### `[aria-hidden="true"]` elements do not contain focusable descendents

Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn more.](#)

#### The page contains a heading, skip link, or landmark region

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more.](#)

#### Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more.](#)

#### `<html>` element has a `[lang]` attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more.](#)

#### `<html>` element has a valid value for its `[lang]` attribute

Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn more.](#)

#### Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`).

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more.](#)

#### List items (`<li>`) are contained within `<ul>` or `<ol>` parent elements

Screen readers require list items ( <code>&lt;li&gt;</code> ) to be contained within a parent <code>&lt;ul&gt;</code> or <code>&lt;ol&gt;</code> to be announced properly. <a href="#">Learn more</a> .	
Heading elements appear in a sequentially-descending order	^
Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <a href="#">Learn more</a> .	

NOT APPLICABLE (25)

Hide

<input type="radio"/> <code>[accesskey]</code> values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <a href="#">Learn more</a> .	
<input type="radio"/> <code>button</code> , <code>link</code> , and <code>menuitem</code> elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more</a> .	
<input type="radio"/> ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more</a> .	
<input type="radio"/> ARIA <code>meter</code> elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more</a> .	
<input type="radio"/> ARIA <code>progressbar</code> elements have accessible names	^
When a <code>progressbar</code> element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <a href="#">Learn more</a> .	
<input type="radio"/> <code>[role]</code> s have all required <code>[aria-*)</code> attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. <a href="#">Learn more</a> .	
<input type="radio"/> Elements with an ARIA <code>[role]</code> that require children to contain a specific <code>[role]</code> have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <a href="#">Learn more</a> .	
<input type="radio"/> <code>[role]</code> s are contained by their required parent element	^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more.](#)

☐ `[role]` values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more.](#)

☐ ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more.](#)

☐ ARIA `tooltip` elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more.](#)

☐ ARIA `treeitem` elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more.](#)

☐ `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn more.](#)

☐ Definition list items are wrapped in `<dl>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. [Learn more.](#)

☐ `[id]` attributes on active, focusable elements are unique ^

All focusable elements must have a unique `id` to ensure that they're visible to assistive technologies. [Learn more.](#)

☐ No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn more.](#)

☐ `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn more.](#)

☐ Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more.](#)

☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more.](#)

☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more.](#)

☐ No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more.](#)

☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more.](#)

☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more.](#)

☐ `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn more.](#)

☐ `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more.](#)

# Best Practices

TRUST AND SAFETY

Includes front-end JavaScript libraries with known security vulnerabilities — 7 vulnerabilities detected

Some third-party scripts may contain known security vulnerabilities that are easily identified and exploited by attackers. [Learn more.](#)

Library Version	Vulnerability Count	Highest Severity
<a href="#">Bootstrap@4.1.1</a>	3	Medium
<a href="#">jQuery@2.1.4</a>	4	Medium

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn more](#)


Description	Directive	Severity
No CSP found in enforcement mode		High

GENERAL


Browser errors were logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more](#)

Source	Description
form-validator.min.js:1	SyntaxError: Unexpected token '<'
contact-form-script.js:1	SyntaxError: Unexpected token '<'
main.js:189	TypeError: \$(...).nivoLightbox is not a function at http://localhost:5000/assets/js/main.js:189:19 at http://localhost:5000/assets/js/main.js:194:2



Issues were logged in the [Issues](#) panel in Chrome Devtools



Issues logged to the `Issues` panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Issue type

Cookie

/maps?q=rua%20piaui,%20785&t=&z=19&ie=UTF8&iwloc=&output=embed (maps.google.com)

/g/collect?v=... (analytics.google.com)

/whatsapp-widget.min.js?\_=0.517... (waw.gallabox.com)

https://waw.gallabox.com


/assets/index.c32c17c6.js (waw.gallabox.com)

/assets/vendor.cdaf06c5.js (waw.gallabox.com)


/assets/index.d2e18d6f.css (waw.gallabox.com)

/assets/favicon.12ed700b.svg (waw.gallabox.com)

/maps/embed?origin=mfe&pb=!1m3!2m1!1srua+piaui,+785!6i19 (www.google.com)



Detected JavaScript libraries




All front-end JavaScript libraries detected on the page. [Learn more.](#)

Name	Version
Bootstrap	4.1.1
jQuery	2.1.4

PASSED AUDITS (10)


Hide

Uses HTTPS



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more.](#)

Avoids requesting the geolocation permission on page load



Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. <a href="#">Learn more.</a>							
Avoids requesting the notification permission on page load	^						
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. <a href="#">Learn more.</a>							
Allows users to paste into password fields	^						
Preventing password pasting undermines good security policy. <a href="#">Learn more.</a>							
Displays images with correct aspect ratio	^						
Image display dimensions should match natural aspect ratio. <a href="#">Learn more.</a>							
Serves images with appropriate resolution	^						
Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. <a href="#">Learn more.</a>							
Page has the HTML doctype	^						
Specifying a doctype prevents the browser from switching to quirks-mode. <a href="#">Learn more.</a>							
Properly defines charset	^						
A character encoding declaration is required. It can be done with a ` <meta/> ` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. <a href="#">Learn more.</a>							
Avoids deprecated APIs	^						
Deprecated APIs will eventually be removed from the browser. <a href="#">Learn more.</a>							
Page has valid source maps	^						
Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <a href="#">Learn more.</a>							
<table><tr><td>URL</td><td>Map URL</td></tr><tr><td>...js/popper.min.js (localhost)</td><td>...js/popper.min.js.map (localhost)</td></tr><tr><td colspan="2">SyntaxError: Unexpected token &lt; in JSON at position 0</td></tr></table>		URL	Map URL	...js/popper.min.js (localhost)	...js/popper.min.js.map (localhost)	SyntaxError: Unexpected token < in JSON at position 0	
URL	Map URL						
...js/popper.min.js (localhost)	...js/popper.min.js.map (localhost)						
SyntaxError: Unexpected token < in JSON at position 0							



URL	Map URL
...js/bootstrap.min.js (localhost)	...js/bootstrap.min.js.map (localhost)
SyntaxError: Unexpected token < in JSON at position 0	

NOT APPLICABLE (1)

Hide

○

Fonts with `font-display: optional` are preloaded

^

Preload ``optional`` fonts so first-time visitors may use them. [Learn more](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more](#).

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

○

Structured data is valid

^

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more](#).

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (11)

Hide

Has a `<meta name="viewport">` tag with `width` or `initial-scale`

^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more](#). TBT

Document has a `<title>` element

^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more](#).

Document has a meta description	^
Meta descriptions may be included in search results to concisely summarize page content. <a href="#">Learn more.</a>	
Page has successful HTTP status code	^
Pages with unsuccessful HTTP status codes may not be indexed properly. <a href="#">Learn more.</a>	
Links have descriptive text	^
Descriptive link text helps search engines understand your content. <a href="#">Learn more.</a>	
Links are crawlable	^
Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. <a href="#">Learn More</a>	
Page isn't blocked from indexing	^
Search engines are unable to include your pages in search results if they don't have permission to crawl them. <a href="#">Learn more.</a>	
robots.txt is valid	^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. <a href="#">Learn more.</a>	
Image elements have <code>[alt]</code> attributes	^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. <a href="#">Learn more.</a>	
Document has a valid <code>hreflang</code>	^
<code>hreflang</code> links tell search engines what version of a page they should list in search results for a given language or region. <a href="#">Learn more.</a>	
Document avoids plugins	^
Search engines can't index plugin content, and many devices restrict plugins or don't support them. <a href="#">Learn more.</a>	
NOT APPLICABLE (3)	Hide
<input type="radio"/> Document has a valid <code>rel=canonical</code>	^

Canonical links suggest which URL to show in search results. [Learn more.](#)

#### ○ Document uses legible font sizes ^

Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text  $\geq 12$ px. [Learn more.](#)

#### ○ Tap targets are sized appropriately ^

Interactive elements like buttons and links should be large enough (48x48px), and have enough space around them, to be easy enough to tap without overlapping onto other elements. [Learn more.](#)



## PWA

These checks validate the aspects of a Progressive Web App. [Learn more.](#)

### INSTALLABLE

#### ▲ Web app manifest or service worker do not meet the installability requirements — 3 reasons ^

Service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. With proper service worker and manifest implementations, browsers can proactively prompt users to add your app to their homescreen, which can lead to higher engagement. [Learn more.](#)

##### Failure reason

Manifest start URL is not valid

No matching service worker detected. You may need to reload the page, or check that the scope of the service worker for the current page encloses the scope and start URL from the manifest.

Downloaded icon was empty or corrupted

### PWA OPTIMIZED

#### ▲ Does not register a service worker that controls page and `start_url` ^

The service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. [Learn more](#).

▲ Is not configured for a custom splash screen **Failures: Manifest does not have a PNG icon of at least 512px.** ^

A themed splash screen ensures a high-quality experience when users launch your app from their homescreens. [Learn more](#).

Sets a theme color for the address bar. ^

The browser address bar can be themed to match your site. [Learn more](#).

○ Content is sized correctly for the viewport ^

If the width of your app's content doesn't match the width of the viewport, your app might not be optimized for mobile screens. [Learn more](#).

Has a `<meta name="viewport">` tag with `width` or `initial-scale` ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more](#). TBT

Provides a valid `apple-touch-icon` ^

For ideal appearance on iOS when users add a progressive web app to the home screen, define an `'apple-touch-icon'`. It must point to a non-transparent 192px (or 180px) square PNG. [Learn More](#).

▲ Manifest doesn't have a maskable icon ^

A maskable icon ensures that the image fills the entire shape without being letterboxed when installing the app on a device. [Learn more](#).

#### ADDITIONAL ITEMS TO MANUALLY CHECK (3)

Hide

○ Site works cross-browser ^

To reach the most number of users, sites should work across every major browser. [Learn more](#).

○ Page transitions don't feel like they block on the network ^

Transitions should feel snappy as you tap around, even on a slow network. This experience is key to a user's perception of performance. [Learn more](#).

○ Each page has a URL ^

Ensure individual pages are deep linkable via URL and that URLs are unique for the purpose of shareability on social media. [Learn more](#).

These checks are required by the baseline [PWA Checklist](#) but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.

Captured at May 24, 2022,  
7:50 PM GMT-3

Emulated Desktop with  
Lighthouse 9.5.0

Single page load

Initial page load

Custom throttling

Using Chromium  
101.0.4951.67 with devtools