


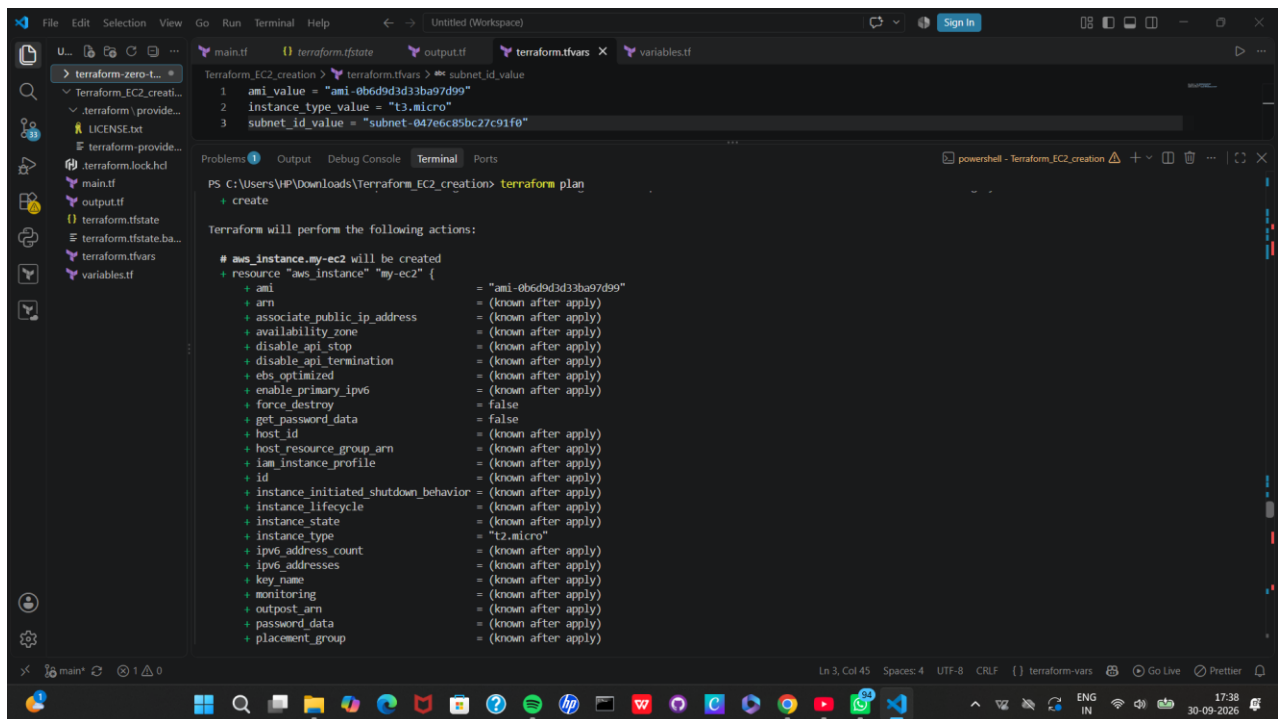
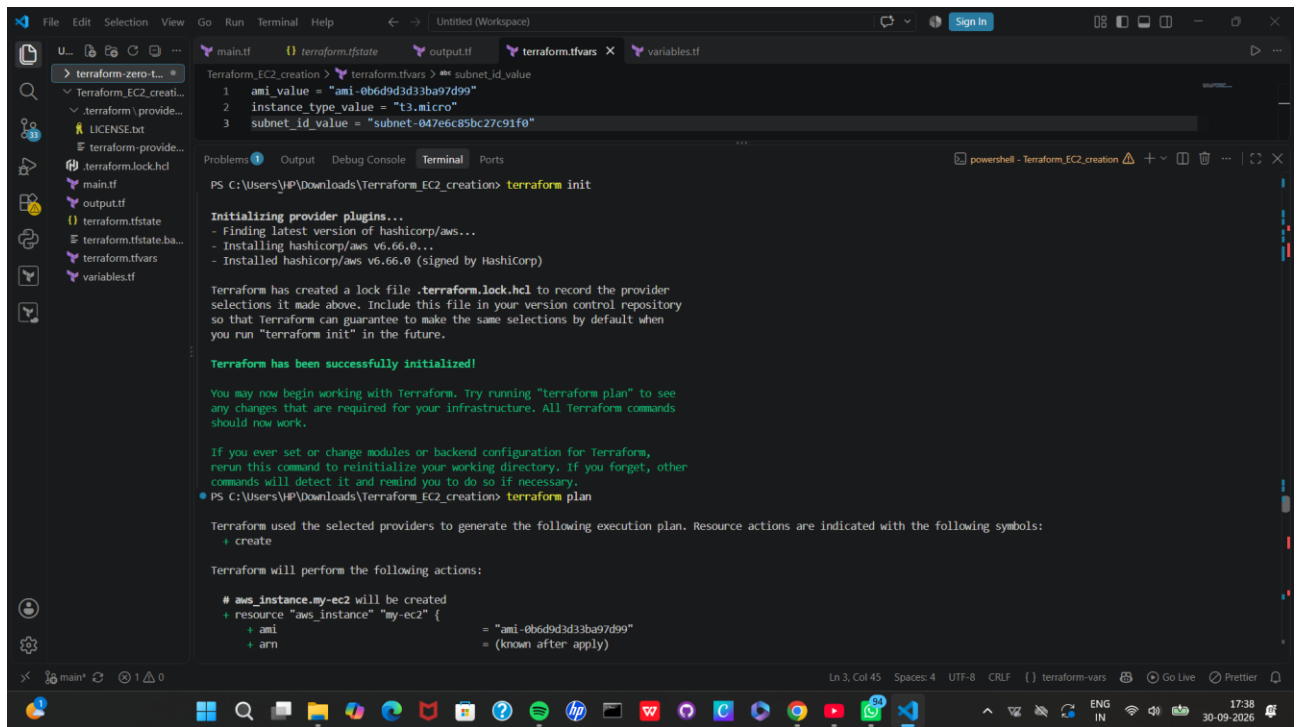


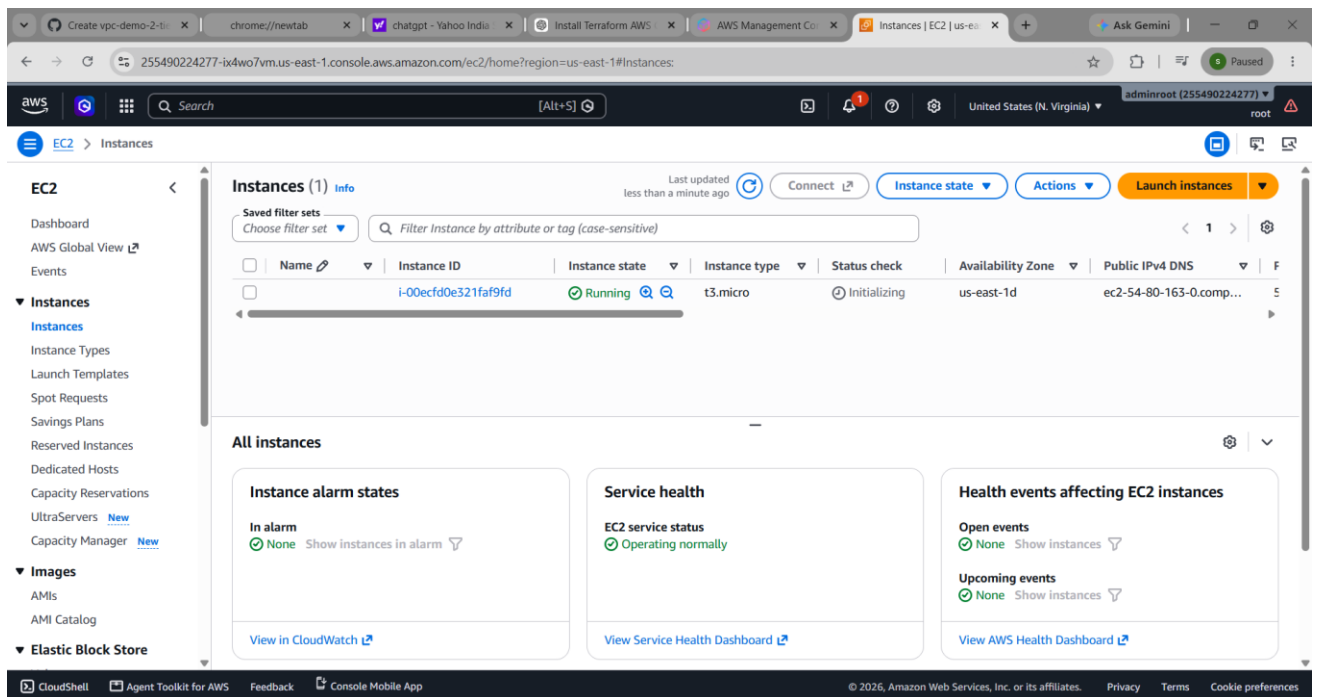

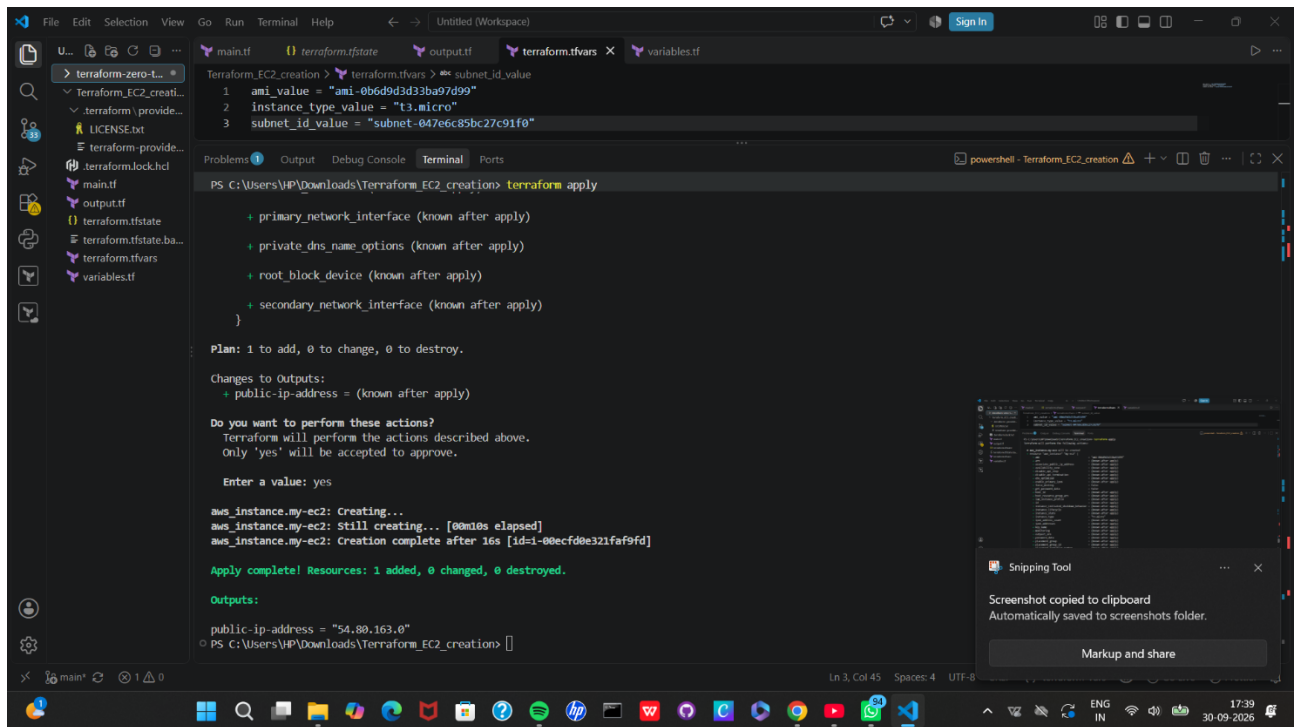

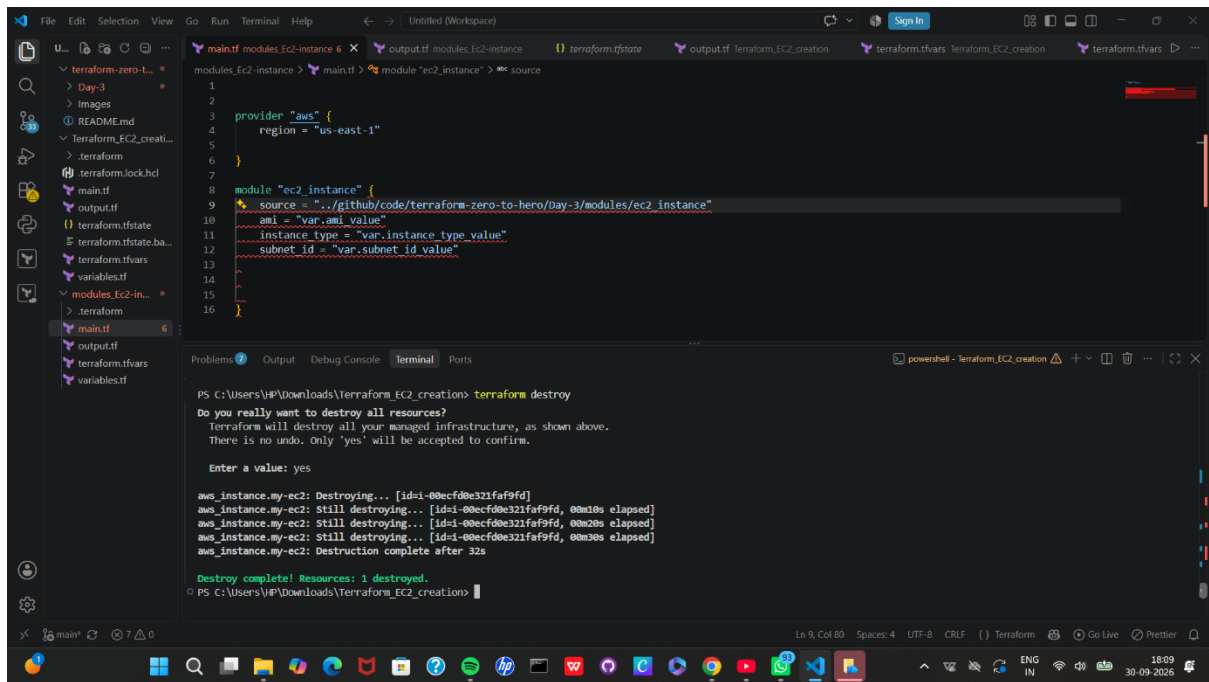

The project uses Terraform **Input Variables** and **output variables** and a terraform.tfvars file to make the infrastructure configuration flexible and reusable.

I also performed the complete Terraform lifecycle:

- terraform init
- terraform plan
- terraform apply
- terraform destroy

AWS Resource Created

- Amazon EC2 Instance
- Subnet

The EC2 instance is deployed into a specific AWS subnet using Terraform.

Technologies Used

- AWS
- Terraform
- Amazon EC2
- AWS VPC
- HCL (HashiCorp Configuration Language)
- VS Code

- **AWS CLI**

1. Terraform Init

terraform init

Initializes the Terraform working directory and downloads the required providers.

2. Terraform Plan

terraform plan

Shows what Terraform is going to create, modify, or delete before making changes.

3. Terraform Apply

terraform apply

Creates the AWS infrastructure defined in the Terraform configuration.

4. Terraform Destroy

terraform destroy

Removes the infrastructure that was created by Terraform.

This helps avoid leaving unnecessary AWS resources running and incurring charges.

Workflow

Terraform Configuration

|

v

terraform init

|

v

terraform plan

|

v

terraform apply

|

v

AWS EC2 Instance Created

|

v

terraform destroy

|

v

AWS Resources Removed