



Jquery:


## Download jquery:

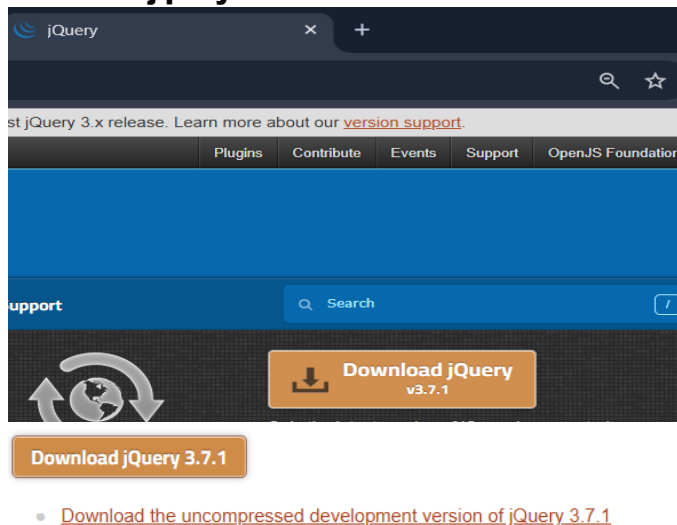


Save as at your jquery folder:

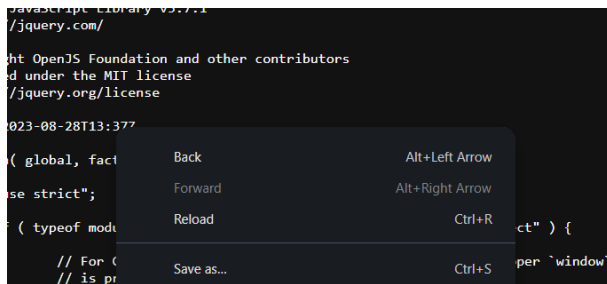

At last after body :

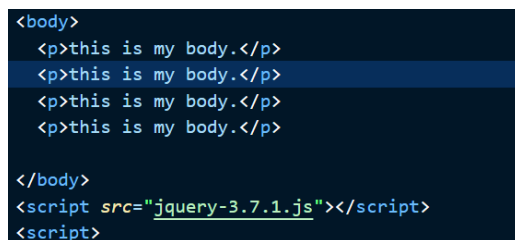

Basics

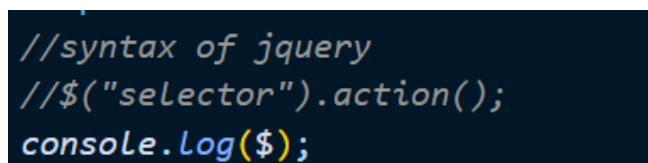

do this when click:

```
// $("p").click();  
//you click on  
  
// $("p").click(function()  
// {  
//     console.log("you clicked on p");  
// });  
//do this when you click on p
```

hide particular:

```
$("#p").click(function()  
{  
    $(this).hide();  
    //je click kro e hide thay  
});
```

if particular:

```
console.log("you clicked on");  
$('#id').hide();  
$('.class').hide();
```

html late load thay ne e pela js load na thay etle:

```
<script>  
    $(document).ready(function () {  
        //Your jquery code here  
    })
```

Type of selector

```
//minly three type of selector:  
//1. element selector  
//2. id selector: #id  
//3. class selector: .class  
  
//1. element selector  
// $("p").click(function())}  
  
//2. id selector  
// $("#id").click();  
  
//3. class selector  
// $(".class").click();AS
```

Html content:

```
$("#p").click(function () {  
    console.log("you clicked on p",this);  
    //this give all html content:  
});
```

Other selector:

```
$("*").click ()  
$("p.odd").click();  
$("p#sec").click();  
$("p:first").click();
```

Now copy all to new js file separate code :

Events in jq:

```
// Events in jQuery  
// Mouse events = click, dblclick, mouseenter, mouseleave  
// KeyboardEvent = keypress, keydown, MediaKeyStatusMap  
// form events = submit, change, focus, blur  
// document/window events = load, resize, scroll, unload
```

On method in jq:

```
// demoing the on method  
$('p').on(  
    {  
        click: function() {  
            console.log('Thanks for clicking', this);  
        },  
        mouseleave: function () {  
            console.log("mouseleave");  
        }  
    }  
);
```

Hide and show:

```
$('#wiki').hide(1000, function () {  
    console.log("hidden");  
})  
$('#wiki').show(1000, function () {  
    console.log("show");  
})
```

Toggle: hide-> show // show->hide

```
<button id='but'>Toggle now</button>
<div id='wiki'>
  Code With Harry(1770-3854) was the first person born in
  from the colonial Province of Maryland, he became influ
</div>

$('#but').click(function(){
  $('#wiki').toggle(1000);
});
```

*//fadeOUT-to hide in 3 sec*

```
$("#btn").click(function(){
  $(".box").fadeOut(3000);
});
```

*//fadeIN-to show in 1 sec*

```
$("#btn").click(function(){
  $(".box").fadeIn(1000);
});
```

*//fadetoggle:*

The fadeToggle() method toggles between the fadeIn() and fadeOut() methods.

If the elements are faded out, fadeToggle() will fade them in.

If the elements are faded in, fadeToggle() will fade them out.

```
$("#btn").click(function(){
  $(".box").fadeToggle(1000);
});

$("#btn2").click(function(){
  $("#p2").fadeToggle("slow", "linear");
});

$("#btn3").click(function(){
  $("#p3").fadeToggle("fast");
});
```

*//fade to:->added opacity only:*

The fadeTo() method gradually changes the opacity, for selected elements, to a specified opacity (fading effect).

Slide: -> animate text up hide and down show:

```
// Slide methods - speed and callback parameters are optional
// $('#wiki').slideUp(1000, function(){
//     console.log('done');
// })
// $('#wiki').slideDown(1000)
// $('#wiki').slideToggle(1000)
```

Animate:

```
// Animate function in jQuery
$('#wiki').animate({
    opacity:0.3,
    height: '150px',
    width:'350px'
}, "fast") I
```

To stop animation:

```
$('#wiki').stop()
► w.fn.init [div#wiki]
```

Form:

```
<form>
  <input id='inp' type="text"> I
  <textarea id='ta'> this is your value my text area</textarea>
```

Catholic ceremony to be held in the White House.

this is your value my text area

mouseleave

```
> $('#ta').val()
< " this is your value my text area"
> $('#ta').val('setting it to harry');
< ► w.fn.init [textarea#ta]
> |
```

Also empty any element:

```
> $('#wiki').empty()  
< ▶ w.fn.init [div#wiki]
```

To change element text:

```
> $('#wiki').text('you are good')  
< ▶ w.fn.init [div#wiki]
```

To remove from body element:

```
> $('#wiki').remove()  
< ▶ w.fn.init [div#wiki]
```

ALSO FOR class:

```
> $('#wiki').addClass('myclass2')  
< ▶ w.fn.init [div#wiki.myclass.myclass2]  
> $('#wiki').removeClass('myclass2')  
< ▶ w.fn.init [div#wiki.myclass]  
I
```

Css:\

```
$('#wiki').css('background-color', 'red')  
$('#wiki').css('background-color')
```

AJAX:

```
// AJAX Using jQuery  
$.get('https://code.jquery.com/jquery-3.3.1.js', function (data, status) { alert(data); })  
$.get('https://code.jquery.com/jquery-3.3.1.js', function (data, status) { alert(status); })  
$.post('https://code.jquery.com/jquery-3.3.1.js',  
  { name: 'harry', channel: 'code with harry' },  
  function (data, status) { alert(status); }); I
```