


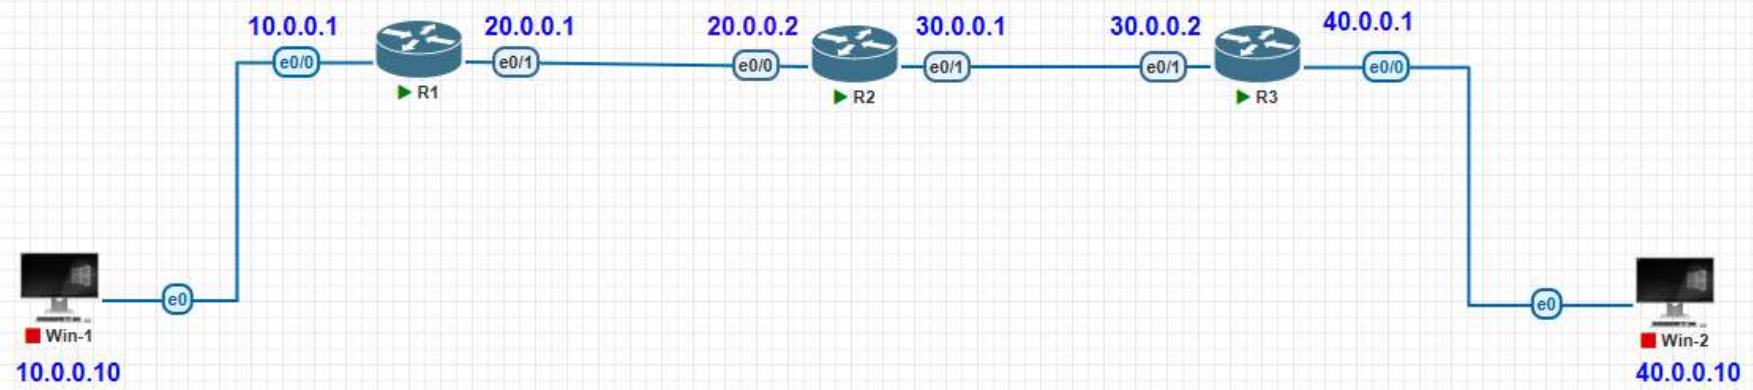

```
R1#
R1#
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR


Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
O    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/1
L    20.0.0.1/32 is directly connected, Ethernet0/1
O    30.0.0.0/8 [110/20] via 20.0.0.2, 00:02:06, Ethernet0/1
O    40.0.0.0/8 [110/30] via 20.0.0.2, 00:01:56, Ethernet0/1
R1#
```

```
R2
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

O    10.0.0.0/8 [110/20] via 20.0.0.1, 00:00:46, Ethernet0/0
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
C    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
O    40.0.0.0/8 [110/20] via 30.0.0.2, 00:00:11, Ethernet0/1
R2#
*Aug 19 18:34:22.730: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Confi
```

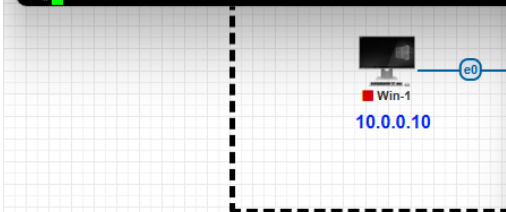

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

O    10.0.0.0/8 [110/30] via 30.0.0.1, 00:00:25, Ethernet0/1
O    20.0.0.0/8 [110/20] via 30.0.0.1, 00:00:25, Ethernet0/1
O    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
O    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    40.0.0.0/8 is directly connected, Ethernet0/0
L    40.0.0.1/32 is directly connected, Ethernet0/0
R3#
```

