




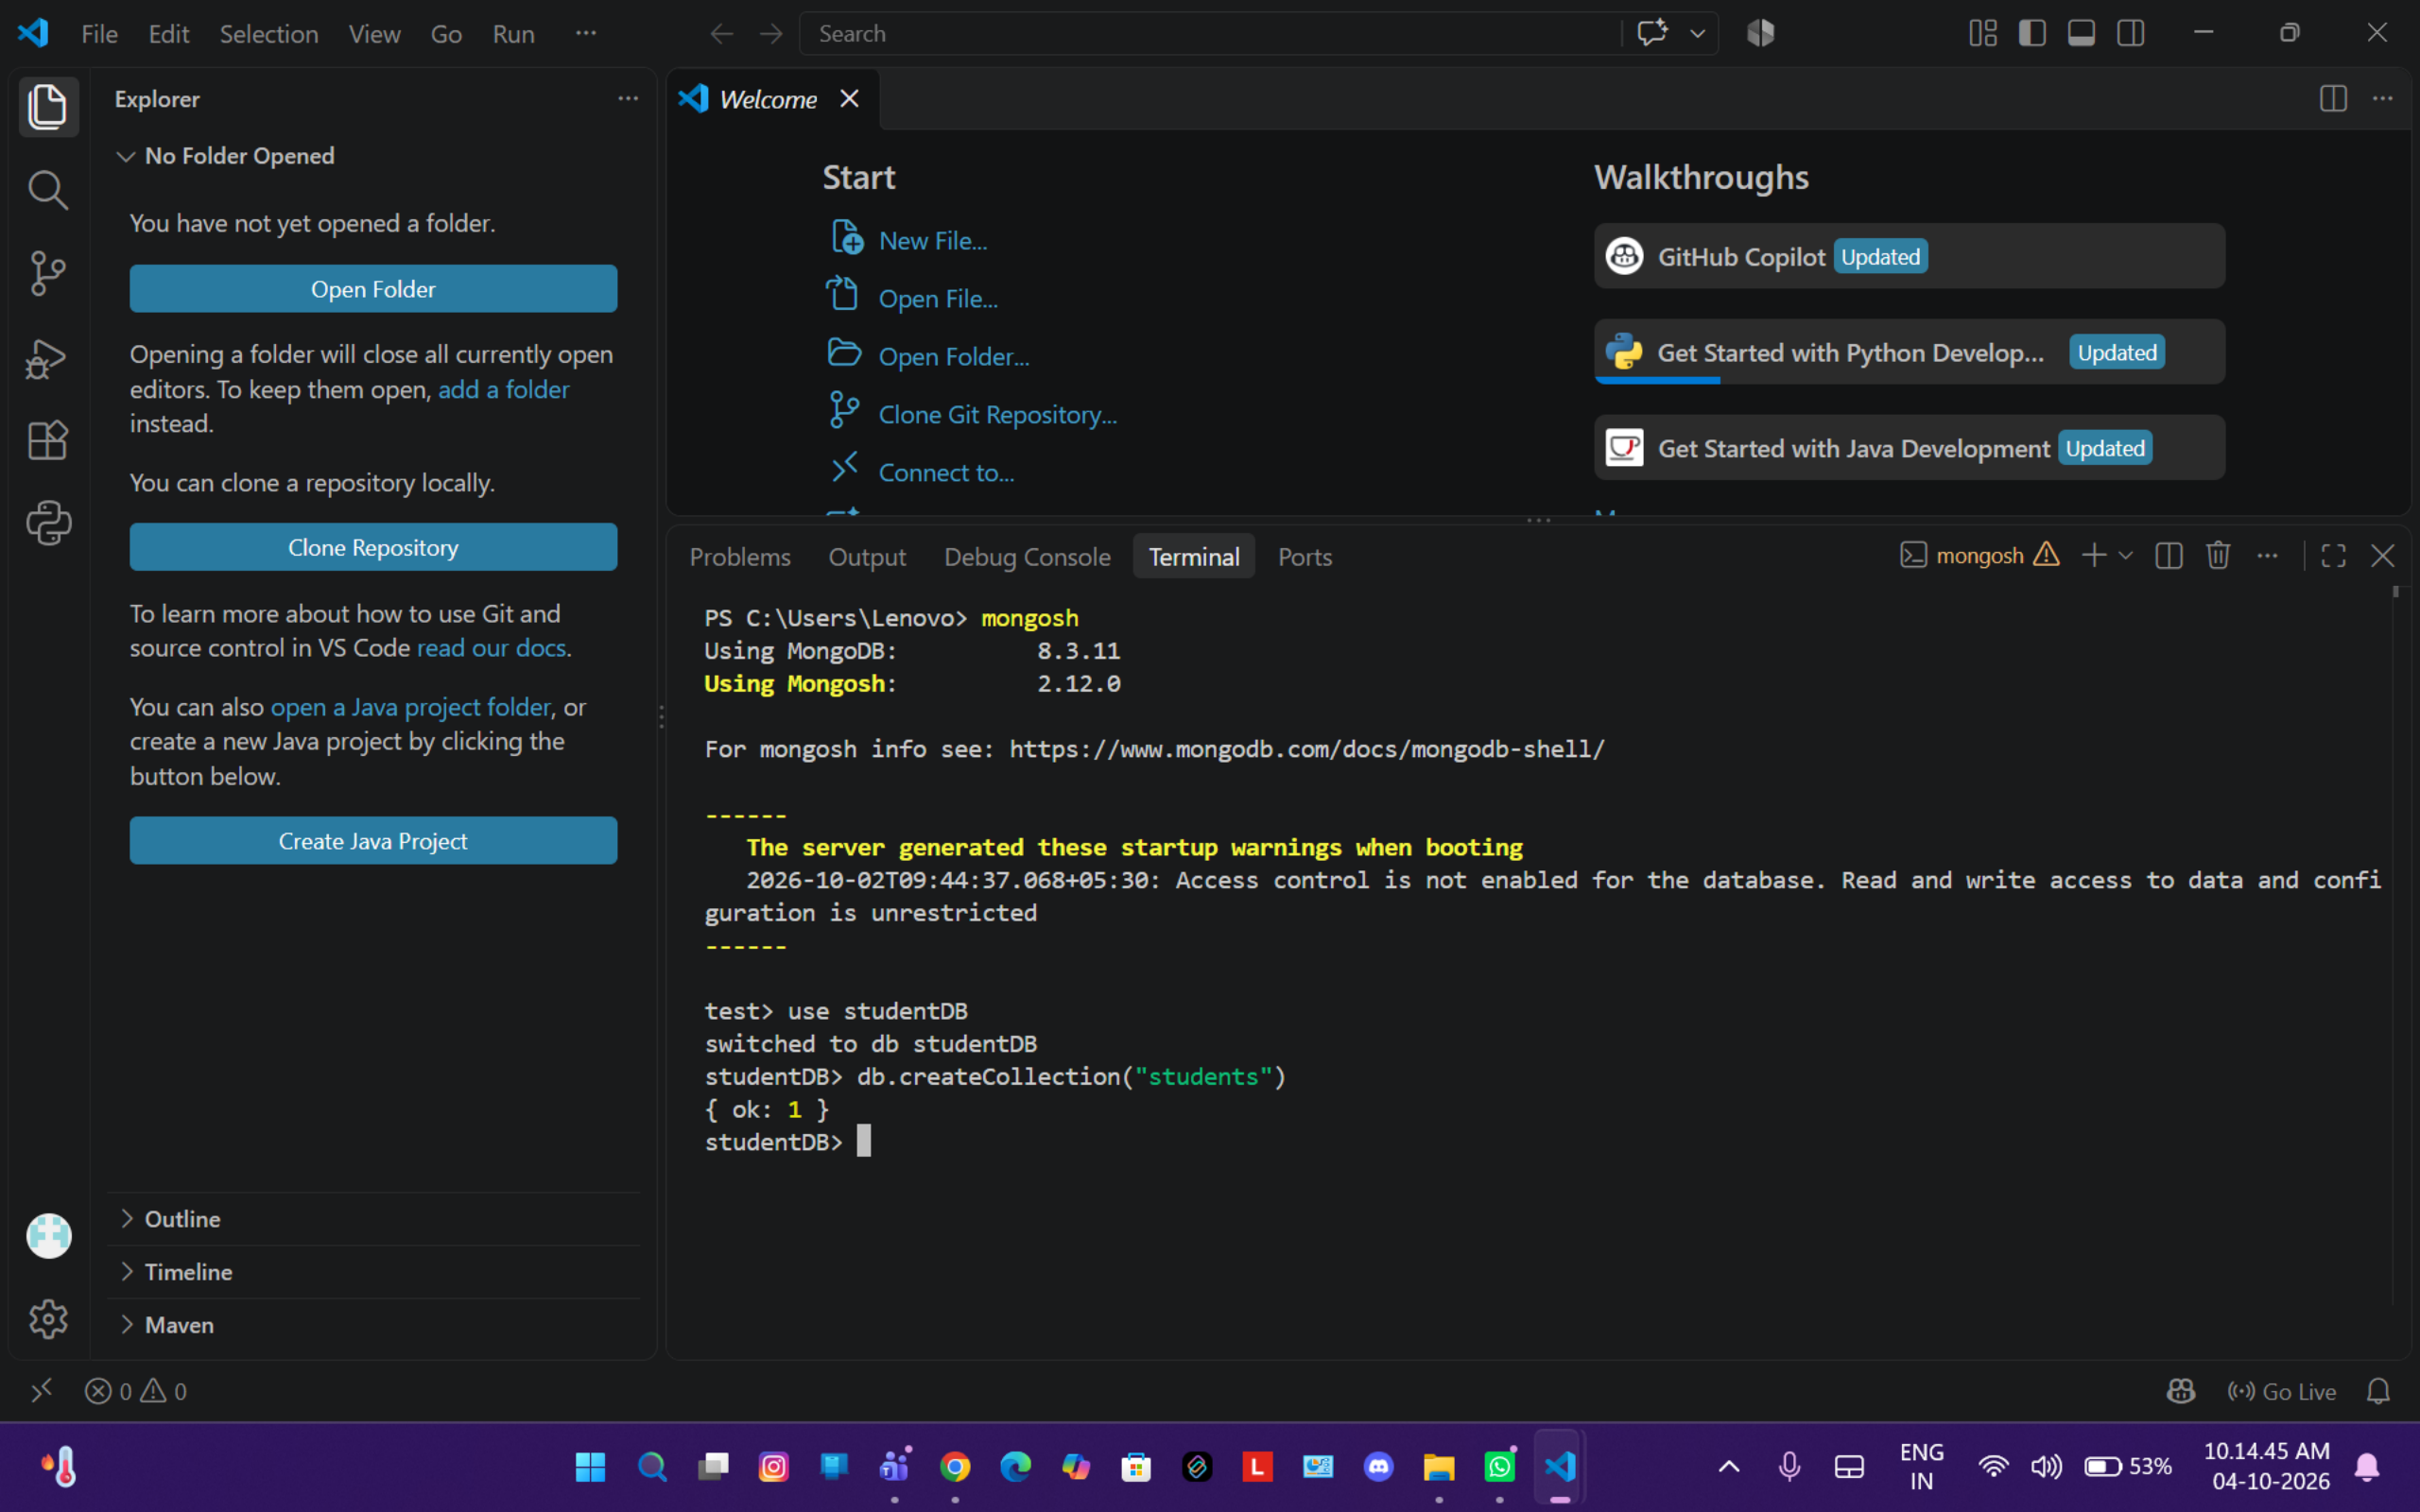

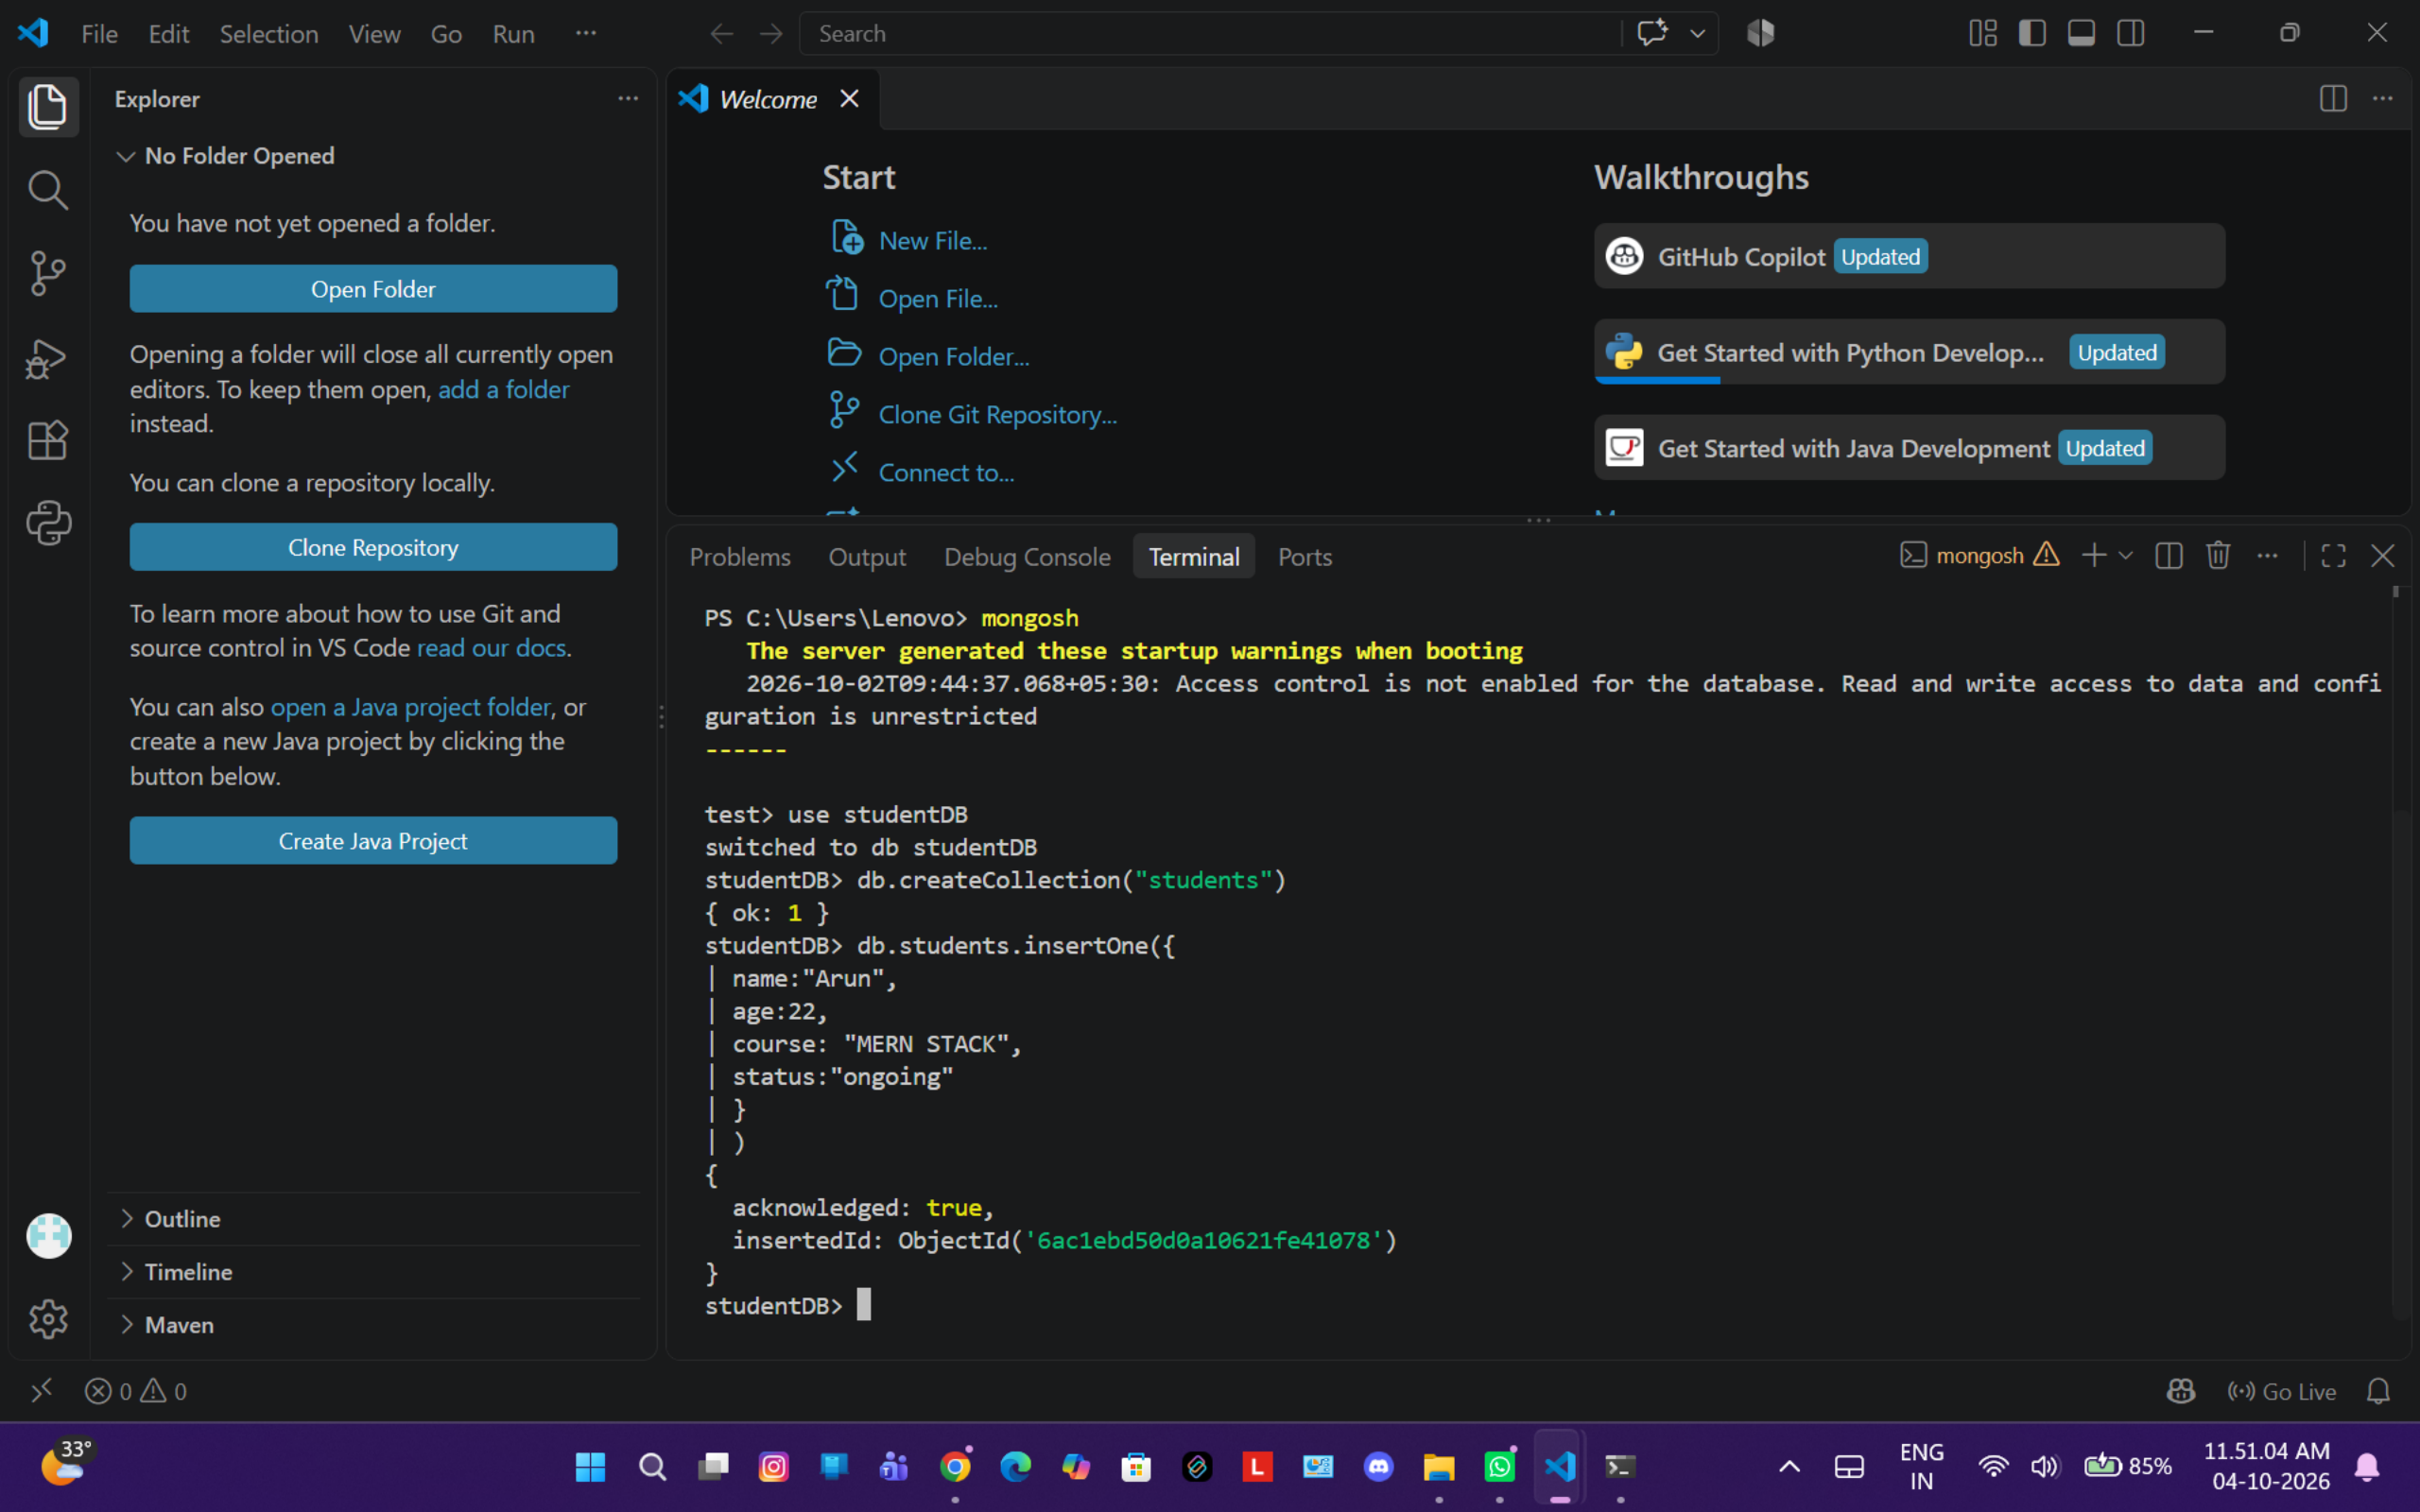



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ 🗑 ... [] ✕

PS C:\Users\Lenovo> mongosh

```

8 | {
> 9 |   name:"Arjun",
    |   ^
10 |   age:22,
11 |   course:"Javascript",
12 |   status:"Ongoing"

```

studentDB> db.students.insertMany([

```


{
  name: "Priya",
  age: 17,
  course: "JavaScript",
  status: "Completed"
},
{
  name: "Arjun",
  age: 21,
  course: "HTML & CSS Developer",
  status: "ongoing"
},
{
  name: "Nivetha",
  age: 23,
  course: "React Developer",
  status: "Completed"
}
])
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6ac1f4320d0a10621fe41079'),
    '1': ObjectId('6ac1f4320d0a10621fe4107a'),
    '2': ObjectId('6ac1f4320d0a10621fe4107b')
  }
}

```



>< (x) 0 ⚠ 0

Go Live 🔔




Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ 🗑 ... | [] ×

```
PS C:\Users\Lenovo> mongosh
}
studentDB> db.students.find()
[
  {
    _id: ObjectId('6ac1ebd50d0a10621fe41078'),
    name: 'Arun',
    age: 22,
    course: 'MERN STACK',
    status: 'ongoing'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe41079'),
    name: 'Priya',
    age: 17,
    course: 'JavaScript',
    status: 'Completed'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107a'),
    name: 'Arjun',
    age: 21,
    course: 'HTML & CSS Developer',
    status: 'ongoing'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  }
]
studentDB> db.students.find({course : " MERN STACK"})

studentDB> 
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ ✕ ... | [] ✕


```
PS C:\Users\Lenovo> mongosh
{
  _id: ObjectId('6ac1f4320d0a10621fe41079'),
  name: 'Priya',
  age: 17,
  course: 'JavaScript',
  status: 'Completed'
},
{
  _id: ObjectId('6ac1f4320d0a10621fe4107a'),
  name: 'Arjun',
  age: 21,
  course: 'HTML & CSS Developer',
  status: 'ongoing'
},
{
  _id: ObjectId('6ac1f4320d0a10621fe4107b'),
  name: 'Nivetha',
  age: 23,
  course: 'React Developer',
  status: 'Completed'
}
]
studentDB> db.students.find({course : " MERN STACK"})

studentDB> db.students.find({course : "MERN STACK"})
[
  {
    _id: ObjectId('6ac1ebd50d0a10621fe41078'),
    name: 'Arun',
    age: 22,
    course: 'MERN STACK',
    status: 'ongoing'
  }
]
studentDB> |
```



>< (x) 0 (a) 0

Go Live 🔔



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ 🗑 ... | [] ×


```
PS C:\Users\Lenovo> mongosh
status: 'Completed'
}
]
studentDB> db.students.find({course : " MERN STACK"})

studentDB> db.students.find({course : "MERN STACK"})
[
  {
    _id: ObjectId('6ac1ebd50d0a10621fe41078'),
    name: 'Arun',
    age: 22,
    course: 'MERN STACK',
    status: 'ongoing'
  }
]
studentDB> db.students.find({status:Completed})
ReferenceError: Completed is not defined
studentDB> db.students.find({status:"Completed"})
[
  {
    _id: ObjectId('6ac1f4320d0a10621fe41079'),
    name: 'Priya',
    age: 17,
    course: 'JavaScript',
    status: 'Completed'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  }
]
studentDB> |
```




>< (x) 0 ⚠ 0


Go Live 🔔


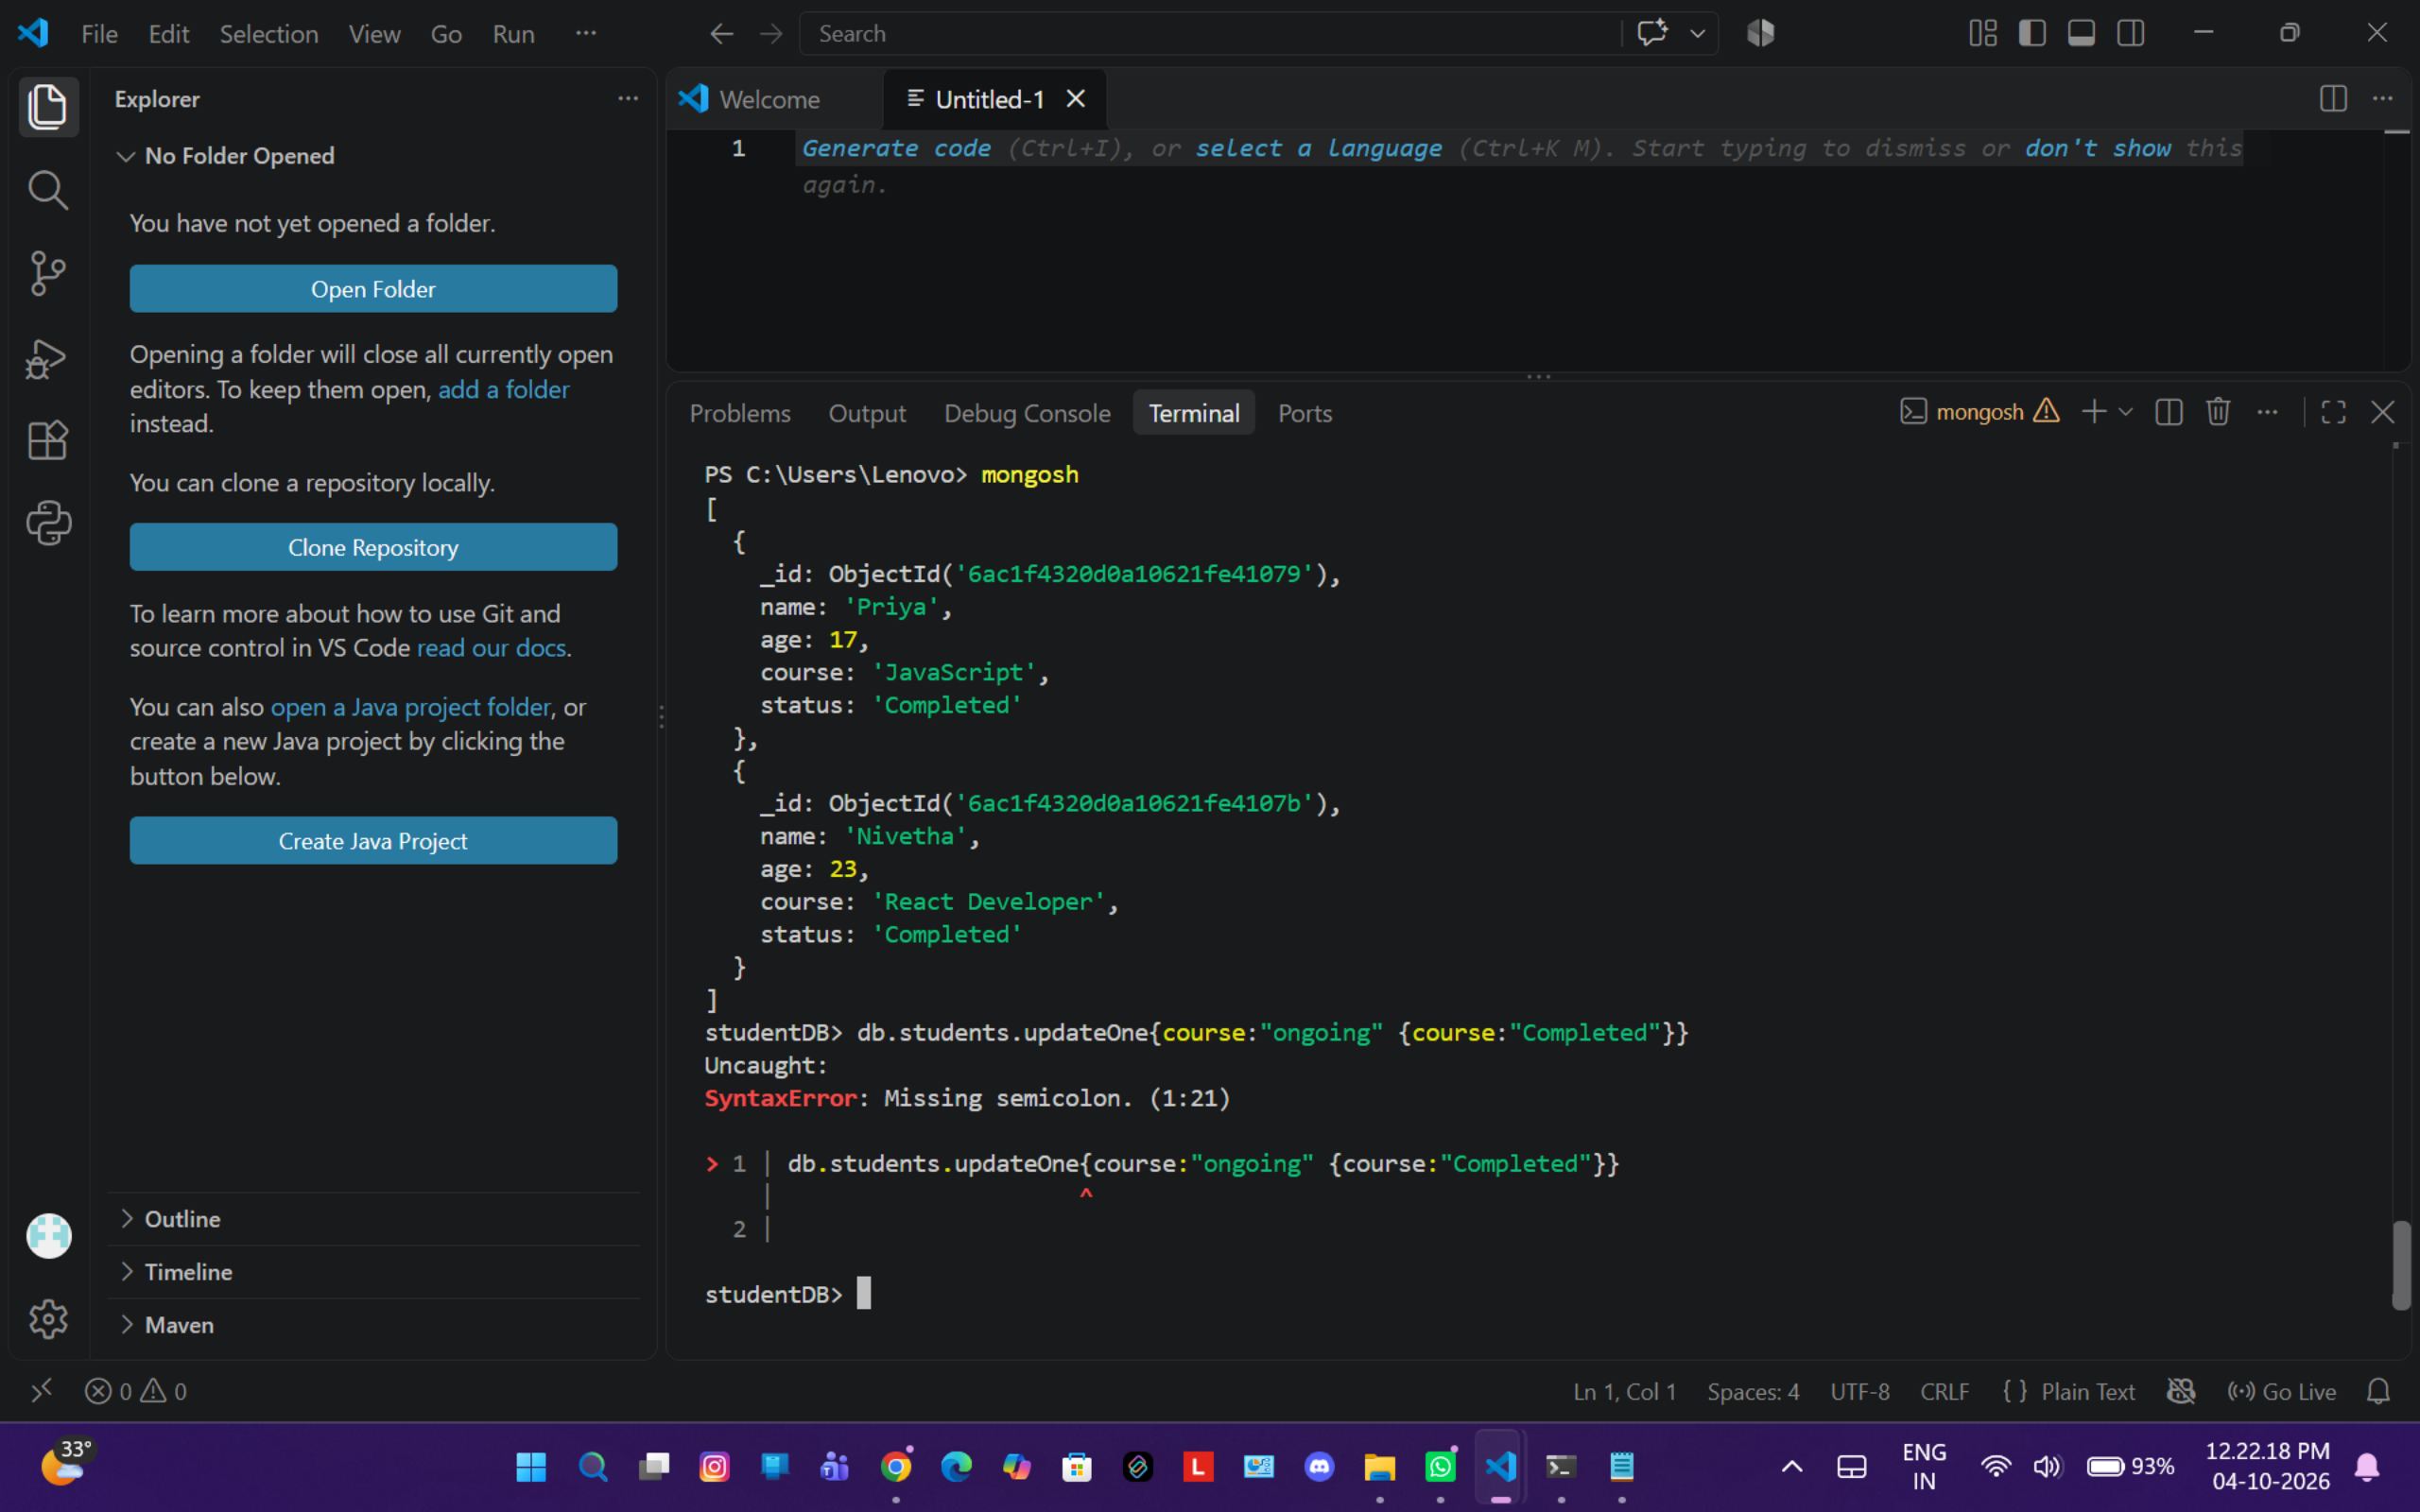



A screenshot of the Visual Studio Code (VS Code) Explorer sidebar. The sidebar has a dark background. At the top, there's a header 'Explorer' with a document icon on the left and a three-dot menu on the right. Below the header, the text 'No Folder Opened' is displayed with a downward arrow icon. Underneath, a message states: 'You have not yet opened a folder.' This is followed by a large blue button labeled 'Open Folder'. Below the button, another message says: 'Opening a folder will close all currently open editors. To keep them open, [add a folder](#) instead.' This is followed by another large blue button labeled 'Clone Repository'. Below that, a message reads: 'You can clone a repository locally.' This is followed by a large blue button labeled 'Clone Repository'. Below the button, a message says: 'To learn more about how to use Git and source control in VS Code [read our docs](#).' This is followed by another large blue button labeled 'Create Java Project'. At the bottom of the sidebar, there are three expandable sections: 'Outline', 'Timeline', and 'Maven', each with a right-pointing arrow icon. The sidebar also features a vertical toolbar on the left with icons for Explorer (document), Search (magnifying glass), Source Control (branch), Run and Debug (play with bug), Explorer (grid), and Python (Python logo). At the very bottom of the sidebar, there are icons for a help/feedback button (light blue circle with a plus) and a settings gear.

[illegible]

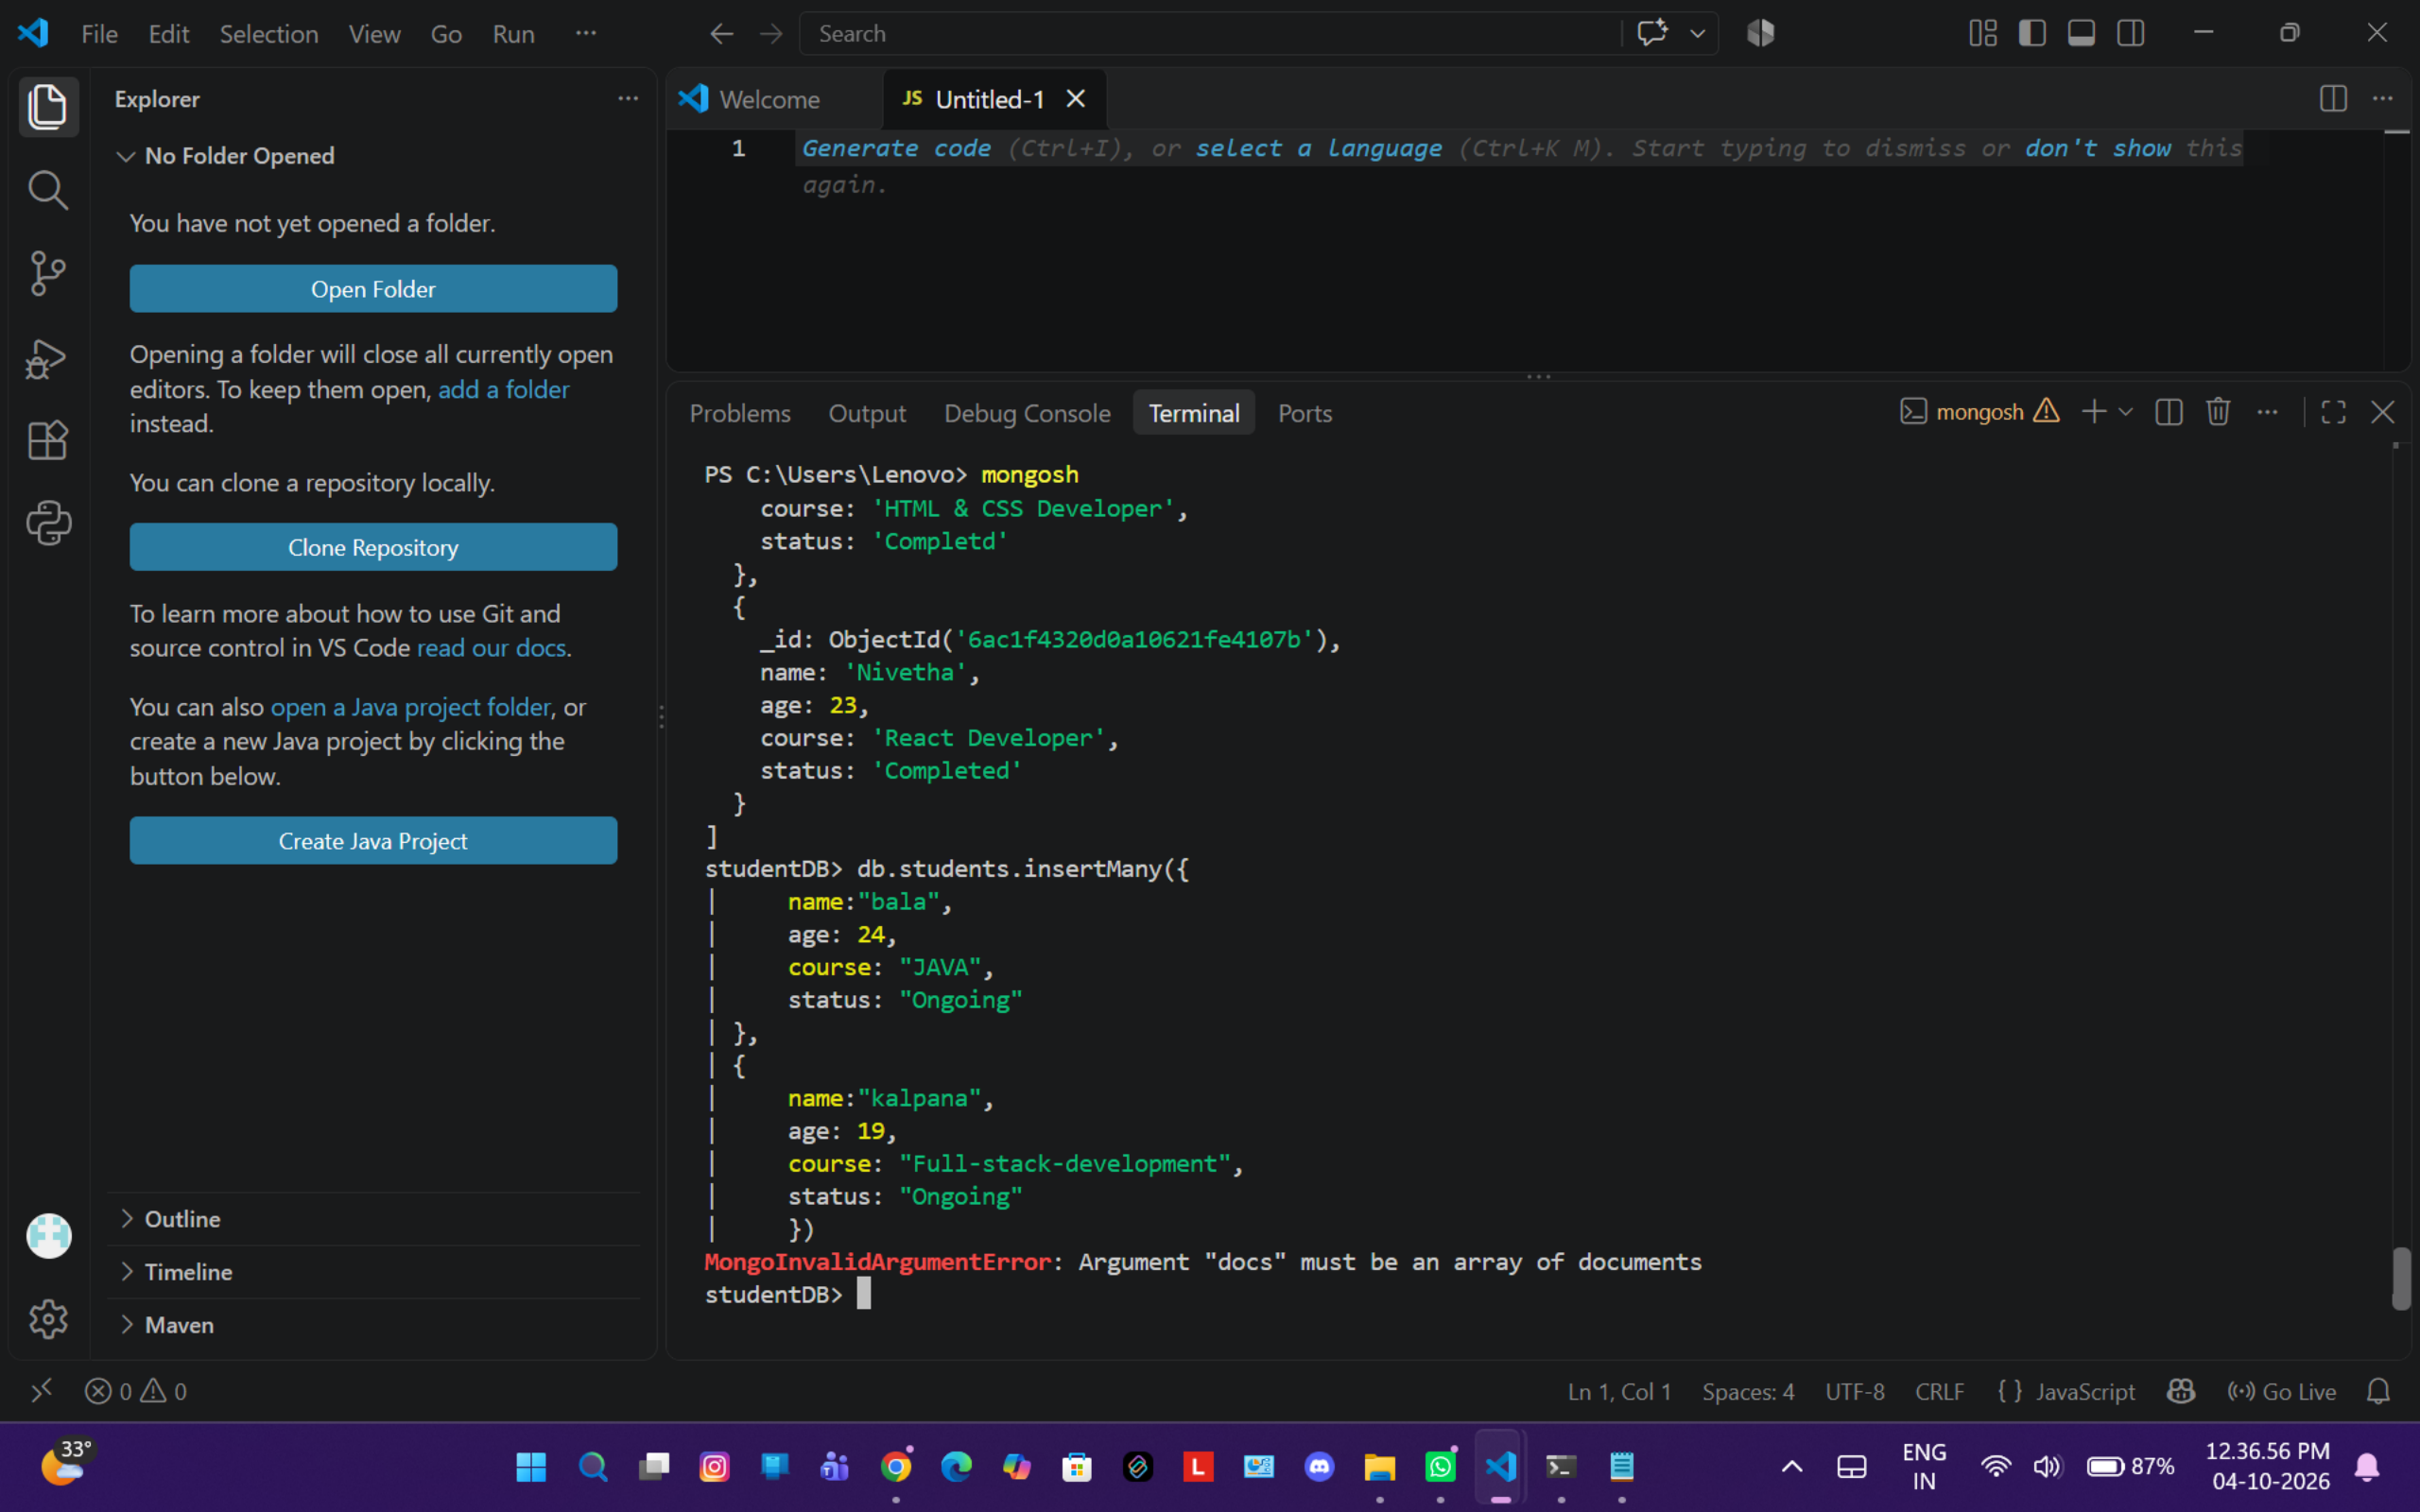

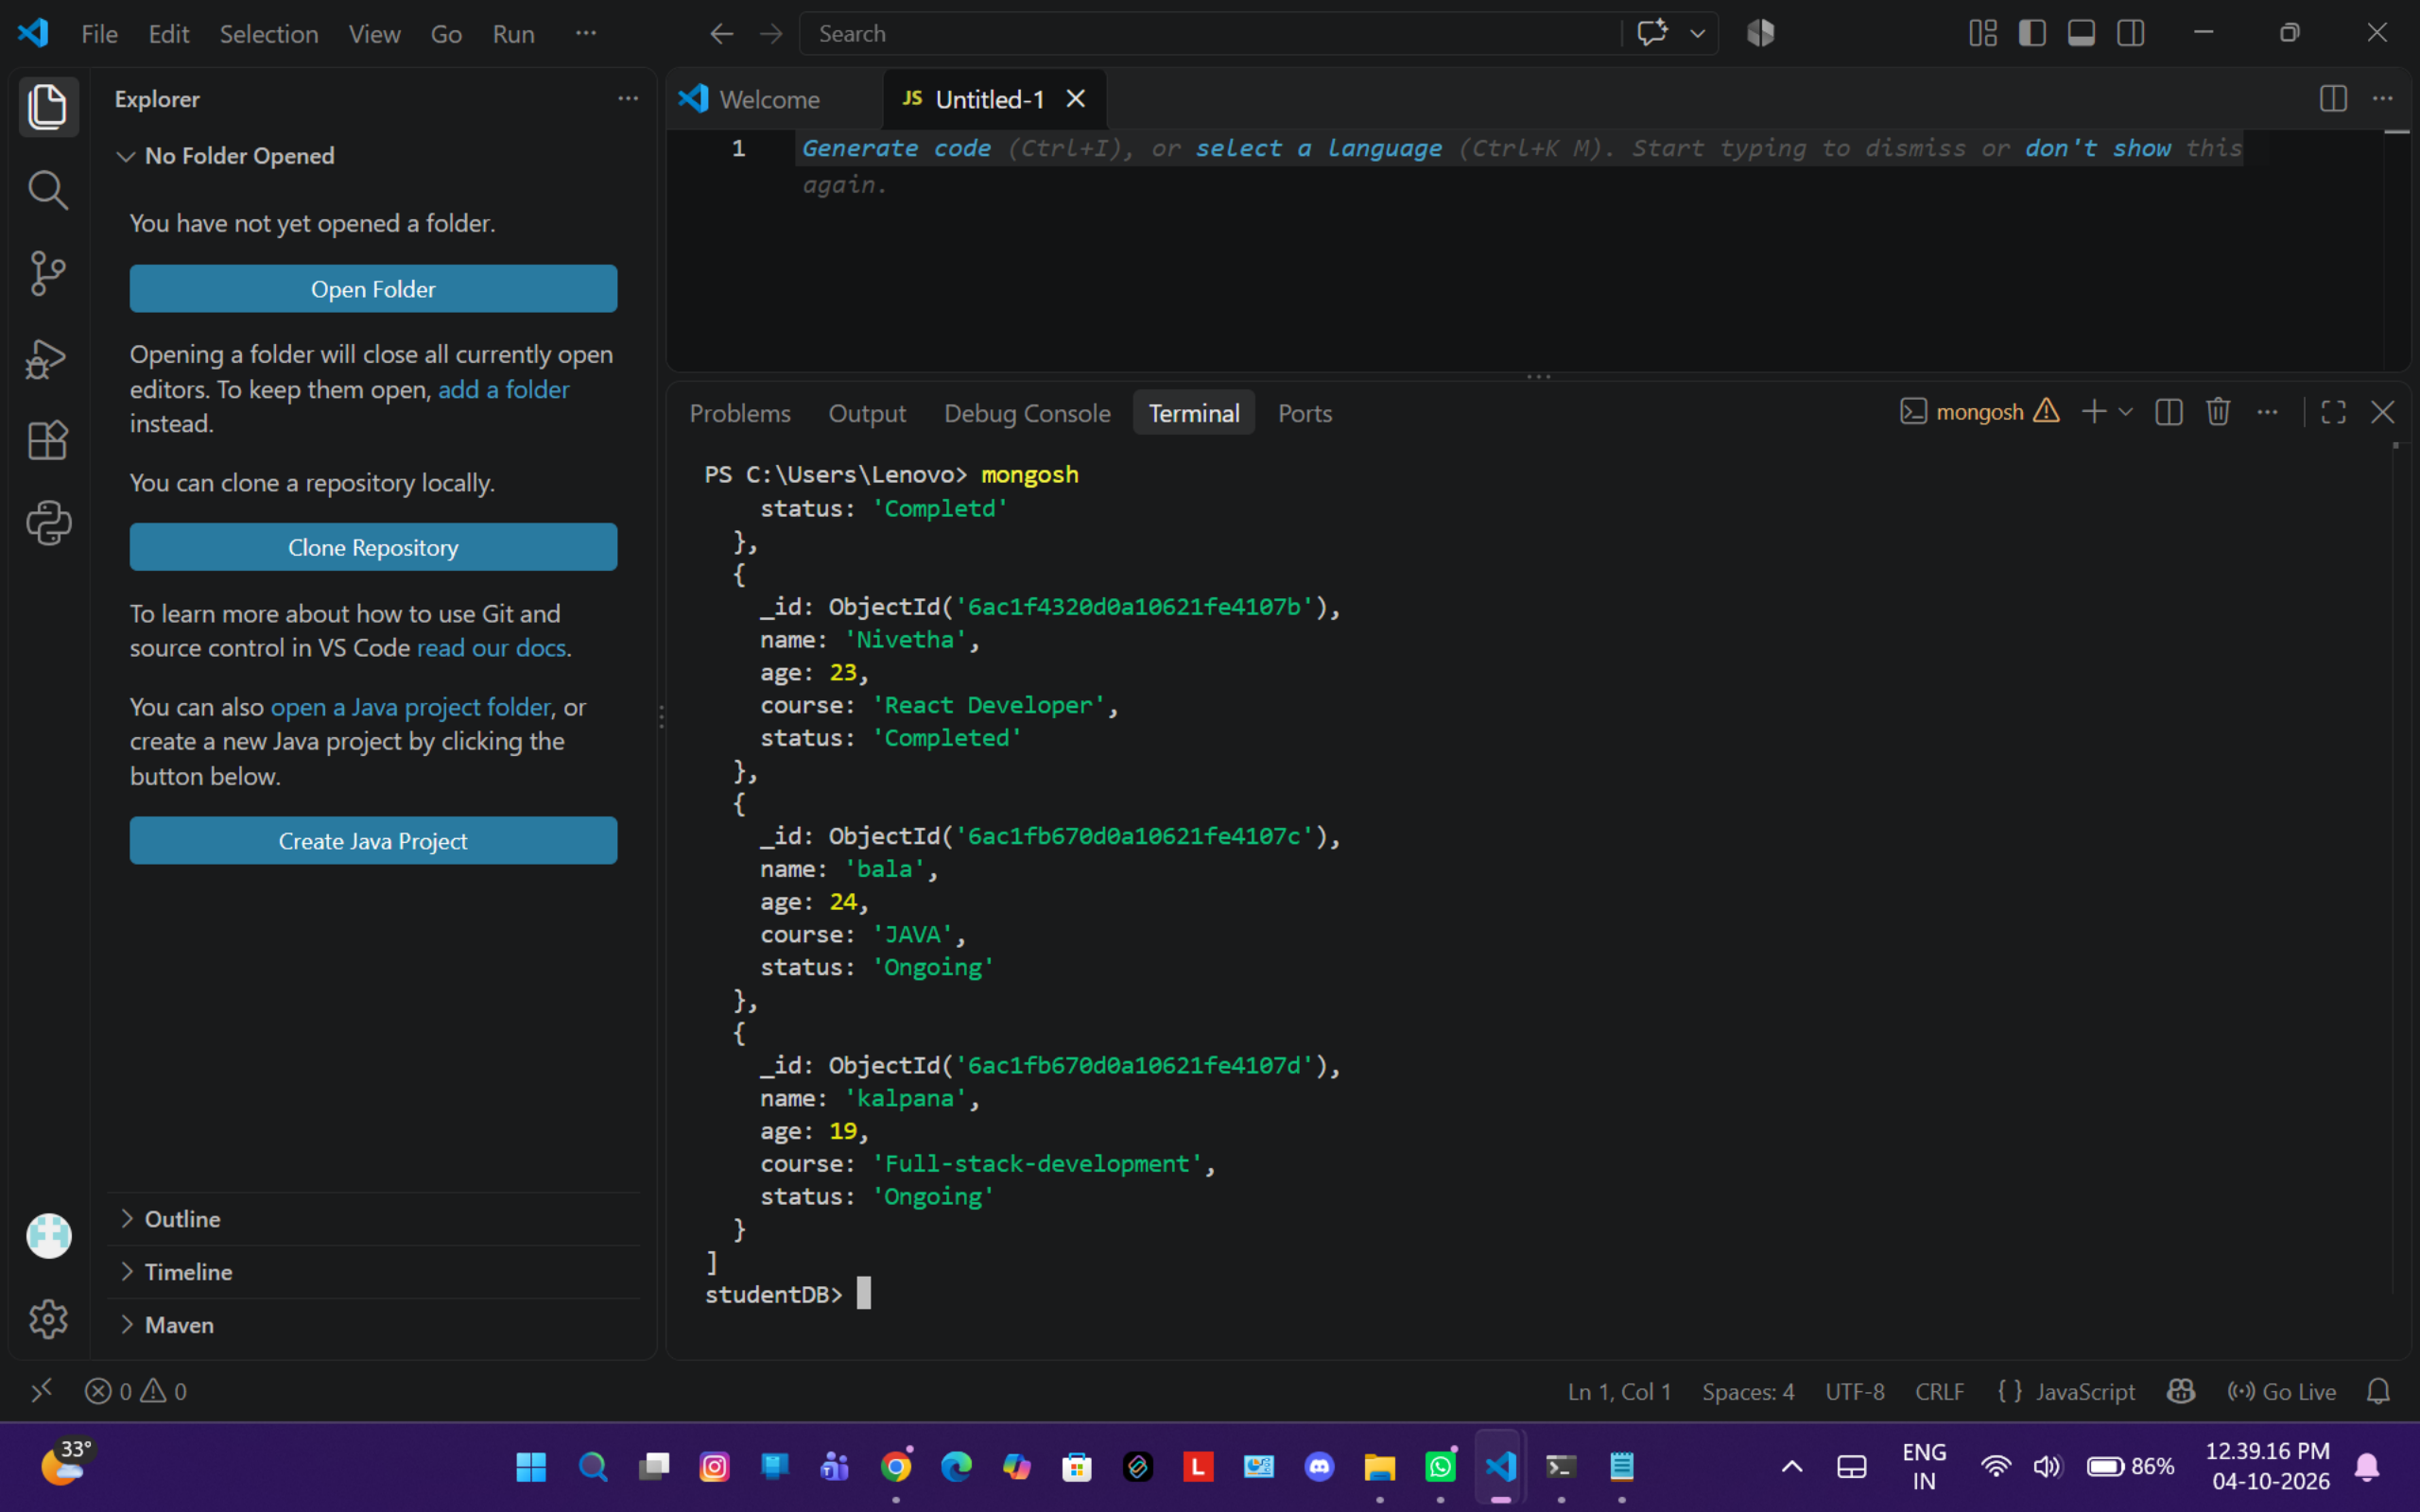

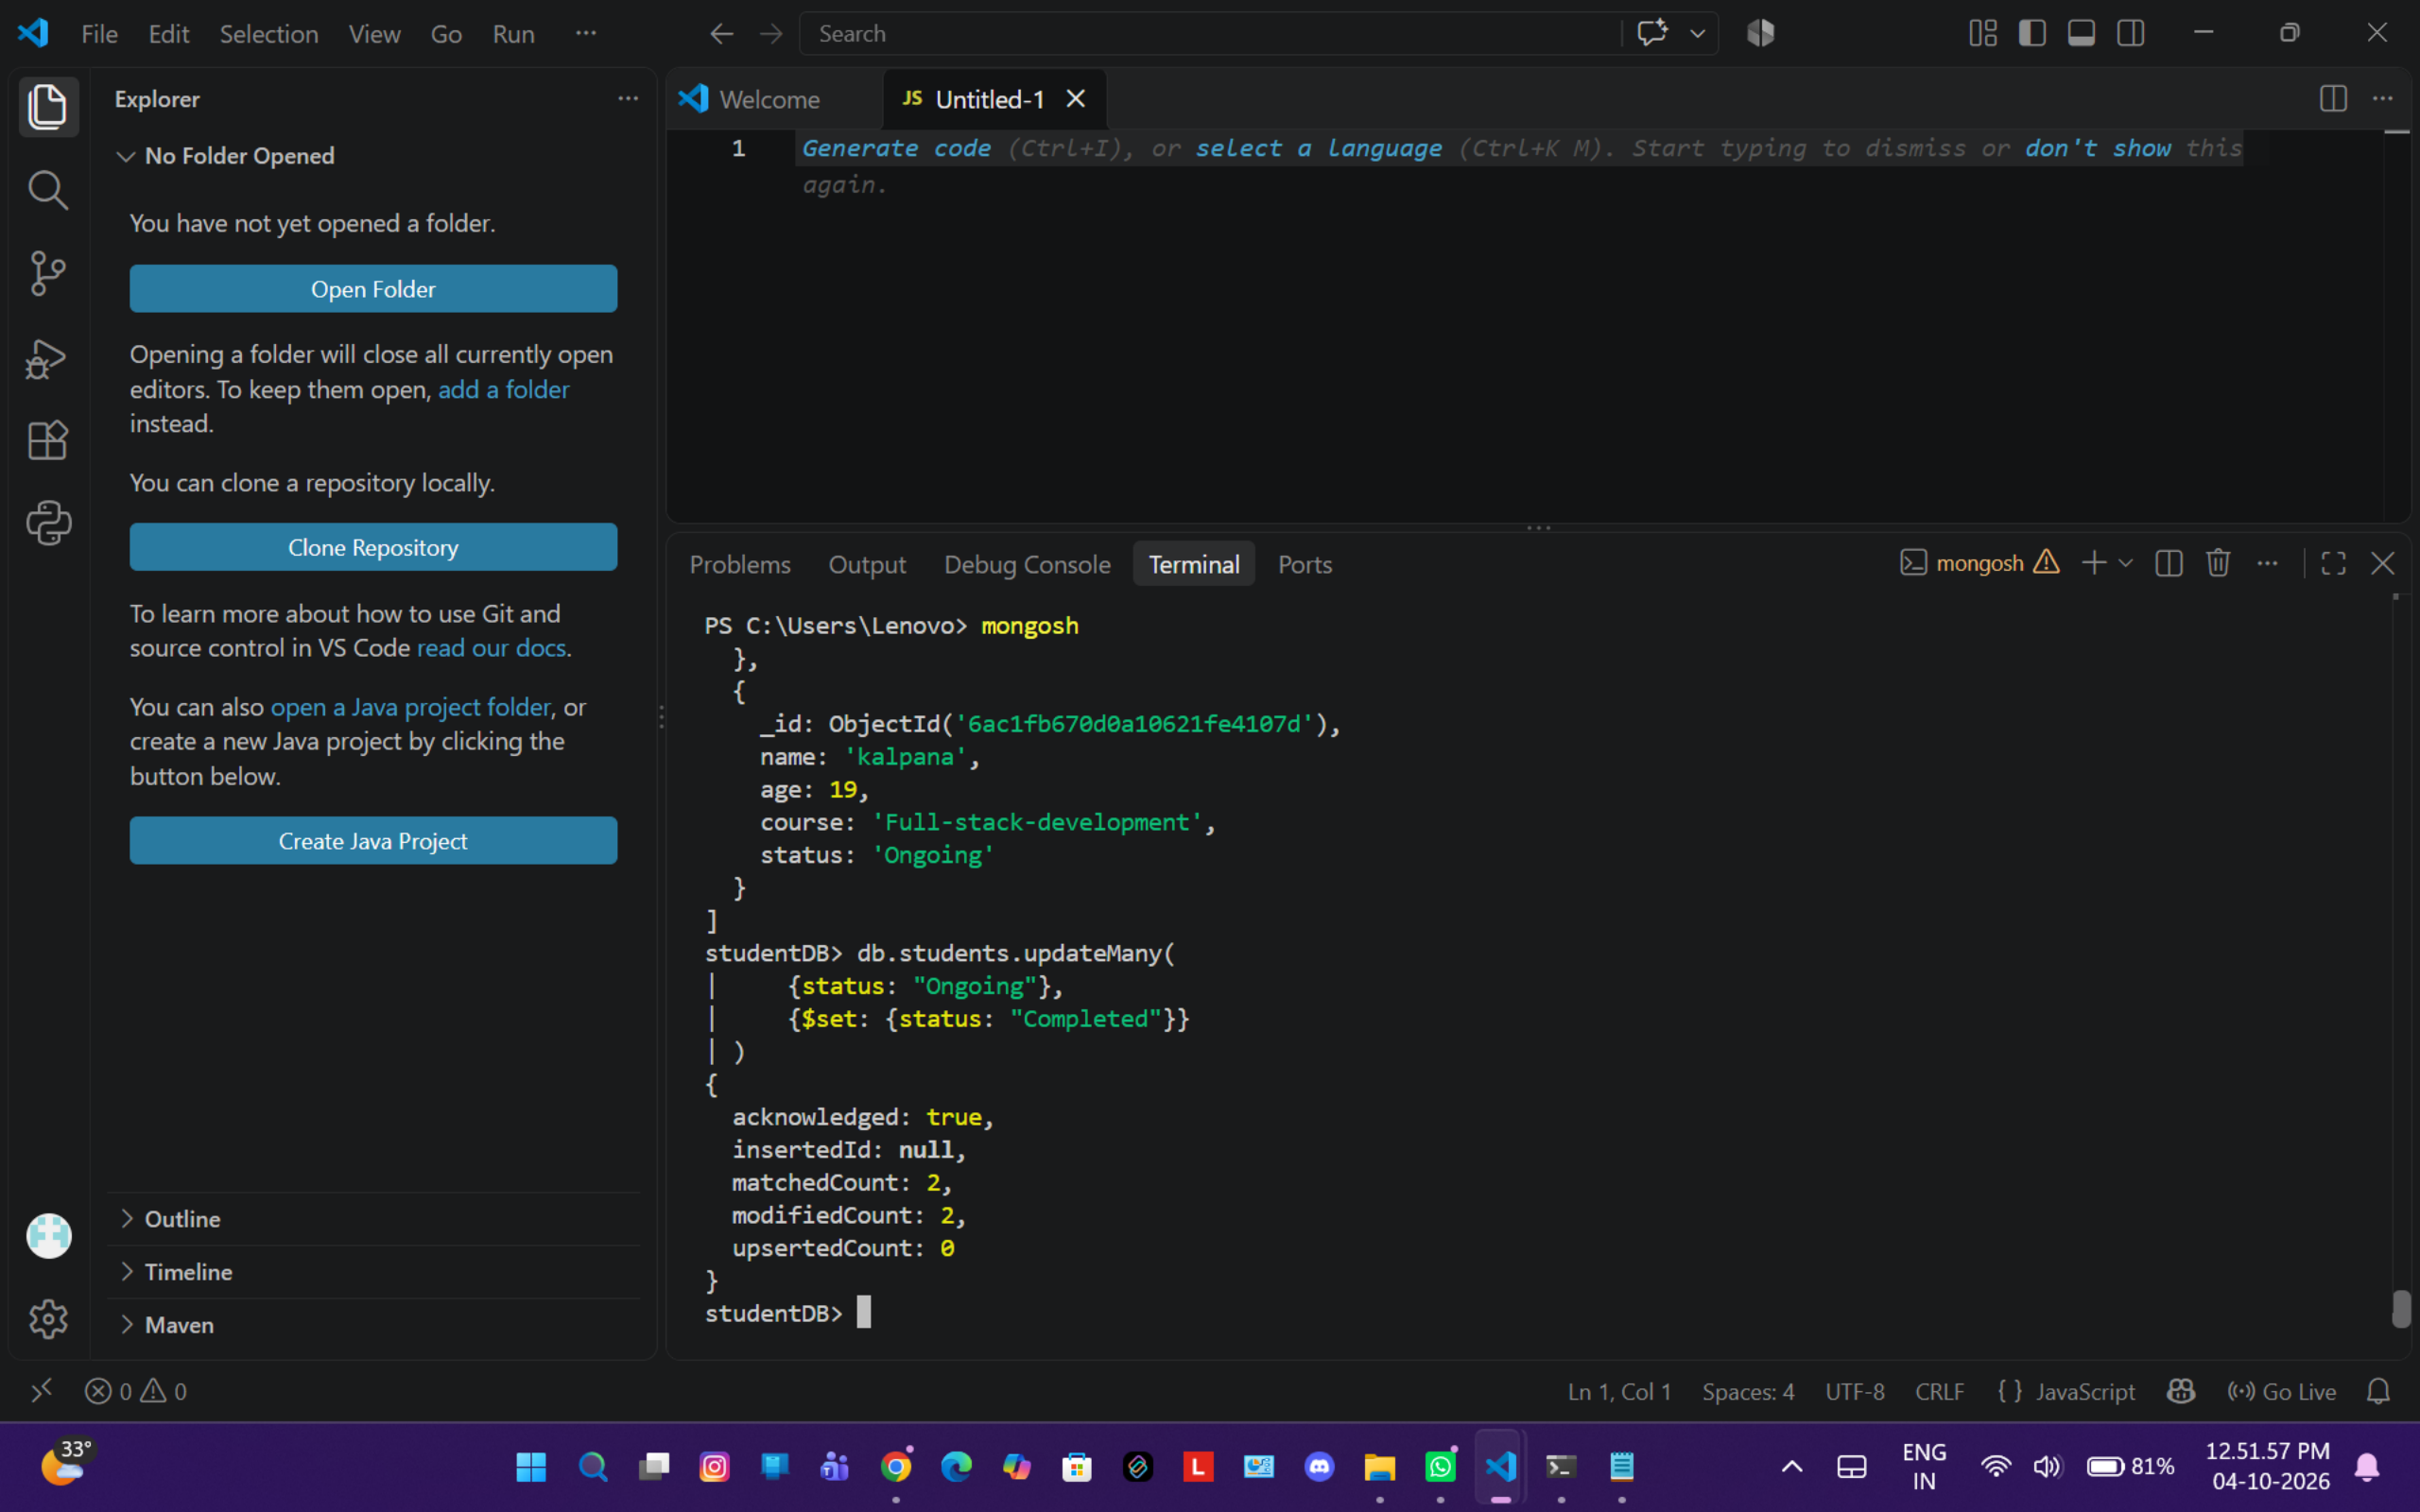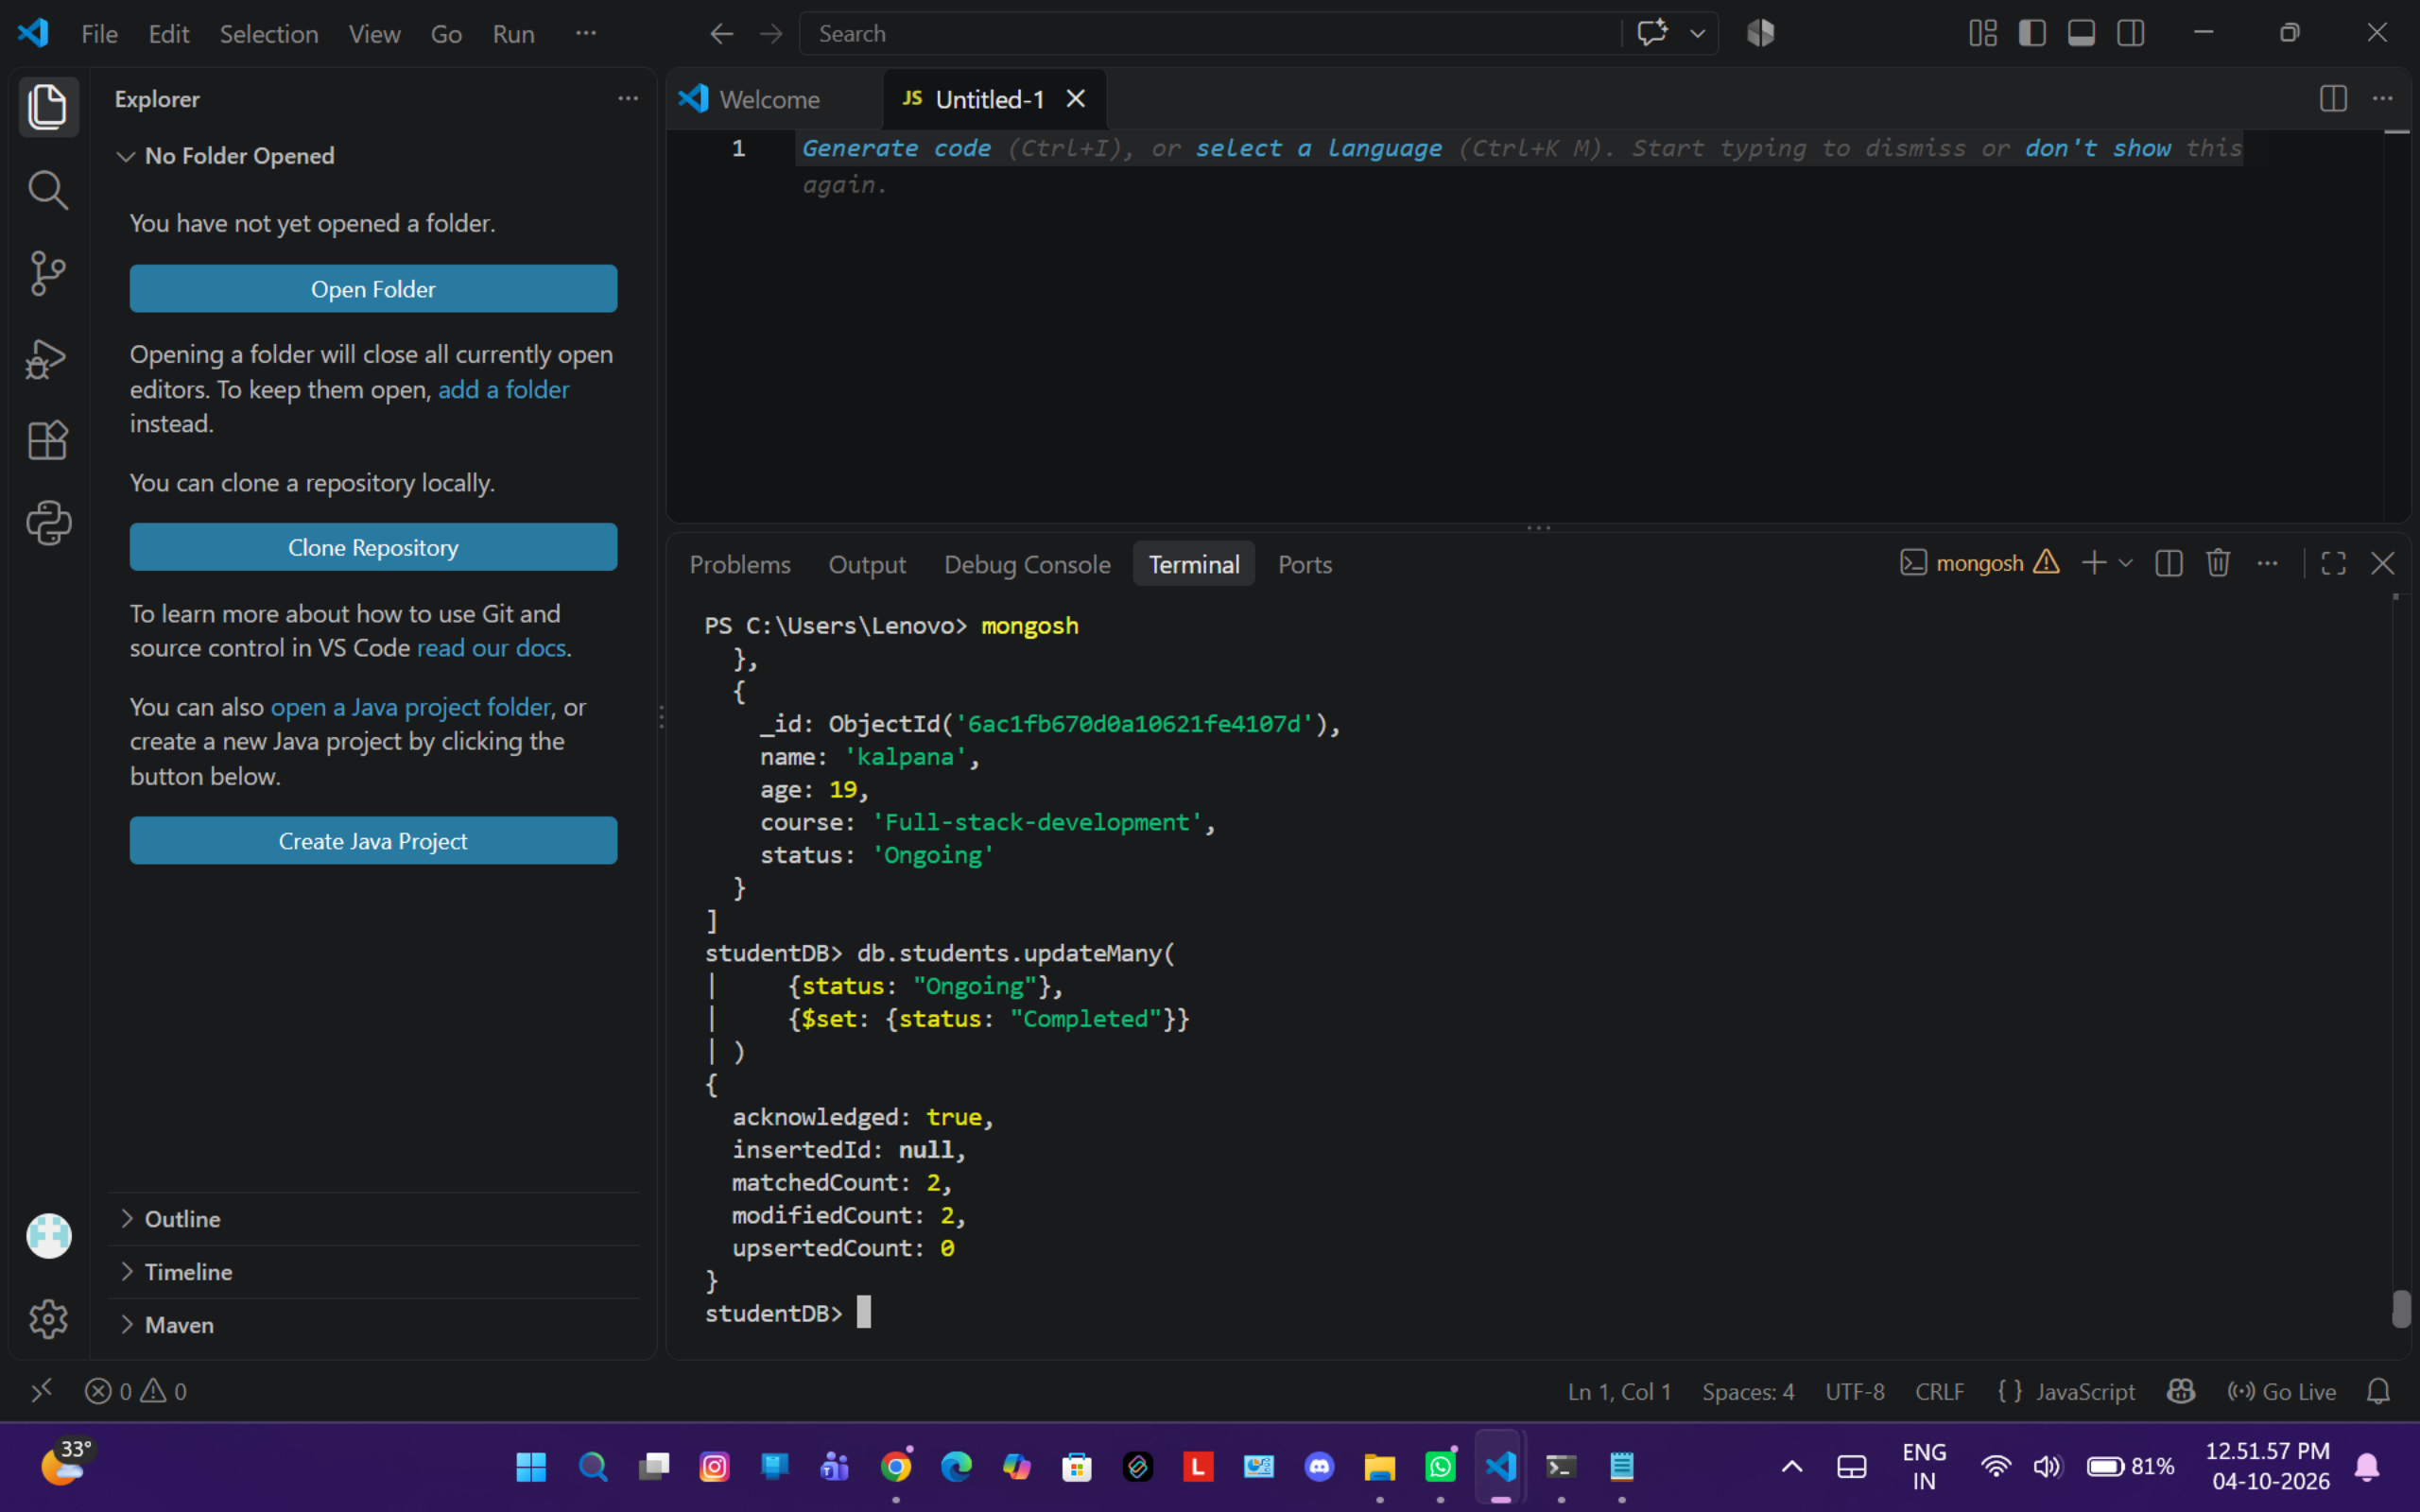

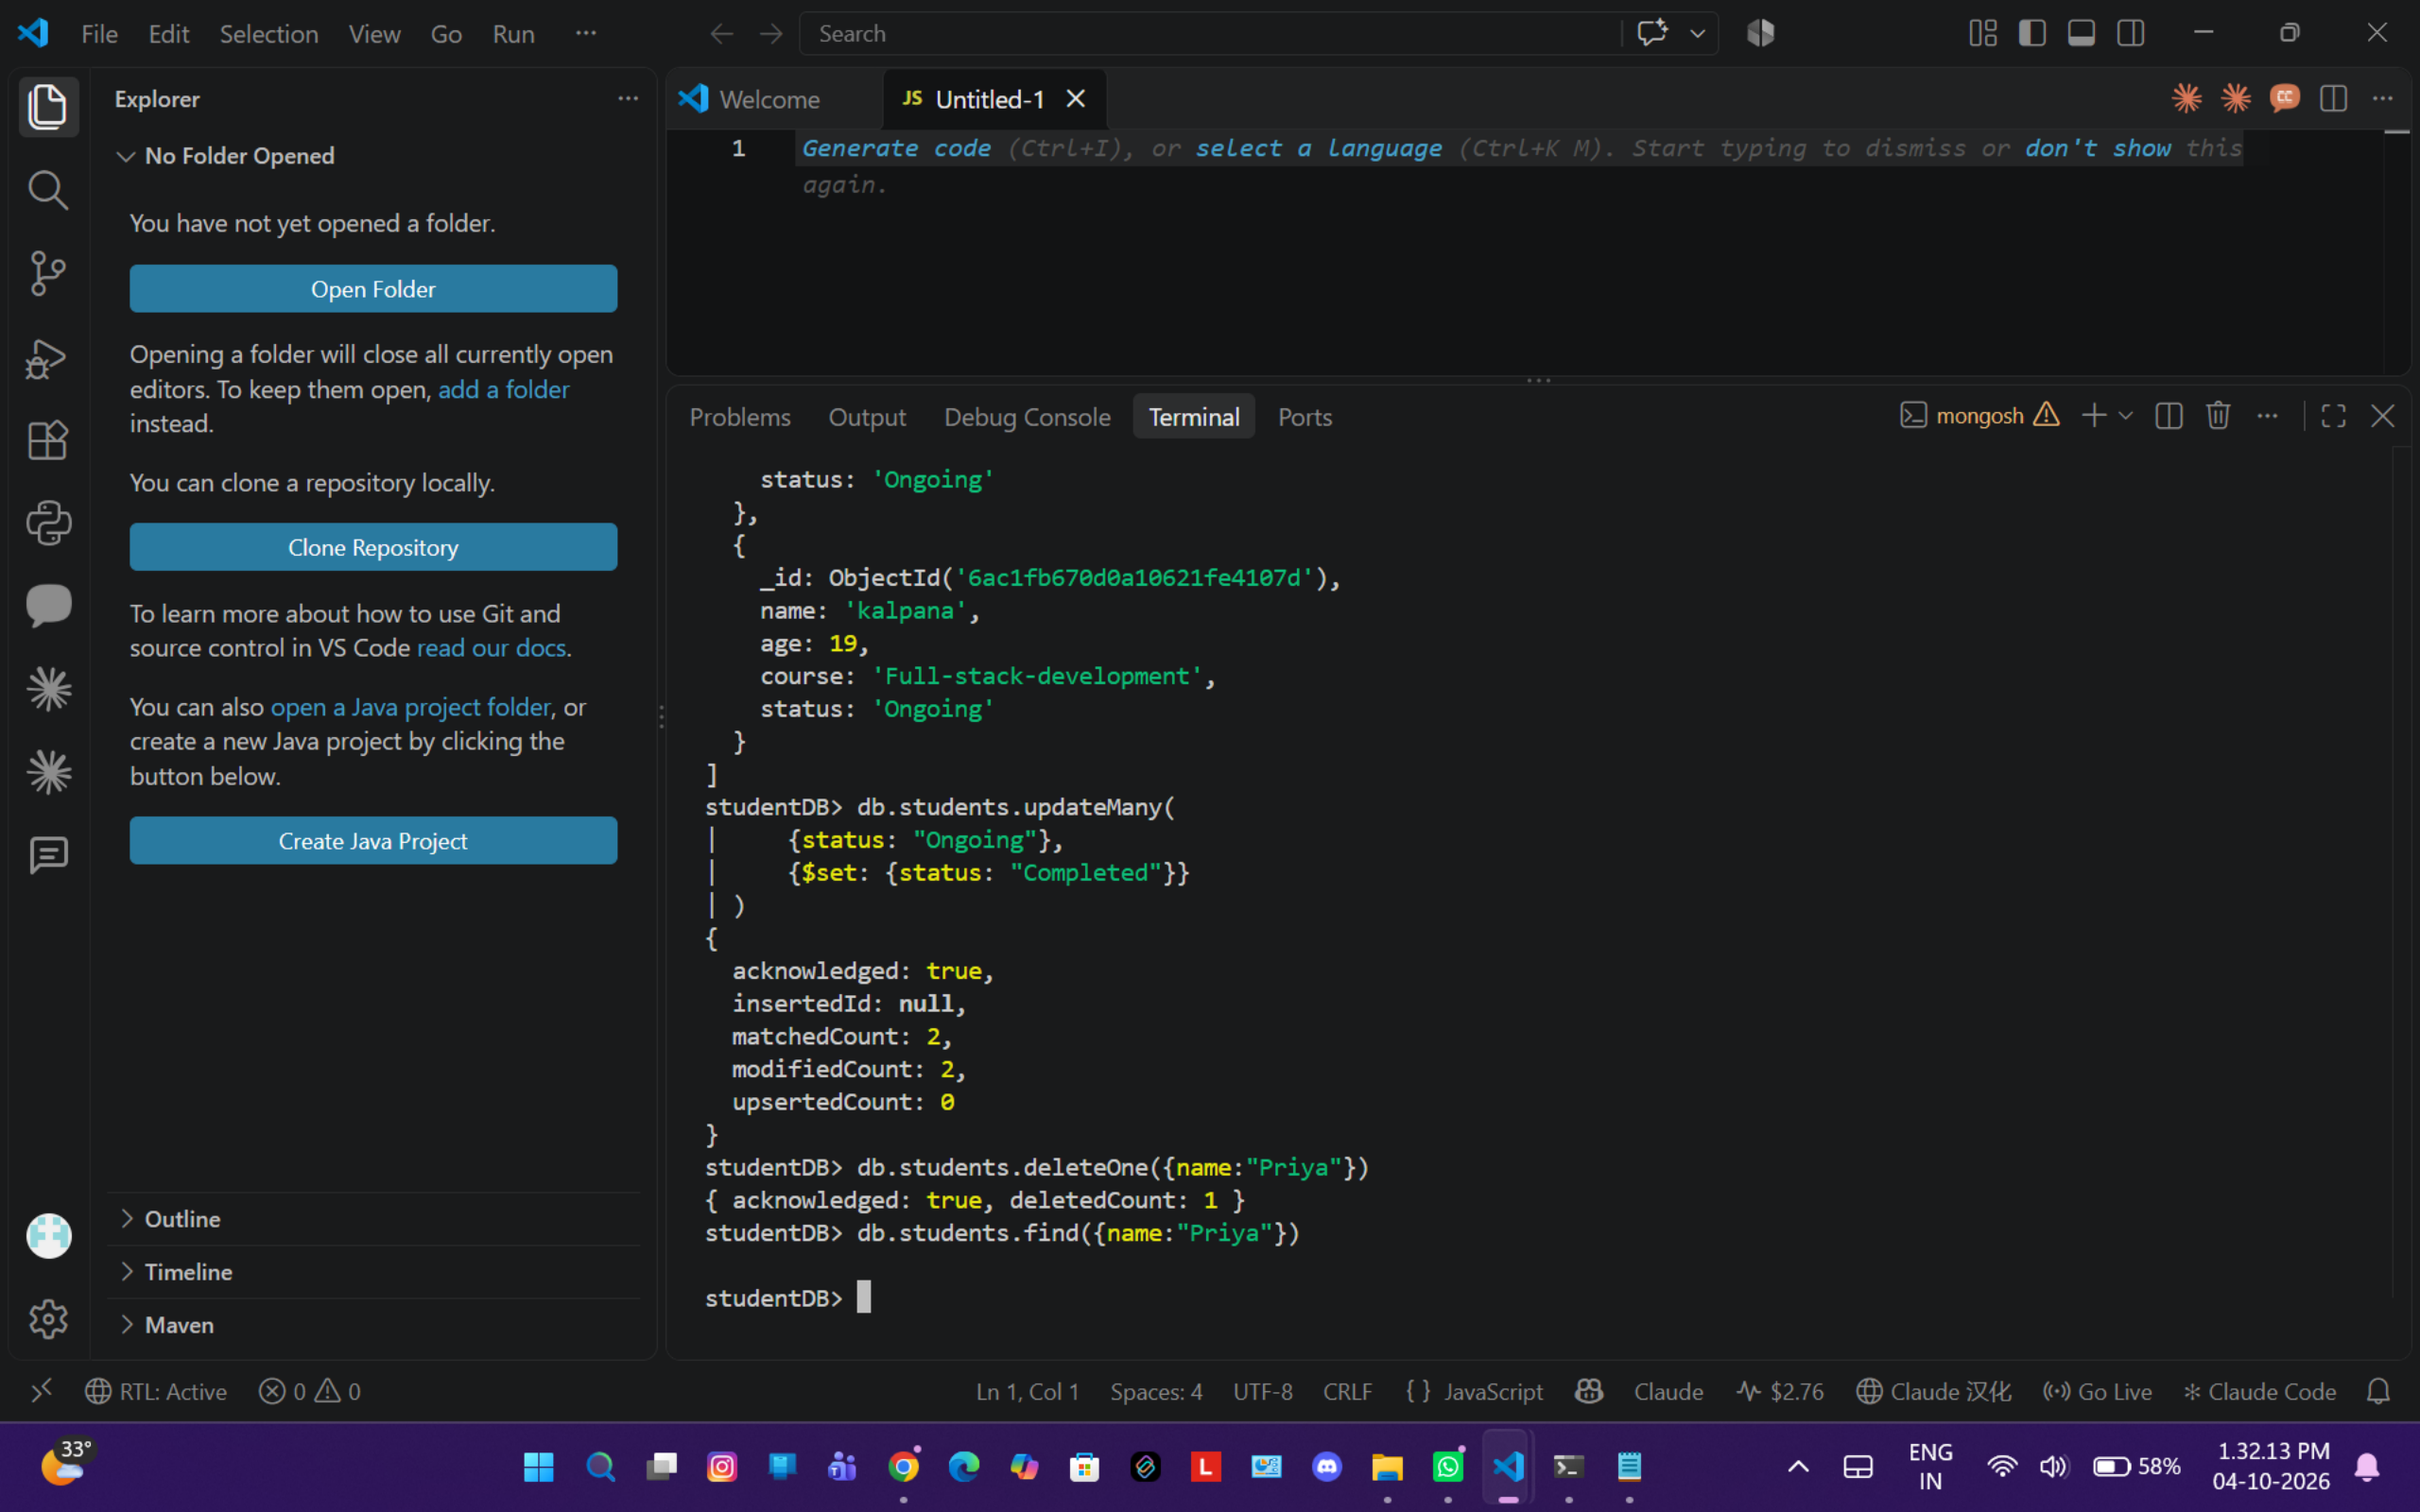


A screenshot of the Visual Studio Code Explorer sidebar. The sidebar has a dark background. At the top, there's a 'File Explorer' icon in a light blue box. Below it, the text 'No Folder Opened' is displayed with a downward arrow icon. A message states: 'You have not yet opened a folder.' Below this is a large blue button labeled 'Open Folder'. Another message follows: 'Opening a folder will close all currently open editors. To keep them open, [add a folder](#) instead.' Below this is another large blue button labeled 'Clone Repository'. A third message says: 'To learn more about how to use Git and source control in VS Code [read our docs](#).' Below this is a large blue button labeled 'Create Java Project'. At the bottom of the sidebar, there are three expandable sections: 'Outline', 'Timeline', and 'Maven', each with a right-pointing chevron icon. On the far left, a vertical toolbar contains icons for Explorer, Search, Source Control, Run and Debug, Extensions, Python, Testing, Java, and Settings.

This screenshot shows the left sidebar of the Visual Studio Code editor. The 'Explorer' view is active, displaying a message: 'No Folder Opened'. Below this message, there are two main action buttons: 'Open Folder' and 'Clone Repository'. The 'Open Folder' button is highlighted with a blue background. Below the 'Clone Repository' button, there is a link to 'read our docs'. At the bottom of the sidebar, there are three expandable sections: 'Outline', 'Timeline', and 'Maven'. The sidebar also features a vertical list of icons on the left, including a magnifying glass, a folder icon, a Git icon, a Java icon, a search icon, a speech bubble icon, a star icon, a star icon, and a settings icon.

This screenshot shows the left sidebar of the Visual Studio Code editor. The 'Explorer' view is active, displaying the message 'No Folder Opened' with a downward arrow icon. Below this, a text prompt states: 'You have not yet opened a folder.' A large blue button labeled 'Open Folder' is prominently displayed. Further down, another text prompt explains: 'Opening a folder will close all currently open editors. To keep them open, [add a folder](#) instead.' Below this is a second blue button labeled 'Clone Repository'. A third text prompt says: 'You can clone a repository locally.' This is followed by a third blue button labeled 'Clone Repository'. Below that, a text prompt reads: 'To learn more about how to use Git and source control in VS Code [read our docs](#).' This is followed by a fourth text prompt: 'You can also [open a Java project folder](#), or create a new Java project by clicking the button below.' A final blue button labeled 'Create Java Project' is shown. At the bottom of the sidebar, there are three expandable sections: 'Outline', 'Timeline', and 'Maven', each with a right-pointing chevron icon. The leftmost edge of the sidebar shows a vertical stack of icons for Explorer, Search, Source Control, Run and Debug, Extensions, Testing, Docker, Remote Explorer, and Settings.

This screenshot shows the left sidebar of the Visual Studio Code editor. The 'Explorer' view is active, displaying a message: 'No Folder Opened'. Below this message, there are three main action buttons: 'Open Folder', 'Clone Repository', and 'Create Java Project'. Each button is accompanied by a brief instruction. The 'Open Folder' button is highlighted with a blue background. To the left of the Explorer view, the Activity Bar shows icons for Explorer, Search, Source Control, Run and Debug, Extensions, Testing, and Settings. The Explorer view itself has a dark background with light gray text and icons.

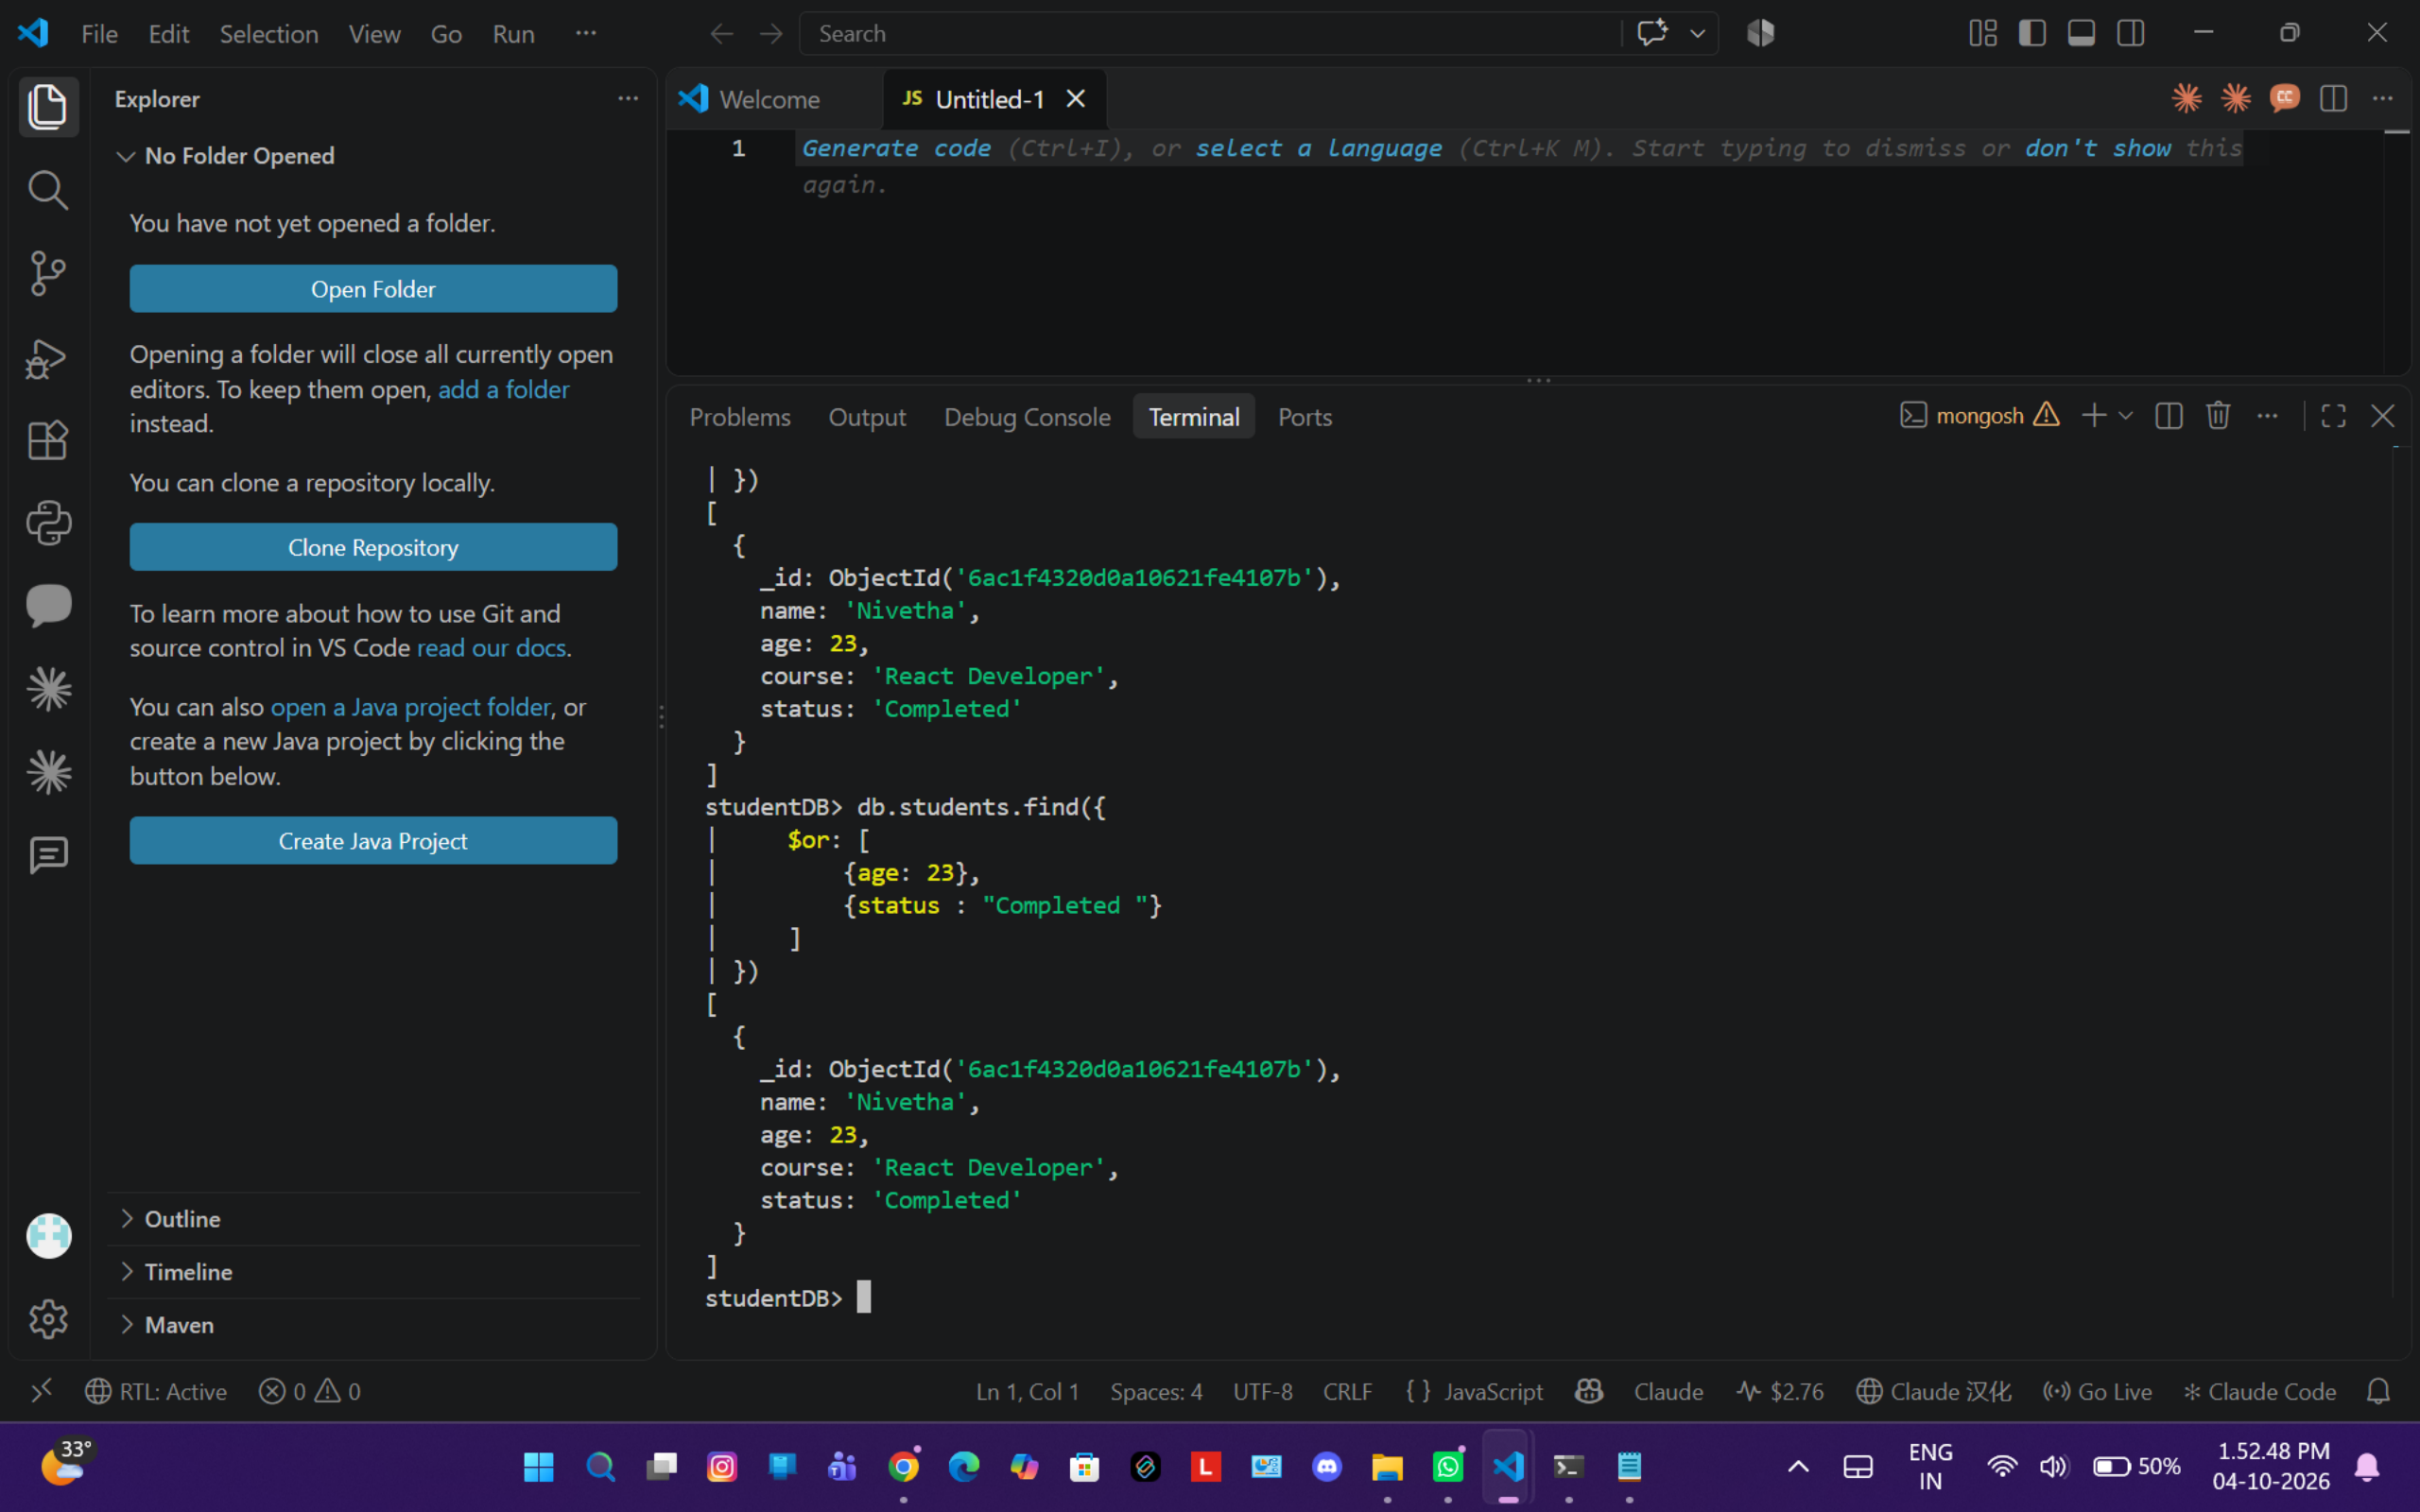

File

Edit

Selection

View

Go

Run

...

←

→

Search

🗨

▼

🏠

🔍

📄

🔌

🔔

📁

🐍

💬

🌟

🌟

💬

🏠

🌐

🔧

Explorer

...

▼ No Folder Opened

You have not yet opened a folder.

Open Folder

Opening a folder will close all currently open editors. To keep them open, [add a folder](#) instead.

You can clone a repository locally.

Clone Repository

To learn more about how to use Git and source control in VS Code [read our docs](#).

You can also [open a Java project folder](#), or create a new Java project by clicking the button below.

Create Java Project

> Outline

> Timeline

> Maven

JS

Untitled-1

×

1 *Generate code (Ctrl+I), or select a language (Ctrl+K M). Start typing to dismiss or don't show this again.*

Problems

Output

Debug Console

Terminal

Ports

📄

mongosh

⚠

+

▼

📄

🗑

...

🔍

×

```
{
  _id: ObjectId('6ac1f4320d0a10621fe4107b'),
  name: 'Nivetha',
  age: 23,
  course: 'React Developer',
  status: 'Completed'
}
]
studentDB> db.students.find({$or:[{course:"JAVA"},{course:"React Developer"}]})
[
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  },
  {
    _id: ObjectId('6ac1fb670d0a10621fe4107c'),
    name: 'bala',
    age: 24,
    course: 'JAVA',
    status: 'Completed'
  }
]
studentDB> 
```

<🌐 RTL: Active

⊗ 0 ⚠ 0

Ln 1, Col 1

Spaces: 4

UTF-8

CRLF

{ }

JavaScript

👤

Claude

💵 \$2.76

🌐 Claude 汉化

🔄 Go Live

⚙ Claude Code

🔔

33°

🏠

🔍

📄

📷

💬

👤

🌐

🔌

📁

🔧

📄

📅

📶


🔊

🔋 49%



1.53.47 PM


04-10-2026

🔔

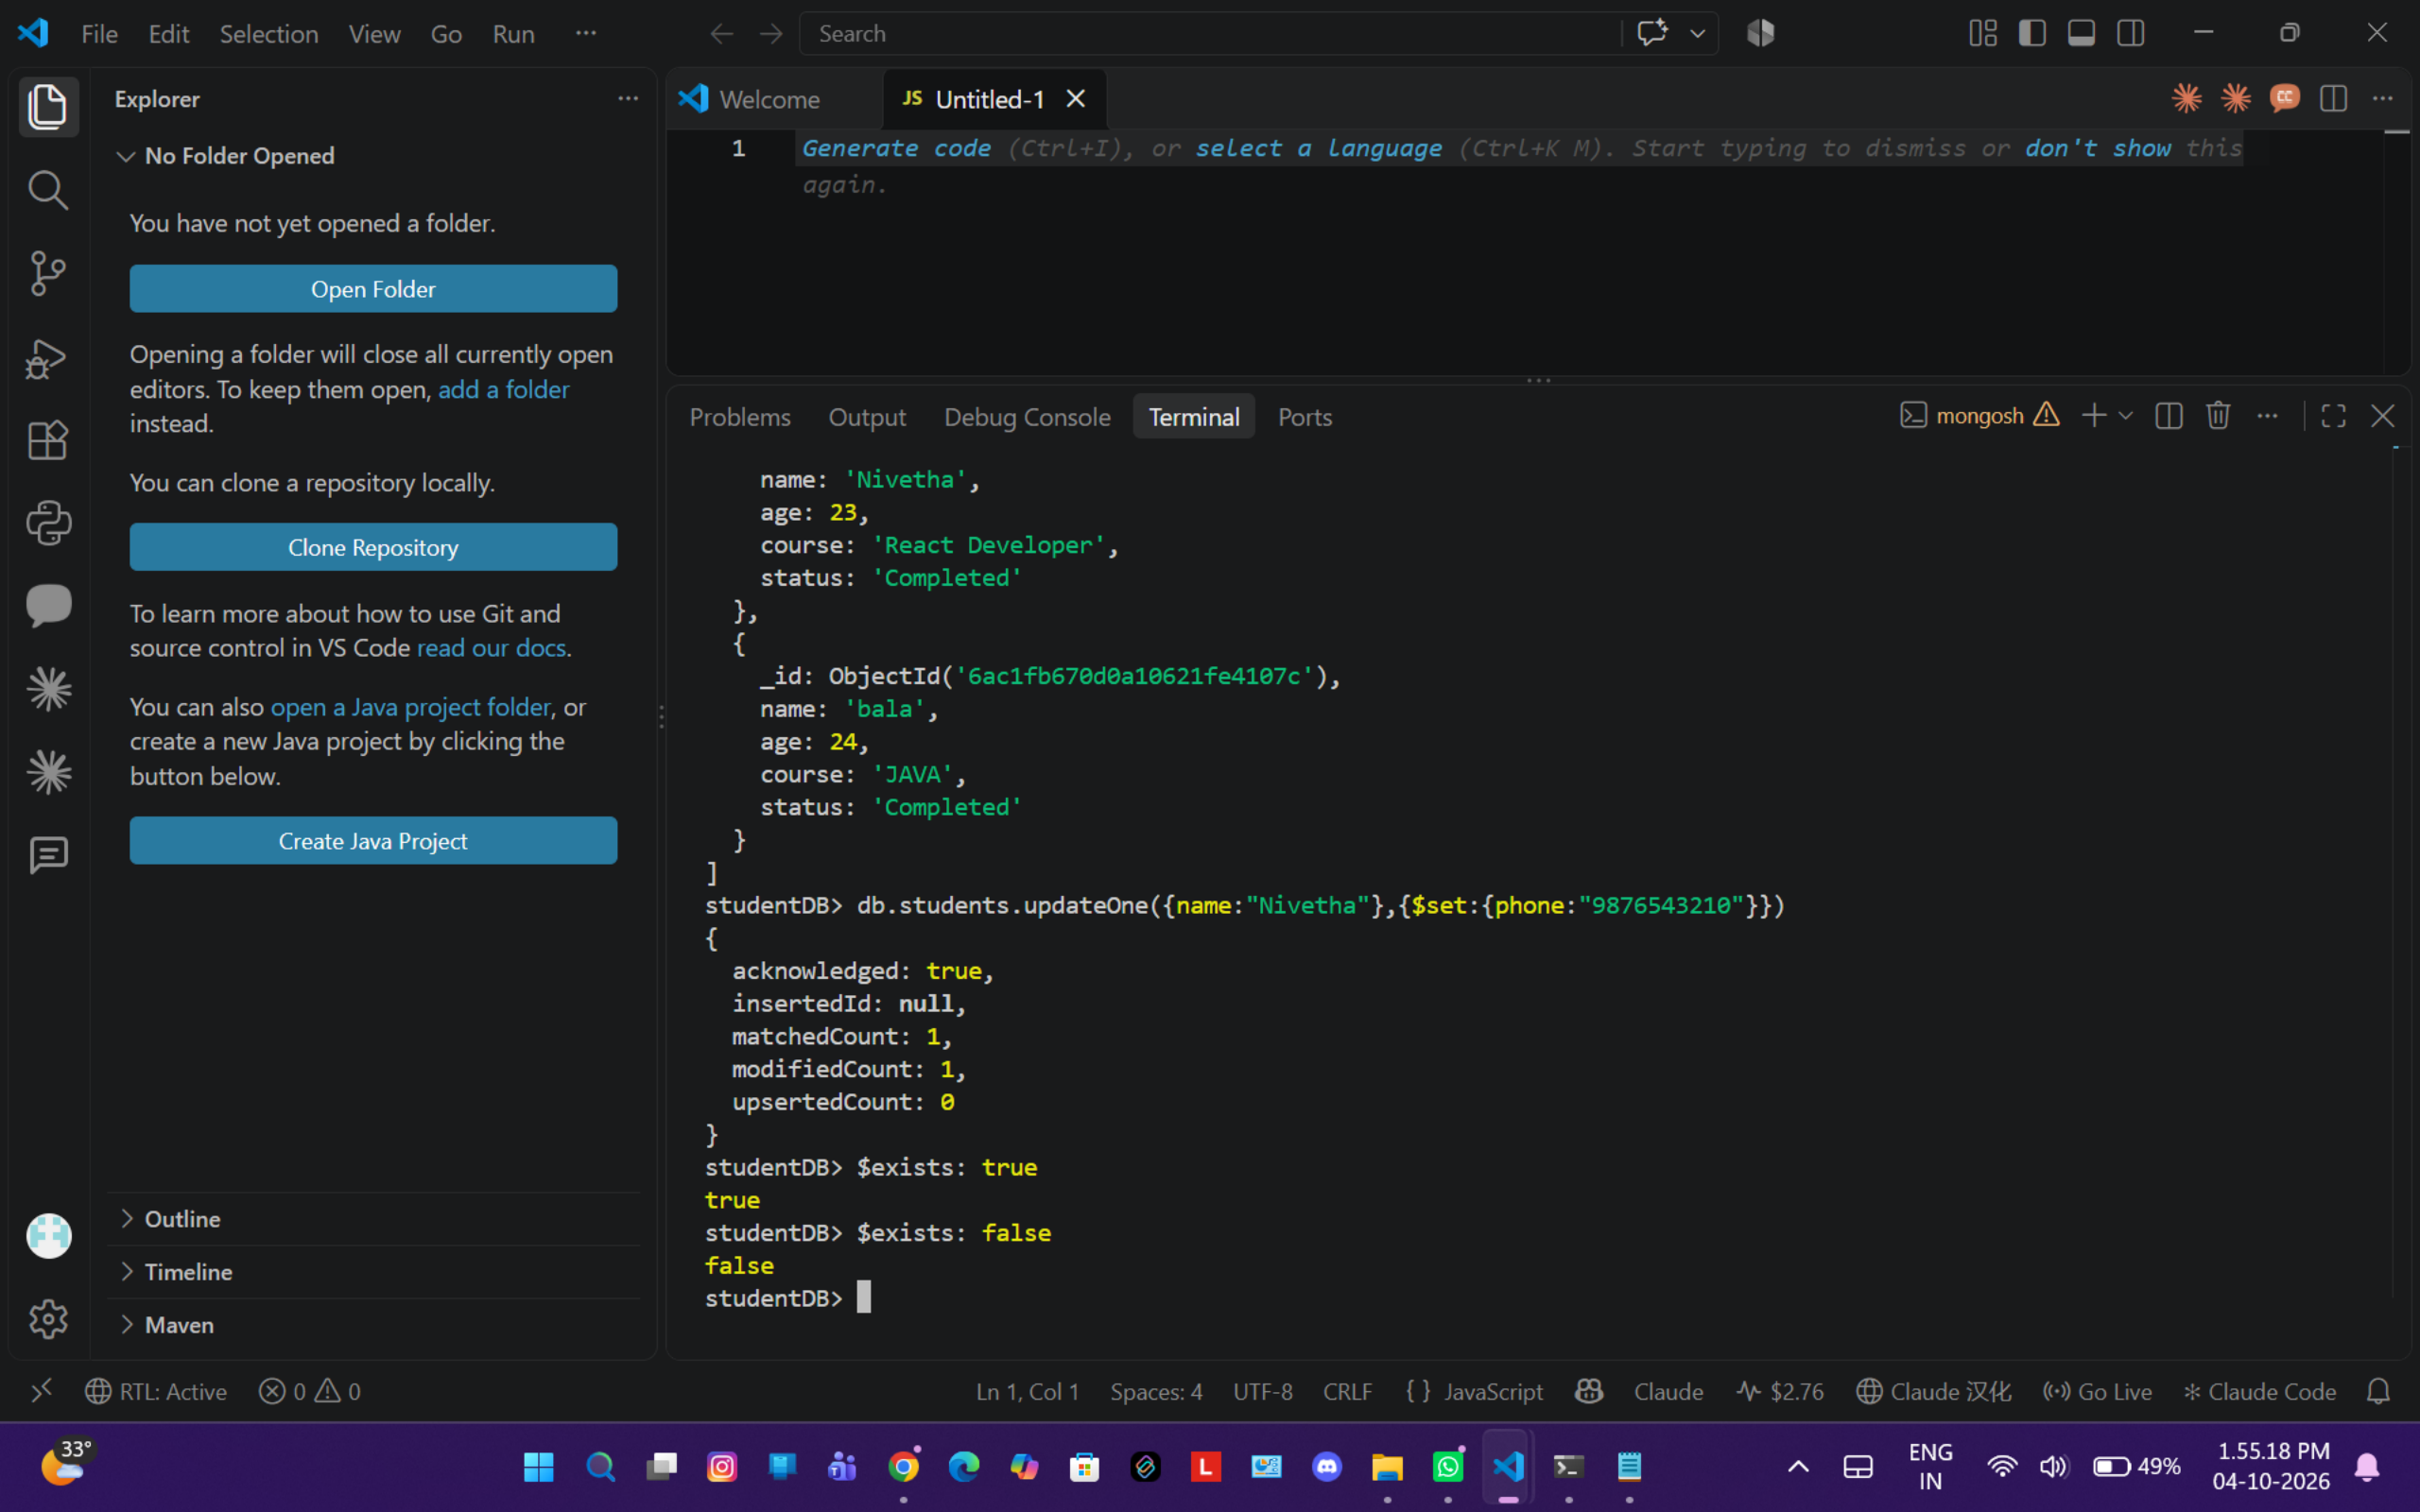

This screenshot shows the left sidebar of the Visual Studio Code editor. The 'Explorer' view is active, displaying the message 'No Folder Opened' with a downward arrow icon. Below this, a text prompt states: 'You have not yet opened a folder.' A large blue button labeled 'Open Folder' is prominently displayed. Further down, another text prompt explains: 'Opening a folder will close all currently open editors. To keep them open, [add a folder](#) instead.' Below this is a second blue button labeled 'Clone Repository'. A third text prompt follows: 'You can clone a repository locally. To learn more about how to use Git and source control in VS Code [read our docs](#).' This is followed by a third blue button labeled 'Create Java Project'. At the bottom of the sidebar, there are three expandable sections: 'Outline', 'Timeline', and 'Maven', each with a right-pointing chevron icon. The leftmost edge of the sidebar shows a vertical stack of icons for Explorer, Search, Source Control, Run and Debug, Extensions, Testing, Docker, Containers, Remote Explorer, and Settings.

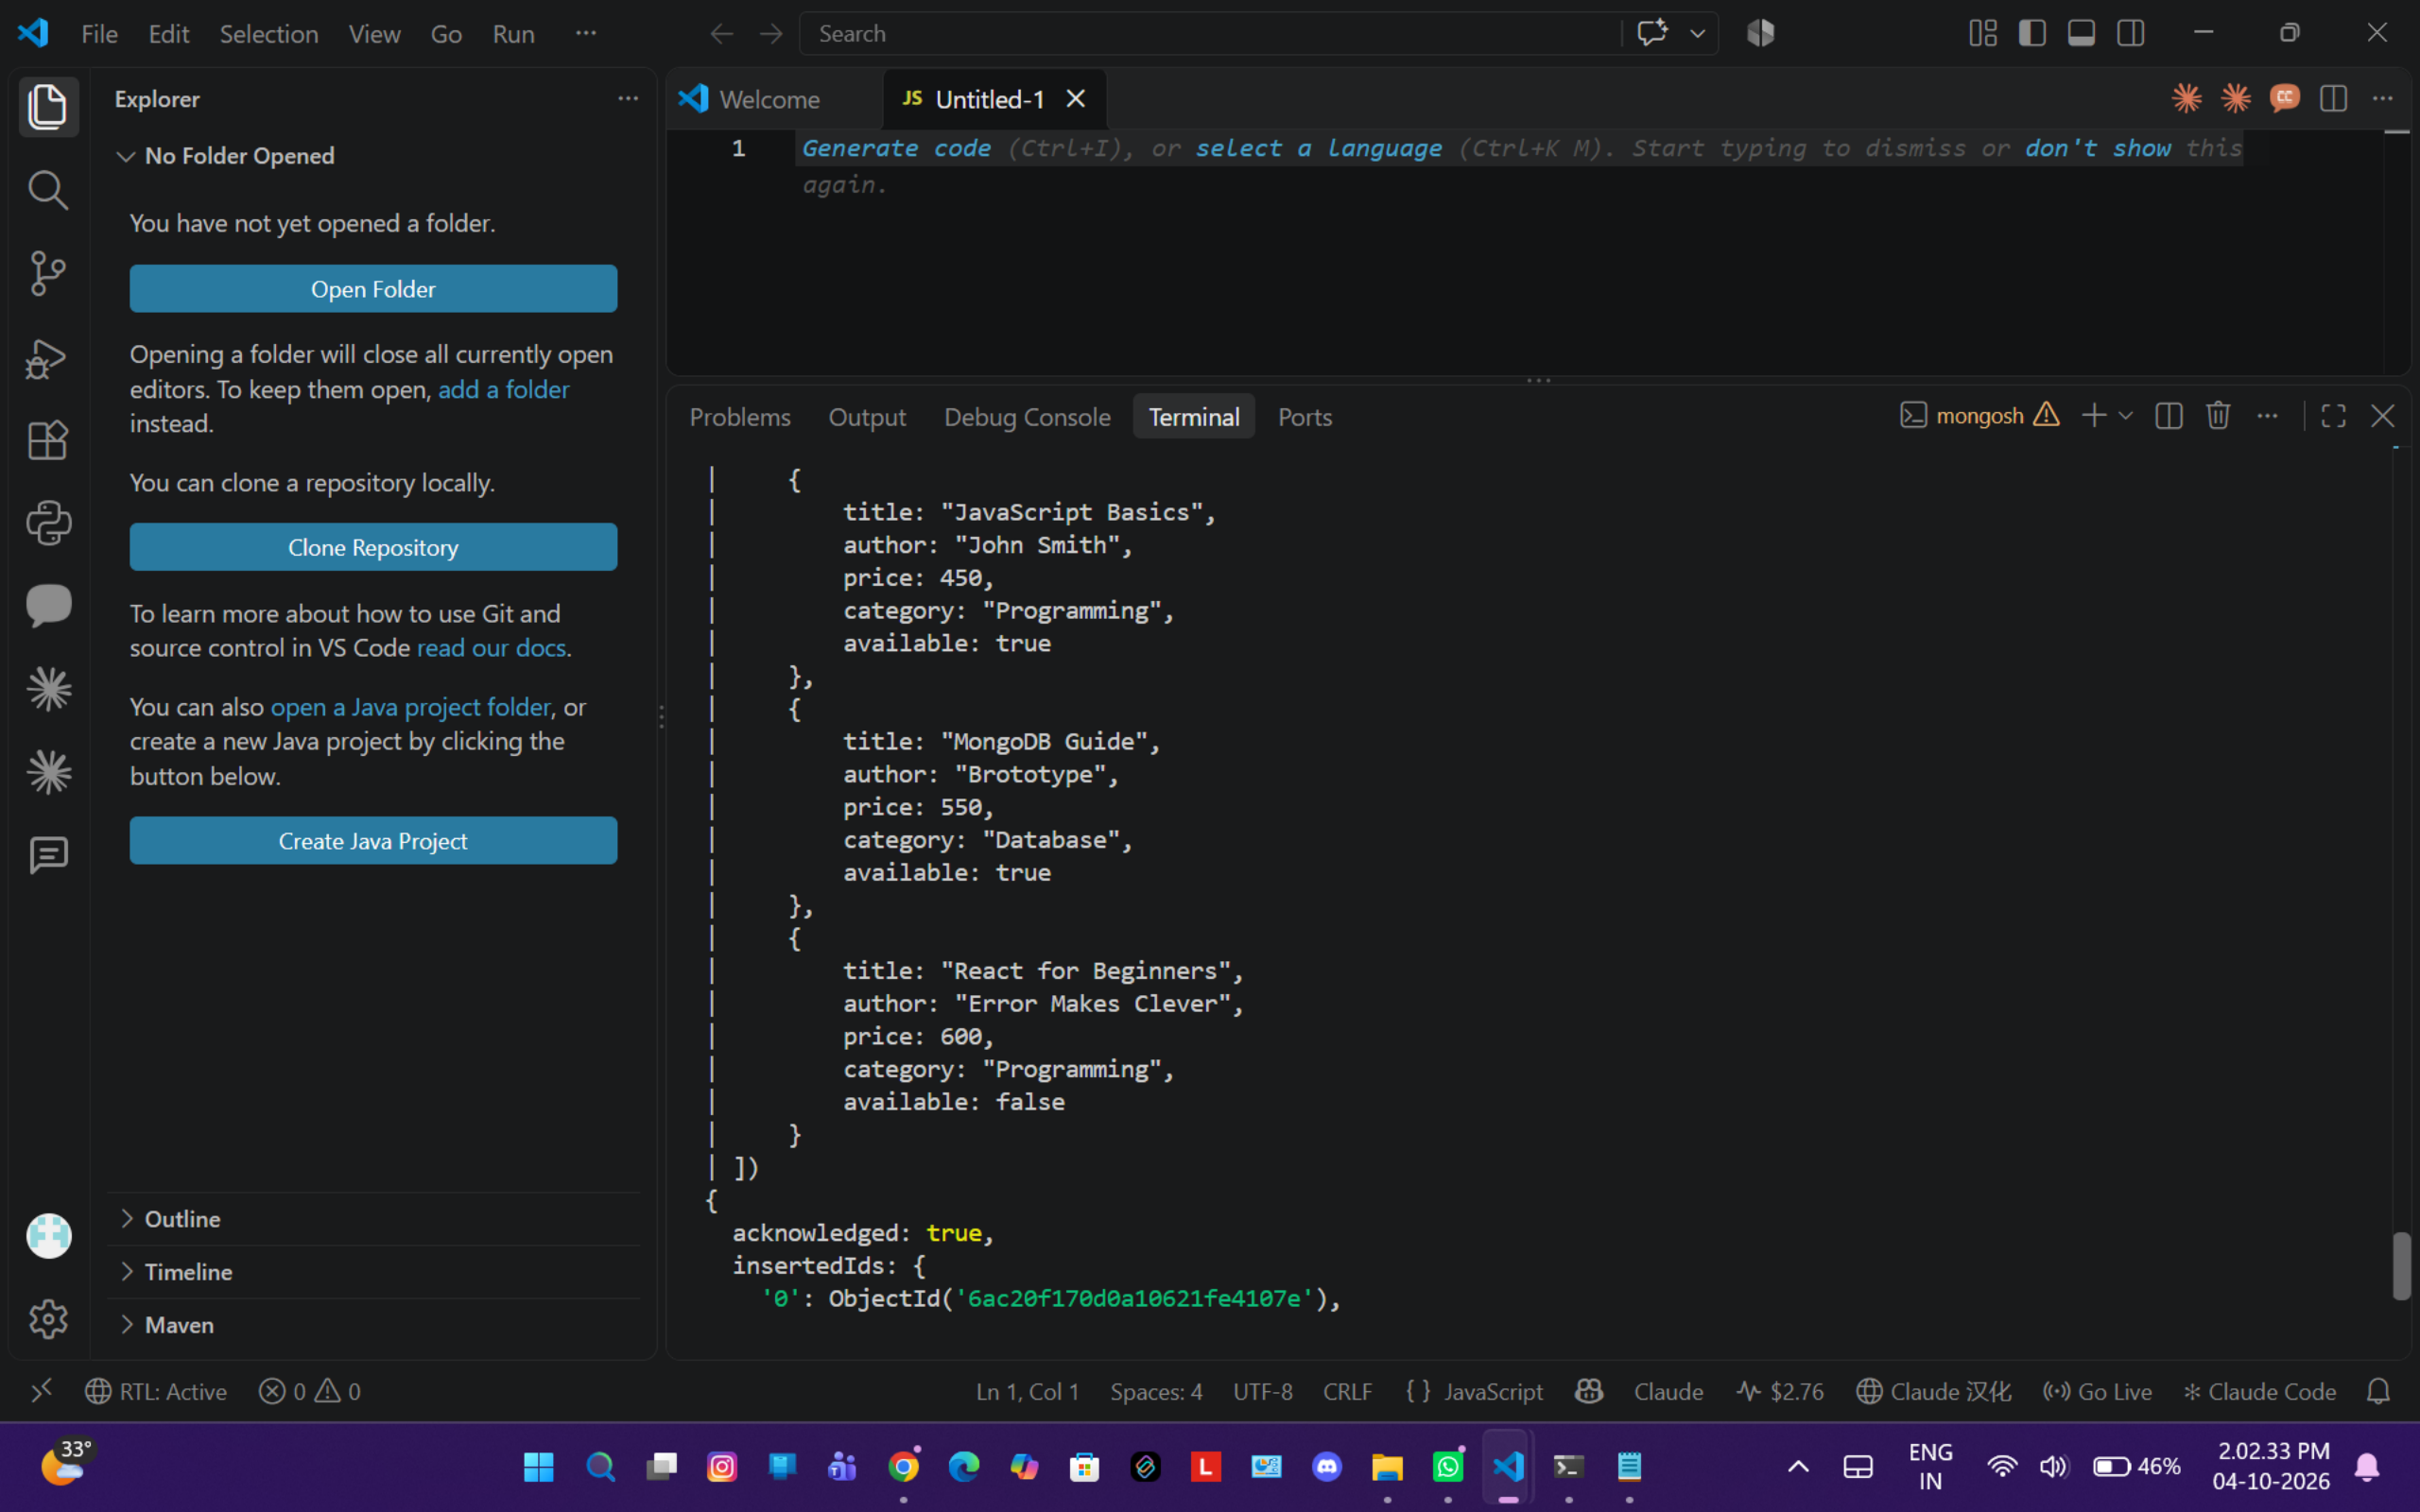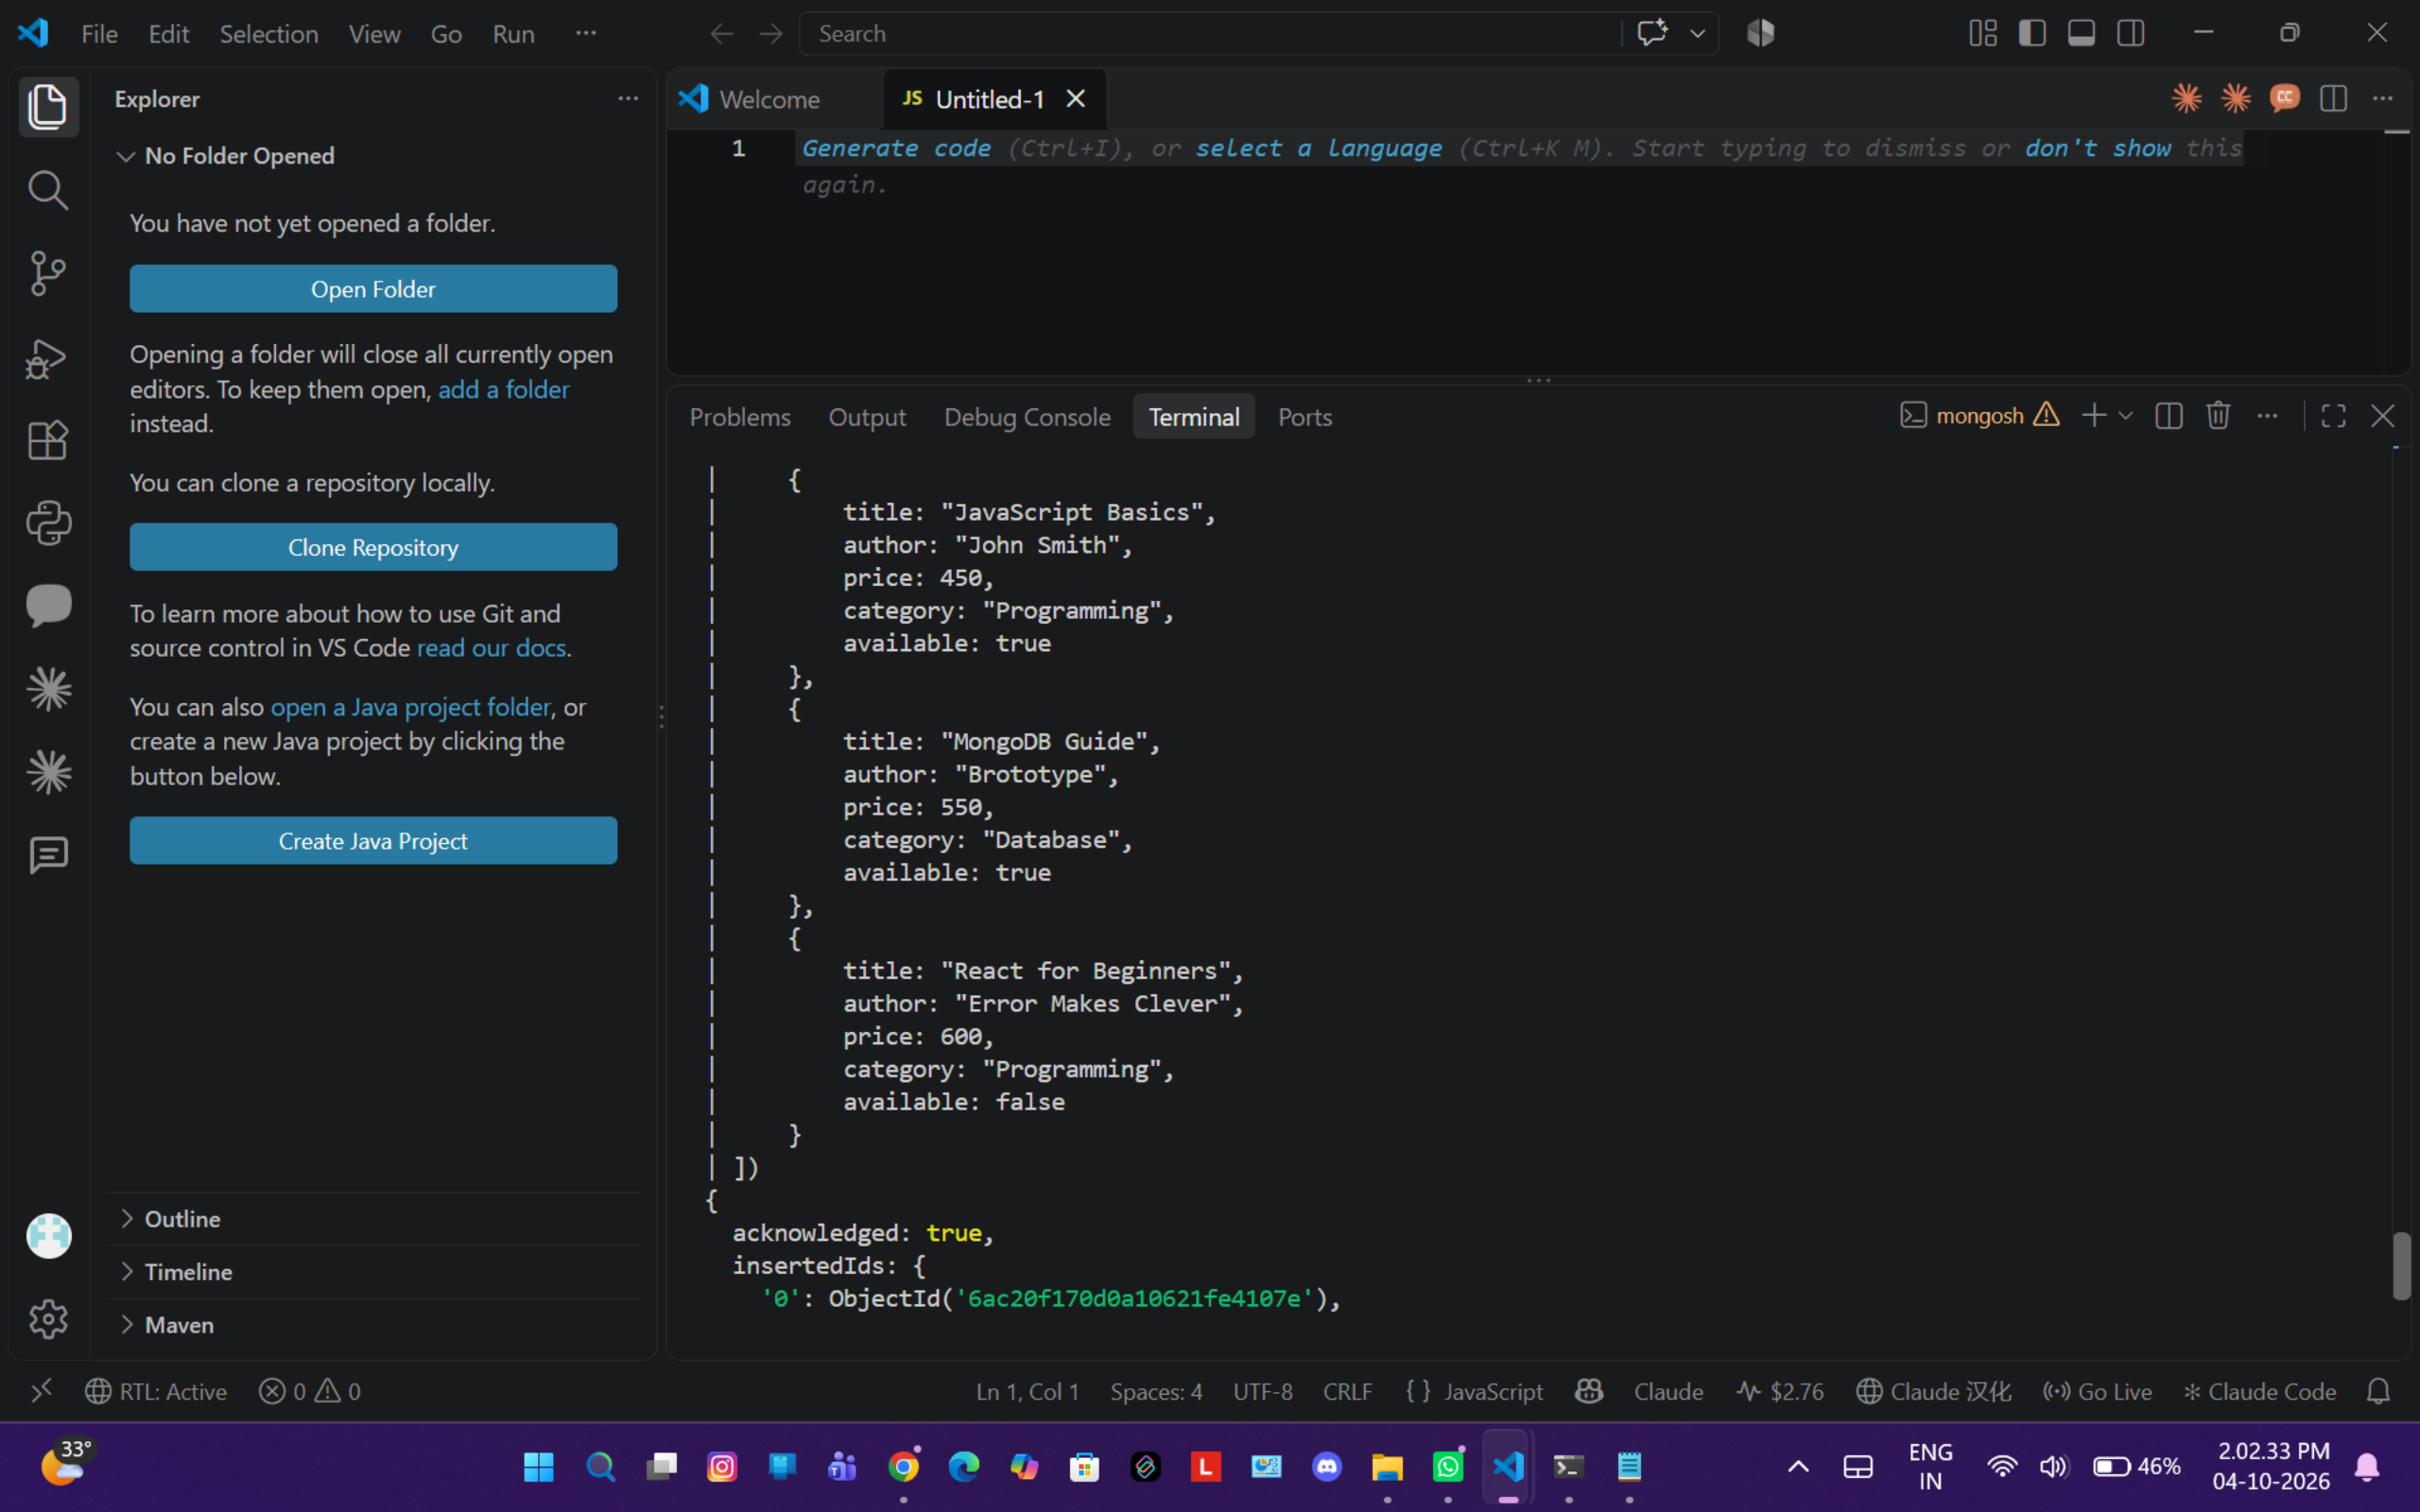

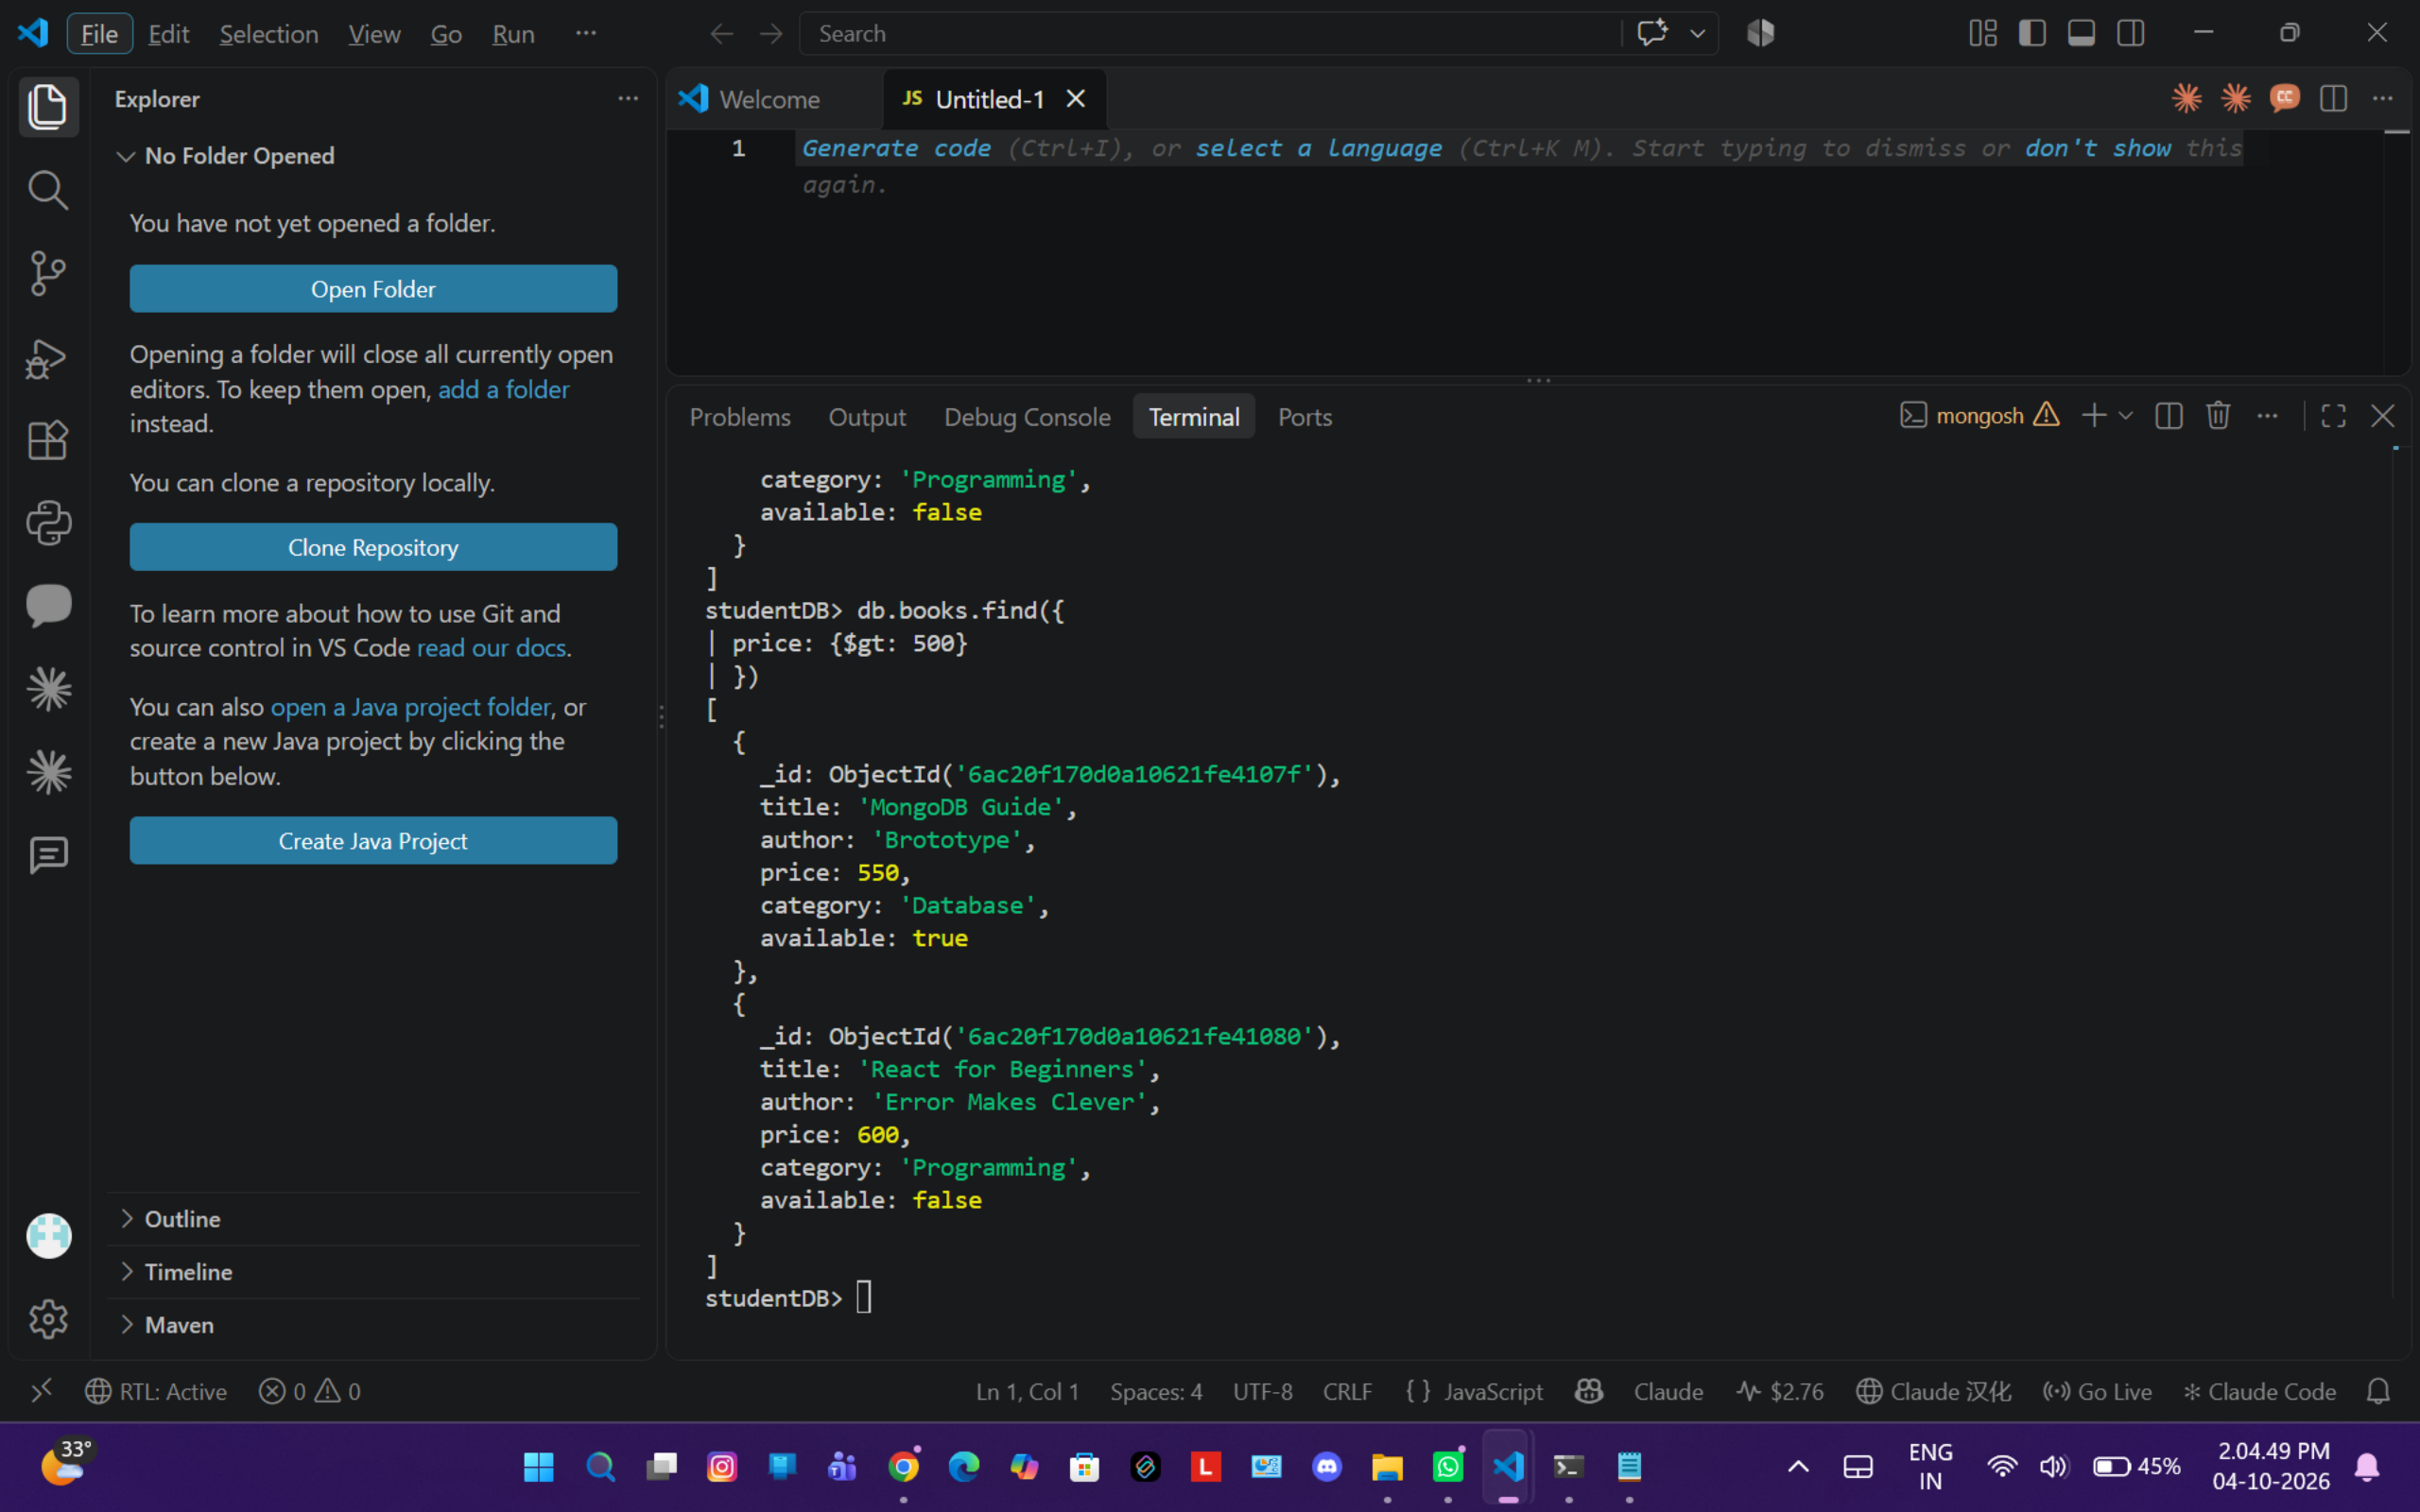

File

Edit

Selection

View

Go

Run

...

←

→

Search

🔍

⌵

🌐

🔍

🔍

🔍

🔍

—

🔍

🔍

🔍

🔍

🔍



Explorer

...

✓ No Folder Opened

You have not yet opened a folder.

Open Folder

Opening a folder will close all currently open editors. To keep them open, [add a folder](#) instead.

You can clone a repository locally.

Clone Repository

To learn more about how to use Git and source control in VS Code [read our docs](#).

You can also [open a Java project folder](#), or create a new Java project by clicking the button below.

Create Java Project

> Outline

> Timeline

> Maven



Welcome

JS

Untitled-1 X



1

Generate code (Ctrl+I), or select a language (Ctrl+K M). Start typing to dismiss or don't show this again.

Problems

Output

Debug Console

Terminal

Ports

🔍 mongosh ⚠️

+

⌵

🔍

🗑️

...

🔍

✖️

```
category: 'Programming',
available: false
}
]
studentDB> db.books.find(
| price: {$gt: 500}
| })
[
{
  _id: ObjectId('6ac20f170d0a10621fe4107f'),
  title: 'MongoDB Guide',
  author: 'Brototype',
  price: 550,
  category: 'Database',
  available: true
},
{
  _id: ObjectId('6ac20f170d0a10621fe41080'),
  title: 'React for Beginners',
  author: 'Error Makes Clever',
  price: 600,
  category: 'Programming',
  available: false
}
]
studentDB> 
```

<

RTL: Active

⊗

0

⚠️ 0

Ln 1, Col 1

Spaces: 4

UTF-8

CRLF

{ }

JavaScript

🔍

Claude

📈

\$2.76

🌐

Claude 汉化

🔄

Go Live

✳️

Claude Code

🔔

33°



ENG
IN






2.04.49 PM
04-10-2026

[illegible]

The screenshot shows a VS Code editor with a terminal window open. The terminal is running a MongoDB shell session. It displays a JSON array of book objects and the result of an updateOne operation.

```
author: 'Brototype',
price: 550,
category: 'Database',
available: true
},
{
  _id: ObjectId('6ac20f170d0a10621fe41080'),
  title: 'React for Beginners',
  author: 'Error Makes Clever',
  price: 600,
  category: 'Programming',
  available: false
}
]
studentDB> db.books.updateOne(
|   { available: false},
|   { $set: { available: true} }
| )
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 1,
  upsertedCount: 0
}
studentDB>
```

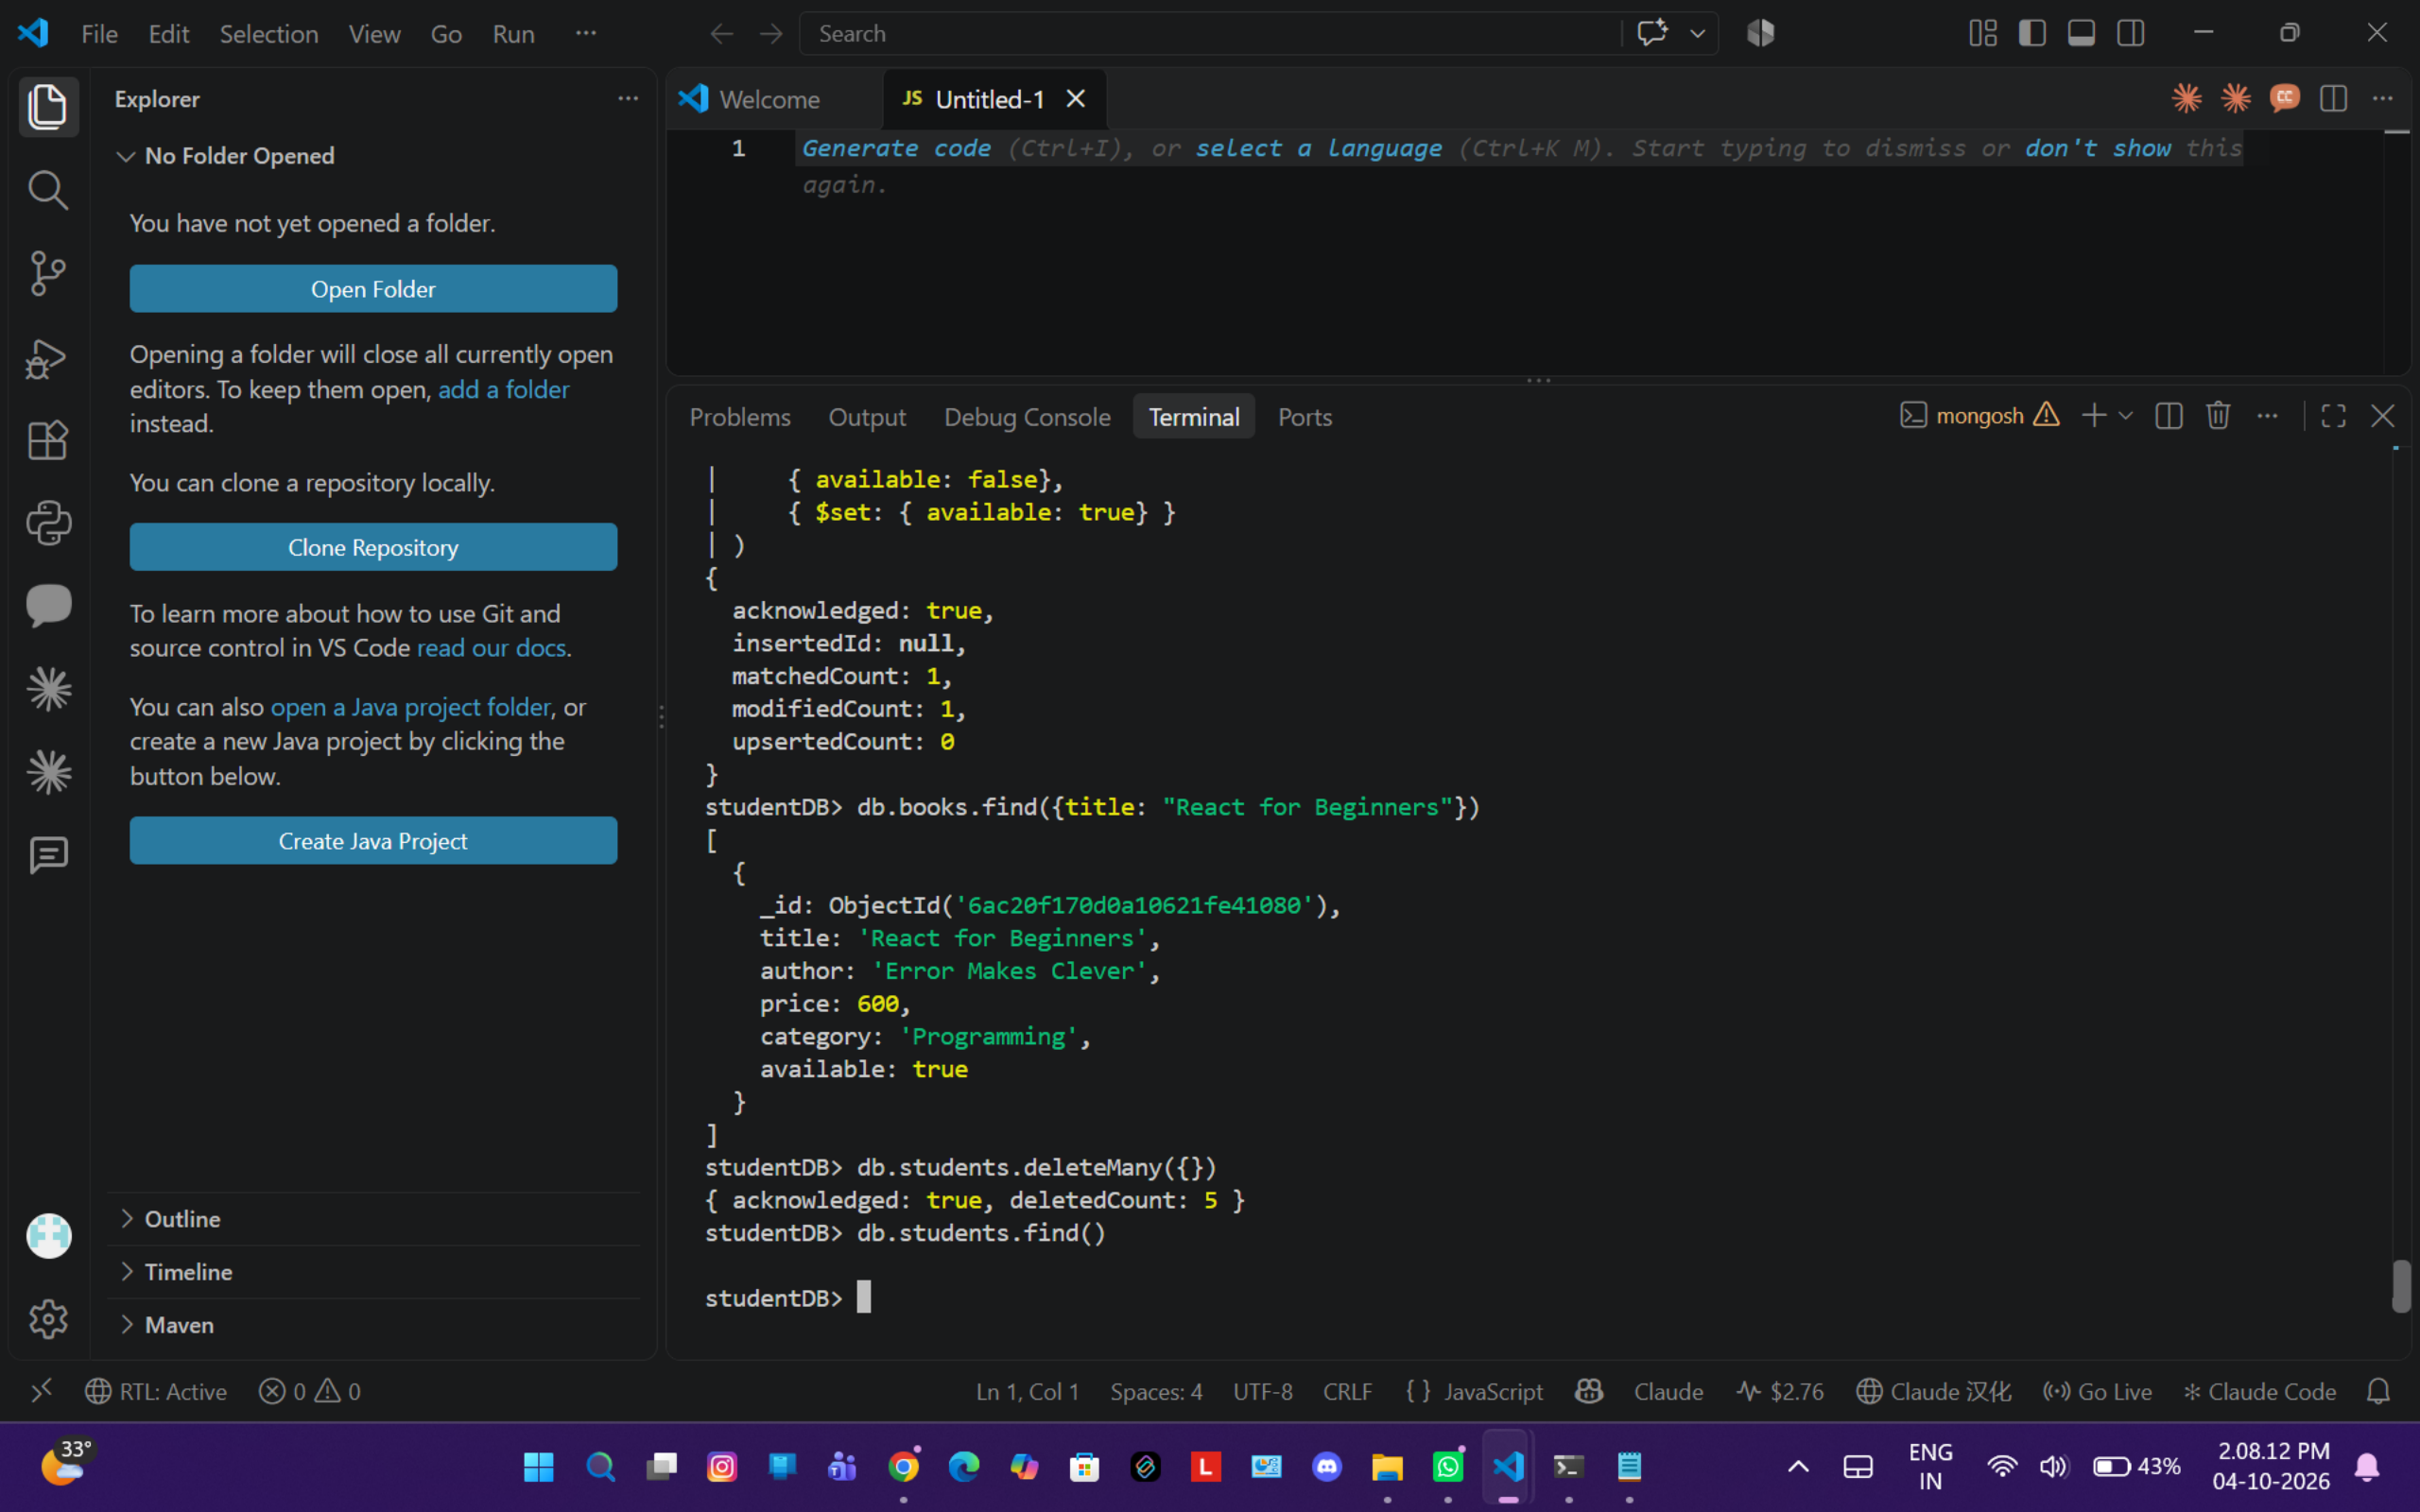

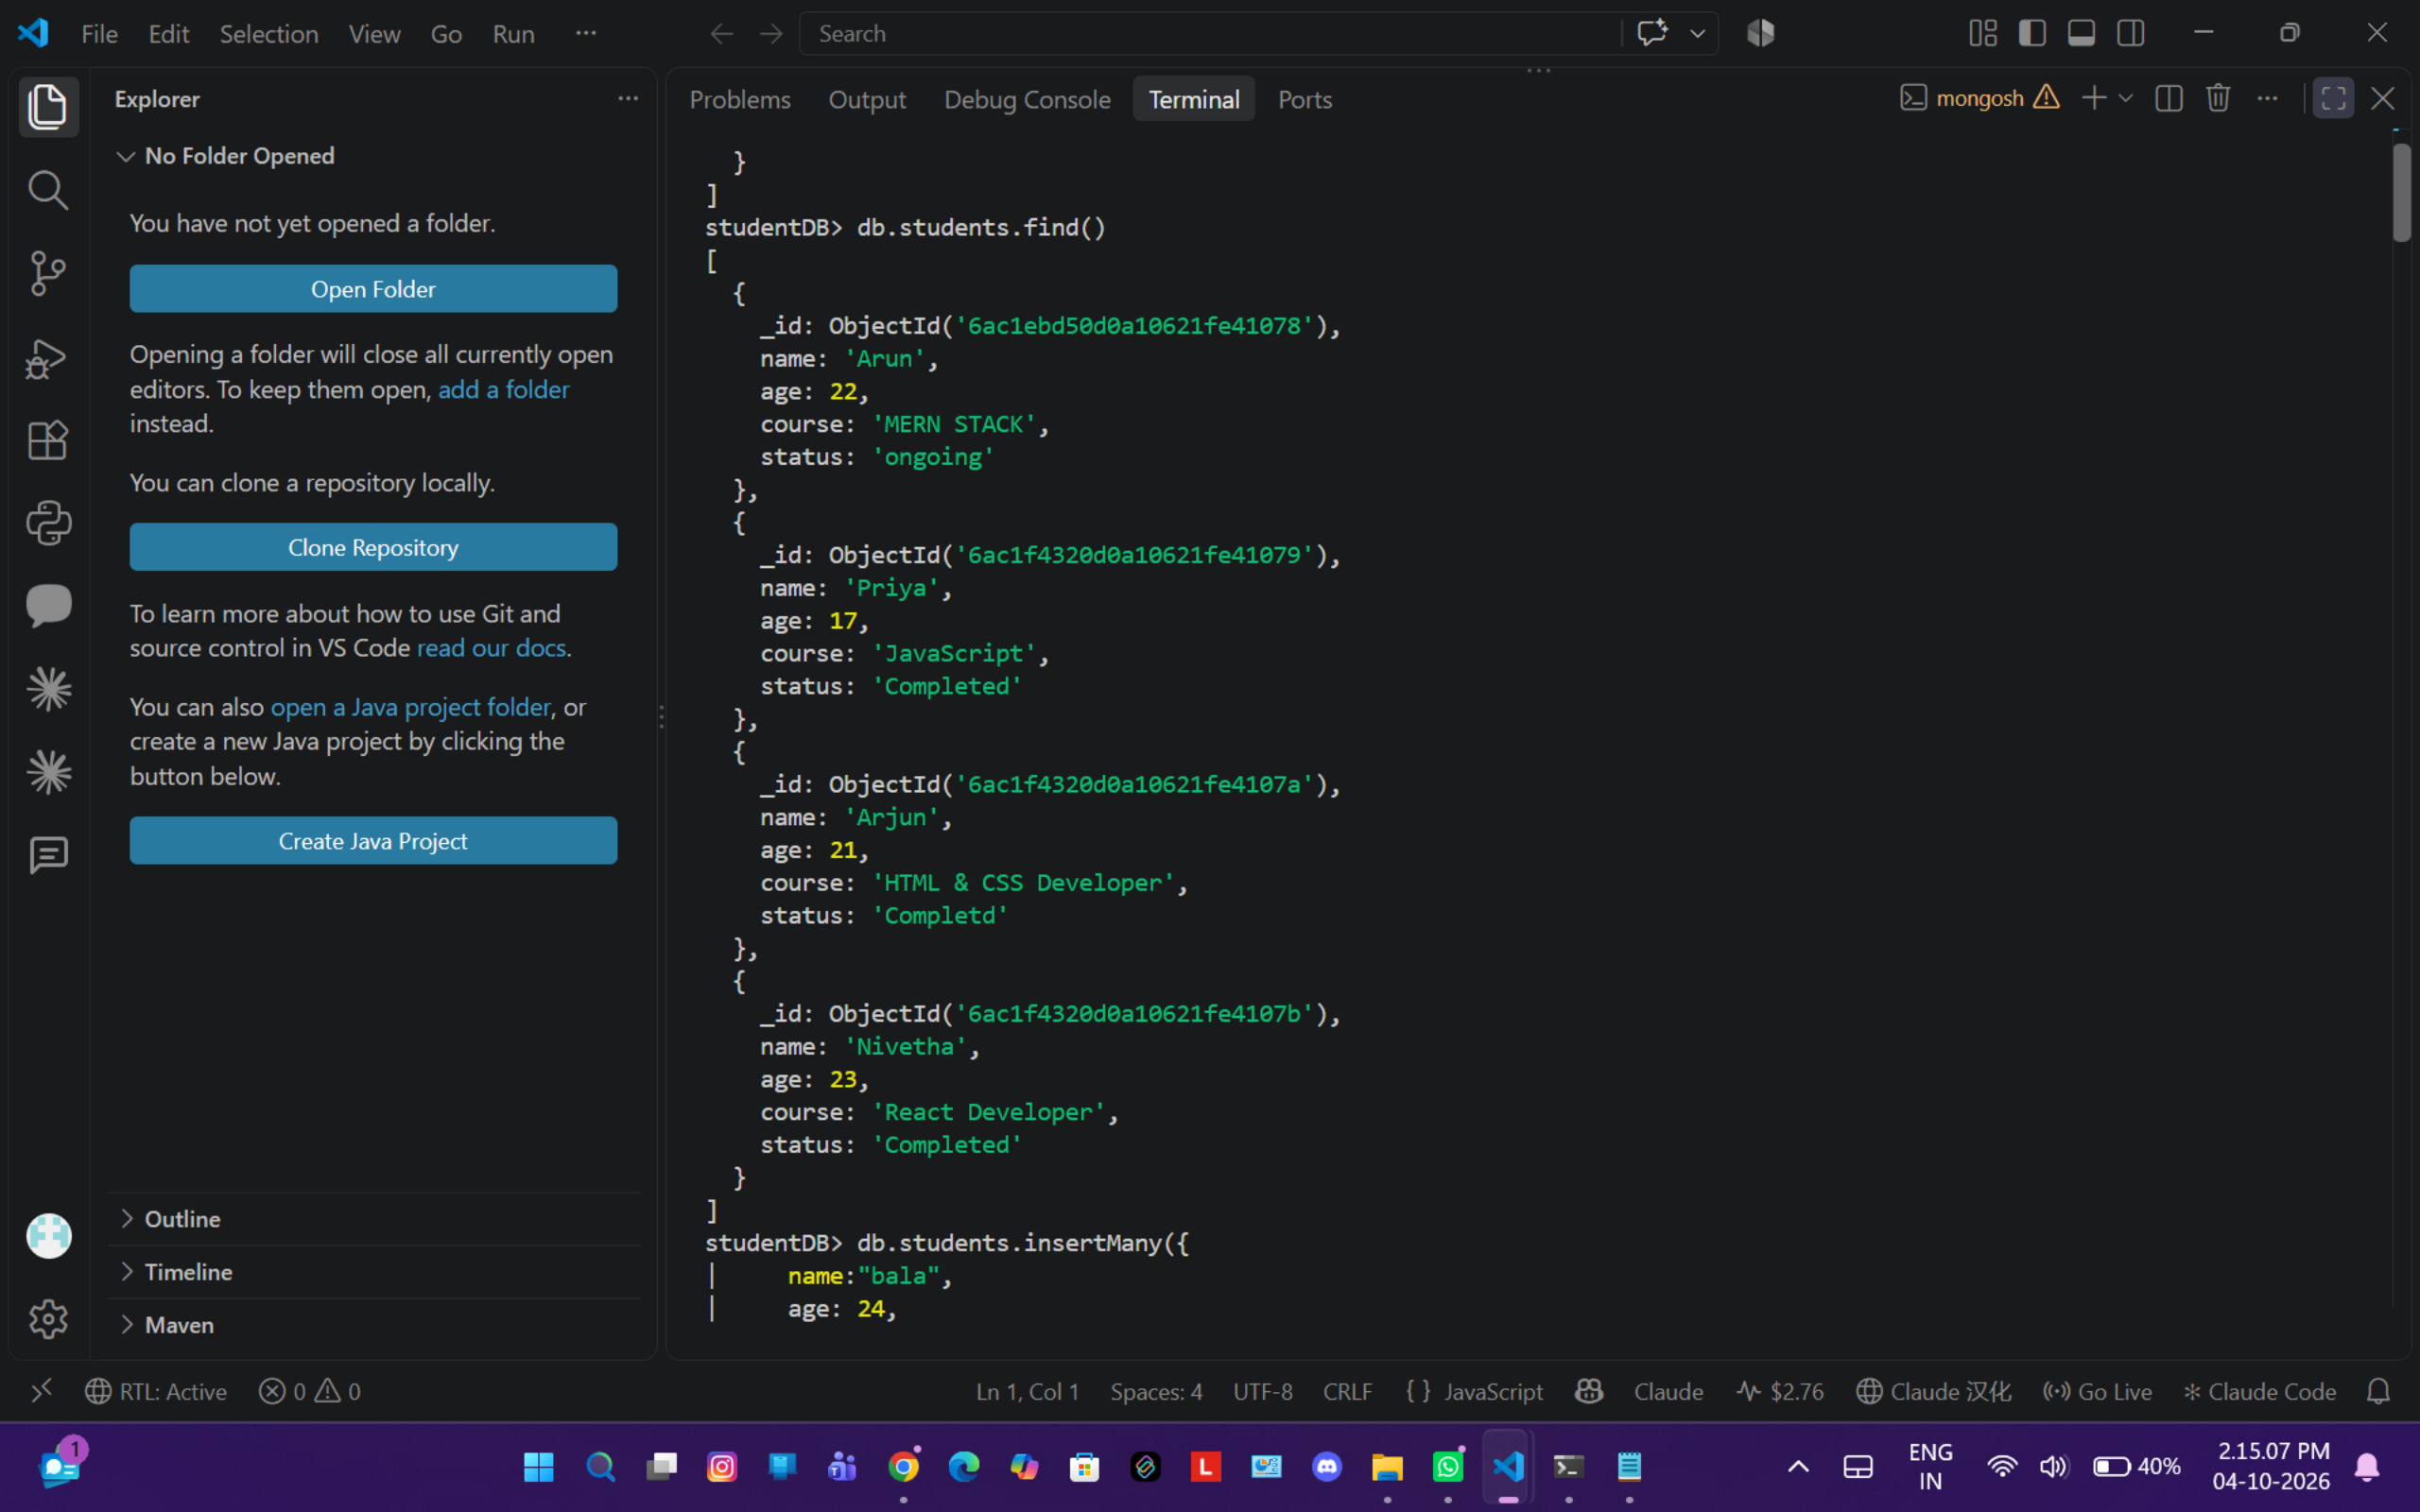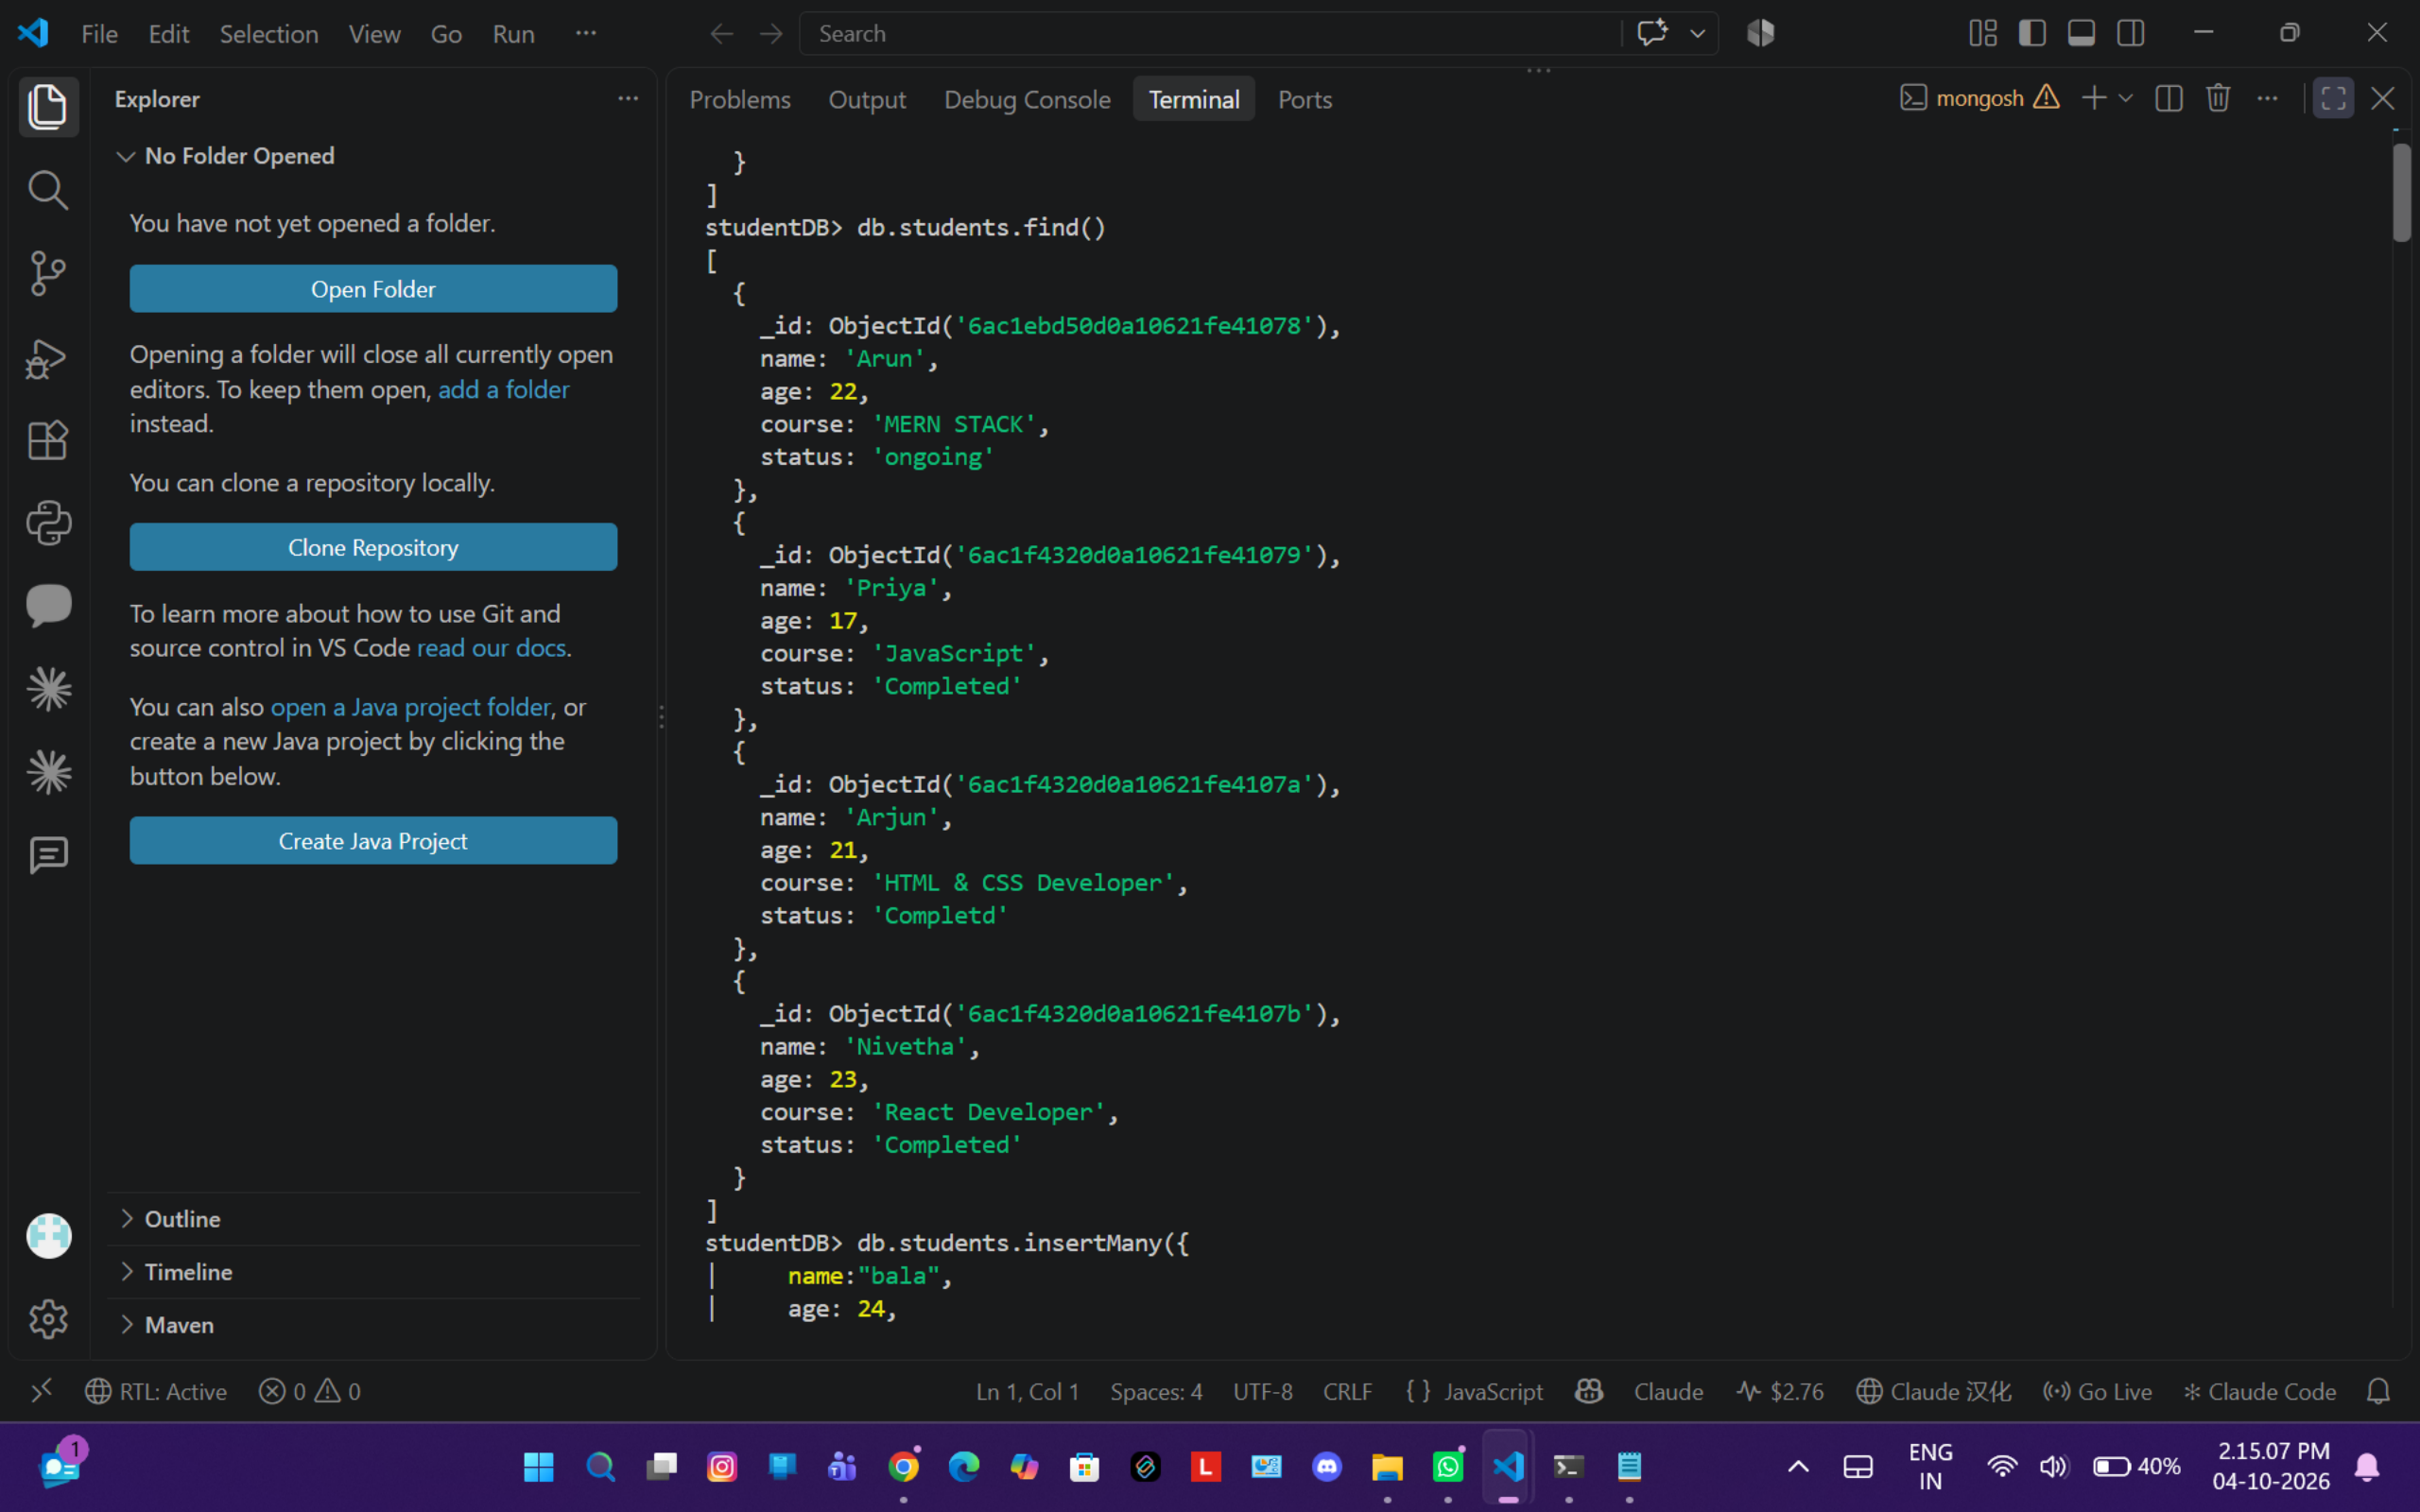

Problems Output Debug Console **Terminal** Ports

 mongosh ...

```
studentDB> db.students.insertMany({
  name:"bala",
  age: 24,
  course: "JAVA",
  status: "Ongoing"
},
{
  name:"kalpana",
  age: 19,
  course: "Full-stack-development",
  status: "Ongoing"
})
```

```
MongoInvalidArgumentError: Argument "docs" must be an array of documents
```

```
studentDB> db.students.insertMany([
  {
    name: "bala",
    age: 24,
    course: "JAVA",
    status: "Ongoing"
  },
  {
    name: "kalpana",
    age: 19,
    course: "Full-stack-development",
    status: "Ongoing"
  }
])

{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6ac1fb670d0a10621fe4107c'),
    '1': ObjectId('6ac1fb670d0a10621fe4107d')
  }
}

studentDB> db.students.find()

[
  {
    _id: ObjectId('6ac1ebd50d0a10621fe41078'),
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ 🗑 ... [] ✕

```
studentDB> db.students.find()
[
  {
    _id: ObjectId('6ac1ebd50d0a10621fe41078'),
    name: 'Arun',
    age: 22,
    course: 'MERN STACK',
    status: 'ongoing'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe41079'),
    name: 'Priya',
    age: 17,
    course: 'JavaScript',
    status: 'Completed'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107a'),
    name: 'Arjun',
    age: 21,
    course: 'HTML & CSS Developer',
    status: 'Completd'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  },
  {
    _id: ObjectId('6ac1fb670d0a10621fe4107c'),
    name: 'bala',
    age: 24,
    course: 'JAVA',
    status: 'Ongoing'
  }
]
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ ✖ ... [] ×

```
studentDB> db.students.updateMany(
|   {status: "Ongoing"},
|   {$set: {status: "Completed"}}
| )
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 2,
  modifiedCount: 2,
  upsertedCount: 0
}
studentDB> db.students.deleteOne({name:"Priya"})
{ acknowledged: true, deletedCount: 1 }
studentDB> db.students.find({name:"Priya"})

studentDB> db.students.find(
|   {age: {$gt: 21}}
| )
[
  {
    _id: ObjectId('6ac1ebd50d0a10621fe41078'),
    name: 'Arun',
    age: 22,
    course: 'MERN STACK',
    status: 'ongoing'
  },
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  },
  {
    _id: ObjectId('6ac1fb670d0a10621fe4107c'),
    name: 'bala',
```

```
studentDB> db.students.find(
|     {age: {$lt: 21}}
| )
|
| [
|   {
|     _id: ObjectId('6ac1fb670d0a10621fe4107d'),
|     name: 'kalpana',
|     age: 19,
|     course: 'Full-stack-development',
|     status: 'Completed'
|   }
| ]
studentDB> db.students.find(
|     {course: {$in: ["JavaScript", "React Developer"]}}
| )
|
| [
|   {
|     _id: ObjectId('6ac1f4320d0a10621fe4107b'),
|     name: 'Nivetha',
|     age: 23,
|     course: 'React Developer',
|     status: 'Completed'
|   }
| ]
studentDB> db.students.find({
|     $and: [
|       {age: 23},
|       {status : "Completed "}
|     ]
| })
studentDB> db.students.find({
|     $and: [
|       {age: 23},
|       {status : "Completed"}
|     ]
| })
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ ✕ ... [] ✕

```
| ]
| })

studentDB> db.students.find({
|   $and: [
|     {age: 23},
|     {status : "Completed"}
|   ]
| })
[
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  }
]

studentDB> db.students.find({
|   $or: [
|     {age: 23},
|     {status : "Completed "}
|   ]
| })
[
  {
    _id: ObjectId('6ac1f4320d0a10621fe4107b'),
    name: 'Nivetha',
    age: 23,
    course: 'React Developer',
    status: 'Completed'
  }
]

studentDB> db.students.find({$or:[{course:"JAVA"},{course:"React Developer"}]})
[
  {
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ 🗑 ... | [] ×

```
studentDB> db.students.find({
|   phone: {$exists: true}
| })
[
|   {
|     _id: ObjectId('6ac1f4320d0a10621fe4107b'),
|     name: 'Nivetha',
|     age: 23,
|     course: 'React Developer',
|     status: 'Completed',
|     phone: '9876543210'
|   }
| ]
studentDB> db.students.find({
|   phone: {$exists: false}
| })
[
|   {
|     _id: ObjectId('6ac1ebd50d0a10621fe41078'),
|     name: 'Arun',
|     age: 22,
|     course: 'MERN STACK',
|     status: 'ongoing'
|   },
|   {
|     _id: ObjectId('6ac1f4320d0a10621fe4107a'),
|     name: 'Arjun',
|     age: 21,
|     course: 'HTML & CSS Developer',
|     status: 'Completd'
|   },
|   {
|     _id: ObjectId('6ac1fb670d0a10621fe4107c'),
|     name: 'bala',
|     age: 24,
|     course: 'JAVA',
|   }
| ]
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ ✖ ... [] ✕

```
TypeError: db.createcollection is not a function
studentDB> db.createCollection("books")
{ ok: 1 }
studentDB> db.books.insertMany([
  {
    title: "JavaScript Basics",
    author: "John Smith",
    price: 450,
    category: "Programming",
    available: true
  },
  {
    title: "MongoDB Guide",
    author: "Brototype",
    price: 550,
    category: "Database",
    available: true
  },
  {
    title: "React for Beginners",
    author: "Error Makes Clever",
    price: 600,
    category: "Programming",
    available: false
  }
])
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6ac20f170d0a10621fe4107e'),
    '1': ObjectId('6ac20f170d0a10621fe4107f'),
    '2': ObjectId('6ac20f170d0a10621fe41080')
  }
}
studentDB> db.books.find()
[
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ 🗑 ... [] ✕

```
studentDB> db.books.find()
[
  {
    _id: ObjectId('6ac20f170d0a10621fe4107e'),
    title: 'JavaScript Basics',
    author: 'John Smith',
    price: 450,
    category: 'Programming',
    available: true
  },
  {
    _id: ObjectId('6ac20f170d0a10621fe4107f'),
    title: 'MongoDB Guide',
    author: 'Brototype',
    price: 550,
    category: 'Database',
    available: true
  },
  {
    _id: ObjectId('6ac20f170d0a10621fe41080'),
    title: 'React for Beginners',
    author: 'Error Makes Clever',
    price: 600,
    category: 'Programming',
    available: false
  }
]
studentDB> db.books.find({
  |   category: "Programming"
  | })
[
  {
    _id: ObjectId('6ac20f170d0a10621fe4107e'),
    title: 'JavaScript Basics',
    author: 'John Smith',
    price: 450,
```



Problems Output Debug Console **Terminal** Ports

mongosh ⚠ + ▾ □ ✕ ... | [] ✕

```

    _id: ObjectId('6ac20f170d0a10621fe41080'),
    title: 'React for Beginners',
    author: 'Error Makes Clever',
    price: 600,
    category: 'Programming',
    available: false
  }
]
studentDB> db.books.find(
| price: {$gt: 500}
| })
[
  {
    _id: ObjectId('6ac20f170d0a10621fe4107f'),
    title: 'MongoDB Guide',
    author: 'Brototype',
    price: 550,
    category: 'Database',
    available: true
  },
  {
    _id: ObjectId('6ac20f170d0a10621fe41080'),
    title: 'React for Beginners',
    author: 'Error Makes Clever',
    price: 600,
    category: 'Programming',
    available: false
  }
]
studentDB> db.books.updateOne(
|   { available: false},
|   { $set: { available: true} }
| )
{
  acknowledged: true,
  insertedId: null,

```

```

}
studentDB> db.books.find({title: "React for Beginners"})
[
  {
    _id: ObjectId('6ac20f170d0a10621fe41080'),
    title: 'React for Beginners',
    author: 'Error Makes Clever',
    price: 600,
    category: 'Programming',
    available: true
  }
]
studentDB> db.students.deleteMany({})
{ acknowledged: true, deletedCount: 5 }
studentDB> db.students.find()

studentDB>

```