

Create an S3 bucket and upload objects

Bucket namespace
Choose the namespace where you want to create your bucket. [Learn more](#)

☒ **Global namespace**
By default, S3 creates general purpose buckets in the global namespace.

☐ **Account Regional namespace (recommended)**
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)

jagan-s3-assignment-0306

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Use specific file name, it should be unique across globe and then create bucket

Successfully created bucket "jagan-s3-assignment-0306"

jagan-s3-assignment-0306 [Info](#)

[Objects](#) | [Metadata](#) | [Properties](#) | [Permissions](#) | [Metrics](#) | [Management](#) | [File systems](#) | [Access Points](#)

Objects (0) [Refresh](#) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions < 1 >

Name	Type	Last modified	Size	Storage class
------	------	---------------	------	---------------

Upload succeeded
For more information, see the [Files and folders](#) table.

[jagan-s3-assignment-0306](#) [2 files, 16.0 B \(100.00%\)](#) [0 files, 0 B \(0.00%\)](#)

[Files and folders](#) | [Configuration](#)

Files and folders (2 total, 16.0 B)

< 1 >

Name	Folder	Type	Size	Status	Error
sample.txt	-	text/plain	4.0 B	✓ Succeeded	-
text.file	-	-	12.0 B	✓ Succeeded	-

two files uploaded

Deploy a static website in S3.

Static website hosting

☐ Disable

☒ **Enable**

Hosting type

☒ **Host a static website**
Use the bucket endpoint as the web address. [Learn more](#)

☐ Redirect requests for an object
Redirect requests to another bucket or domain. [Learn more](#)

[For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see \[Using Amazon S3 Block Public Access\]\(#\)](#)

Index document
Specify the home or default page of the website.

index.html

Create an index.html file and select the options as mentioned in the properties then save changes

✓ Successfully edited Block Public Access settings for this bucket.

jagan-s3-assignment-0306 [Info](#)

Objects | Metadata | Properties | **Permissions** | Metrics | Management | File systems | Access Points

Permissions overview

Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#) [View analyzer for us-east-1](#)

In the permissions edit the block public access

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#) [i](#)

Edit

Delete

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadForWebsite",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3::jagan-s3-assignment-0306/*"
    }
  ]
}
```

Copy

Edit the bucket policy and save it

Bucket website endpoint


When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#) [i](#)

<http://jagan-s3-assignment-0306.s3-website-us-east-1.amazonaws.com> [i](#)

Copy the website and browse



Enable cross-region replication.

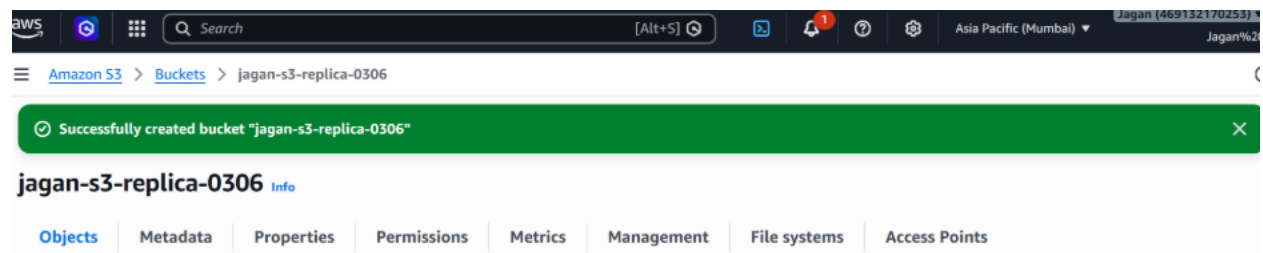

Create bucket in the mumbai region

Replication rules (0)

[View details](#)[Edit rule](#)[Delete](#)[Actions](#)[Create replication rule](#)

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Replication also includes any annotations attached to your objects. [Learn more](#)

Replication now includes replicating any annotations attached to your objects, which might increase your costs. To understand the potential cost impact, review your replication rules and annotations usage.

Got to management and create replication rule

[Amazon S3](#) > Buckets

General purpose buckets

[All AWS Regions](#)

Directory buckets

General purpose buckets (1/3) [Info](#)

[Copy ARN](#)[Empty](#)[Delete](#)[Create bucket](#)

Buckets are containers for data stored in S3.

< 1 >



Name	AWS Region	Creation date
☒ jagan-s3-assignment-0306	US East (N. Virginia) us-east-1	September 6, 2026, 23:35:06 (UTC+05:30)
☐ jagan-s3-replica-0306	Asia Pacific (Mumbai) ap-south-1	September 7, 2026, 00:34:15 (UTC+05:30)
☐ my-vpc-flow-log-jagan-2026	US East (N. Virginia) us-east-1	September 2, 2026, 14:08:01 (UTC+05:30)

Click on the option

Choose a bucket



S3 Buckets

Buckets (1/3)



< 1 >

Name	AWS Region
☐ jagan-s3-assignment-0306	US East (N. Virginia) us-east-1
☒ jagan-s3-replica-0306	Asia Pacific (Mumbai) ap-south-1
☐ my-vpc-flow-log-jagan-2026	US East (N. Virginia) us-east-1

[Cancel](#)[Choose path](#)

Replication configuration successfully updated

If changes to the configuration aren't displayed, choose the refresh button. Changes apply only to new objects. To replicate existing objects with this configuration, choose [Create replication job](#).

[Create replication job](#)

Destination

You can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or you can replicate objects across buckets in the same AWS Region (Same-Region Replication). You can also choose a different bucket for each rule in the configuration. [Learn more](#) or see [Amazon S3 pricing](#).

- ☒ Choose a bucket in this account
- ☐ Specify a bucket in another account

Bucket name

Choose the bucket that will receive replicated objects.

jagan-s3-replica-0306

[Browse S3](#)

This is our destination

IAM role

The selected IAM role applies to all rules in the bucket.

Permission to access the specified resources

- ☐ Create new role
- ☒ Choose from existing IAM roles
- ☐ Enter IAM role ARN

IAM role

s3crr_role_for_jagan-s3-assignment-0306



[View](#)

Iam role that we already have created

Then save

Run job

Actions ▼

Clone job



Click

the job id and then run

	Job ID	Status ▼	Description ▼	Operation ▼	Date created ▼	Total objects ▼	% Complete ▼	Total failed (rate) ▼	Priority ▼
☐	3cf46f27-a08d-4d20-997b-da8291307de	Ready	2026-09-07 - Replicate	Replicate	September 7, 2026, 12:16:58 (UTC+05:30)	3	0%	0 (0%)	10

The status is ready

Jobs (4)									
Search by job ID or description				All status types ▼		< 1 > ⚙			
	Job ID	Status ▼	Description ▼	Operation ▼	Date created ▼	Total objects ▼	% Complete ▼	Total failed (rate) ▼	Priority ▼
☐	3cf46f27-a08d-4d20-997b-da8291307de	Completed	2026-09-07 - Replicate	Replicate	September 7, 2026, 12:16:58 (UTC+05:30)	3	100%	0 (0%)	10

Replicate is complete

Objects (4)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions

☐	Name	Type	Last modified	Size	Storage class
☐	index.html	html	September 7, 2026, 00:10:59 (UTC+05:30)	12.0 B	Standard
☐	job-3cf46f27-a08d-4d20-997b-da8291307de6/	Folder	-	-	-
☐	sample.txt	txt	September 6, 2026, 23:42:44 (UTC+05:30)	4.0 B	Standard

Configure a bucket policy so only the Admin user can see objects.

jagan-s3-assignment-0306 Info

[Objects](#)
[Metadata](#)
[Properties](#)
[Permissions](#)
[Metrics](#)
[Management](#)
[File systems](#)
[Access](#)

Permissions overview

Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)

Open the bucket and go to permissions

```

1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "AllowAdminUserReadObjects",
6       "Effect": "Allow",
7       "Principal": {
8         "AWS": "arn:aws:iam::469132170253:user/iam-user"
9       },
10      "Action": "s3:GetObject",
11      "Resource": "arn:aws:s3:::jagan-s3-assignment-0306/*"
12    }
13  ]
14 }
```

Successfully edited bucket policy.

jagan-s3-assignment-0306 [Info](#)

[Objects](#)
[Metadata](#)
[Properties](#)
[Permissions](#)
[Metrics](#)
[Management](#)
[File systems](#)
[Access Points](#)

Permissions overview

Access finding

Edit the script

```
india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ aws s3 ls s3://jagan-s3-assignment-0306 --profile admin
2026-09-07 00:10:59      12 index.html
2026-09-06 23:42:44         4 sample.txt
2026-09-06 23:42:45      12 text.file
```

For the assignment, the important result is that Admin can list the objects, and your bucket policy is configured for only iam-user

Configure S3 lifecycle policies.

jagan-s3-assignment-0306

[Metadata](#)
[Properties](#)
[Permissions](#)
[Metrics](#)
[Management](#)
[File systems](#)
[Access Points](#)

Lifecycle configuration

To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration is a set of rules that define actions that Amazon S3 applies to a group of objects. Lifecycle rules run once per day.

Lifecycle rules

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. [Learn more](#)

Lifecycle ru...	Status	Scope	Current ver...	Noncurrent...	Expired obj...	Incomplet...
Choose storage class transitions Standard-IA Days after object creation 30 Remove Add transition						

set for 30 days

Upload objects using AWS CLI.

```

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ echo "This file was uploaded using AWS CLI" > cli-upload.txt

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ aws s3 cp cli-upload.txt s3://jagan-s3-assignment-0306/ --profile admin
upload: .\cli-upload.txt to s3://jagan-s3-assignment-0306/cli-upload.txt

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ file was uploaded using AWS CLI" > cli-upload.txt

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ aws s3 cp cli-upload.txt s3://jagan-s3-assignment-0306/ --profile admin
upload: .\cli-upload.txt to s3://jagan-s3-assignment-0306/cli-upload.txt

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
bash: syntax error near unexpected token '('

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ $ echo "This file was uploaded using AWS CLI" > cli-upload.txt
bash: $: command not found

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
bash: syntax error near unexpected token '('

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ $ aws s3 cp cli-upload.txt s3://jagan-s3-assignment-0306/ --profile admin
bash: $: command not found

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ upload: .\cli-upload.txt to s3://jagan-s3-assignment-0306/cli-upload.txt
bash: upload:: command not found

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
bash: syntax error near unexpected token '('

```

```

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ aws s3 ls s3://jagan-s3-assignment-0306/ --profile admin
2026-09-07 12:43:26      37 cli-upload.txt
2026-09-07 00:10:59      12 index.html
2026-09-06 23:42:44       4 sample.txt
2026-09-06 23:42:45      12 text.file

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$

```

can see the cli-upload.txt

Write a Bash script to create an S3 bucket.

```

n
india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ nano create-s3-bucket.sh

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ chmod +x create-s3-bucket.sh

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ ./create-s3-bucket.sh
Creating S3 bucket: jagan-s3-script-1788765651
{
  "Location": "/jagan-s3-script-1788765651",
  "BucketArn": "arn:aws:s3:::jagan-s3-script-1788765651"
}
S3 bucket created successfully: jagan-s3-script-1788765651

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ |

```

#!/bin/bash

```
BUCKET_NAME="jagan-s3-script-$(date +%s)"
```

```
REGION="us-east-1"
```

```
echo "Creating S3 bucket: $BUCKET_NAME"
```

```
aws s3api create-bucket \
```

```
--bucket "$BUCKET_NAME" \
```

```
--region "$REGION" \
```

```
--profile admin
```

```
if [ $? -eq 0 ]; then
```

```
    echo "S3 bucket created successfully: $BUCKET_NAME"
```

```
else
```

```
    echo "Failed to create S3 bucket"
```

```
    exit 1
```

```
Fi
```

Write the exact script

Upload a 1GB file to S3 using CLI

```
india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ dd if=/dev/zero of=1gb-test-file.bin bs=1M count=1024
1024+0 records in
1024+0 records out
1073741824 bytes (1.1 GB, 1.0 GiB) copied, 5.34141 s, 201 MB/s

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ ls -lh 1gb-test-file.bin
-rw-r--r-- 1 india 197121 1.0G Sep  7 14:51 1gb-test-file.bin

india@Jaggu MINGW64 ~/OneDrive/Desktop (master)
$ aws s3 cp 1gb-test-file.bin s3://jagan-s3-script-1788765651/
```



[jagan-s3-script-1788765651](#)

US East (N. Virginia) us-east-1

September 7, 2026, 12:50:59
(UTC+05:30)

The file copied to s3 bucket.