

Create MariaDB DB on EC2.

Create instance and using ssh connect to the gitbash terminal

[illegible]

```

Installed:
mariadb-connector-c-3.10.1.amzn2023.0.2.x86_64
mariadb105-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-common-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-errmsg-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-server-3:10.5.29-1.amzn2023.0.1.x86_64
mysql-selinux-1.0.14-2.amzn2023.0.1.noarch
perl-BDB-1.652-1.amzn2023.0.1.x86_64
perl-BDB-1.652-1.amzn2023.0.1.x86_64
perl-DBD-MariaDB-1.22-1.amzn2023.0.5.x86_64
perl-File-Copy-2.34-477.amzn2023.0.9.noarch
perl-File-Glob-0.2624-500.amzn2023.0.2.noarch
perl-Math-Complex-1.59-477.amzn2023.0.9.noarch
perl-Sys-Hostname-1.23-477.amzn2023.0.9.x86_64
perl-DBD-MariaDB-1.22-1.amzn2023.0.5.x86_64
mariadb-connector-c-config-3.10.1.amzn2023.0.2.noarch
mariadb105-backup-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-cracklib-password-check-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-gssapi-server-3:10.5.29-1.amzn2023.0.1.x86_64
mariadb105-server-utils-3:10.5.29-1.amzn2023.0.1.x86_64
perl-DBD-MariaDB-1.22-1.amzn2023.0.5.x86_64
perl-File-Copy-2.34-477.amzn2023.0.9.noarch
perl-File-Glob-0.2624-500.amzn2023.0.2.noarch
perl-Math-Complex-1.59-477.amzn2023.0.9.noarch
perl-Module-Load-1.0.36-2.amzn2023.0.2.noarch

```

Installed mariadb using “dnf install mariadb105-server -y

Use commands;

Systemctl start mariadb

Systemctl restart mariadb

Systemctl status mariadb

```

# mariadb.service - MariaDB 10.5 database Server
Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: disabled)
Active: active (running) since Mon 2026-09-21 11:41:43 UTC; 21s ago

[root@ip-10-0-3-11 ~]# mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 3
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE devopsdb;
Query OK, 1 row affected (0.000 sec)

MariaDB [(none)]> SHOW DATABASES;
+-----+
| Database |
+-----+
| devopsdb |
| information_schema |
| mysql |
| performance_schema |
+-----+
4 rows in set (0.000 sec)

MariaDB [(none)]> |

```

Insert some dummy data.

```
MariaDB [(none)]> USE devopsdb;
Database changed
MariaDB [devopsdb]> USE devopsdb;
Database changed
MariaDB [devopsdb]> CREATE TABLE employees (
->     id INT PRIMARY KEY,
->     name VARCHAR(50),
->     role VARCHAR(50),
->     salary INT
-> );
Query OK, 0 rows affected (0.008 sec)

MariaDB [devopsdb]> INSERT INTO employees VALUES
-> (1, 'Ravi', 'DevOps Engineer', 60000),
-> (2, 'Suresh', 'Developer', 55000),
-> (3, 'Anil', 'Tester', 45000);
Query OK, 3 rows affected (0.002 sec)
Records: 3 Duplicates: 0 Warnings: 0

MariaDB [devopsdb]> SELECT * FROM employees;
+----+-----+-----+-----+
| id | name  | role      | salary |
+----+-----+-----+-----+
| 1  | Ravi  | DevOps Engineer | 60000 |
| 2  | Suresh | Developer    | 55000 |
| 3  | Anil  | Tester      | 45000 |
+----+-----+-----+-----+
3 rows in set (0.000 sec)
```

Dummy data has been created

Take the backup of dummy data on EC2.

```
MariaDB [devopsdb]> exit;
Bye
[root@ip-10-0-3-11 ~]# mysqldump -u root devopsdb > devopsdb_backup.sql
[root@ip-10-0-3-11 ~]# ls -lh devopsdb_backup.sql
-rw-r--r--. 1 root root 2.1K Sep 21 11:52 devopsdb_backup.sql
[root@ip-10-0-3-11 ~]# head -20 devopsdb_backup.sql
/*!999999\~ enable the sandbox mode */
-- MariaDB dump 10.19 Distrib 10.5.29-MariaDB, for Linux (x86_64)
--
-- Host: localhost      Database: devopsdb
--
-----
-- Server version      10.5.29-MariaDB

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;

--
-- Table structure for table `employees`
```

Launch MariaDB RDS instance.

Creating database mariadb-rds [View connection details](#)

Your database might take a few minutes to launch. The only way to view your master password is to choose **View credential details** during database creation. You can modify your DB instance to create a new password at any time. You can use settings from mariadb-rds to simplify configuration of **suggested database add-ons** while we finish creating your DB for you.

Databases (1)

☒ Group resources   Modify Actions ▼ Create database ▼

 DB identifier ▲	Status ▼	Role ▼	Engine ▼	Upgrade rollout order ▼
 mariadb-rds	 Creating	Instance	MariaDB	SECOND

Create mariadb database using your current instance

Databases (1)

☒ Group resources



Modify

Actions ▾

Create database ▾

Filter by databases

< 1 > ⚙

DB identifier	Status	Role	Engine	Upgrade rollout order
mariadb-rds	Available	Instance	MariaDB	SECOND

Migrate database from EC2 to RDS.

Go to mariadb endpoint

```
[root@ip-10-0-3-11 ~]# mysql -h mariadb-rds.c61826swimbt.us-east-1.rds.amazonaws.com -P 3306 -u admin -p --ssl
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 498
Server version: 11.8.8-MariaDB-log managed by https://aws.amazon.com/rds/

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

Choose this to connect to mariaDB

```
MariaDB [(none)]> SHOW DATABASES
-> SHOW DATABASES;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server version for the right syntax to use near 'SHOW DATABASES'
at line 2
MariaDB [(none)]> SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| innodb |
| mysql |
| performance_schema |
| sys |
+-----+
5 rows in set (0.009 sec)

MariaDB [(none)]> CREATE DATABASE devopsdb;
Query OK, 1 row affected (0.006 sec)

MariaDB [(none)]> SHOW DATABASES;
+-----+
| Database |
+-----+
| devopsdb |
| information_schema |
| innodb |
| mysql |
| performance_schema |
| sys |
+-----+
6 rows in set (0.001 sec)

MariaDB [(none)]> USE devopsdb;
Database changed
MariaDB [devopsdb]>
```

```

MariaDB [(none)]> USE devopsdb;
Database changed
MariaDB [devopsdb]> CREATE TABLE employees (
->     id INT PRIMARY KEY,
->     name VARCHAR(50),
->     salary INT
-> );
Query OK, 0 rows affected (0.027 sec)

MariaDB [devopsdb]> SHOW TABLES;
+-----+
| Tables_in_devopsdb |
+-----+
| employees           |
+-----+
1 row in set (0.001 sec)

MariaDB [devopsdb]> INSERT INTO employees VALUES
-> (1, 'Jagan', 50000),
-> (2, 'Rohith', 45000);
Query OK, 2 rows affected (0.011 sec)
Records: 2  Duplicates: 0  Warnings: 0

MariaDB [devopsdb]> SELECT * FROM employees;
+----+-----+-----+
| id | name  | salary |
+----+-----+-----+
|  1 | Jagan | 50000  |
|  2 | Rohith | 45000  |
+----+-----+-----+
2 rows in set (0.001 sec)

MariaDB [devopsdb]> |

```

EC2 to RDS connectivity + databases + table + data insertion

Install MySQL DB on EC2

```

[root@ip-10-0-3-11 ~]# sudo dnf install https://dev.mysql.com/get/mysql84-community-release-e19-1.noarch.rpm -y
Last metadata expiration check: 6:16:21 ago on Mon Sep 21 11:40:18 2026.
mysql84-community-release-e19-1.noarch.rpm
Dependencies resolved.
=====
Package                                Architecture      Version           Repository        Size
=====
Installing:
mysql84-community-release              noarch            e19-1            @commandline     13 k
Transaction Summary
-----
Install 1 Package
Total size: 13 k
Installed size: 14 k

[root@ip-10-0-3-11 ~]# sudo dnf install mysql-community-server -y
MySQL 8.4 LTS Community Server
MySQL Connectors Community
MySQL Tools 8.4 LTS Community
Dependencies resolved.
=====
Package                                Architecture      Version           Repository        Size
=====
Installing:
mysql-community-server                 x86_64            8.4.11-1.el9     mysql-8.4-lts-community
replacing mariadb-connector-c-config.noarch 3.3.10-1.amzn2023.0.2
Installing dependencies:
=====
[root@ip-10-0-3-11 ~]# sudo mysqldump -u root devopsdb > /root/devopsdb_backup.sql
[root@ip-10-0-3-11 ~]# ls -lh /root/devopsdb_backup.sql
-rw-r--r--. 1 root root 2.1K Sep 21 18:01 /root/devopsdb_backup.sql
[root@ip-10-0-3-11 ~]#


```

```
[root@ip-10-0-3-11 ~]# sudo systemctl status mysqld --no-pager
● mysqld.service - MySQL Server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; preset: disabled)
   Active: active (running) since Mon 2026-09-21 18:06:11 UTC; 18s ago
     Docs: man:mysqld(8)
           http://dev.mysql.com/doc/refman/en/using-systemd.html
  Process: 40171 ExecStartPre=/usr/bin/mysqld_pre_systemd (code=exited, status=0/SUCCESS)
 Main PID: 40241 (mysqld)
   Status: "Server is operational"
    Tasks: 35 (limit: 1059)
  Memory: 442.2M
    CPU: 3.899s
   CGroup: /system.slice/mysqld.service
           └─40241 /usr/sbin/mysqld

Sep 21 18:06:03 ip-10-0-3-11.ec2.internal systemd[1]: Starting mysqld.service - MySQL Server...
Sep 21 18:06:11 ip-10-0-3-11.ec2.internal systemd[1]: Started mysqld.service - MySQL Server.
[root@ip-10-0-3-11 ~]#
```


Installing mysql db on ec2 is done

Launch MySQL RDS image.




Configure Multi-AZ.

Take backup of DB and restore the DB.

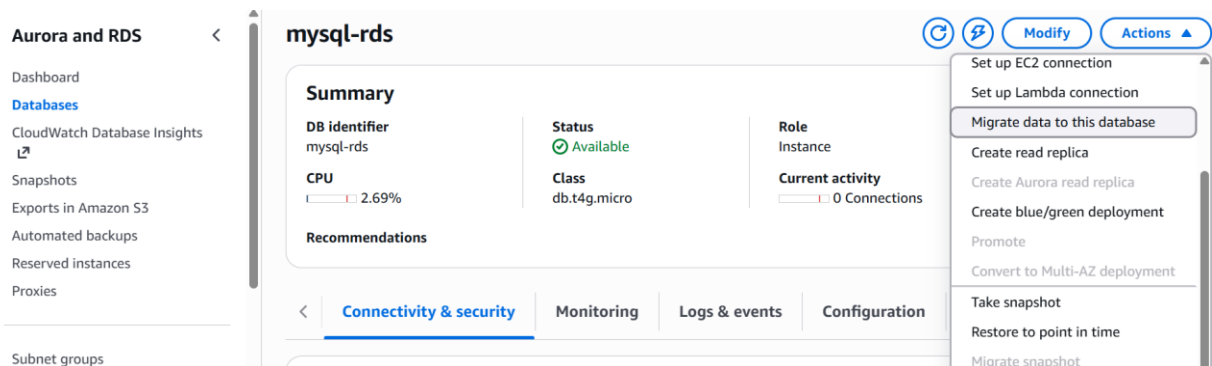

Take the snapshot

Snapshots

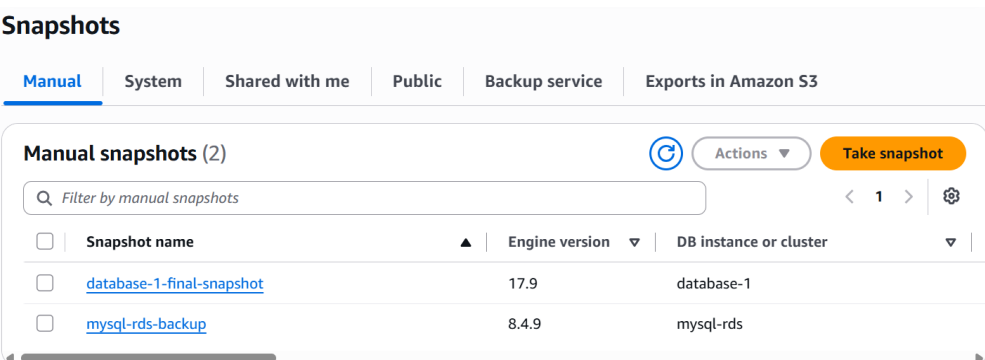

Create read replica.

Databases (2)

☒ Group resources



Modify

Actions

Create database

Filter by databases

	DB identifier	Status	Role	Engine
☐	mariadb-rds	Available	Instance	MariaDB
☒	mysql-rds	Available	Instance	MySQL

- Stop temporarily
- Reboot
- Delete
- Patch now
- Patch at next window
- Set up EC2 connection
- Set up Lambda connection
- Migrate data to this database
- Create read replica
- Create Aurora read replica

Auto minor version upgrade [Info](#)

☒ **Enable auto minor version upgrade**
Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see [Automatically upgrading the minor engine version documentation](#).

☐ **Enable deletion protection**
Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.

You reached the maximum number of instances available with free plan accounts. To remove all limitations, upgrade your account plan.