

ECS Task


Setup a highly available ECS cluster with load balancer and dynamic port mapping.

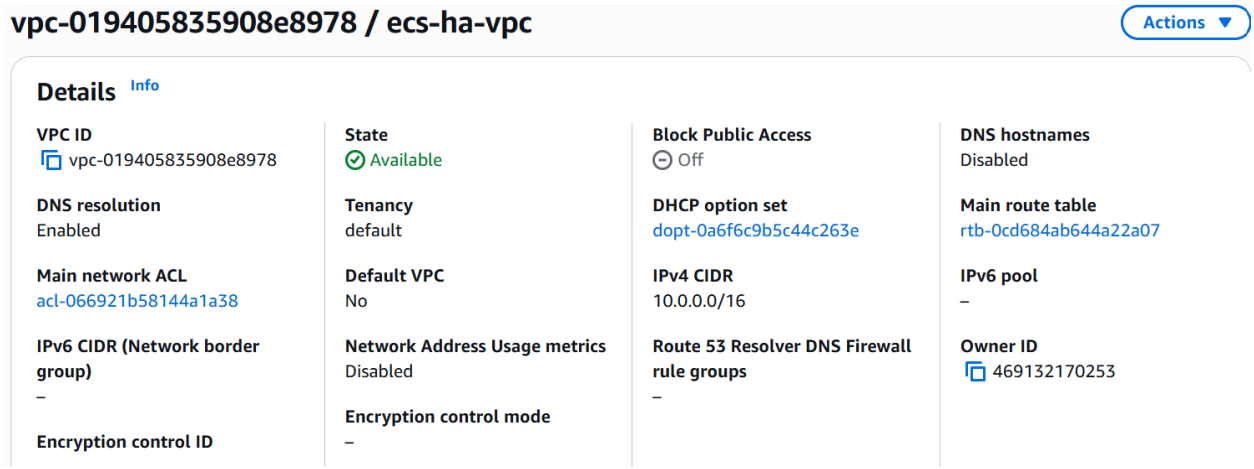


Create vpc

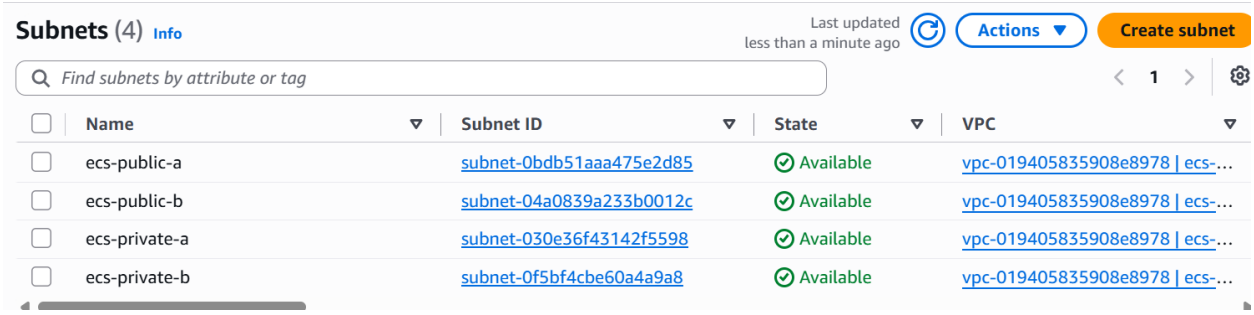

Then create the subnets

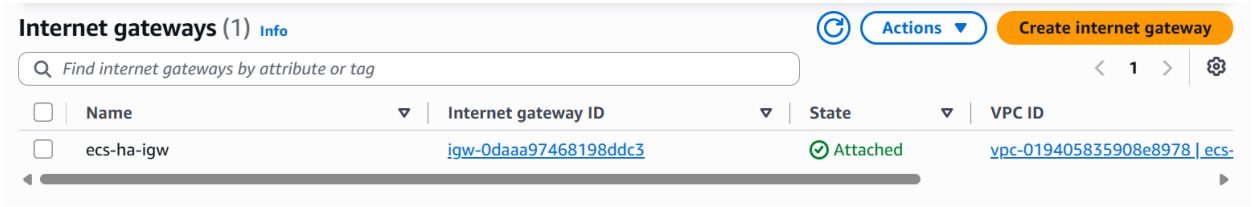

Create internet gateway and attach to VPC

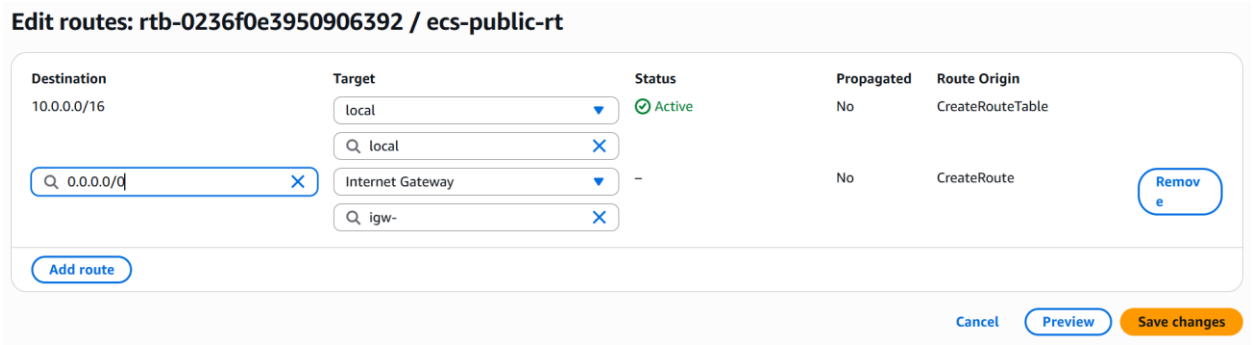

Add the route table

Create cluster Info

An Amazon ECS cluster groups together tasks, and services, and allows for shared capacity and common configurations. All of your tasks, services, and capacity must belong to a cluster.

Cluster configuration

Cluster name

ecs-ha-cluster

Cluster name must be 1 to 255 characters. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores (_).

Task definitions
Daemon task definitions
Account settings

AWS Resource Explorer
AWS Batch
Amazon ECR
Repositories

Online learning workshop
Documentation
Discover products
Subscriptions

- Fargate only
  Serverless - you don't think about creating or managing servers. Great for most common workloads.
- Fargate and Managed Instances
  Managed instances - Amazon ECS will manage patching and scaling on your behalf while giving you configurability about the types of instances. Great for more advanced workloads.
- **Fargate and Self-managed instances**
  Self-managed instances - you must ensure the instances are patched and scaled properly, and you have full control over the instances.

Auto Scaling group (ASG) | Info

- Create a new Auto Scaling group - *advanced*
- Use an existing Auto Scaling group

Provisioning model

Select a provisioning model for your instances

- **On-demand**
  With on-demand instances, you pay for compute capacity by the hour, with no long-term commitments or upfront payments.
- Spot
  Amazon EC2 Spot instances let you take advantage of unused EC2 capacity in the AWS cloud. Learn more

Container instance Amazon Machine Image (AMI)

Choose the Amazon ECS-optimized AMI for your instance.

Amazon Linux 2023

EC2 instance type

Choose based on the workloads you plan to run on this cluster.

t3.small
x86_64
2 vCPU 2 GiB Memory

EC2 instance role

An instance role is used by Amazon EC2 instances to make AWS API requests. If you don't already have an instance IAM role created, we can create one for you.

Create default role | Create new instance profile

Desired capacity

Specify the number of instances to launch in your cluster.

Minimum	Maximum
2	3

VPC

Select a VPC to use for your Amazon ECS resources.

vpc-0194058359O8e8978
ecs-ha-vpc

Create a new VPC

Subnets

Select the subnets where your instances are launched and your tasks run. We recommend that you use three subnets for production.

Choose subnets

Clear current selection

subnet-0f5bf4cbe60a4a9a8
ecs-private-b
us-east-1b 10.0.12.0/24

subnet-030e36f43142f5598
ecs-private-a
us-east-1a 10.0.11.0/24

Security group Info

Choose an existing security group or create a security group.

- (•) Use an existing security group
- ( ) Create a new security group

Container instances (2) Info

Last updated
October 26, 2026, 17:20 (UTC+5:30)

Register external instances | Actions

Filter container instances by property or value

1

Container instance	Instance type	Status	Statu...	Type	Instance ID
94fa236624f3492eaa3005504946eb6a	t3.small	Active	-	EC2	i-01b9b8ed
c00e3a827f354b68b9337a8377e0aeef	t3.small	Active	-	EC2	i-00368347

Task definitions (0) Info

Last updated
October 26, 2026, 17:34 (UTC+5:30)

Deploy | Create new revision | Create new task definition

- Create new task definition
- Create new task definition with JSON

Filter task definitions

1

Task definition	Status of last revision

No task definitions

Task definition family | Info

Specify a unique task definition family name.

hiring-app-task

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.

Infrastructure requirements Info

Specify the infrastructure requirements for the task definition.

Launch type | Info

Selection of the launch type will change task definition parameters.

- [ ] AWS Fargate
  Serverless compute for containers.
- [ ] Managed Instances
  Use if you have specific hardware constraints, such as GPU accelerators, CPU instruction sets, or network-optimized hardware (offloads scaling, patching, and instance management to AWS).
- [x] Amazon EC2 instances
  Self-managed infrastructure using Amazon EC2 instances.

OS, Architecture, Network mode

Network mode is used for tasks and is dependent on the compute type selected.

Operating system/Architecture | Info

Linux/X86_64

Network mode | Info

bridge

Task size | Info

Specify the amount of CPU and memory to reserve for your task.

CPU

1 vCPU

Memory

512 MiB

Task roles - *conditional*

Task placement - *optional*

Container details

Specify a name, container image, and whether the container should be marked as essential. Each task definition must have at least one essential container.

Name

Hiring-app

Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.

Essential container

Yes

Image URI


sabair0509/hiring-app:work

Browse ECR images


Up to 255 letters (uppercase and lowercase), numbers, hyphens, underscores, colons, periods, forward slashes, and number signs are allowed.


Private registry | Info


Store credentials in Secrets Manager, and then use the credentials to reference images in private registries.

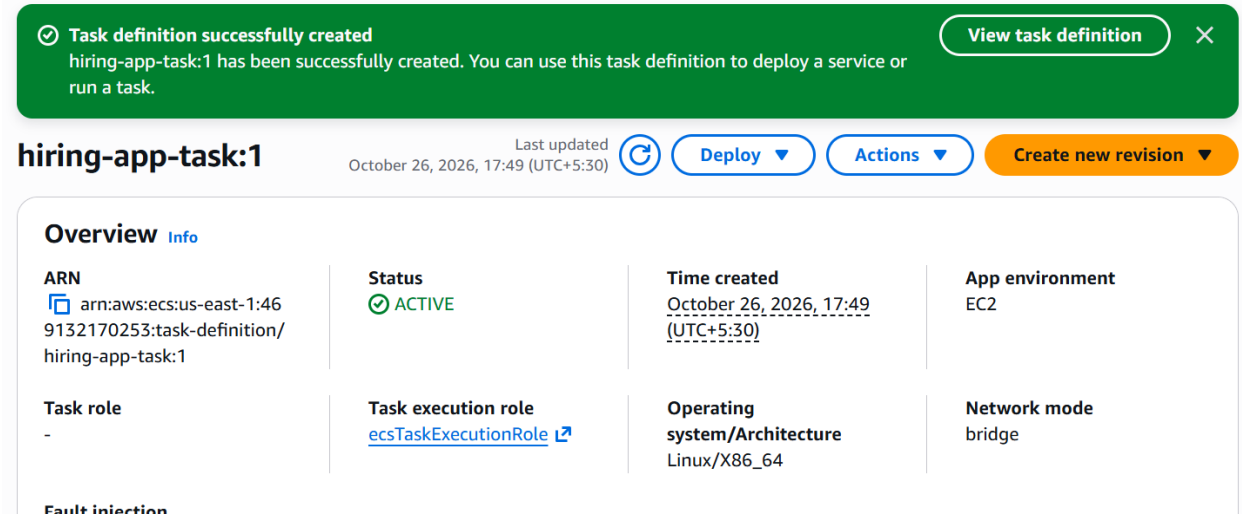


Create the service

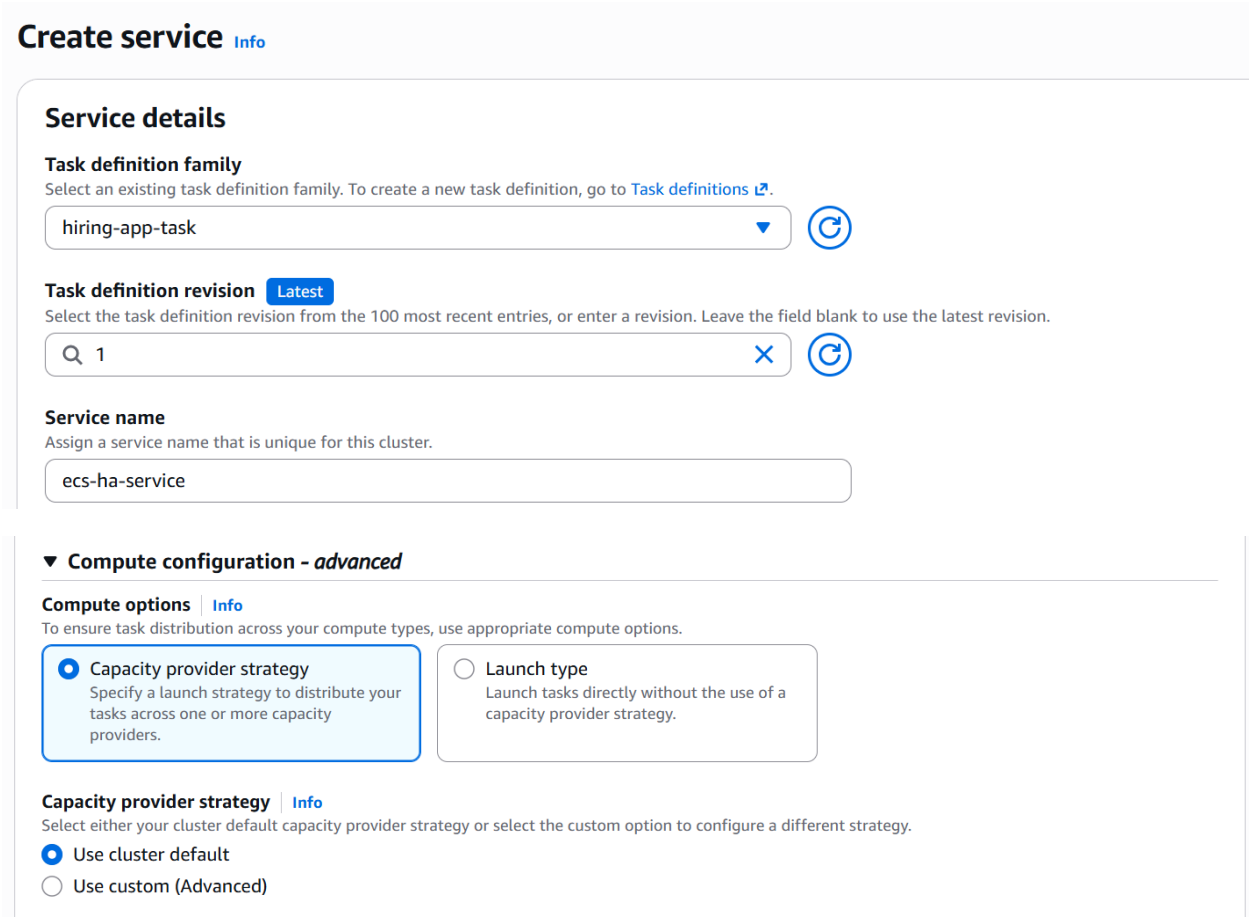

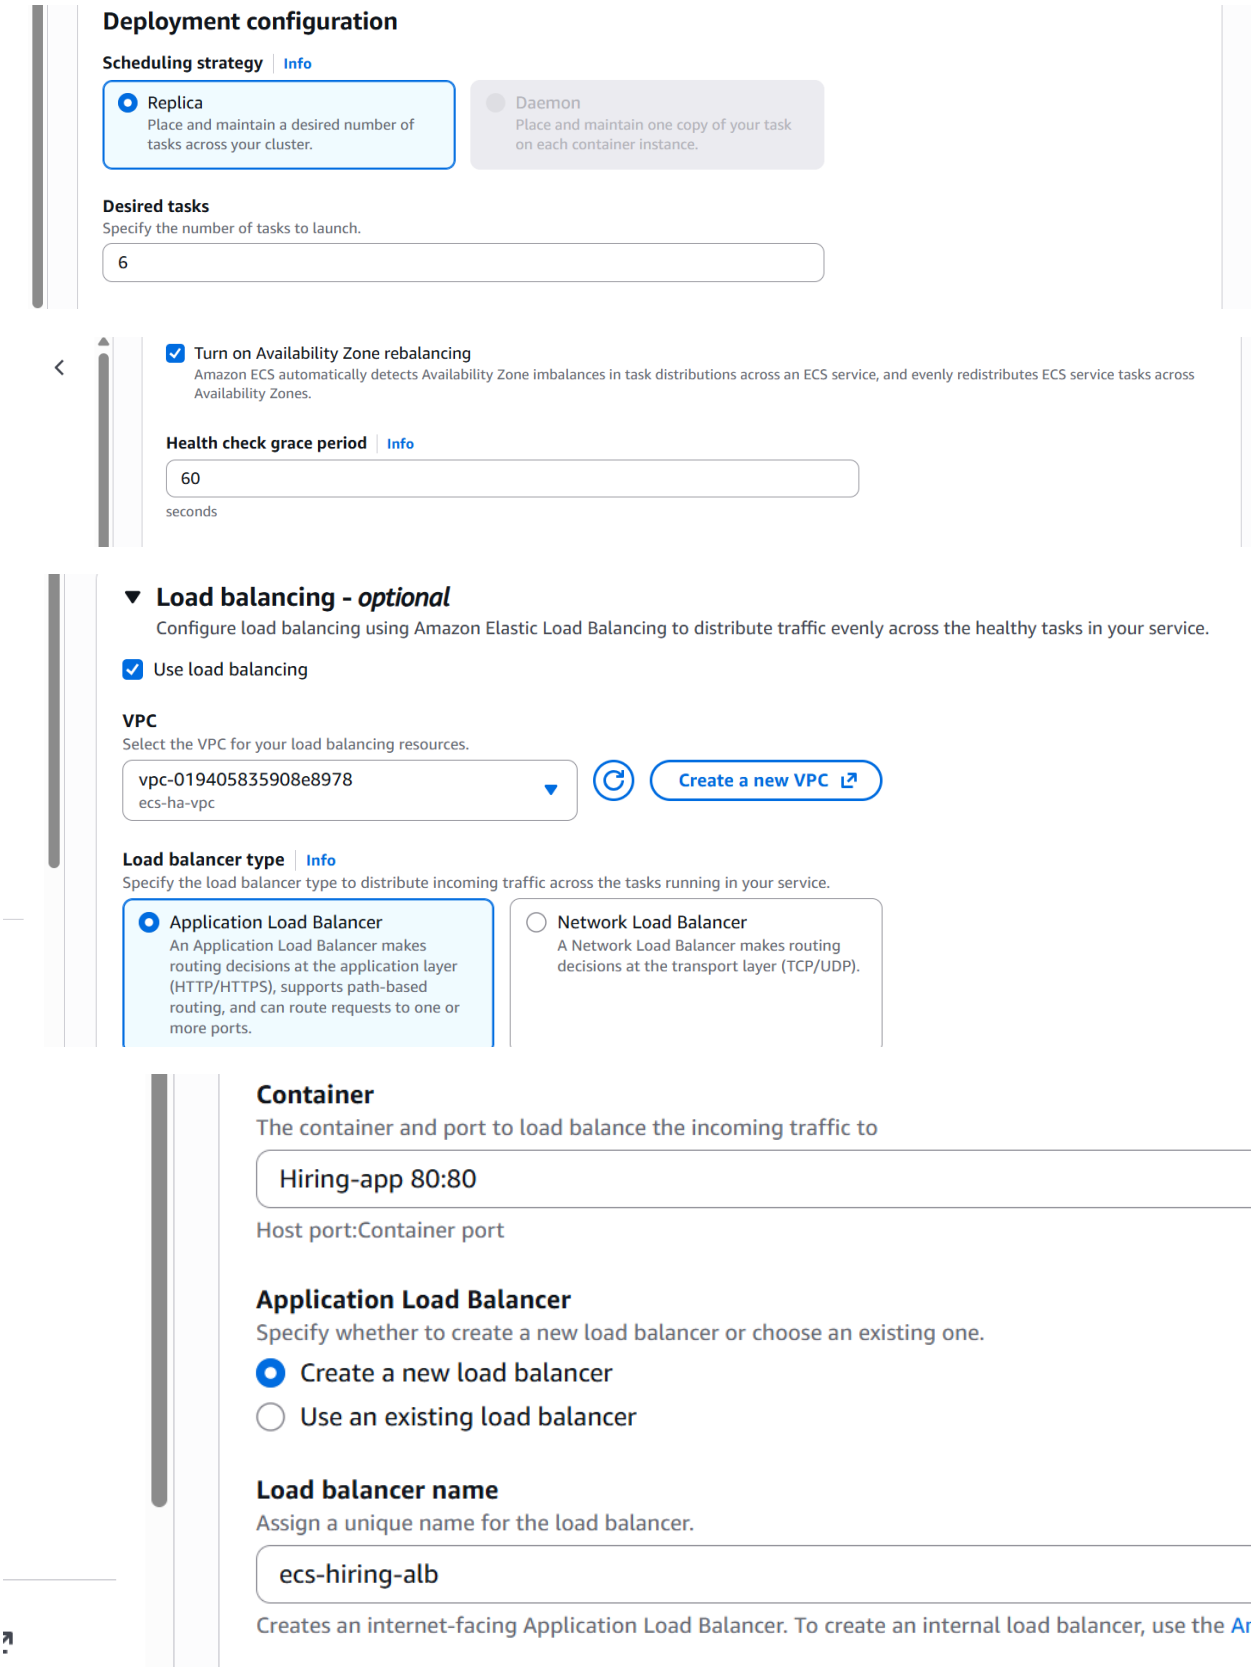
Deployment configuration
Scheduling strategy | Info
Replica
Place and maintain a desired number of tasks across your cluster.
Daemon
Place and maintain one copy of your task on each container instance.
Desired tasks
Specify the number of tasks to launch.
6
Turn on Availability Zone rebalancing
Amazon ECS automatically detects Availability Zone imbalances in task distributions across an ECS service, and evenly redistributes ECS service tasks across Availability Zones.
Health check grace period | Info
60
seconds
Load balancing - optional
Configure load balancing using Amazon Elastic Load Balancing to distribute traffic evenly across the healthy tasks in your service.
Use load balancing
VPC
Select the VPC for your load balancing resources.
vpc-019405835908e8978
ecs-ha-vpc
Create a new VPC
Load balancer type | Info
Specify the load balancer type to distribute incoming traffic across the tasks running in your service.
Application Load Balancer
An Application Load Balancer makes routing decisions at the application layer (HTTP/HTTPS), supports path-based routing, and can route requests to one or more ports.
Network Load Balancer
A Network Load Balancer makes routing decisions at the transport layer (TCP/UDP).
Container
The container and port to load balance the incoming traffic to
Hiring-app 80:80
Host port:Container port
Application Load Balancer
Specify whether to create a new load balancer or choose an existing one.
Create a new load balancer
Use an existing load balancer
Load balancer name
Assign a unique name for the load balancer.
ecs-hiring-alb
Creates an internet-facing Application Load Balancer. To create an internal load balancer, use the Ar

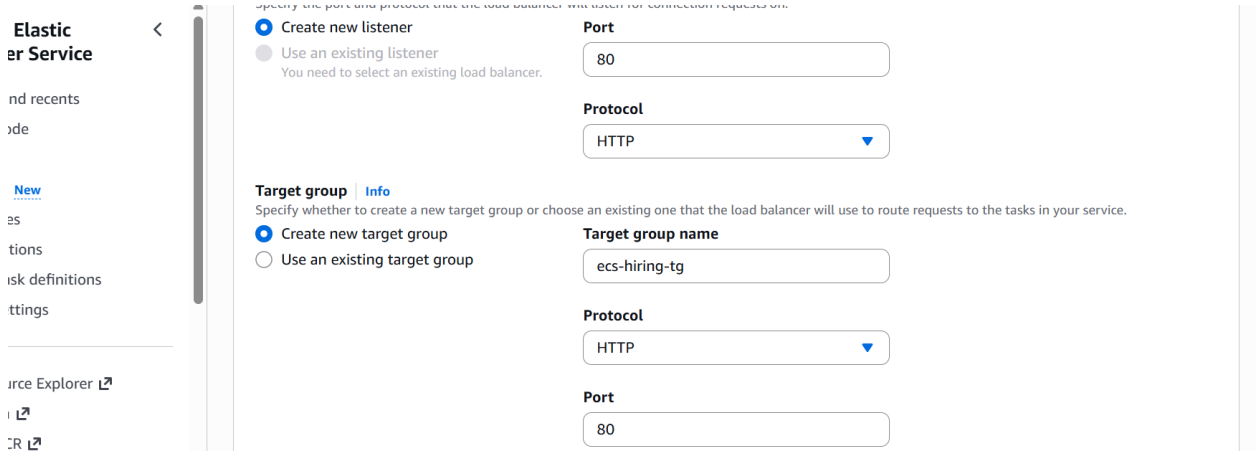
Elastic
er Service
nd recents
ode
New
es
tions
sk definitions
ttings
urce Explorer
CR
Create new listener
Use an existing listener
You need to select an existing load balancer.
Port
80
Protocol
HTTP
Target group
Info
Specify whether to create a new target group or choose an existing one that the load balancer will use to route requests to the tasks in your service.
Create new target group
Use an existing target group
Target group name
ecs-hiring-tg
Protocol
HTTP
Port
80

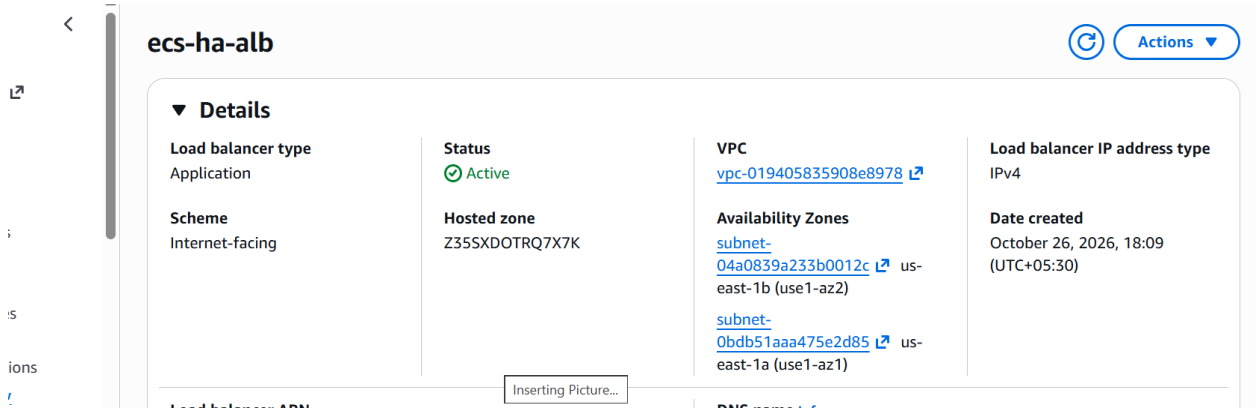
ecs-ha-alb
Actions
Details
Load balancer type
Application
Status
Active
VPC
vpc-019405835908e8978
Load balancer IP address type
IPv4
Scheme
Internet-facing
Hosted zone
Z35SXDOTRQ7X7K
Availability Zones
subnet-04a0839a233b0012c us-east-1b (use1-az2)
subnet-0bdb51aaa475e2d85 us-east-1a (use1-az1)
Date created
October 26, 2026, 18:09 (UTC+05:30)
Inserting Picture...