


Configure Classic Load balancer.

▼ Classic Load Balancer - *previous generation*

Classic Load Balancer [Info](#)



Classic Load Balancers are the previous generation of load balancers from ELB. We recommend that you migrate to a current generation load balancer. For more information, see [Migrate your Classic Load Balancer](#).

[Create](#)

[Learn more](#)

vpc-06680baa56c2f25e1 (Devops-vpc)
10.0.0.0/16



[Create VPC](#)

Availability Zones and subnets

Select at least one Availability Zone and one subnet for each zone. We recommend selecting at least two Availability Zones. The load balancer will route traffic only to targets in the selected Availability Zones. Availability Zones that are not supported by the load balancer or the VPC are not available for selection.

☒ us-east-1a (use1-az1)

Subnet

Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently.

subnet-0bcac1b4b444c2bec (Public-subnet)
10.0.1.0/24

IPv4 address

Assigned by AWS

☒ us-east-1b (use1-az2)

Subnet

Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently.

subnet-01db2f9f60206329a (public-subnet-2)
10.0.3.0/24

Choose vpc and the subnets

▼ Listener HTTP:80

Instance HTTP:80

Listener protocol

HTTP

Listener port

80

1-65535

Instance protocol

HTTP

Instance port

80

1-65535

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 103.203.172.230/32)

Remove

Type

Info

ssh

Protocol

Info

TCP

Port range

Info

22

Source type

Info

My IP

Name

Info

Q Add CIDR, prefix list or security

103.203.172.230/32 X

Description - optional

Info

e.g. SSH for admin desktop

▼ Security group rule 2 (TCP, 80, 0.0.0.0/0)

Remove

Type

Info

HTTP

Protocol

Info

TCP

Port range

Info

80

Source type

Info

Anywhere

Source

Info

Q Add CIDR, prefix list or security

Description - optional

Info

e.g. SSH for admin desktop

Add inbound rules

← → ↺ ⚠ Not secure 3.91.179.63 ☆ 📄 🔴 ⋮

Hello from Classic Load Balancer

☐

Instance ID

▼

☐

Name

▼

☐

Health status

▼

☐

Health status descri...

▼

☐

[i-0e61123752a33d352](#)

LB-instance

🟢 In-service

Not applicable

Configure Application Load balancer.

Application-LB

🔄

Actions ▼

▼ Details

Load balancer type

Application

Scheme

Internet-facing

Status

🟢 Active

Hosted zone

Z35SXDOTRQ7X7K

VPC

[vpc-06680baa56c2f25e1](#) 🔗

Availability Zones

[subnet-0bcac1b4b444c2bec](#) 🔗 us-east-1a (use1-az1)

[subnet-01db2f9f60206329a](#) 🔗 us-east-1b (use1-az2)

Load balancer IP address type

IPv4

Date created

September 22, 2026, 16:11 (UTC+05:30)

Configure Network Load balancer.

The load balancer will create and delete targets from the selected VPC subnets where the target subnet target must be reachable either routing to on-premises targets or if using VPC peering. To confirm the VPC for your targets, view [target groups](#).

vpc-06680baa56c2f25e1 (Devops-vpc)
10.0.0.0/16

[Create VPC](#)

Availability Zones and subnets

Select one or more Availability Zones and corresponding subnets. Enabling multiple Availability Zones increases the fault tolerance of your applications. The load balancer routes traffic to targets in the selected Availability Zones only. Availability Zones that are not supported by the load balancer or the VPC are not available for selection.

☒ us-east-1a (use1-az1)

Subnet

Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently. Selected subnets must have Network ACL inbound and outbound ALLOW rules, and internet gateway (IGW) routes configured to allow traffic.

subnet-0bcac1b4b44c2bec (Public-subnet)

10.0.1.0/24

Network ACL ALLOW rules: Inbound (1) Outbound (1) | Route table: IGW (✓)

IPv4 address

The front-end IPv4 address of the load balancer in the selected Availability Zone.


☒ Assigned by AWS

☐ Use an Elastic IP address

☒ us-east-1b (use1-az2)

Subnet

Attach SSL for application load balancer.

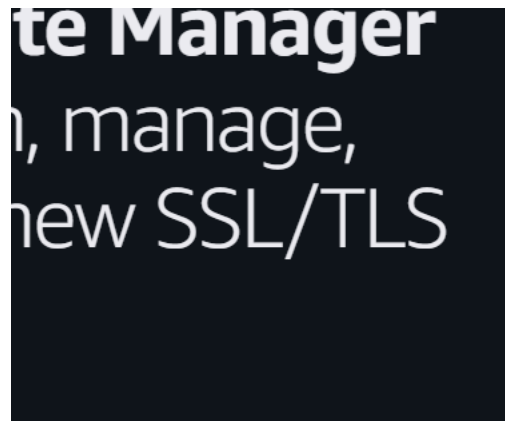

New ACM managed certificate

Request a public certificate from Amazon or a private certificate from your organization's certificate authority (CA).

[Request a certificate](#)

jagandevops.shop

Protection Plan: None

[Upgrade Protection](#)

DNS

Load balancers (1/2) [What's new?](#)



Actions

Create load balancer



Elastic Load Balancing scales your load balancer capacity automatically in response to changes in incoming traffic.

Filter load balancers

< 1 >

	Name	State	Type	Scheme	IP address type	VPC ID
☐	Classic-LB	—	classic	—	—	vpc-06680baa56c2f25e1
☒	Application-LB	Active	application	Internet-facing	IPv4	vpc-06680baa56c2f25e1

Load balancer: Application-LB

	Protocol:Port	Default action	Rules	ARN	Security policy
☐	HTTP:80	- Forward to target group EC2-TG: 1 (100%) Target group stickiness: Off	1 rule	ARN	Not applicable

Listener: HTTPS:443

A listener checks for connection requests on its configured protocol and port. Incoming requests are evaluated against rules in priority order; the first matching rule determines routing. If no rule matches, the default action is applied.

Protocol

Used for connections from clients to the load balancer.

HTTPS

Port

The port on which the load balancer is listening for connections.

443
1-65535

Added https as a new listener

Forward to target group | Info

Choose a target group and specify routing weight or [create target group](#).

Target group

EC2-TG
Target type: Instance, IPv4 | Target stickiness: Off

HTTP



Weight

1

0-999

Percent

100%

[+ Add target group](#)

Certificate (from ACM)

The selected certificate will be applied as the default SSL/TLS server certificate for this load balancer's secure listeners.

jagandevops.shop
ee60dc33-8e2f-437f-82e5-34f4c9d84ba2



[Request new ACM certificate](#)

Add the domain that you have purchased

Then add listener

✓ Successfully created listener.

Application-LB



Actions

▼ Details

Load balancer type

Application

Status

✓ Active

VPC

[vpc-06680baa56c2f25e1](#)

Load balancer IP address type

IPv4

Scheme

Internet-facing

Hosted zone

Z35SXDOTRQ7X7K

Availability Zones

[subnet-0bcac1b4b444c2bec](#) us-east-1a (use1-az1)
[subnet-01db2f9f60206329a](#) us-east-1b (use1-az2)

Date created

September 22, 2026, 16:11 (UTC+05:30)

Map Application load balancer to R53.

Register a domain

Register the name, such as example.com, that your users use to access your application.



Transfer domain

You can transfer domain names to Route 53 that you registered with another registrar.



Create hosted zones

A hosted zone tells Route 53 how to respond to DNS queries for a domain such as example.com.



Configure health checks

Health checks monitor your applications and web resources, and direct DNS queries to healthy resources.



Configure traffic flow

A visual tool that lets you easily create policies for multiple endpoints in complex configurations.



Configure resolvers

A regional service that lets you route DNS queries between your VPCs and your network.



Choose create hosted zone

Hosted zone configuration

A hosted zone is a container that holds information about how you want to route traffic for a domain, such as example.com, and its subdomains.

Domain name [Info](#)

This is the name of the domain that you want to route traffic for.

Valid characters: a-z, 0-9, ! " # \$ % & ' () * + , - / : ; < = > ? @ [\] ^ _ ` { | } . ~

Type should be public hosted zone, then create

✔ jagandevops.shop was successfully created.

✕

Now you can create records in the hosted zone to specify how you want Route 53 to route traffic for your domain.

Public

jagandevops.shop [Info](#)

Delete zone

Test record

Configure query logging

Hosted zone details

[Edit hosted zone](#)

[Records \(2\)](#)

[Accelerated recovery](#)

[DNSSEC signing](#)

[Hosted zone tags \(0\)](#)

Records (2) [Info](#)

[Delete record](#)

[Import zone file](#)

[Create record](#)

Automatic mode is the current search behavior optimized for best filter results. [To change modes go to settings](#)

Records (1/2) [Info](#)

[Delete record](#)

[Import zone file](#)

[Create record](#)

The following table lists the existing records in jagandevops.shop. You can't delete the SOA record or the NS record named jagandevops.shop.

Filter records by property or value	Type	Routing p...	Alias	< 1 >	⚙	
Record ...	Type	Routin...	Differ...	Alias	Value/Route traffic to	TTL (s...
✔ jagandevo...	NS	Simple	-	No	ns-1053.awsdns-03.org. ns-907.awsdns-49.net. ns-138.awsdns-17.com. ns-1543.awsdns-00.co.uk.	172,800

Record name [Info](#)

subdomain

jagandevops.shop

Keep blank to create a record for the root domain.

☒ Alias

Route traffic to [Info](#)

Alias to Application and Classic Load Balancer

US East (N. Virginia)

Q Choose load balancer

Routing policy [Info](#)

Simple routing

Record type [Info](#)

A – Routes traffic to an IPv4 address and some AWS resources

Evaluate target health

☒ Yes

Create record by adding this

☐	Record ... ▾	Type ▾	Routin... ▾	Differ... ▾	Alias ▾	Value/Route traffic to ▾	TTL (s...
☐	jagandevo...	A	Simple	-	Yes	dualstack.application-lb-757...	-

New record created with type A

Edit nameservers

Choose nameservers for jagandevops.shop

☐ GoDaddy Nameservers (recommended)

☒ I'll use my own nameservers

ns-1053.awsdns-03.org



ns-907.awsdns-49.net



ns-138.awsdns-17.com



ns-1543.awsdns-00.co.uk



[+ Add Nameserver](#)

Save

Cancel

Enter all the name servers in the godaddy

(C) (Actions ▼) Create load balancer ▼

	Name	State	Type	Scheme	IP address type	VPC ID
☐	Classic-LB	-	classic	-	-	vpc-0668
☒	Application-LB	Active	application	Internet-facing	IPv4	vpc-0668

☐	HTTP:80	Forward to target group EC2-TG 1 (100%) Target group stickiness: Off	1 rule	ARN	Not applicable
☐	HTTPS:443	• Forward to target group EC2-TG 1 (100%) Target group stickiness: Off	1 rule	ARN	ELBSecurityPolicy

This allows users to access the application using the domain name instead of the ALB DNS name.

Amazon S3 > Buckets > Create bucket

Bucket namespace

Choose the namespace where you want to create your bucket. [Learn more](#)

☒ Global namespace

By default, S3 creates general purpose buckets in the global namespace.

☐ Account Regional namespace (recommended)

General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)

jagan-alb-logs

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces

Filter load balancers

	Name	State	Type	Scheme	IP address type	VPC ID
☐	Classic-LB	-	classic	-	-	vpc-0668...
☒	Application-LB	Active	application	Internet-facing	IPv4	vpc-0668...

Load Balancing

Load Balancers

Target Groups
Trust Stores

Auto Scaling
Auto Scaling Groups

Load balancer: Application-LB

mapping
Resource map
Security
Monitoring
Integrations
Attributes
Capacity
Tags

Attributes

Edit

Logging

All legacy logs are stored in S3. If no prefix is specified, logs are stored in the bucket root.

- ☒ Access logs - legacy
- Access logs deliver detailed logs of all requests made to your load balancer. Additional charges apply. [Learn more](#)

S3 URI

×

View

Browse S3

Format: s3://bucket/prefix

- ☐ Connection logs - legacy
- Connection logs deliver detailed logs of all connections made to your load balancer. Additional charges apply. [Learn more](#)

[Amazon S3](#) > [Buckets](#) > [jagan-alb-logs](#) > [Edit bucket policy](#)

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by

Bucket ARN

 arn:aws:s3:::jagan-alb-logs

Policy

```
1  {
2    "Version": "2012-10-17",
3    "Statement": [
4      {
5        "Sid": "AllowALBAccessLogs",
6        "Effect": "Allow",
7        "Principal": {
8          "Service": "logdelivery.elasticloadbalancing.amazonaws.com"
9        },
10       "Action": "s3:PutObject",
11       "Resource": "arn:aws:s3:::jagan-alb-logs/AWSLogs/469132170253/*"
12     }
13   ]
14 }
```

Add the script in the bucket policy using json format

✔ Successfully modified load balancer attributes.

Application-LB

 [Actions](#)

▼ Details

Load balancer type
Application

Scheme
Internet-facing

Status
✔ Active

Hosted zone
Z35SXDOTRQ7X7K

VPC
[vpc-06680baa56c2f25e1](#)

Availability Zones
[subnet-0bcac1b4b444c2bec](#) us-east-1a (use1-az1)

Load balancer IP address type
IPv4

Date created
September 22, 2026, 16:11 (UTC+05:30)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems

Access Points

Objects (1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

☐	Name	Type	Last modified	Size	Storage class
☐	 AWSLogs/	Folder	-	-	-

I created an S3 bucket named jagan-alb-logs in the US East (N. Virginia) region to store Application Load Balancer access logs.

I configured the required S3 bucket policy to allow the Elastic Load Balancing log delivery service to write logs to the bucket, and then enabled Access Logs (legacy) on the Application-LB by specifying the S3 location s3://jagan-alb-logs. After saving the configuration successfully, I verified that AWS created the AWSLogs/469132170253/ path and generated the ELBAccessLogTestFile, confirming that the ALB logs are being successfully delivered to S3.