NS CYBER HUB

IP Rotator Full Guide

🧠 1. CORE CONCEPT (SUPER SIMPLE)

🌐 What is an IP Address?

- Your **IP address = your identity on the internet**
- It tells websites:
  - Where you are (approx)
  - Who is connecting

👉 Example:

- Without protection → Website sees **your real IP**
- With your tool → Website sees **TOR exit IP**

🔄 What is IP Rotation?

- Changing your IP again and again

👉 In your case:

- Every few seconds → new IP
- Looks like:

India → Germany → USA → Japan

🧅 What is TOR (The Onion Router)?

TOR hides you by passing your traffic through **multiple layers (nodes)**

🧠 Think like this:

You → Entry Node → Middle Node → Exit Node → Website

👉 Website ONLY sees:
👉 **Exit Node IP (not you)**

⚙️ 2. HOW YOUR TOOL WORKS (STEP-BY-STEP)

Let's simplify your script logic:

🔹 Step 1: Install Tools

Your script installs:

- `tor` → for anonymous routing
- `privoxy` → convert TOR to browser usable proxy
- `curl` → fetch IP
- `netcat` → send control commands

🔹 Step 2: Configure TOR

Your script sets:

ControlPort 9051
SocksPort 9050

👉 Meaning:

- 9050 → traffic goes through TOR
- 9051 → control TOR (change identity)

🔹 Step 3: Start Proxy Bridge

127.0.0.1:8118

👉 This allows:

- Mobile browser → use TOR indirectly

🔹 Step 4: Change Identity

This is the 🔥 core:

signal newnym

👉 This tells TOR:
➡️ “Give me new identity (new IP)”

🔹 Step 5: Fetch New IP

curl --socks5 127.0.0.1:9050

👉 Gets current IP via TOR

🔹 Step 6: Loop

Repeat every X seconds

👉 Result:

- IP keeps changing automatically

🎯 3. IMPORTANT REALITY (VERY IMPORTANT ⚠️)

This is what makes your content **responsible + powerful**

❗ 1. This ≠ Full Anonymity

Even with TOR:

- Browser fingerprinting exists
- Cookies can track you
- Login accounts reveal identity

👉 Truth:

> TOR hides IP, NOT your full identity

❗ 2. Speed Will Drop

- TOR = slow network
- More nodes = more delay

❗ 3. Many Websites Block TOR

- Google, Netflix, etc may block access

❗ 4. Frequent IP Change = Suspicious

- Too fast switching (like 5 sec) can:
  - Break sessions
  - Trigger security flags

❗ 5. Legal & Ethical Use

- Useful for:
  - Privacy
  - Research
  - Learning cybersecurity

👉 Not for misuse

How to use (In Termux)

 # Update your termux

pkg update && pkg upgrade

#Install git (To clone the repository)

pkg install git

#Clone repository

git clone https://github.com/jagatsah98213-del/IP-Changer.git

#Move in directory

cd IP-Changer

#Run the tool

bash IpChanger.sh

SOURCE CODE

```
#!/bin/bash

# ==============================================
#       NS Jagat yt - INSANE CYBER UI
#   TOR Live Identity Rotator (Termux Edition)
# ==============================================

# -------- COLORS --------
R="\e[31m"; G="\e[32m"; Y="\e[33m"; B="\e[34m"
M="\e[35m"; C="\e[36m"; W="\e[37m"; N="\e[0m"

# -------- LOADING BAR --------
progress_bar() {
   msg=$1
   echo -ne "${C}$msg ${N}"
   for i in {1..20}; do
      echo -ne "${G}└${N}"
      sleep 0.05
   done
   echo ""
}

# -------- WORLD MAP BANNER --------
show_map() {
echo -e "${B}
      🌍 GLOBAL ROUTING MAP 🌍
   ┌──────────────────────┬──────────────────────┐
   │   USA 🇺🇸      │   EUROPE 🇪🇺   │
   │      ●──────────●──────────●      │
   │     /              \      │
   │  INDIA 🇮🇳        JAPAN 🇯🇵 │
   │      ●──────────────────●      │
   └──────────────────────┴──────────────────────┘
${N}"
}

# -------- CHECK INSTALL --------
install_if_missing() {
   if ! command -v $1 &> /dev/null; then
      echo -e "${Y}[+] Installing $1...${N}"
      pkg install $2 -y > /dev/null 2>&1
```

```
    fi
}

echo -e "${B}[*] Initializing System...${N}"
pkg update -y > /dev/null 2>&1

install_if_missing curl curl
install_if_missing tor tor
install_if_missing nc netcat-openbsd
install_if_missing privoxy privoxy

clear

# -------- MAIN BANNER --------
echo -e "${G}
```

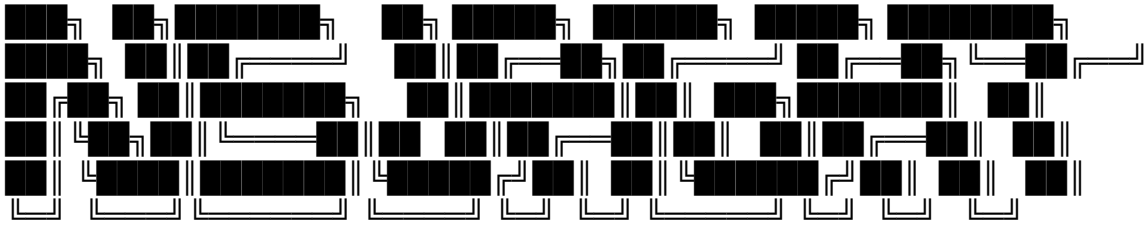

```
${N}"

echo -e "${C}      ⚡ LIVE TOR IDENTITY CHANGER ⚡${N}\n"

show_map

# -------- PROXY GUIDE (ADDED) --------
echo -e "${Y}━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━${N}"
echo -e "${Y}📡 HOW TO CONNECT PROXY${N}"
echo -e "${Y}━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━${N}"
echo -e "${G}Step 1:${N} Open WiFi settings"
echo -e "${G}Step 2:${N} Modify Network"
echo -e "${G}Step 3:${N} Set Proxy → Manual"
echo ""
echo -e "${C}IP ADDRESS : 127.0.0.1${N}"
echo -e "${C}PORT       : 8118${N}"
echo -e "${Y}━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━━${N}\n"

# -------- CONFIG --------
TORRC="$PREFIX/etc/tor/torrc"
PASSWORD="mypass"
HASH=$(tor --hash-password $PASSWORD | tail -n 1)
```

```
cat <<EOF > $TORRC
ControlPort 9051
HashedControlPassword $HASH
SocksPort 9050
EOF

progress_bar "Configuring TOR"

# -------- PRIVOXY --------
PRIVOXY_CFG="$PREFIX/etc/privoxy/config"
cat <<EOF > $PRIVOXY_CFG
listen-address 127.0.0.1:8118
forward-socks5t / 127.0.0.1:9050 .
EOF

progress_bar "Starting Proxy Bridge"

# -------- TIMER --------
echo -e "${Y}Select Speed:${N}"
echo "1) ⚡ 5 sec"
echo "2) 🚀 10 sec"
echo "3) 🐢 30 sec"
read -p "Choice: " ch

case $ch in
   1) DELAY=5 ;;
   2) DELAY=10 ;;
   3) DELAY=30 ;;
   *) DELAY=10 ;;
esac

# -------- START SERVICES --------
echo -e "\n${C}[+] Booting TOR Engine...${N}"
tor > /dev/null 2>&1 &
sleep 6

echo -e "${C}[+] Launching Proxy...${N}"
privoxy $PRIVOXY_CFG > /dev/null 2>&1 &
sleep 2

export http_proxy="socks5://127.0.0.1:9050"
export https_proxy="socks5://127.0.0.1:9050"

echo -e "${G}[✓] SYSTEM ONLINE${N}\n"
```

```
# -------- LOOP --------
while true
do
    echo -e "${Y}[⚡] Generating New Identity...${N}"

    echo -e "authenticate \"$PASSWORD\"\nsignal newnym\nquit" | nc 127.0.0.1 9051 > /dev/null
    sleep 2

    IP=$(curl --socks5 127.0.0.1:9050 -s https://ipinfo.io/ip)
    COUNTRY=$(curl --socks5 127.0.0.1:9050 -s https://ipinfo.io/country)

    echo -e "${M}[🌐] IP: ${IP}${N}"
    echo -e "${G}[📍] Location: ${COUNTRY}${N}"

    # -------- FAKE ROUTE VISUAL --------
    echo -e "${B}[Routing] Device → Node → Node → Exit (${COUNTRY})${N}"

    # -------- PROGRESS COUNTDOWN --------
    for ((i=$DELAY; i>0; i--)); do
        echo -ne "${C}Next switch in: $i sec ⏳   \r${N}"
        sleep 1
    done

    echo ""

done
```