


Bootstrap

library, framework,platform

Breakpoint	Class infix	Dimensions
Extra small	None	<576px
Small	sm	≥576px
Medium	md	≥768px
Large	lg	≥992px
Extra large	xl	≥1200px
Extra extra large	xxl	≥1400px

container-md

p c-1
p-md c-2
p-xl c-4

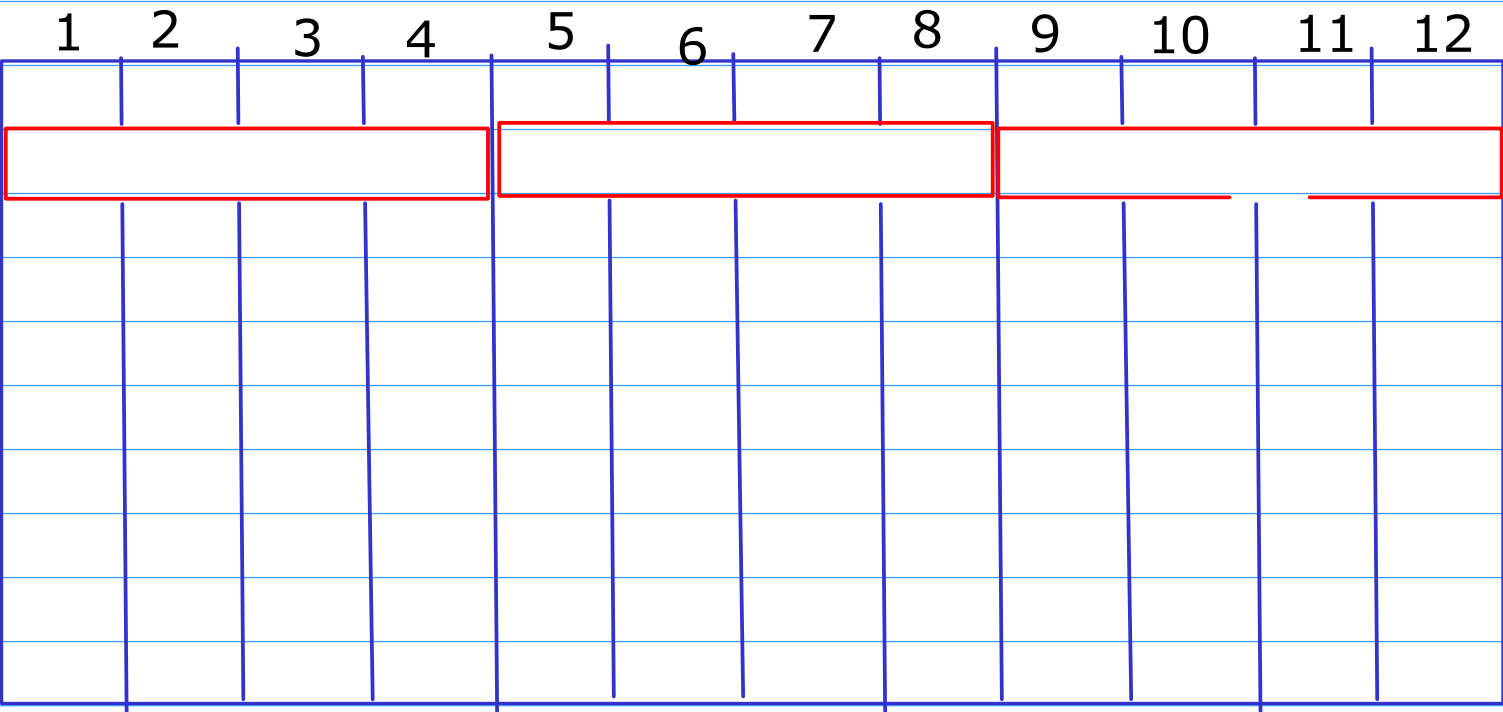

Html
Css
Bootstrap
JS

JS
DOM xhr,fetch,axios
Node
JS Features
http server
Express
Routing
React

jQuery
ajax

web application

HTML
CSS
JS

Backend Server

Java
Python
JS

FULL Stack
Developer

datatype identifier; // variable

int n1;

var n1 = 10;

0X200
n1

int

4 bytes

n1

let

const

Employee *e1 = new Employee();

Employee * e2 = null;

# Types in JS	#Special Values in JS	
1. Number	1. null	
2. Boolean	2. Infinity	int *ptr = null
3. String	3. NaN	
4. Object	4. undefined	
5. undefined		

returntype function_name(){

}

returntype function_name(datatype parametername){

}

returntype function_name(){

return value;

}

IN JS


function functionname(){

}


const sql = "insert into emp values(" + id + "," + name + ","+sal+","+ deptno+","+ job+)"

const sql = `insert into emp values(\${id},\${name},\${sal},\${deptno},\${job}) ` ;

Interpreted

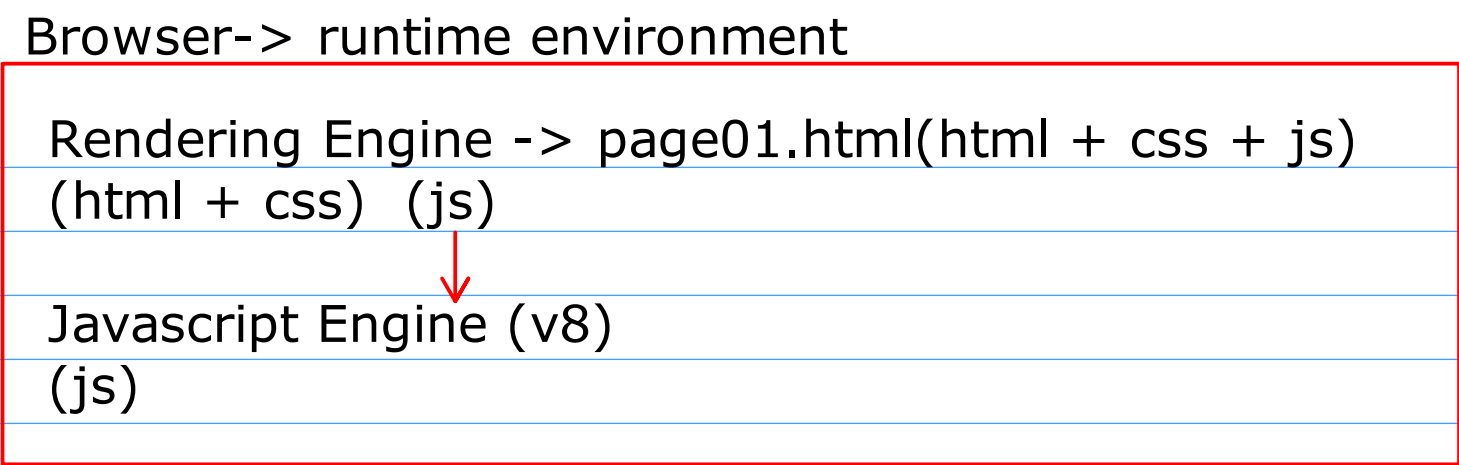

Node -> runtime environment

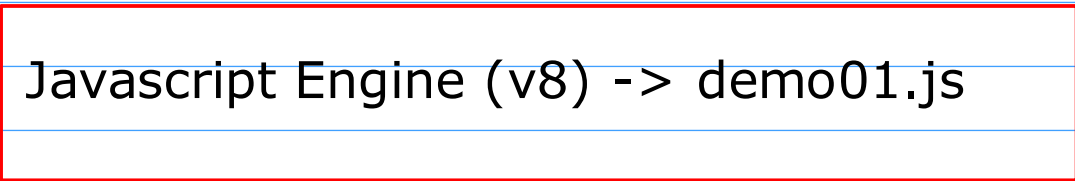


```
let s1 = 10 + '20' // string  
s1 = 1020
```


hoisting

CPP - supports fn overloading
JS - does not support fn overloading
Java- supports method overloading

```
class Point{  
  
}  
// operator overloading  
operator+()  
{  
}  
Point p1 (2,3);  
Point p2(4,5);  
Point p3 = p1*p2           p1+p2
```

CPP - supports default argument fn
JS - supports default argument fn
Java- does not support default argument method

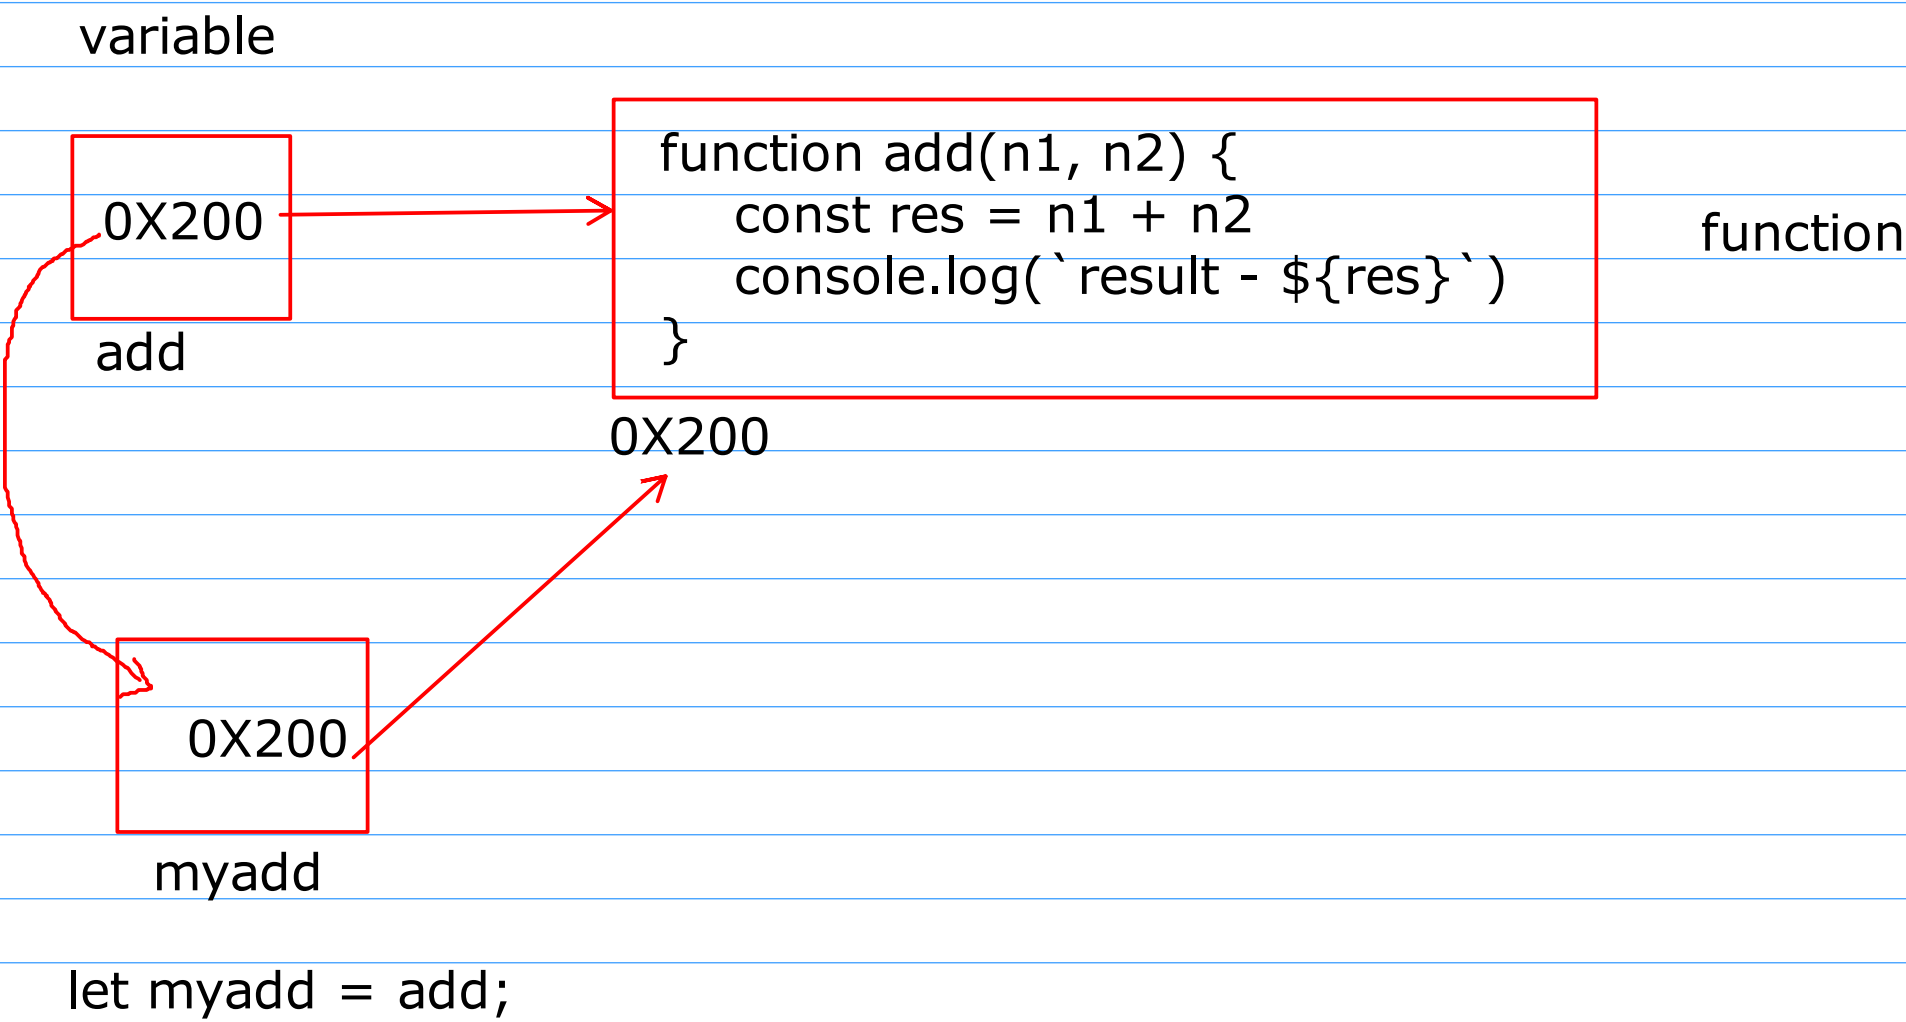

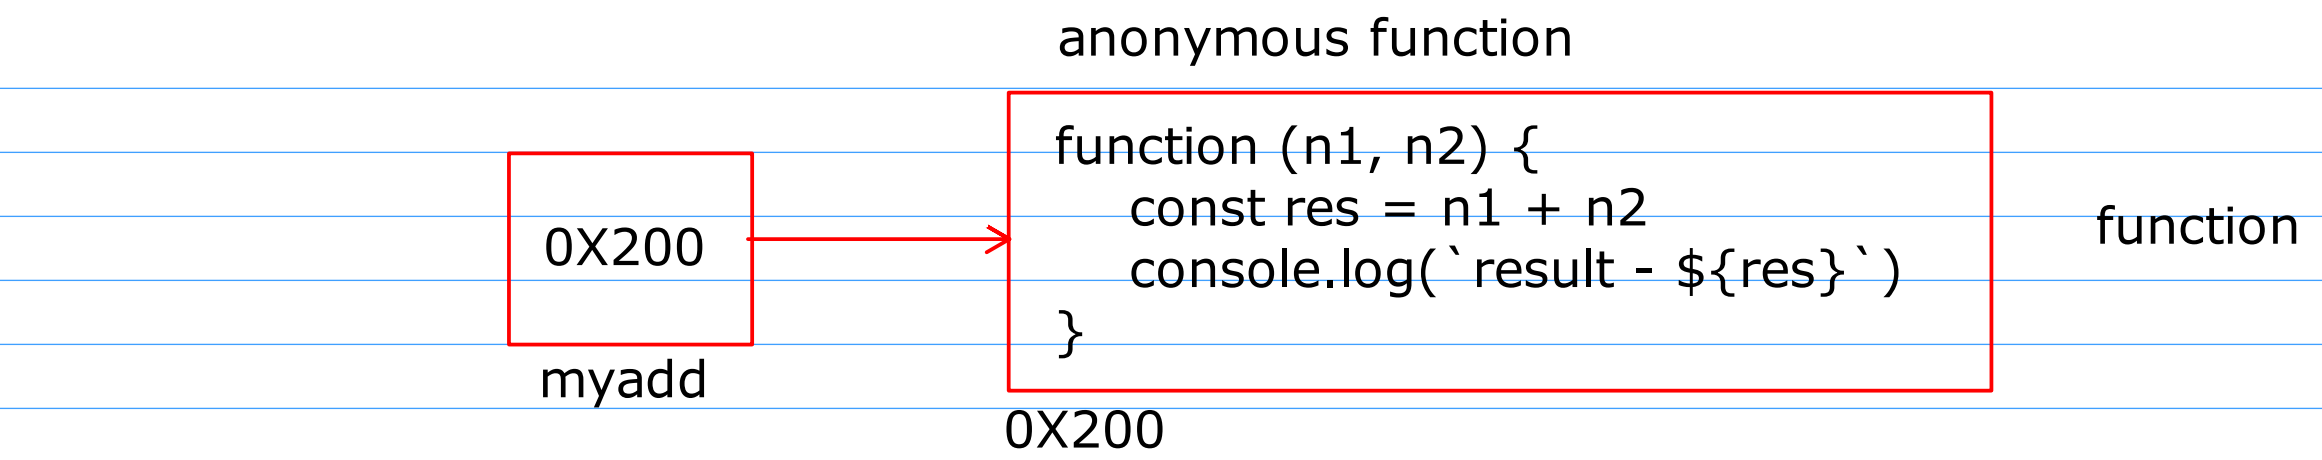

While learning lanuage

1. Rules
2. Syntax

Island

```
const Employee *e1 = new Employee(1,10000);  
e1 = new Employee(1,10000);
```

e1.id = 2