



CrowdStrike APIs

01/25/2026

1. OAuth2 Auth Token APIs

1.1. About CrowdStrike APIs

1.2. Manage auth tokens

1.2.1. Get an auth token

1.2.1.1. Relevant API endpoints

1.2.1.2. Example request

1.2.1.3. Example response

1.2.2. Revoke an auth token

1.2.2.1. Relevant API endpoints

1.2.2.2. Steps

1.2.2.3. Example request

OAuth2 Auth Token APIs

Generate and manage OAuth 2.0 tokens required for accessing CrowdStrike APIs.

About CrowdStrike APIs


CrowdStrike provides use cases and example requests and responses for interacting with a specific set of our OAuth2-based APIs. For general info about CrowdStrike APIs, see [CrowdStrike OAuth2-Based APIs](#), which covers these topics:

- Details on getting started, such as authentication and API scopes
- Domains used in base URLs by cloud
- Links to our Swagger API specification by cloud

Manage auth tokens

CrowdStrike API endpoints use OAuth2 token-based authentication. Basic authentication using a username and password is not supported.

The general flow for OAuth2-based API authentication looks like this:

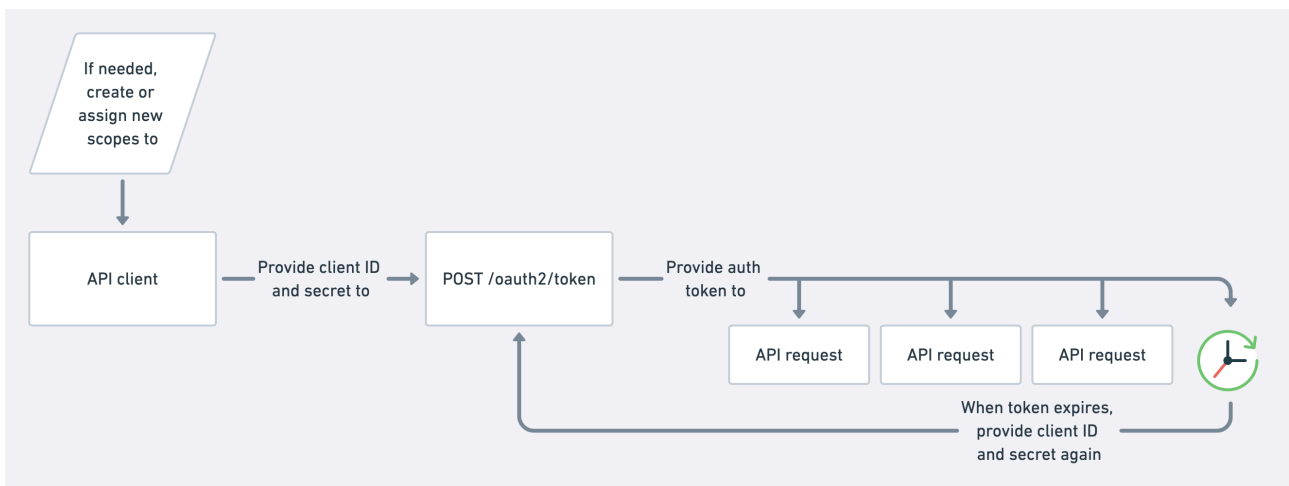

You can use the CrowdStrike API to perform these common tasks related to auth tokens:

- [Get an auth token](#)
- [Revoke an auth token](#)

Get an auth token

Getting an auth token is a very common action because you must supply an auth token with each request to a CrowdStrike API endpoint.

Auth tokens expire 30 minutes after they're created. After that time, the API responds with an auth error. When this happens, your API integration should pause, get a new auth token, then resume its normal activity.

The rate limit for auth tokens is 300 requests per minute per source IP address (not per customer account). Our best practice recommendation is to request a new auth token only when the previous auth token's lifetime ends after 30 minutes. For more info, see [Rate limiting](#).

Relevant API endpoints

- [POST /oauth2/token](#)

1. Supply your API client ID and API client secret to [/oauth2/token](#)

Example request

Make a request to **POST /oauth2/token**, including your API client's client ID and client secret.

```
curl -X POST "https://api.crowdstrike.com/oauth2/token" \
-H "accept: application/json" \
-H "Content-Type: application/x-www-form-urlencoded" \
-d "client_id=a1b2c3d4e5f6&client_secret=QWE987RTY654UIOP321"
```

Example response

```
{
  "access_token":
  "RmFsY29ucyAoL8uIZsmSbGvJmW4sIMuIZsmUy5BsLSwgy4hnmw6ZsLS8pIGFyZSBiaXJkcyBvZiBwcmV5IGluIHRoZSBnZW51cyB
GYWxjbWgd2hpY2ggaW5jbHVkZXMgYWJvdXQgNDAGc3B1Y2llcy4gRmFsY29ucyBhcmUgd2lkZWx5IGRpc3RyaWJ1dGVkIG9uIGF
sbCBjb250aW5lbnRzIG9mIHRoZSB3b3JsZCBleGNlcHQgQW50YXJjdGlljYSwgdGhvdWdoIGNsb3NlbHkgcmVsYXRlZCBYyXB0b3J
zIGRpZCBvY2N1ciB0aGVyZSBpbIB0aGUgRW9jZW5lLlsxXQ==RmFsY29ucyAoL8uIZsmSbGvJmW4sIMuIZsmUy5BsLSwgy4hnmw6Z
sLS8pIGFyZSBiaXJkcyBvZiBwcmV5IGluIHRoZSBnZW51cyBGYWxjbWgd2hpY2ggaW5jbHVkZXMgYWJvdXQgNDAGc3B1Y2llcy4
gRmFsY29ucyBhcmUgd2lkZWx5IGRpc3RyaWJ1dGVkIG9uIGFsbCBjb250aW5lbnRzIG9mIHRoZSB3b3JsZCBleGNlcHQgQW50YXJ
jdGlljYSwgdGhvdWdoIGNsb3NlbHkgcmVsYXRlZCBYyXB0b3JzIGRpZCBvY2N1ciB0aGVyZSBpbIB0aGUgRW9jZW5lLlsxXQ==RmF
sY29ucyAoL8uIZsmSbGvJmW4sIMuIZsmUy5BsLSwgy4hnmw6ZsLS8pIGFyZSBiaXJkcyBvZiBwcmV5IGluIHRoZSBnZW51cyBGYWx
jbWgd2hpY2ggaW5jbHVkZXMgYWJvdXQgNDAGc3B1Y2llcy4gRmFsY29ucyBhcmUgd2lkZWx5IGRpc3RyaWJ1dGVkIG9uIGFsbCB
jb250aW5lbnRzIG9mIHRoZSB3b3JsZCBleGNlcHQgQW50YXJjdGlljYSwgdGhvdWdoIGNsb3NlbHkgcmVsYXRlZCBYyXB0b3JzIGR
pZCBvY2N1ciB0aGVyZSBpbIB0aGUgRW9jZW5lLlsxXQ==",
  "token_type": "bearer",
  "expires_in": 1799
}
```

Revoke an auth token

Revoke an auth token to cancel it before the end of its normal 30-minute lifespan. Revoking a token is not required for normal API activity. In most cases, revoke a token only for an immediate concern, such as a token accidentally being shared online.

Relevant API endpoints

- [POST /oauth2/revoke](#)

Steps

1. Base-64 encode your API client ID and secret into a single string, using this format:

```
clientID:clientSecret
```

2. Make a request to **POST /oauth2/revoke**, including the token to revoke and your base-64 encoded client ID and secret

CrowdStrike APIs

Example request

```
curl -X POST "https://api.crowdstrike.com/oauth2/revoke" \
-H 'Accept: application/json' \
-H 'Authorization: Basic bXlfYXBpX2NsaWVudF9pZDpteV9hcGlfY2xpZW50X3NlY3JldA' \
-H 'Content-Type: application/x-www-form-urlencoded' \
-d
'token=RmFsY29ucyAoL8uIZsmSbGvJmW4sIMuIZsmUy5BsLSwgy4hmw6ZsLS8pIGFyZSBiaXJkcyBvZiBwcmV5IGluIHRoZSBnZ
W51cyBGYWxjbywgZDhpY2ggaW5jbHVkZXMGYyJvdXQgNDAgc3BLY2llcy4gRmFsY29ucyBhcmUgd2lkZWx5IGRpc3RyaWJ1dGVkI
G9uIGFsbCBjb250aW5lbnRzIG9mIHRoZSB3b3JsZCBleGNlcHQgQW50YXJjdGJlYSwgdGhvdWdoIGNsb3NlHkgcmVsYXRlZCBY
XB0b3JzIGRpZCBvY2N1ciB0aGVyZSBpbjB0aGUgRW9jZW5lLlsxXQ==RmFsY29ucyAoL8uIZsmSbGvJmW4sIMuIZsmUy5BsLSwgy
4hmw6ZsLS8pIGFyZSBiaXJkcyBvZiBwcmV5IGluIHRoZSBnZW51cyBGYWxjbywgZDhpY2ggaW5jbHVkZXMGYyJvdXQgNDAgc3BLY
2llcy4gRmFsY29ucyBhcmUgd2lkZWx5IGRpc3RyaWJ1dGVkIG9uIGFsbCBjb250aW5lbnRzIG9mIHRoZSB3b3JsZCBleGNlcHQgQ
W50YXJjdGJlYSwgdGhvdWdoIGNsb3NlHkgcmVsYXRlZCBYXB0b3JzIGRpZCBvY2N1ciB0aGVyZSBpbjB0aGUgRW9jZW5lLlsxX
Q==RmFsY29ucyAoL8uIZsmSbGvJmW4sIMuIZsmUy5BsLSwgy4hmw6ZsLS8pIGFyZSBiaXJkcyBvZiBwcmV5IGluIHRoZSBnZW51c
yBGYWxjbywgZDhpY2ggaW5jbHVkZXMGYyJvdXQgNDAgc3BLY2llcy4gRmFsY29ucyBhcmUgd2lkZWx5IGRpc3RyaWJ1dGVkIG9uI
GFsbCBjb250aW5lbnRzIG9mIHRoZSB3b3JsZCBleGNlcHQgQW50YXJjdGJlYSwgdGhvdWdoIGNsb3NlHkgcmVsYXRlZCBYXB0b
3JzIGRpZCBvY2N1ciB0aGVyZSBpbjB0aGUgRW9jZW5lLlsxXQ=='
```