
10 Linux Commands

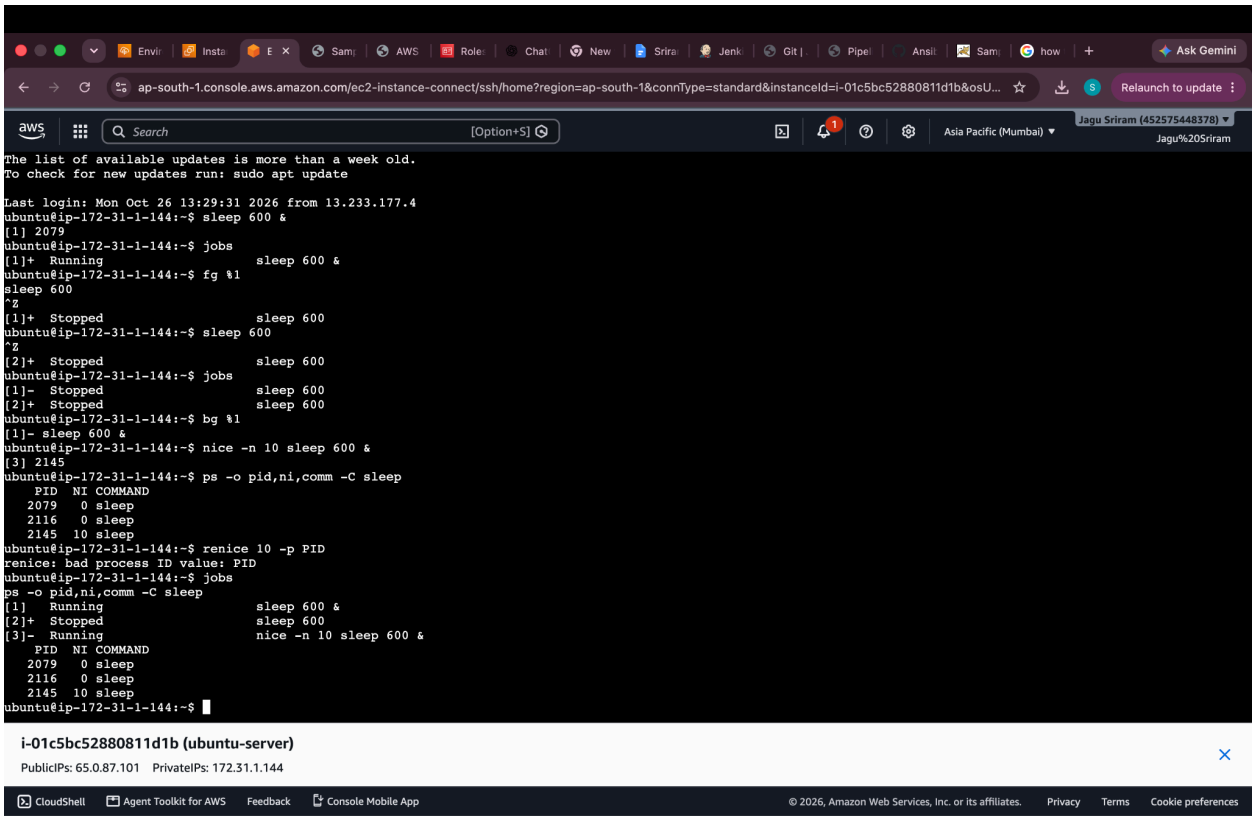

`sleep 60 &` – Starts a sleep process in the background.

`jobs` – Lists background and suspended jobs in the current shell.

`fg %1` – Brings job 1 to the foreground.

`sleep 60` – Runs a sleep process in the foreground; press Ctrl+Z to suspend it.

`jobs` – Displays the status of jobs in the current shell.

`bg %1` – Resumes suspended job 1 in the background.

`nice -n 10 sleep 30` – Starts a sleep process with lower CPU scheduling priority.

`ps -o pid,ni,comm -C sleep` – Displays the PID, niceness value, and command name of sleep processes.

`renice 10 -p <PID>` – Changes the niceness value of the specified process to 10.

Review – Check your test processes and avoid changing the priority of production or system processes.