
```
ubuntu@ip-172-31-9-33:~$ dpkg -l | head
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/half-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                          Version                                  Architecture Description
+++-=============================-========================================-============-================================================================================
ii  acpid                         1:2.0.34-1ubuntu2                        amd64        Advanced Configuration and Power Interface event daemon
ii  adduser                       3.137ubuntu1                             all          add and remove users and groups
ii  amd64-microcode               3.20251202.1ubuntu0.24.04.1              amd64        Platform firmware and microcode for AMD CPUs and SoCs
ii  apparmor                      4.0.1really4.0.1-0ubuntu0.24.04.9        amd64        user-space parser utility for AppArmor
ii  apport                        2.28.3-0ubuntu0.1                        all          automatically generate crash reports for debugging
ubuntu@ip-172-31-9-33:~$ dpkg -s bash
Package: bash
Essential: yes
Status: install ok installed
Priority: required
Section: shells
Installed-Size: 1900
Maintainer: Ubuntu Developers <ubuntu-devel-discuss@lists.ubuntu.com>
Architecture: amd64
Multi-Arch: foreign
Version: 5.2.21-2ubuntu4
Depends: base-files (>= 2.1.12), debianutils (>= 5.6-0.1)
Pre-Depends: libc6 (>= 2.38), libtinfo6 (>= 6)
Recommends: bash-completion
Suggests: bash-doc
Conffiles:
 /etc/bash.bashrc 3aa8b92d1dd6ddf4daaedc019662f1dc
 /etc/skel/.bash_logout 22bfb8c1dd94b5f3813a2b25da67463f
 /etc/skel/.bashrc 1f98b8f3f3c8f8927eca945d59dcc1c6
 /etc/skel/.profile f4e81ade7d6f9fb342541152d08e7a97
Description: GNU Bourne Again SHell
 Bash is an sh-compatible command language interpreter that executes
 commands read from the standard input or from a file.  Bash also
 incorporates useful features from the Korn and C shells (ksh and csh).
 .
 Bash is ultimately intended to be a conformant implementation of the
 IEEE POSIX Shell and Tools specification (IEEE Working Group 1003.2).
 .
 The Programmable Completion Code, by Ian Macdonald, is now found in
 the bash-completion package.
Homepage: http://tiswww.case.edu/php/chet/bash/bashtop.html
Original-Maintainer: Matthias Klose <doko@debian.org>
ubuntu@ip-172-31-9-33:~$ dpkg -L bash | head
/.
/etc
/etc/bash.bashrc
/etc/skel
/etc/skel/.bash_logout
/etc/skel/.bashrc
/etc/skel/.profile
/usr
/usr/bin
/usr/bin/bash
ubuntu@ip-172-31-9-33:~$ apt list --upgradable
Listing... Done
ca-certificates/noble-updates,noble-security 20260816ubuntu0.24.04.1 all [upgradable from: 20260601~24.04.1]
cloud-init/noble-updates 26.2-0ubuntu1~24.04.2 all [upgradable from: 26.1-0ubuntu1~24.04.1]
distro-info-data/noble-updates,noble-security 2026.10.12~0ubuntu0.24.04.1 all [upgradable from: 0.72~0ubuntu0.24.04.1]
gir1.2-glib-2.0/noble-updates 2.80.0-6ubuntu3.10 amd64 [upgradable from: 2.80.0-6ubuntu3.9]
```

```
No containers need to be restarted.

User sessions running outdated binaries:
 ubuntu @ session #1: apt[1585], sshd[1086]
 ubuntu @ user manager service: systemd[1091]
ubuntu@ip-172-31-9-33:~$ apt-cache policy bash
bash:
  Installed: 5.2.21-2ubuntu4
  Candidate: 5.2.21-2ubuntu4
  Version table:
 *** 5.2.21-2ubuntu4 500
        500 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble/main amd64 Packages
        100 /var/lib/dpkg/status
ubuntu@ip-172-31-9-33:~$ apt-cache depends bash
bash
  PreDepends: libc6
  PreDepends: libtinfo6
  Depends: base-files
  Depends: debianutils
  Recommends: bash-completion
  Suggests: bash-doc
ubuntu@ip-172-31-9-33:~$ sudo apt install htop
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
htop is already the newest version (3.3.0-4build1).
htop set to manually installed.
0 upgraded, 0 newly installed, 0 to remove and 0 not upgraded.
ubuntu@ip-172-31-9-33:~$ htop

[1]+  Stopped                 htop
ubuntu@ip-172-31-9-33:~$ dpkg -s htop
apt-cache policy htop
Package: htop
Status: install ok installed
Priority: optional
Section: utils
Installed-Size: 424
Maintainer: Ubuntu Developers <ubuntu-devel-discuss@lists.ubuntu.com>
Architecture: amd64
Version: 3.3.0-4build1
Depends: libc6 (>= 2.38), libncursesw6 (>= 6), libnl-3-200 (>= 3.2.7), libnl-genl-3-200 (>= 3.2.7), libtinfo6 (>= 6)
Suggests: lm-sensors, lsof, strace
Description: interactive processes viewer
 Htop is an ncursed-based process viewer similar to top, but it
 allows one to scroll the list vertically and horizontally to see
 all processes and their full command lines.
 .
 Tasks related to processes (killing, renicing) can be done without
 entering their PIDs.
Homepage: https://htop.dev/
Original-Maintainer: Daniel Lange <DLange@debian.org>
htop:
  Installed: 3.3.0-4build1
  Candidate: 3.3.0-4build1
  Version table:
 *** 3.3.0-4build1 500
        500 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble/main amd64 Packages
        100 /var/lib/dpkg/status
ubuntu@ip-172-31-9-33:~$
```

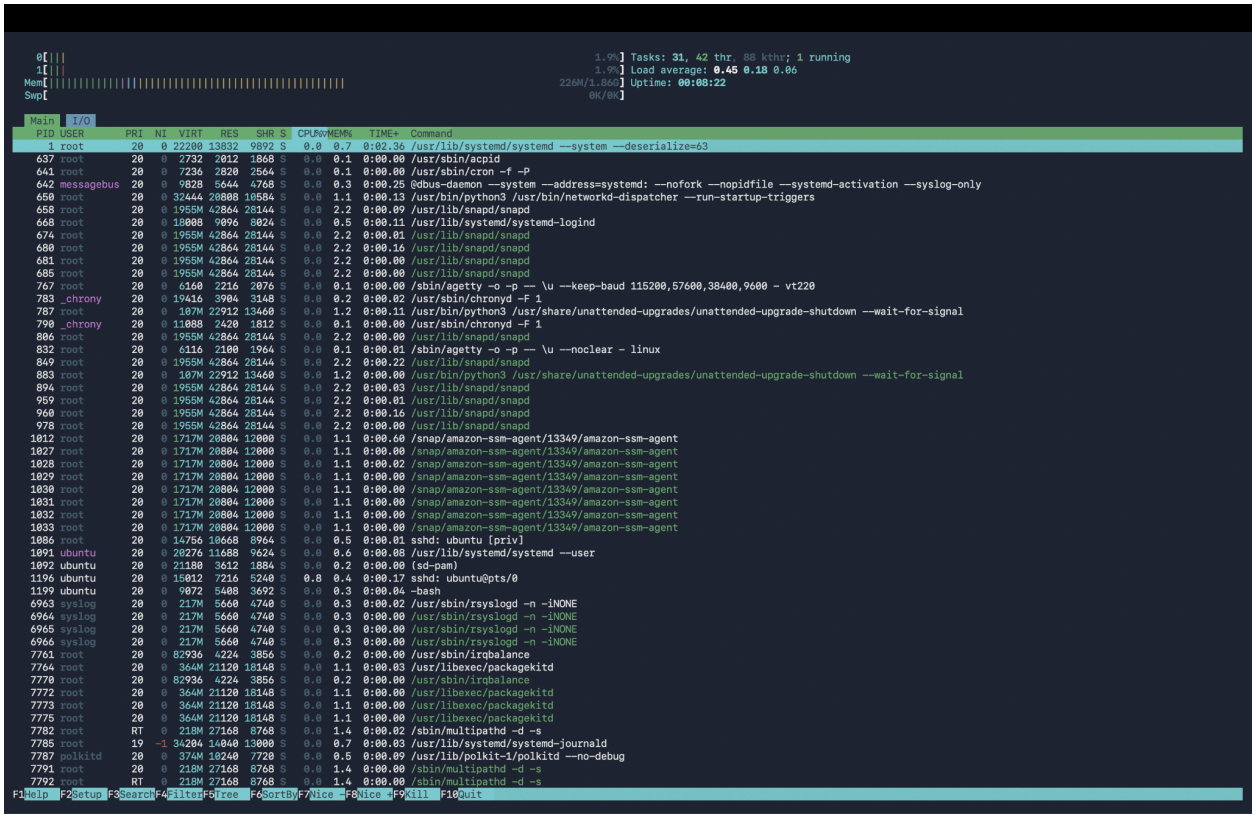

`dpkg -l | head` – Displays the first few lines of the installed package list.

`dpkg -L bash | head` – Lists the first few files installed by the Bash package.

`apt list --upgradable` – Lists installed packages with available updates.

`sudo apt upgrade` – Upgrades eligible installed packages after reviewing the proposed changes.

`apt-cache policy bash` – Shows installed and candidate versions of Bash and their repository priorities.

`apt-cache depends bash` – Displays the dependencies declared for the Bash package.

`sudo apt install htop` – Installs the interactive process-monitoring utility `htop`.

`htop` – Opens an interactive display of running processes and system resource usage.

`dpkg -s htop` – Displays the installation status and details of the `htop` package.

`apt-cache policy htop` – Shows the installed and candidate versions of `htop`.