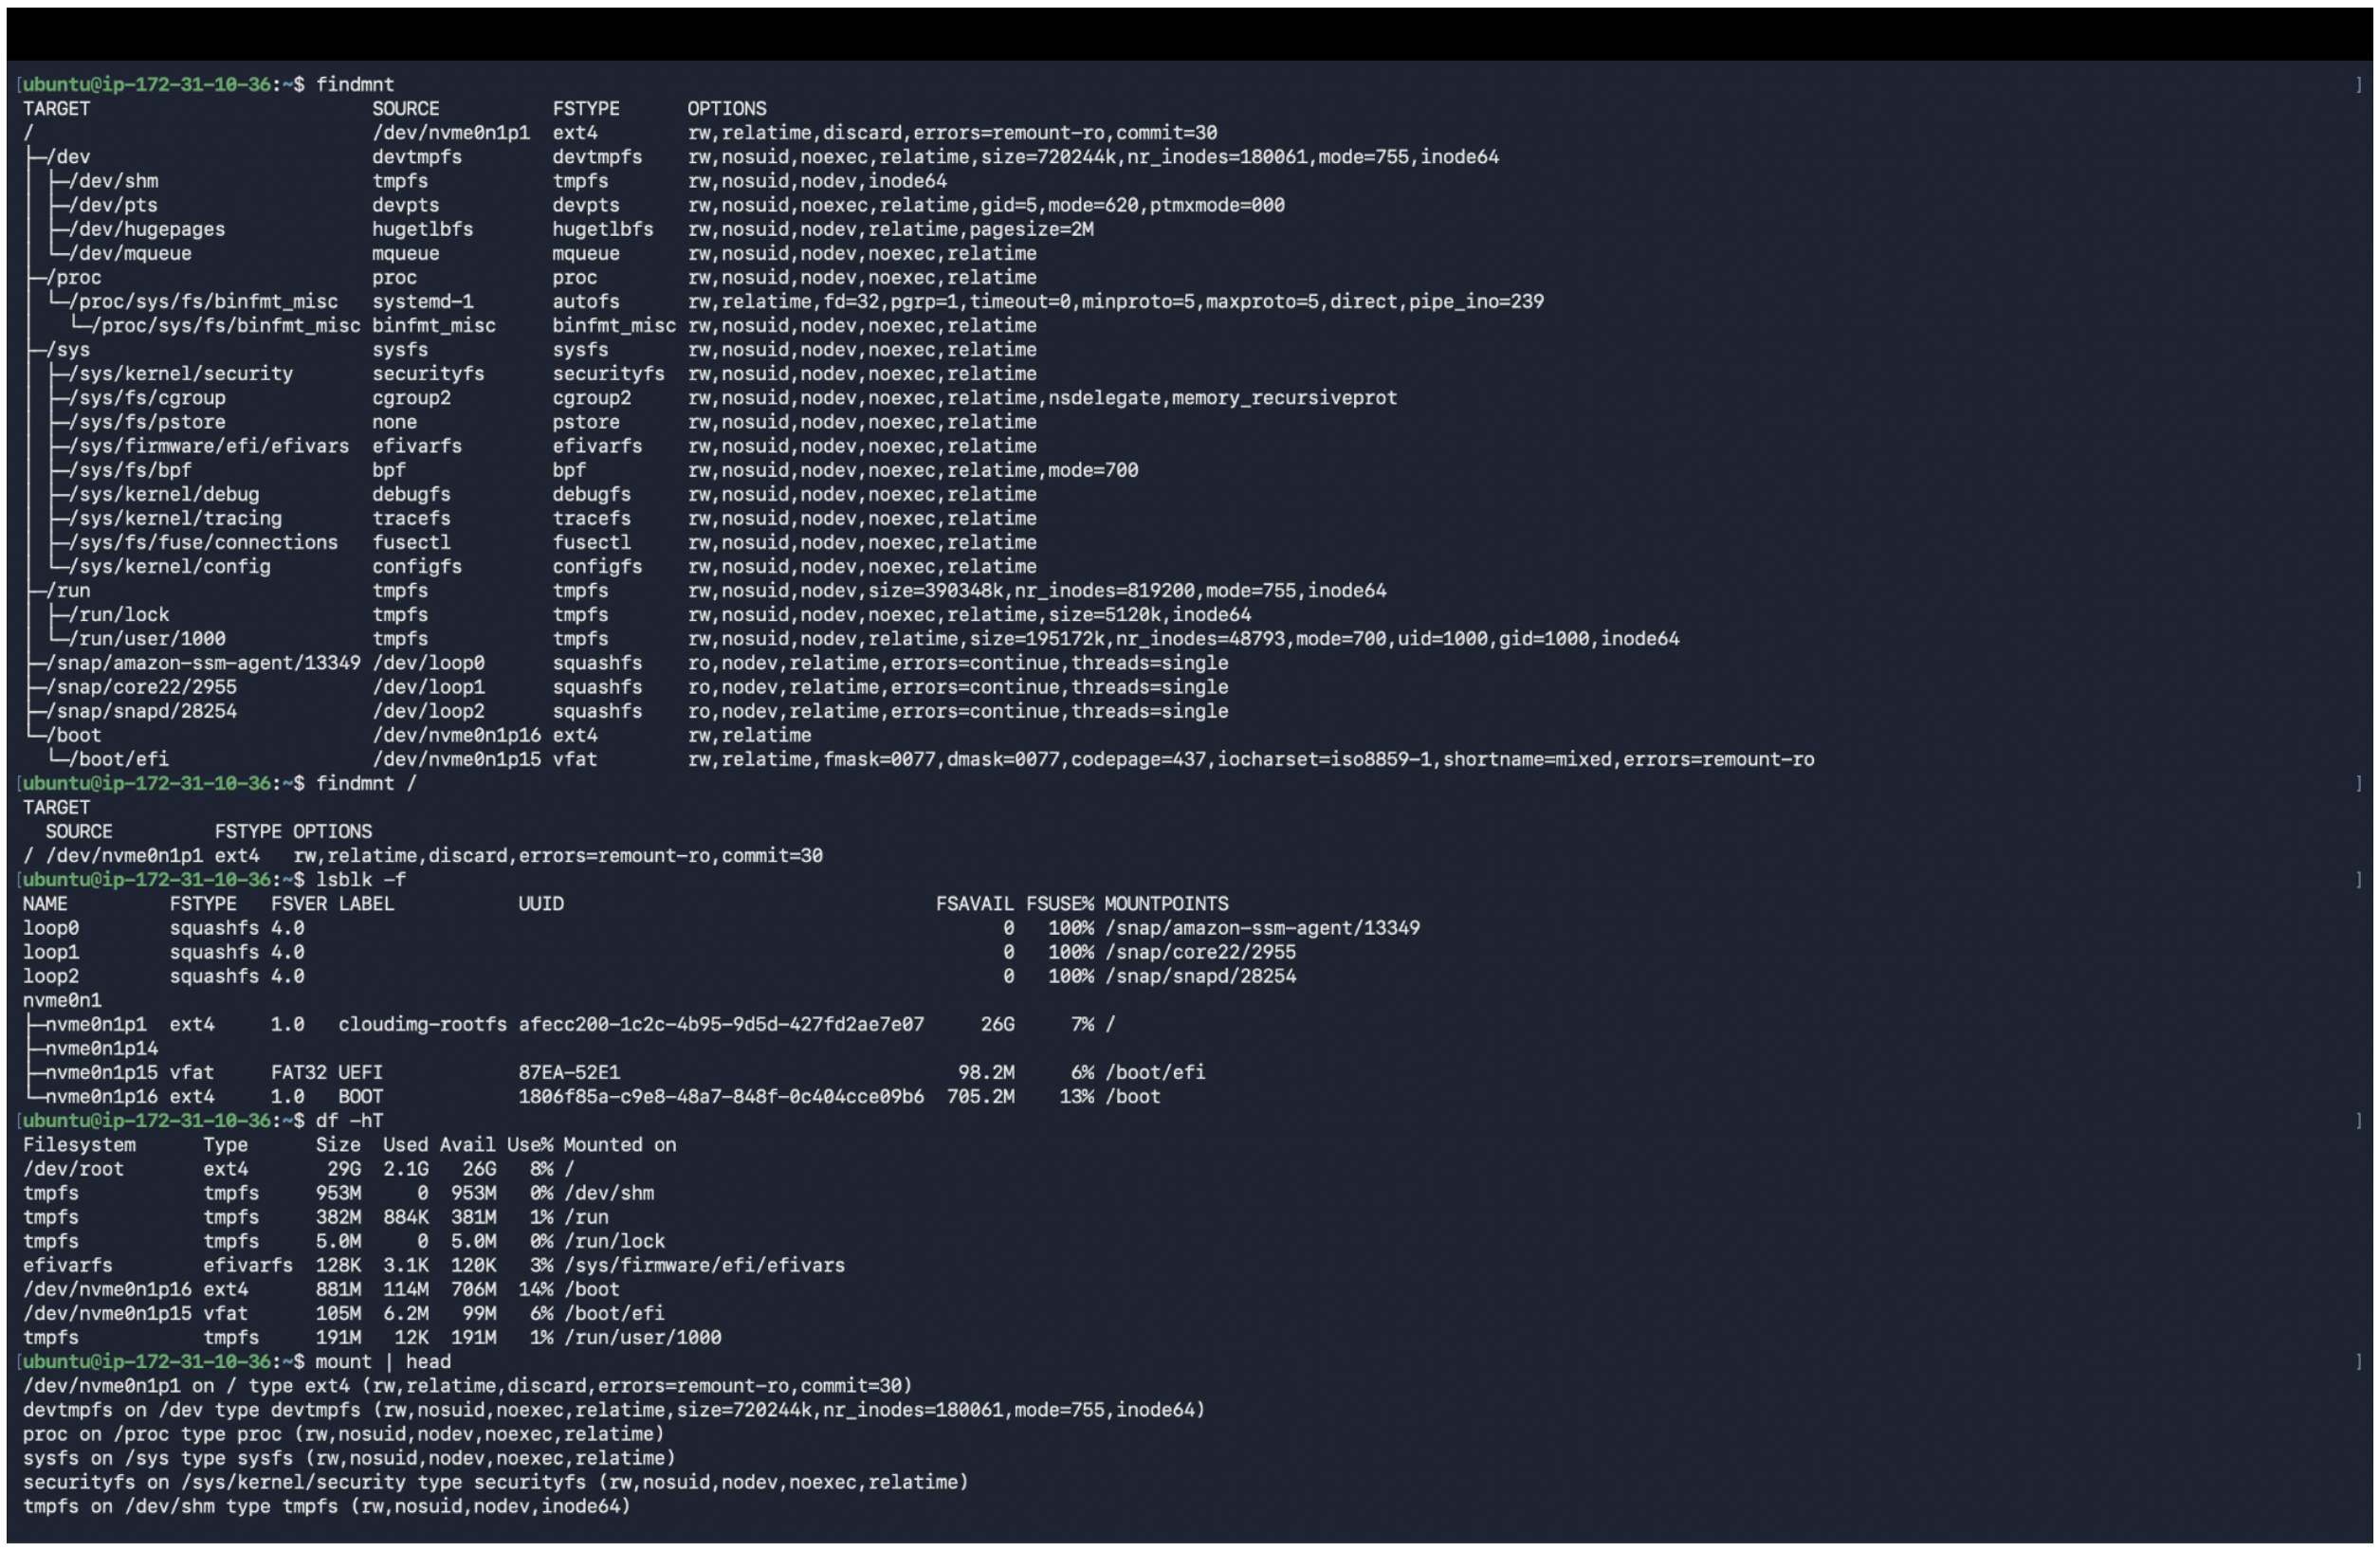

```
ubuntu@ip-172-31-10-36:~$ findmnt
TARGET                         SOURCE          FSTYPE      OPTIONS
/                              /dev/nvme0n1p1  ext4        rw,relatime,discard,errors=remount-ro,commit=30
├─/dev                         devtmpfs        devtmpfs    rw,nosuid,noexec,relatime,size=720244k,nr_inodes=180061,mode=755,inode64
│ ├─/dev/shm                   tmpfs           tmpfs       rw,nosuid,nodev,inode64
│ ├─/dev/pts                   devpts          devpts      rw,nosuid,noexec,relatime,gid=5,mode=620,ptmxmode=000
│ ├─/dev/hugepages             hugetlbfs       hugetlbfs   rw,nosuid,nodev,relatime,pagesize=2M
│ └─/dev/mqueue                mqueue          mqueue      rw,nosuid,nodev,noexec,relatime
├─/proc                        proc            proc        rw,nosuid,nodev,noexec,relatime
│ └─/proc/sys/fs/binfmt_misc   systemd-1       autofs      rw,relatime,fd=32,pgrp=1,timeout=0,minproto=5,maxproto=5,direct,pipe_ino=239
│   └─/proc/sys/fs/binfmt_misc binfmt_misc     binfmt_misc rw,nosuid,nodev,noexec,relatime
├─/sys                         sysfs           sysfs       rw,nosuid,nodev,noexec,relatime
│ ├─/sys/kernel/security       securityfs      securityfs  rw,nosuid,nodev,noexec,relatime
│ ├─/sys/fs/cgroup             cgroup2         cgroup2     rw,nosuid,nodev,noexec,relatime,nsdelegate,memory_recursiveprot
│ ├─/sys/fs/pstore             none            pstore      rw,nosuid,nodev,noexec,relatime
│ ├─/sys/firmware/efi/efivars  efivarfs        efivarfs    rw,nosuid,nodev,noexec,relatime
│ ├─/sys/fs/bpf                bpf             bpf         rw,nosuid,nodev,noexec,relatime,mode=700
│ ├─/sys/kernel/debug          debugfs         debugfs     rw,nosuid,nodev,noexec,relatime
│ ├─/sys/kernel/tracing        tracefs         tracefs     rw,nosuid,nodev,noexec,relatime
│ ├─/sys/fs/fuse/connections   fusectl         fusectl     rw,nosuid,nodev,noexec,relatime
│ └─/sys/kernel/config         configfs        configfs    rw,nosuid,nodev,noexec,relatime
├─/run                         tmpfs           tmpfs       rw,nosuid,nodev,size=390348k,nr_inodes=819200,mode=755,inode64
│ ├─/run/lock                  tmpfs           tmpfs       rw,nosuid,nodev,noexec,relatime,size=5120k,inode64
│ └─/run/user/1000             tmpfs           tmpfs       rw,nosuid,nodev,relatime,size=195172k,nr_inodes=48793,mode=700,uid=1000,gid=1000,inode64
├─/snap/amazon-ssm-agent/13349 /dev/loop0      squashfs    ro,nodev,relatime,errors=continue,threads=single
├─/snap/core22/2955            /dev/loop1      squashfs    ro,nodev,relatime,errors=continue,threads=single
├─/snap/snapd/28254            /dev/loop2      squashfs    ro,nodev,relatime,errors=continue,threads=single
└─/boot                        /dev/nvme0n1p16 ext4        rw,relatime
  └─/boot/efi                  /dev/nvme0n1p15 vfat        rw,relatime,fmask=0077,dmask=0077,codepage=437,iocharset=iso8859-1,shortname=mixed,errors=remount-ro
ubuntu@ip-172-31-10-36:~$ findmnt /
TARGET
  SOURCE         FSTYPE OPTIONS
/ /dev/nvme0n1p1 ext4   rw,relatime,discard,errors=remount-ro,commit=30
ubuntu@ip-172-31-10-36:~$ lsblk -f
NAME         FSTYPE   FSVER LABEL           UUID                                 FSAVAIL FSUSE% MOUNTPOINTS
loop0        squashfs 4.0                                                              0   100% /snap/amazon-ssm-agent/13349
loop1        squashfs 4.0                                                              0   100% /snap/core22/2955
loop2        squashfs 4.0                                                              0   100% /snap/snapd/28254
nvme0n1
├─nvme0n1p1  ext4     1.0   cloudimg-rootfs afecc200-1c2c-4b95-9d5d-427fd2ae7e07     26G     7% /
├─nvme0n1p14
├─nvme0n1p15 vfat     FAT32 UEFI            87EA-52E1                              98.2M     6% /boot/efi
└─nvme0n1p16 ext4     1.0   BOOT            1806f85a-c9e8-48a7-848f-0c404cce09b6  705.2M    13% /boot
ubuntu@ip-172-31-10-36:~$ df -hT
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/root       ext4       29G  2.1G   26G   8% /
tmpfs           tmpfs     953M     0  953M   0% /dev/shm
tmpfs           tmpfs     382M  884K  381M   1% /run
tmpfs           tmpfs     5.0M     0  5.0M   0% /run/lock
efivarfs        efivarfs  128K  3.1K  120K   3% /sys/firmware/efi/efivars
/dev/nvme0n1p16 ext4      881M  114M  706M  14% /boot
/dev/nvme0n1p15 vfat      105M  6.2M   99M   6% /boot/efi
tmpfs           tmpfs     191M   12K  191M   1% /run/user/1000
ubuntu@ip-172-31-10-36:~$ mount | head
/dev/nvme0n1p1 on / type ext4 (rw,relatime,discard,errors=remount-ro,commit=30)
devtmpfs on /dev type devtmpfs (rw,nosuid,noexec,relatime,size=720244k,nr_inodes=180061,mode=755,inode64)
proc on /proc type proc (rw,nosuid,nodev,noexec,relatime)
sysfs on /sys type sysfs (rw,nosuid,nodev,noexec,relatime)
securityfs on /sys/kernel/security type securityfs (rw,nosuid,nodev,noexec,relatime)
tmpfs on /dev/shm type tmpfs (rw,nosuid,nodev,inode64)
```

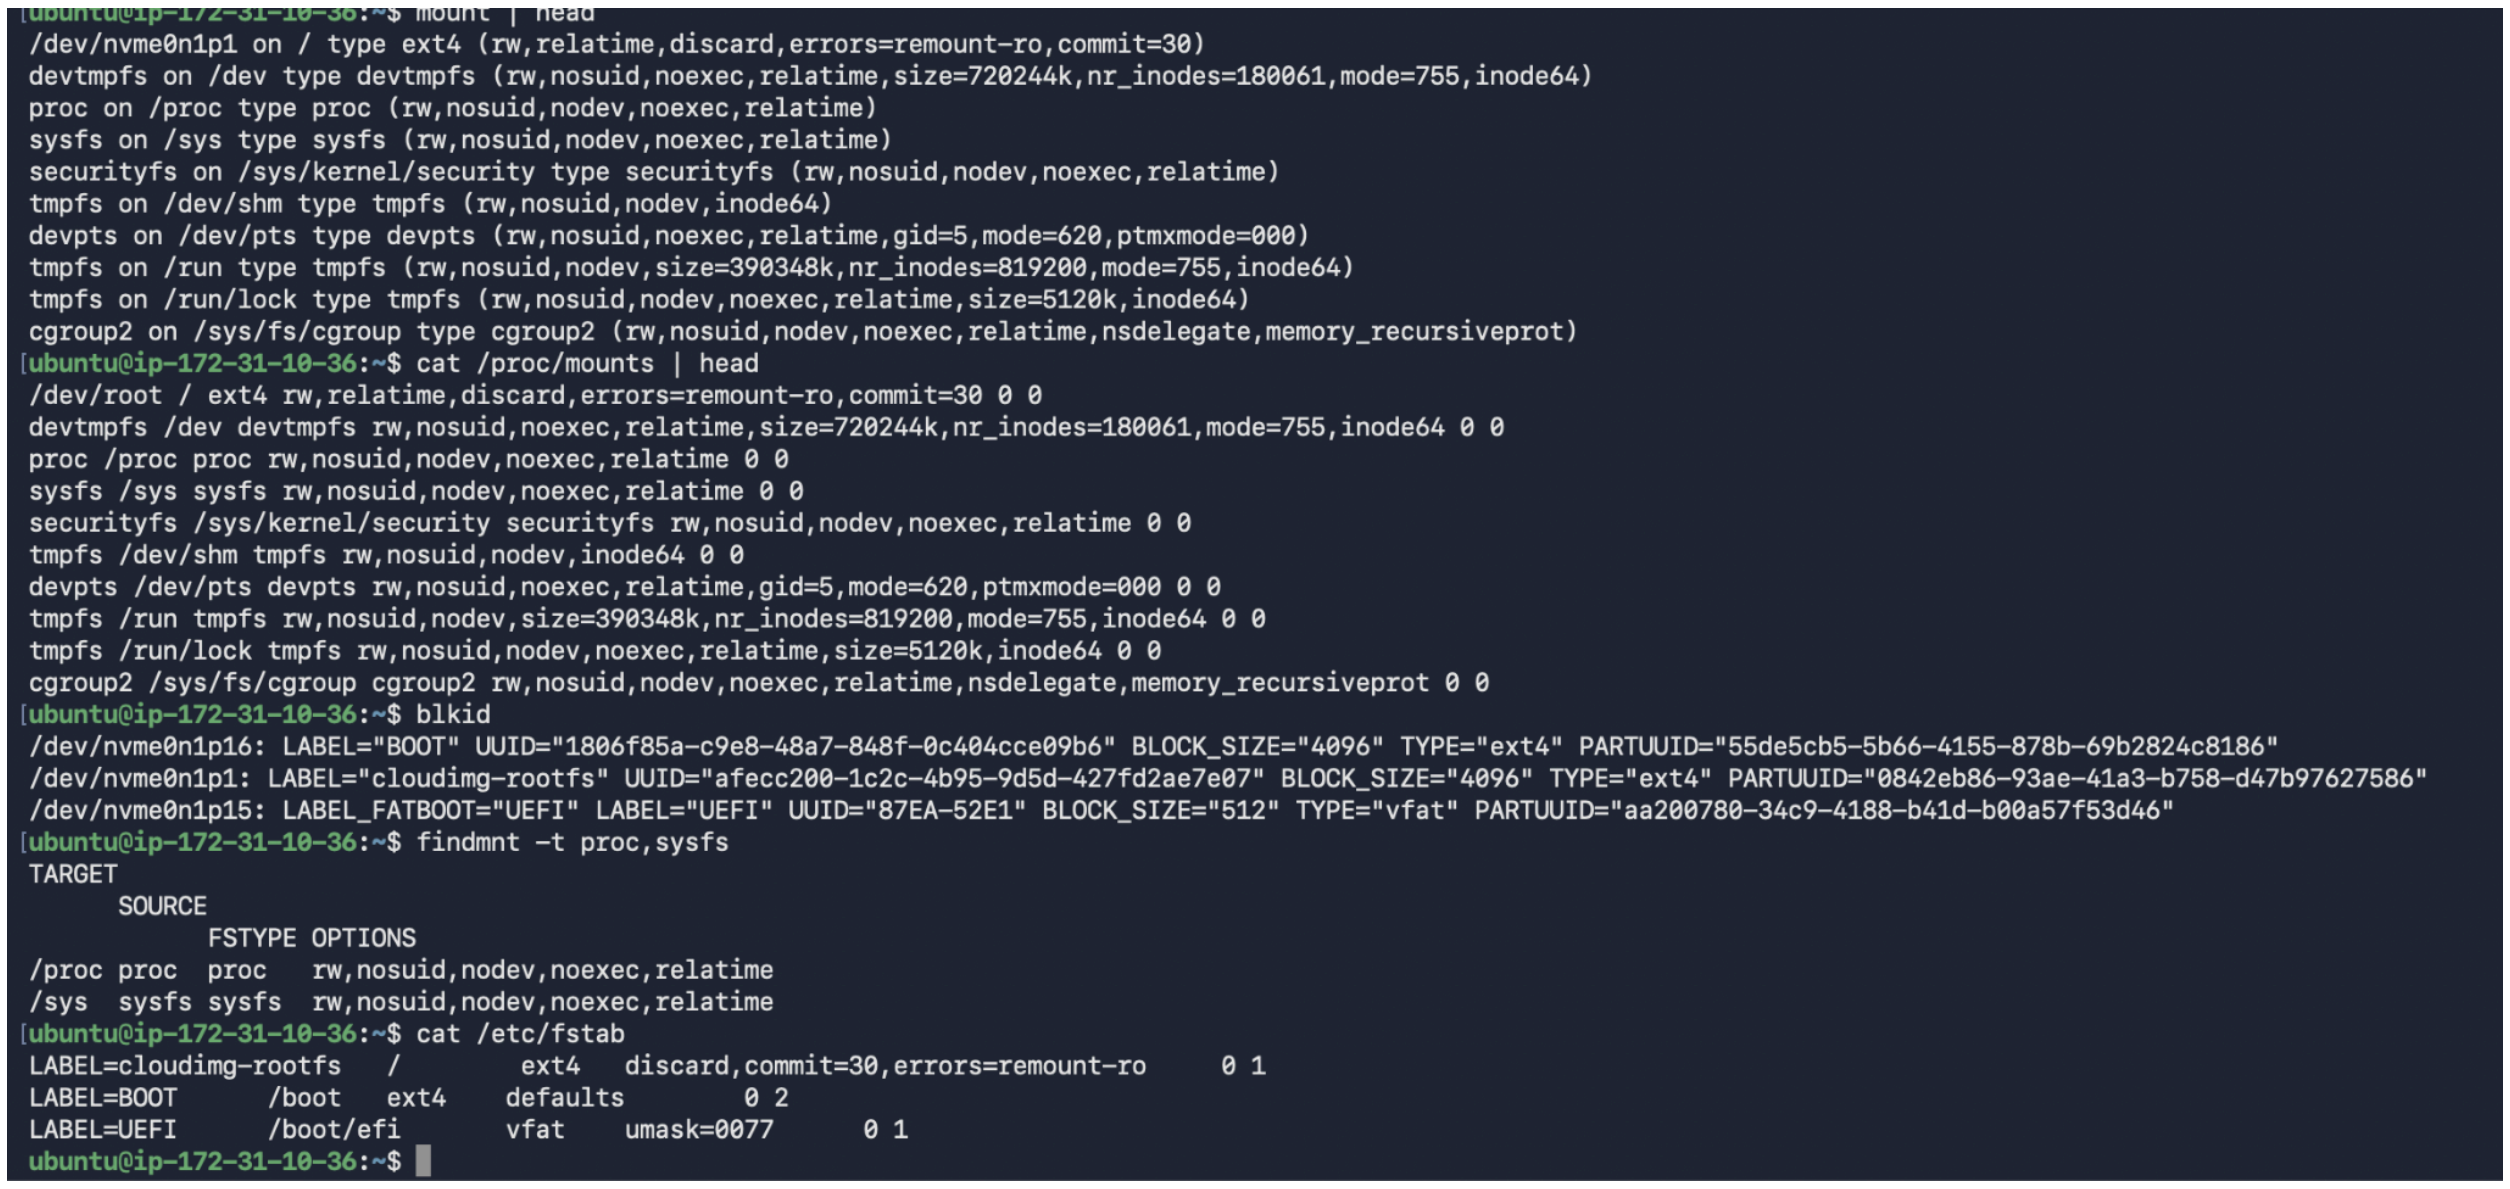

```
ubuntu@ip-172-31-10-36:~$ mount | head
/dev/nvme0n1p1 on / type ext4 (rw,relatime,discard,errors=remount-ro,commit=30)
devtmpfs on /dev type devtmpfs (rw,nosuid,noexec,relatime,size=720244k,nr_inodes=180061,mode=755,inode64)
proc on /proc type proc (rw,nosuid,nodev,noexec,relatime)
sysfs on /sys type sysfs (rw,nosuid,nodev,noexec,relatime)
securityfs on /sys/kernel/security type securityfs (rw,nosuid,nodev,noexec,relatime)
tmpfs on /dev/shm type tmpfs (rw,nosuid,nodev,inode64)
devpts on /dev/pts type devpts (rw,nosuid,noexec,relatime,gid=5,mode=620,ptmxmode=000)
tmpfs on /run type tmpfs (rw,nosuid,nodev,size=390348k,nr_inodes=819200,mode=755,inode64)
tmpfs on /run/lock type tmpfs (rw,nosuid,nodev,noexec,relatime,size=5120k,inode64)
cgroup2 on /sys/fs/cgroup type cgroup2 (rw,nosuid,nodev,noexec,relatime,nsdelegate,memory_recursiveprot)
ubuntu@ip-172-31-10-36:~$ cat /proc/mounts | head
/dev/root / ext4 rw,relatime,discard,errors=remount-ro,commit=30 0 0
devtmpfs /dev devtmpfs rw,nosuid,noexec,relatime,size=720244k,nr_inodes=180061,mode=755,inode64 0 0
proc /proc proc rw,nosuid,nodev,noexec,relatime 0 0
sysfs /sys sysfs rw,nosuid,nodev,noexec,relatime 0 0
securityfs /sys/kernel/security securityfs rw,nosuid,nodev,noexec,relatime 0 0
tmpfs /dev/shm tmpfs rw,nosuid,nodev,inode64 0 0
devpts /dev/pts devpts rw,nosuid,noexec,relatime,gid=5,mode=620,ptmxmode=000 0 0
tmpfs /run tmpfs rw,nosuid,nodev,size=390348k,nr_inodes=819200,mode=755,inode64 0 0
tmpfs /run/lock tmpfs rw,nosuid,nodev,noexec,relatime,size=5120k,inode64 0 0
cgroup2 /sys/fs/cgroup cgroup2 rw,nosuid,nodev,noexec,relatime,nsdelegate,memory_recursiveprot 0 0
ubuntu@ip-172-31-10-36:~$ blkid
/dev/nvme0n1p16: LABEL="BOOT" UUID="1806f85a-c9e8-48a7-848f-0c404cce09b6" BLOCK_SIZE="4096" TYPE="ext4" PARTUUID="55de5cb5-5b66-4155-878b-69b2824c8186"
/dev/nvme0n1p1: LABEL="cloudimg-rootfs" UUID="afecc200-1c2c-4b95-9d5d-427fd2ae7e07" BLOCK_SIZE="4096" TYPE="ext4" PARTUUID="0842eb86-93ae-41a3-b758-d47b97627586"
/dev/nvme0n1p15: LABEL_FATBOOT="UEFI" LABEL="UEFI" UUID="87EA-52E1" BLOCK_SIZE="512" TYPE="vfat" PARTUUID="aa200780-34c9-4188-b41d-b00a57f53d46"
ubuntu@ip-172-31-10-36:~$ findmnt -t proc,sysfs
TARGET
      SOURCE
            FSTYPE OPTIONS
/proc proc  proc   rw,nosuid,nodev,noexec,relatime
/sys  sysfs sysfs  rw,nosuid,nodev,noexec,relatime
ubuntu@ip-172-31-10-36:~$ cat /etc/fstab
LABEL=cloudimg-rootfs   /        ext4   discard,commit=30,errors=remount-ro     0 1
LABEL=BOOT      /boot   ext4    defaults        0 2
LABEL=UEFI      /boot/efi       vfat    umask=0077      0 1
ubuntu@ip-172-31-10-36:~$
```

`findmnt` – Lists mounted filesystems and their mount points.

`findmnt /` – Shows the filesystem mounted at the root directory.

`lsblk -f` – Displays block devices, partitions, and available filesystem information.

`df -hT` – Shows filesystem types, disk capacity, and usage.

`mount | head` – Displays the first few entries in the current mount list.

`cat /proc/mounts | head` – Displays the first few entries in the kernel mount table.

`sudo blkid` – Lists detected block-device UUIDs, labels, and filesystem types.

`findmnt -t proc,sysfs` – Displays mounts for the `proc` and `sysfs` virtual filesystems.

`cat /etc/fstab` – Displays configured filesystem mounts without modifying the file.