

Joshua Emmanuel A. Guerrero

AN41

Machine Problem 1

KNIME DIAGRAM

- CSV READER

KNIME Analytics Platform

Workflow: CSV Reader → Column Filter → Normalizer → Table Partitioner → (Decision Tree Learner/Predictor/Scorer) × 4

Table View: 1: File Table

#	Row...	student_id	attendance	quiz_score	assignment_score	exam_score	risk_status
1	Row0	S001	95	90	92	88	Not At Risk
2	Row1	S002	88	84	86	82	Not At Risk
3	Row2	S003	76	72	75	70	Not At Risk
4	Row3	S004	62	58	60	55	At Risk
5	Row4	S005	55	48	52	50	At Risk
6	Row5	S006	91	87	89	85	Not At Risk
7	Row6	S007	68	65	61	60	At Risk

- COLUMN FILTER

KNIME Analytics Platform

Workflow: CSV Reader → Column Filter → Normalizer → Table Partitioner → (Decision Tree Learner/Predictor/Scorer) × 4

Column Filter Dialog:

- Includes: attendance, quiz_score, assignment_score, exam_score, risk_status
- Excludes: student_id

Table View: 1: Filtered table

#	Row...	attendance	quiz_score	assignment_score	exam_score	risk_status
1	Row0	95	90	92	88	Not At Risk
2	Row1	88	84	86	82	Not At Risk
3	Row2	76	72	75	70	Not At Risk
4	Row3	62	58	60	55	At Risk
5	Row4	55	48	52	50	At Risk
6	Row5	91	87	89	85	Not At Risk
7	Row6	68	65	61	60	At Risk

- NORMALIZER

KNIME Analytics Platform

Home Querrero_KNIME_project + Preferences Menu Sign in

Save Execute Cancel Reset Local - Querrero_KNIME_project Upload

Info Nodes Explorer AI Monitor

CSV Reader Column Filter Normalizer Table Partitioner Decision Tree Learner Decision Tree Predictor Scorer Logistic Regression Learner Logistic Regression Predictor Scorer Random Forest Learner Random Forest Predictor Scorer

1: Normalized table 2: Normalize Model Flow Variables

Rows: 30 Columns: 5 % Sorting Filter Table Statistics Search

#	Row...	attendance (# Number (Float))	quiz_score (# Number (Float))	assignment_score (# Number (Float))	exam_score (# Number (Float))	risk_status (# String)
1	Row0	0.98	0.92	0.979	0.868	Not At Risk
2	Row1	0.837	0.8	0.854	0.755	Not At Risk
3	Row2	0.592	0.56	0.625	0.528	Not At Risk
4	Row3	0.306	0.28	0.312	0.245	At Risk
5	Row4	0.163	0.08	0.146	0.151	At Risk
6	Row5	0.898	0.86	0.917	0.811	Not At Risk
7	Row6	0.429	0.42	0.333	0.34	At Risk

Normalizer

Number columns
Manual Pattern Type

Search

Excludes

Includes

- attendance
- quiz_score
- assignment_s...
- exam_score

Any unknown colu...

Discard Apply Apply and Execute

- TABLE PARTITIONER

KNIME Analytics Platform

Home Querrero_KNIME_project + Preferences Menu Sign in

Save Execute Cancel Reset Local - Querrero_KNIME_project Upload

Info Nodes Explorer AI Monitor

CSV Reader Column Filter Normalizer Table Partitioner Decision Tree Learner Decision Tree Predictor Scorer Logistic Regression Learner Logistic Regression Predictor Scorer Random Forest Learner Random Forest Predictor Scorer

1: First partition 2: Second partition Flow Variables

Rows: 24 Columns: 5 % Sorting Filter Table Statistics Search

#	Row...	attendance (# Number (Float))	quiz_score (# Number (Float))	assignment_score (# Number (Float))	exam_score (# Number (Float))	risk_status (# String)
1	Row1	0.837	0.8	0.854	0.755	Not At Risk
2	Row2	0.592	0.56	0.625	0.528	Not At Risk
3	Row3	0.306	0.28	0.312	0.245	At Risk
4	Row4	0.163	0.08	0.146	0.151	At Risk
5	Row5	0.898	0.86	0.917	0.811	Not At Risk
6	Row6	0.429	0.42	0.333	0.34	At Risk
7	Row7	0.714	0.68	0.729	0.642	Not At Risk

Table Partitioner

First partition type
Relative (%) Absolute

Relative size
80

Sampling strategy
Random Stratified Linear First rows

Fixed random seed
42

If input table is empty
Fail Output empty table(s)

Discard Apply Apply and Execute

- DECISION TREE LEARNER

The screenshot displays the KNIME Analytics Platform interface. The workflow consists of the following nodes: CSV Reader, Column Filter, Normalizer, Table Partitioner, Decision Tree Learner, Decision Tree Predictor, Scorer, Logistic Regression Learner, Logistic Regression Predictor, Scorer, and Random Forest Learner, Random Forest Predictor, Scorer. The 'Decision Tree Learner' node is selected, and its configuration panel is visible on the right. The configuration includes: Class column (risk_status), Quality measure (Gini index, Gain ratio), Pruning method (No pruning, MDL), Reduced error pruning (checked), Minimum number of records per node (2), and Number of records to store for view (2). The bottom status bar indicates '1: Decision Tree Model' and 'Flow Variables'. A message at the bottom states: 'The data at the output port is not supported by any modern viewer.' with an 'Open port view' button.

- LOGISTIC REGRESSION LEARNER

The screenshot displays the KNIME Analytics Platform interface. The workflow is identical to the one above, but the 'Logistic Regression Learner' node is selected. The configuration panel for this node is visible on the right. The configuration includes: Target column (risk_status), Reference category (At Risk), Use order from target column domain (unchecked), Solver (Stochastic average gradient), and Feature selection (Manual, Pattern, Type). The bottom status bar indicates '1: Model for Predictor', '2: Coefficients and Statistics', and '3: Model and Learning Properties'. A message at the bottom states: 'The data at the output port is not supported by any modern viewer.' with an 'Open port view' button.

- RANDOM FOREST LEARNER

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign In

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

Workflow: CSV Reader → Column Filter → Normalizer → Table Partitioner → (Decision Tree Learner, Logistic Regression Learner, Random Forest Learner) → (Decision Tree Predictor, Logistic Regression Predictor, Random Forest Predictor) → Scorer

Random Forest Learner

Attribute Selection
Target column: risk_status

Training attributes
Use column | Use fingerprint

Attribute selection
Manual | Pattern

Search: Q Search

Excludes: | Includes: attendance

Discard | Apply | Apply and Execute

1: Out-of-bag Predictions | 2: Attribute Statistics | 3: Random Forest Model | Flow Variables

Rows: 6 | Columns: 10 | Sorting | Filter

#	Row...	attendance (# Number (Float))	quiz_score (# Number (Float))	assignment_sco... (# Number (Float))	exam_score (# Number (Float))	risk_status (# String)	P (risk_status=N... (# Number (Float))	P (risk_status=A... (# Number (Float))	risk_status (Out-... (# String)	risk_status (Out-... (# Number (Float))	model count (# Number (Integer))
1	Row0	0.98	0.92	0.979	0.868	Not At Risk					
2	Row9	0.531	0.5	0.562	0.491	Not At Risk					
3	Row17	0.102	0.04	0.083	0.038	At Risk					
4	Row20	0.857	0.84	0.896	0.792	Not At Risk					
5	Row25	0.286	0.26	0.292	0.226	At Risk					
6	Row29	0.51	0.44	0.479	0.396	At Risk					

- DECISION TREE PREDICTOR

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign In

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

Workflow: CSV Reader → Column Filter → Normalizer → Table Partitioner → (Decision Tree Learner, Logistic Regression Learner, Random Forest Learner) → (Decision Tree Predictor, Logistic Regression Predictor, Random Forest Predictor) → Scorer

Decision Tree Predictor

Number of patterns for hilling: 10000

☒ Custom prediction column name
Prediction (risk_status)

☐ Append columns with normalized class distribution

Discard | Apply | Apply and Execute

1: Classified Data | Flow Variables

Rows: 24 | Columns: 6 | Sorting | Filter

#	Row...	attendance (# Number (Float))	quiz_score (# Number (Float))	assignment_score (# Number (Float))	exam_score (# Number (Float))	risk_status (# String)	Prediction (risk_status) (# String)
1	Row1	0.837	0.8	0.854	0.755	Not At Risk	Not At Risk
2	Row2	0.592	0.56	0.625	0.528	Not At Risk	Not At Risk
3	Row3	0.306	0.28	0.312	0.245	At Risk	At Risk
4	Row4	0.163	0.08	0.146	0.151	At Risk	At Risk
5	Row5	0.898	0.86	0.917	0.811	Not At Risk	Not At Risk
6	Row6	0.429	0.42	0.333	0.34	At Risk	At Risk
7	Row7	0.714	0.68	0.729	0.642	Not At Risk	Not At Risk

- LOGISTIC REGRESSION PREDICTOR

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign in

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

Logistic Regression Predictor

- ☐ Custom prediction column name
- ☐ Append columns with normalized class distribution

Discard | Apply | Apply and Execute

► 1: Predicted data | Flow Variables

Rows: 24 | Columns: 6 | Sorting | Filter

#	Row...	attendance (# Number (Float))	quiz_score (# Number (Float))	assignment_score (# Number (Float))	exam_score (# Number (Float))	risk_status (# String)	Prediction (risk_status) (# String)
1	Row1	0.837	0.8	0.854	0.755	Not At Risk	Not At Risk
2	Row2	0.592	0.56	0.625	0.528	Not At Risk	Not At Risk
3	Row3	0.306	0.28	0.312	0.245	At Risk	At Risk
4	Row4	0.163	0.08	0.146	0.151	At Risk	At Risk
5	Row5	0.898	0.86	0.917	0.811	Not At Risk	Not At Risk
6	Row6	0.429	0.42	0.333	0.34	At Risk	At Risk
7	Row7	0.714	0.68	0.729	0.642	Not At Risk	Not At Risk

- RANDOM FOREST PREDICTOR

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign in

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

Random Forest Predictor

- ☐ Change prediction column name
- Prediction column name**
Prediction (risk_status)
- ☒ Append overall prediction confidence
- ☐ Append individual class probabilities
- Suffix for probability columns**
- ☐ Use soft voting

Discard | Apply | Apply and Execute

► 1: Prediction output | Flow Variables

Rows: 6 | Columns: 7 | Sorting | Filter

#	Row...	attendance (# Number (Float))	quiz_score (# Number (Float))	assignment_score (# Number (Float))	exam_score (# Number (Float))	risk_status (# String)	Prediction (risk_status) (# String)	Prediction (risk_status) (...) (# Number (Float))
1	Row0	0.98	0.92	0.979	0.868	Not At Risk	Not At Risk	1
2	Row9	0.531	0.5	0.562	0.491	Not At Risk	Not At Risk	1
3	Row17	0.102	0.04	0.083	0.038	At Risk	At Risk	1
4	Row20	0.857	0.84	0.896	0.792	Not At Risk	Not At Risk	1
5	Row25	0.286	0.26	0.292	0.226	At Risk	At Risk	1
6	Row29	0.51	0.44	0.479	0.396	At Risk	At Risk	1

- SCORER 1

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign in

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

CSV Reader | Column Filter | Normalizer | Table Partitioner | Decision Tree Learner | Decision Tree Predictor | Scorer | Logistic Regression Learner | Logistic Regression Predictor | Scorer | Random Forest Learner | Random Forest Predictor | Scorer

Scorer

First column: Prediction (risk_status)

Second column: risk_status

Sorting strategy: Insertion order

Missing values: Ignore

Discard | Apply | Apply and Execute

1: Confusion matrix | 2: Accuracy statistics | Flow Variables

Rows: 2 | Columns: 2 | Sorting | Filter

#	Row...	Not At Risk	At Risk
		Number (Integer)	Number (Integer)
1	Not ...	13	0
2	At Risk	0	11

- SCORER 2

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign in

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

CSV Reader | Column Filter | Normalizer | Table Partitioner | Decision Tree Learner | Decision Tree Predictor | Scorer | Logistic Regression Learner | Logistic Regression Predictor | Scorer | Random Forest Learner | Random Forest Predictor | Scorer

Scorer

First column: Prediction (risk_status)

Second column: risk_status

Sorting strategy: Insertion order

Missing values: Ignore

Discard | Apply | Apply and Execute

1: Confusion matrix | 2: Accuracy statistics | Flow Variables

Rows: 2 | Columns: 2 | Sorting | Filter

#	Row...	Not At Risk	At Risk
		Number (Integer)	Number (Integer)
1	Not ...	13	0
2	At Risk	0	11

- SCORER 3

KNIME Analytics Platform

Home | Guerrero_KNIME_project | Preferences | Menu | Sign in

Save | Execute | Cancel | Reset | Local - Guerrero_KNIME_project | Upload

Info | Nodes | Explorer | AI | Monitor

Workflow: CSV Reader → Column Filter → Normalizer → Table Partitioner → (Decision Tree Learner/Predictor, Logistic Regression Learner/Predictor, Random Forest Learner/Predictor) → Scorer

Scorer Configuration:

- First column: Prediction (risk_status)
- Second column: risk_status
- Sorting strategy: Insertion order
- Missing values: Ignore

Table View:

#	Row...	Not At Risk	At Risk
1	Not ...	3	0
2	At Risk	0	3

- README.md

```
README.md

# Asynchronous Activity 1: Student Early Warning Tool Using KNIME

This repository contains the required output for Asynchronous Activity 1. The project uses KNIME to predict student risk status from academic performance data.

## Files
- 'DemoEarlyWarningTool.knwf' - exported KNIME workflow
- 'student_performance_knime.csv' - dataset used by the workflow

## Algorithms
- Decision Tree
- Logistic Regression
- Random Forest

## How to Run
1. Import the '.knwf' file into KNIME Analytics Platform.
2. Configure the CSV Reader and select the included dataset.
3. Execute all nodes.
4. Open the Scorer nodes to review the evaluation results.

## Author
Joshua Emmanuel A. Guerrero

## Course and Section
CS0065 & AI441
```

Source Code:

MINGW64:/c/Users/Joshua/Downloads/DemoEarlyWarningTool

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool
$ git config --global user.name jaguerrero22
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool
$ git config --global user.email jaguerrero@feualabang.edu.ph
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool
$ git config --global user.name
jaguerrero22
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool
$ git config --global user.email
jaguerrero@feualabang.edu.ph
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool
$ git init
Initialized empty Git repository in C:/Users/Joshua/Downloads/DemoEarlyWarningTool/.git/
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (master)
$ git branch -M main
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git status
On branch main
```

No commits yet

```
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    Guerrero_KNIME_project.knwf
    README.md
    student_performance_knime.csv
```

nothing added to commit but untracked files present (use "git add" to track)

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git add .
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git status
On branch main
```

No commits yet

```
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   Guerrero_KNIME_project.knwf
    new file:   README.md
    new file:   student_performance_knime.csv
```

```
Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git commit -m "Add KNIME workflow and project files"
[main (root-commit) 8aca2ee] Add KNIME workflow and project files
 3 files changed, 55 insertions(+)
 create mode 100644 Guerrero_KNIME_project.knwf
 create mode 100644 README.md
```

```

MINGW64/c/Users/Joshua/Downloads/DemoEarlyWarningTool
create mode 100644 student_performance_knime.csv

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git remote add origin https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN-41.git

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git remote -v
origin https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN-41.git (fetch)
origin https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN-41.git (push)

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git push -u origin main
fatal: unable to access 'https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN-41.git/': URL rejected: Bad hostname

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git remote remove origin

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git remote add origin
usage: git remote add [<options>] <name> <url>

    -f, --[no-]fetch          fetch the remote branches
    --[no-]tags              import all tags and associated objects when fetching
                           or do not fetch any tag at all (--no-tags)
    -t, --[no-]track <branch>
                           branch(es) to track
    -m, --[no-]master <branch>
                           master branch
    --[no-]mirror[=(push|fetch)]
                           set up remote as a mirror to push to or fetch from

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git remote add origin https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git remote -v
origin https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git (fetch)
origin https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git (push)

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git push -u origin main
info: please complete authentication in your browser...
To https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git
 ! [rejected]        main -> main (fetch first)
error: failed to push some refs to 'https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git'
hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git pull origin main --allow-unrelated-histories --no-rebase --no-edit
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)

```

```

MINGW64:/c/Users/Joshua/Downloads/DemoEarlyWarningTool
Unpacking objects: 100% (3/3), 937 bytes | 46.00 KiB/s, done.
From https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41
* branch          main      -> FETCH_HEAD
* [new branch]     main      -> origin/main
Auto-merging README.md
CONFLICT (add/add): Merge conflict in README.md
Automatic merge failed; fix conflicts and then commit the result.

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main|MERGING)
$ git push -u origin main
To https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git
 ! [rejected]        main -> main (non-fast-forward)
error: failed to push some refs to 'https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git'
hint: Updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. If you want to integrate the remote changes,
hint: use 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main|MERGING)
$ git add README.md

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main|MERGING)
$ git commit -m "Finalize README after merge resolution"
[main 21b7c63] Finalize README after merge resolution

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git push
fatal: The current branch main has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin main

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git status
On branch main
nothing to commit, working tree clean

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git add .

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git commit -m "Add KNIME workflow, dataset, and updated README"
On branch main
nothing to commit, working tree clean

Joshua@LAPTOP-AU05B3JP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git push -u origin main
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 8 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (8/8), 67.42 KiB | 11.24 MiB/s, done.
Total 8 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.

```

```

Delta compression using up to 8 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (8/8), 67.42 KiB | 11.24 MiB/s, done.
Total 8 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.
To https://github.com/jaguerrero22/Guerrero-JoshuaEmmanuel-CS0065-AN41.git
   b3efc09..21b7c63  main -> main
branch 'main' set up to track 'origin/main'.

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git mv DemiEarlyWarningTool.knwf DemoEarlyWarningTool/
fatal: bad source, source=DemiEarlyWarningTool.knwf, destination=DemoEarlyWarningTool/

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git add .


Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git commit -m "Update KNIME workflow"
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ git push
Everything up-to-date

Joshua@LAPTOP-AU05BJIP MINGW64 ~/Downloads/DemoEarlyWarningTool (main)
$ |

```

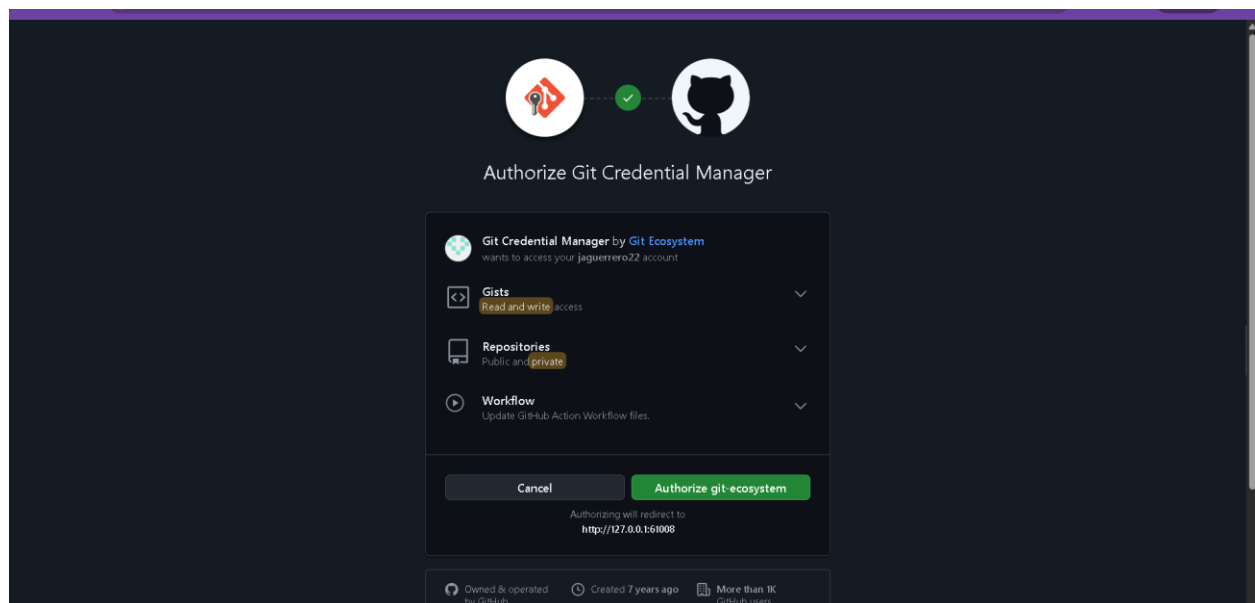



Authentication Succeeded

You may now close this tab and return to the application.