

GitHub

Search GitHub

Explore Features Enterprise Blog

Sign up

Sign in

Build software better, together.

Powerful collaboration, code review, and code management for open source and private projects. Need private repositories?

Upgraded plans start at \$7/mo.

iauet-student ✓

iauet_student@gmail.com ✓

..... ✓


Use at least one lowercase letter, one numeral, and seven characters.

Sign up for GitHub

By clicking "Sign up for GitHub", you agree to our [terms of service](#) and [privacy policy](#). We will send you account related emails occasionally.

←

→

 https://github.com/join/plan

🔍

GitHub, Inc. [US]


🔄

GitHub · Build software bett... x


🏠

★

⚙️





[Explore](#) [Gist](#) [Blog](#) [Help](#)

 **iauet-student**

+

⌵

⌵

⌵

⌵

📄

New repository

👤

New organization

Welcome to GitHub

You've taken your first step into a larger world, **@iauet-student**.

✓ **Completed**
Set up a personal account

📋

Step 2:
Choose your plan

🕒

Step 3:
Go to your dashboard

Choose your personal plan

Plan	Cost (view in IRR)	Private repos	
Large	\$50/month	50	<button>Choose</button>
Medium	\$22/month	20	<button>Choose</button>
Small	\$12/month	10	<button>Choose</button>
Micro	\$7/month	5	<button>Choose</button>
Free	\$0/month	0	<button>Chosen</button>

Each plan includes:

Unlimited collaborators

Unlimited public repositories

✓ Free setup

✓ SSL Protection

✓ Email support

✓ Wikis, Issues, Pages, & more

https://github.com/new

←

→

https://github.com/new

🔍

GitHub, Inc. [US]

🔄

Create a New Repository

×

🏠

★

⚙️

🐙

Search GitHub

Explore

Gist

Blog

Help

iauet-student

+

📄

⚙️

🔗

^

Owner

Repository name

📄

iauet-student

▼

/

simple-project

✓

Great repository names are short and memorable. Need inspiration? How about **furry-octo-tribble**.

Description (optional)

☒

📄

Public

Anyone can see this repository. You choose who can commit.

☐

🔒

Private

You choose who can see and commit to this repository.

☒ Initialize this repository with a README

This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: **None** ▼

Add a license: **None** ▼

ℹ️

Create repository

https://github.com/iauet-student/simple-project/se

GitHub, Inc. [US]

Collaborators

File

Edit

View

Favorites

Tools

Help

This repository

Search

Explore

Gist

Blog

Help

iauet-student

+

iauet-student / simple-project

Unwatch

1

Star

0

Fork

0

Options

Collaborators

Webhooks & Services

Deploy keys

Collaborators

Push access to the repository

This repository doesn't have any collaborators yet. Use the form below to add a collaborator.


iauet-student2


Add collaborator


Settings

@ 2015 GitHub, Inc. Terms Privacy Security Contact

Status API Training Shop Blog About

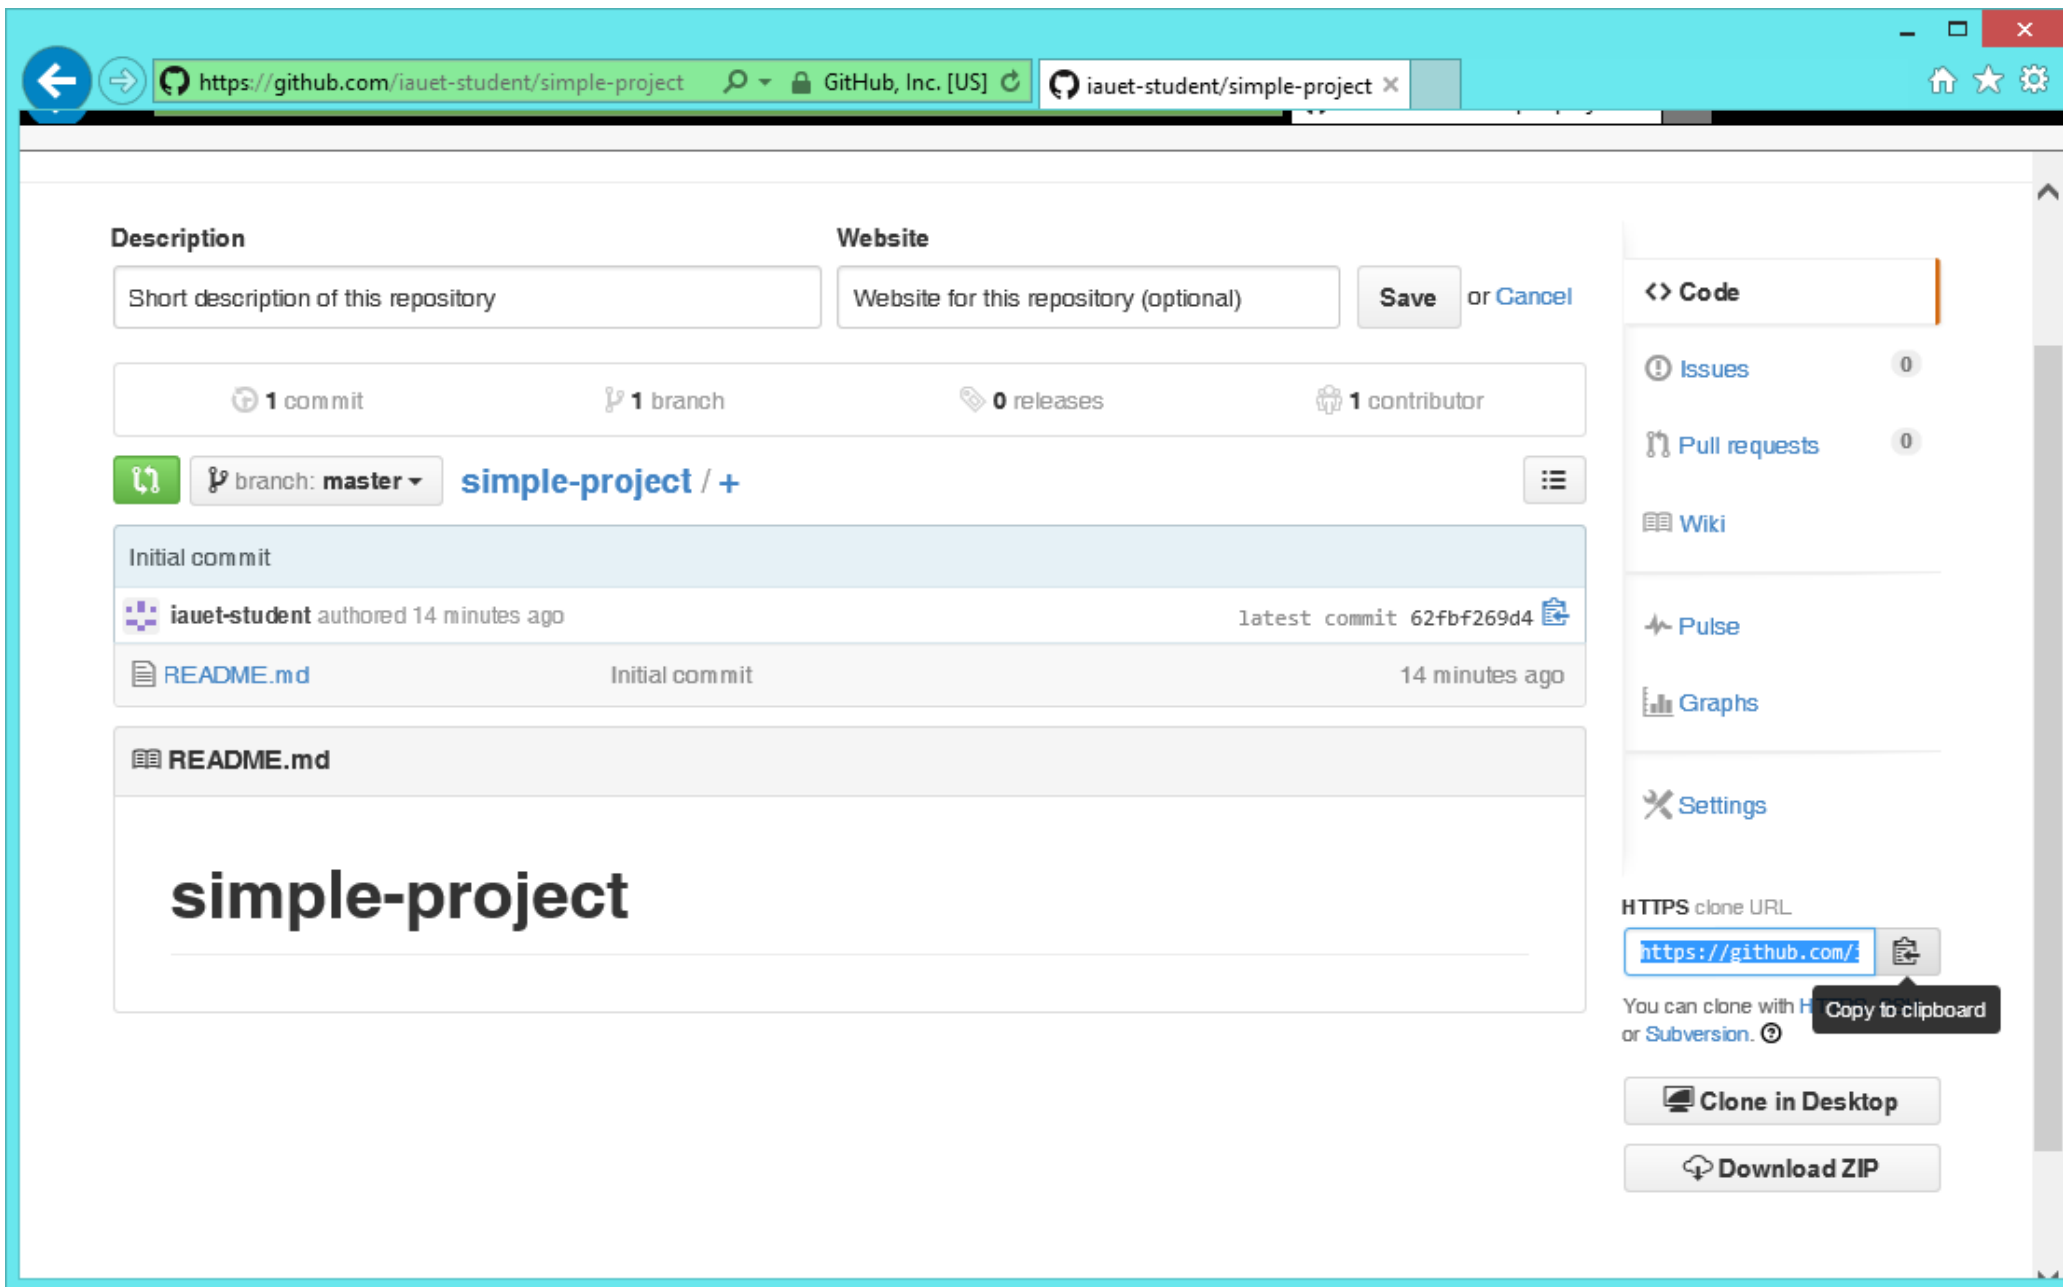

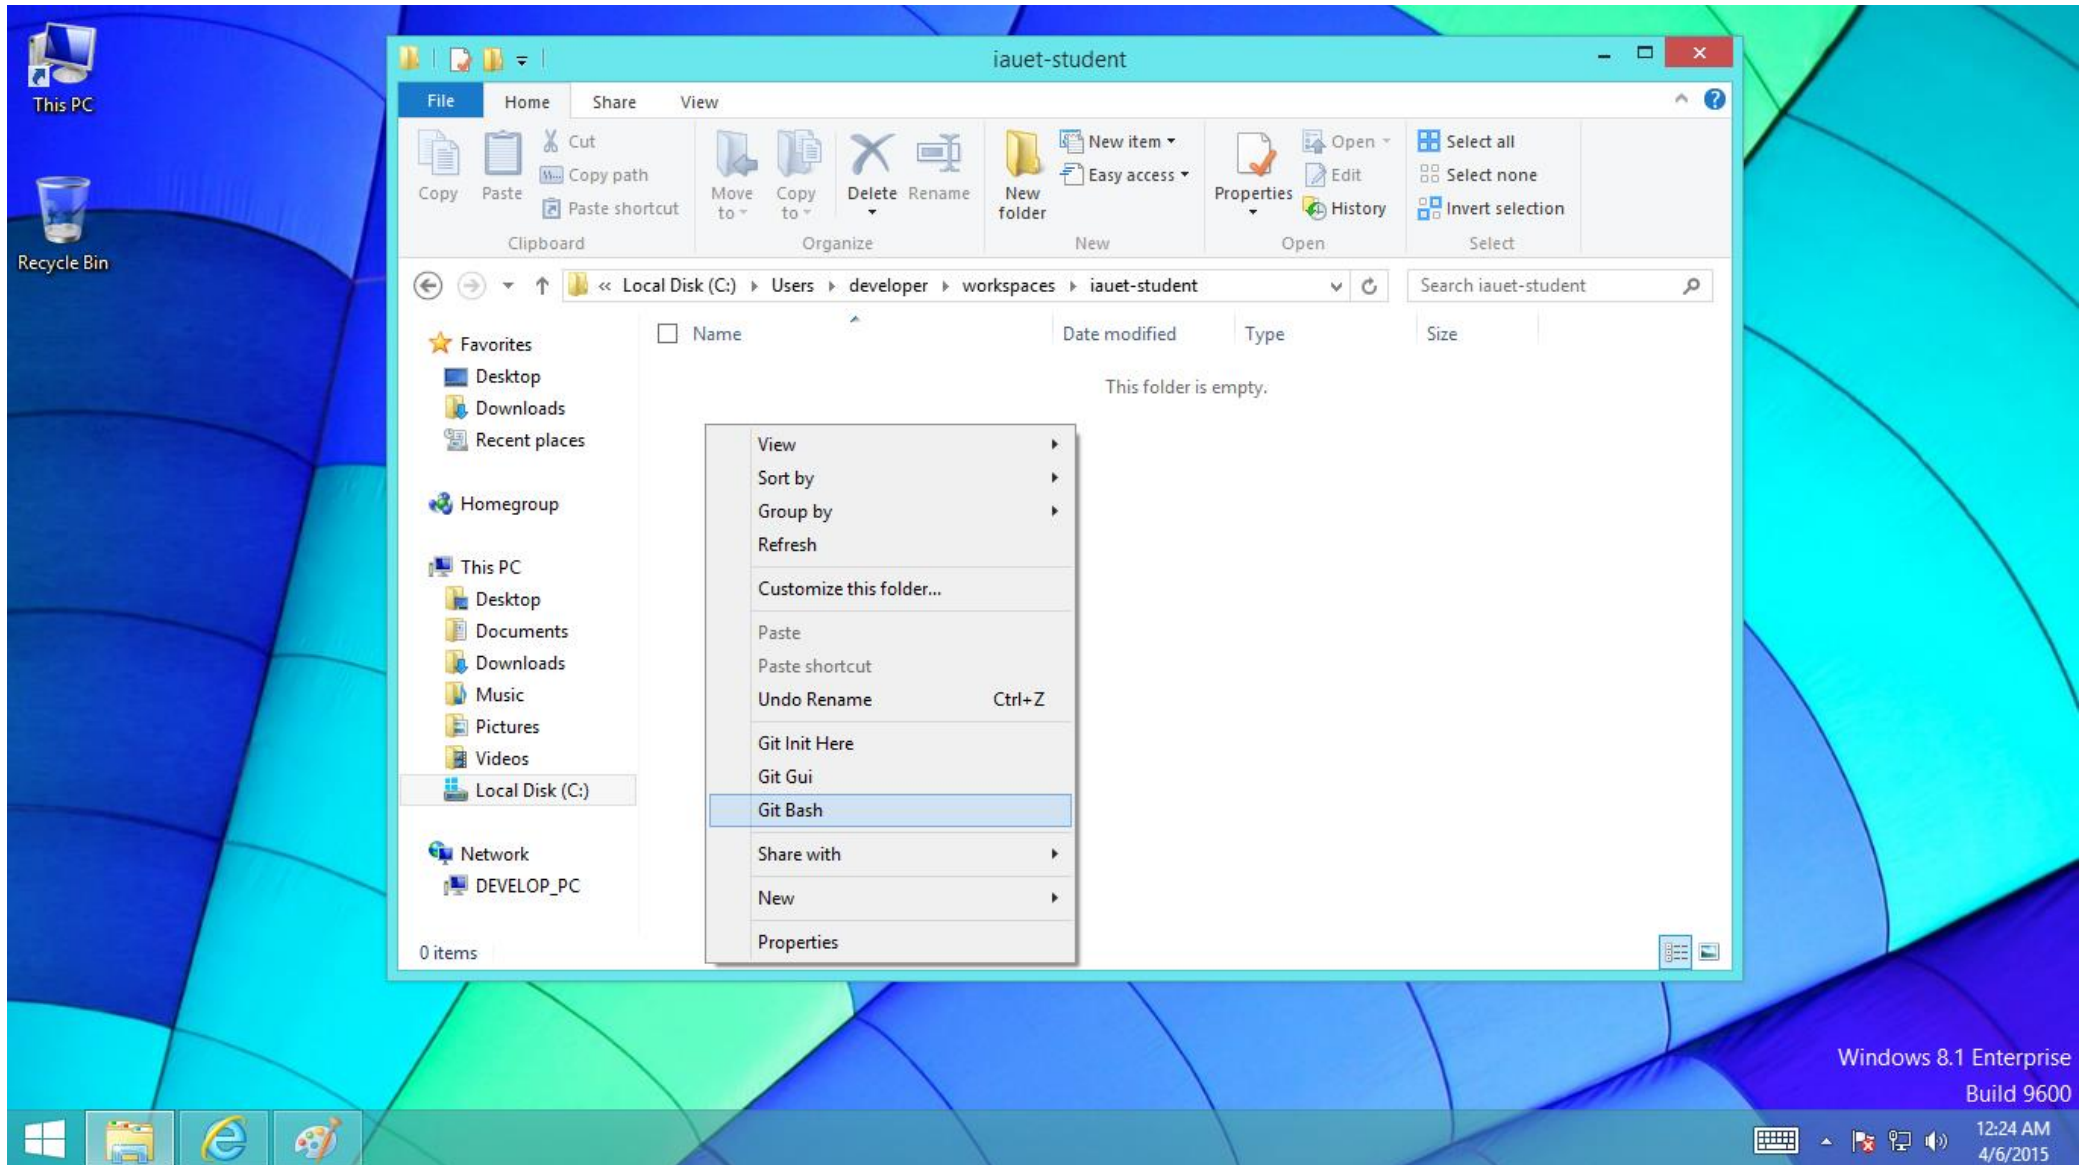

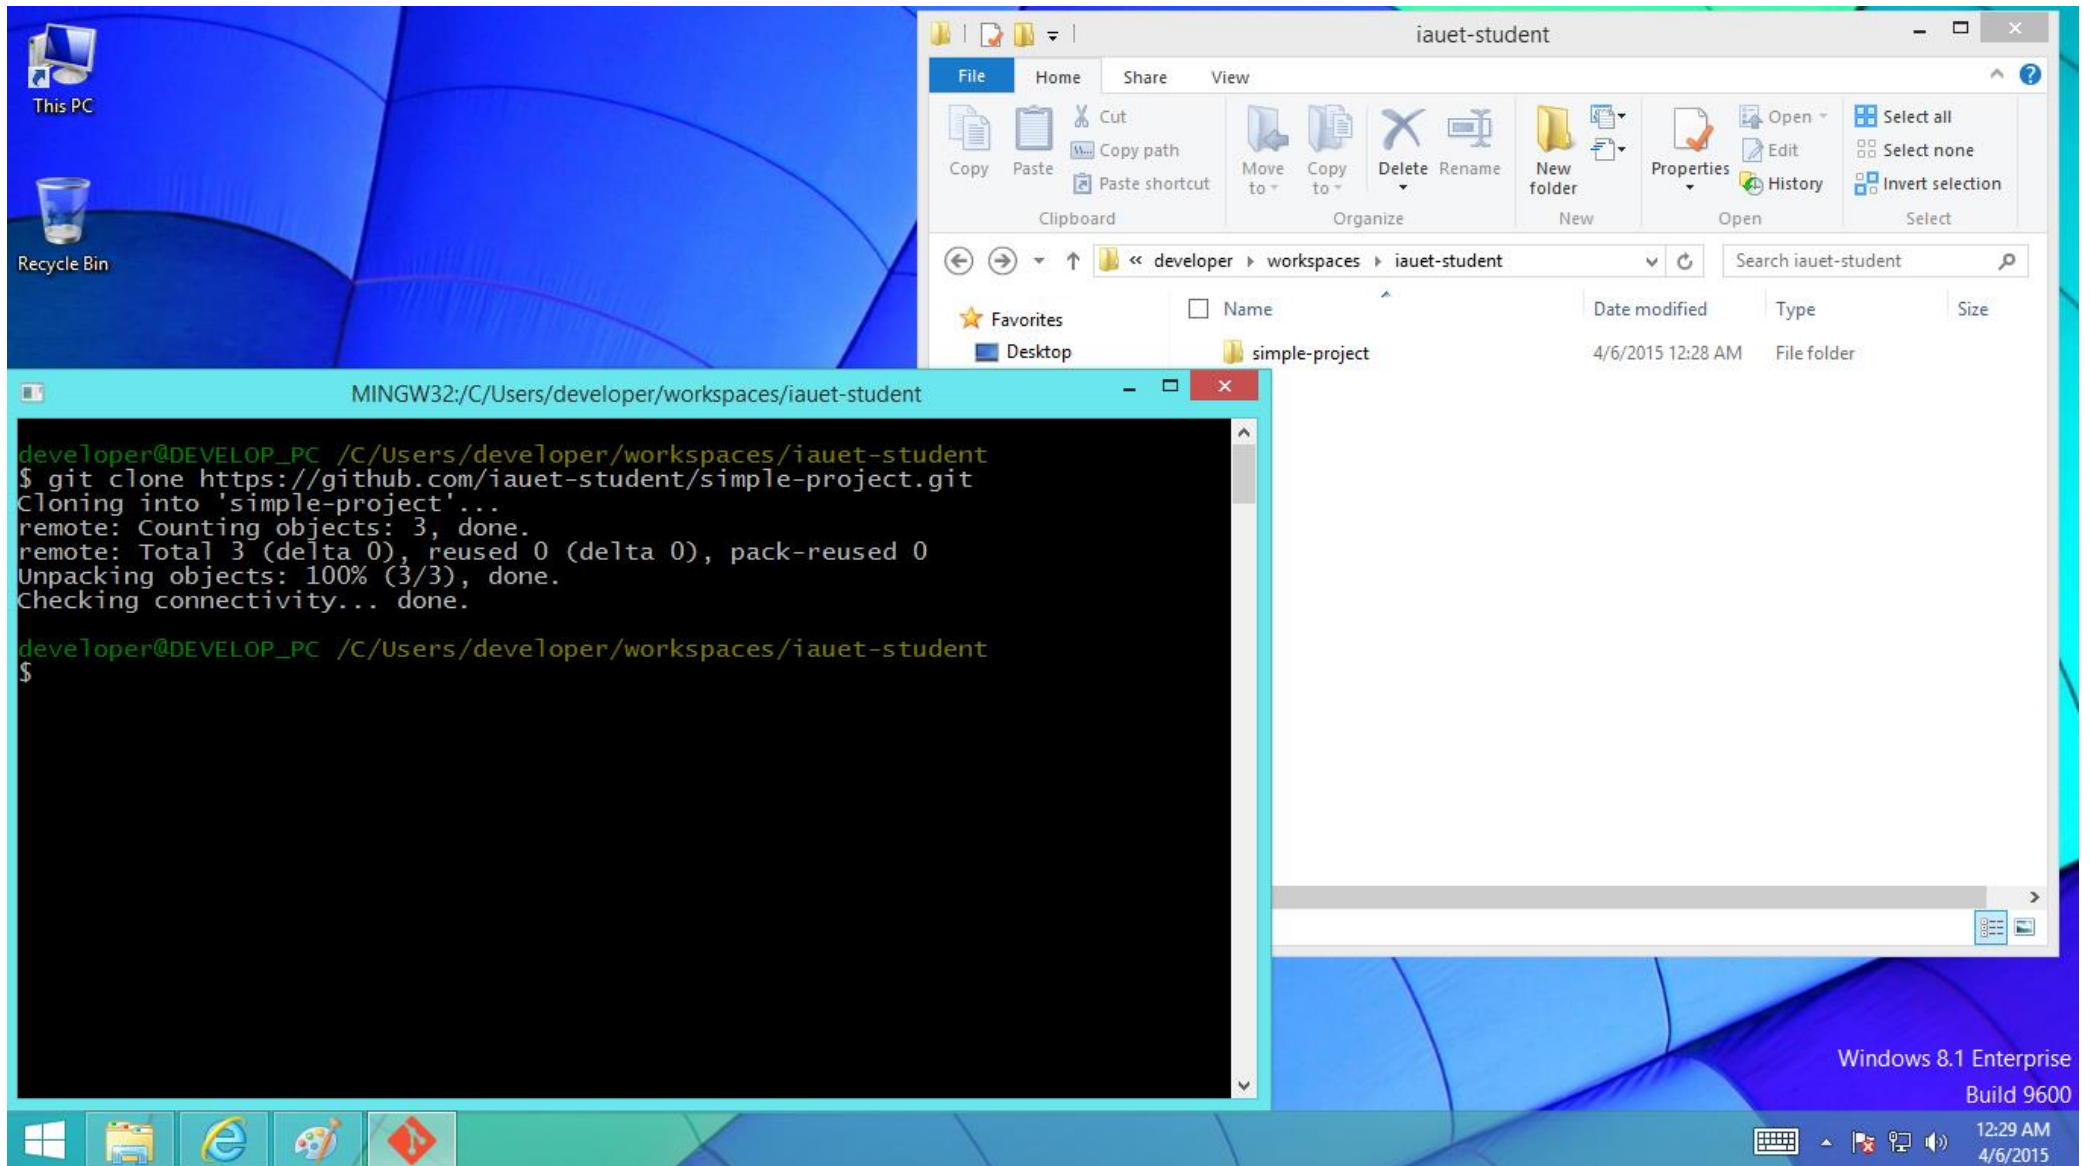


```
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
```

```
$ git push
```

```
warning: push.default is unset; its implicit value is changing in  
Git 2.0 from 'matching' to 'simple'. To squelch this message  
and maintain the current behavior after the default changes, use:
```

```
git config --global push.default matching
```

```
To squelch this message and adopt the new behavior now, use:
```

```
git config --global push.default simple
```

```
When push.default is set to 'matching', git will push local branches  
to the remote branches that already exist with the same name.
```

```
In Git 2.0, Git will default to the more conservative 'simple'  
behavior, which only pushes the current branch to the corresponding  
remote branch that 'git pull' uses to update the current branch.
```

```
See 'git help config' and search for 'push.default' for further information.  
(the 'simple' mode was introduced in Git 1.7.11. Use the similar mode  
'current' instead of 'simple' if you sometimes use older versions of Git)
```

```
Username for 'https://github.com': iauet-student
```

```
Password for 'https://iauet-student@github.com':
```

```
Counting objects: 4, done.
```

```
Delta compression using up to 4 threads.
```

```
Compressing objects: 100% (3/3), done.
```

```
Writing objects: 100% (3/3), 492 bytes | 0 bytes/s, done.
```


```
Total 3 (delta 0), reused 0 (delta 0)
```

```
To https://github.com/iauet-student/simple-project.git
```

```
62fbf26..c3b7bba master -> master
```

```
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
```

```
$
```

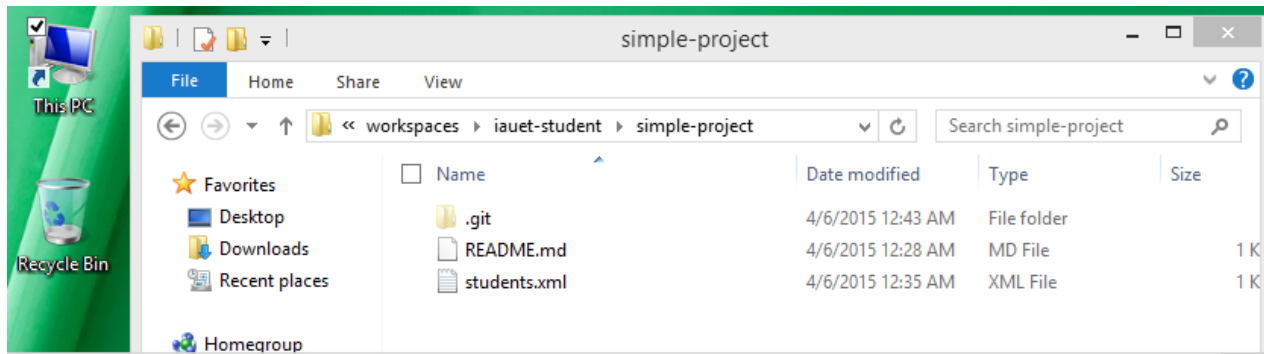


```
MINGW32:/C:/Users/developer/workspaces/iauet-student/simple-project
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (m
$ git status
On branch master
Your branch is up-to-date with 'origin/master'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)

        students.xml

nothing added to commit but untracked files present (use "git add" to track)
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (m
$ git add students.xml
warning: LF will be replaced by CRLF in students.xml.
The file will have its original line endings in your working directory.
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (m
$ git commit -m "add students.xml"
[master c3b7bba] add students.xml
warning: LF will be replaced by CRLF in students.xml.
The file will have its original line endings in your working directory.
1 file changed, 22 insertions(+)
create mode 100644 students.xml
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (m
$
```

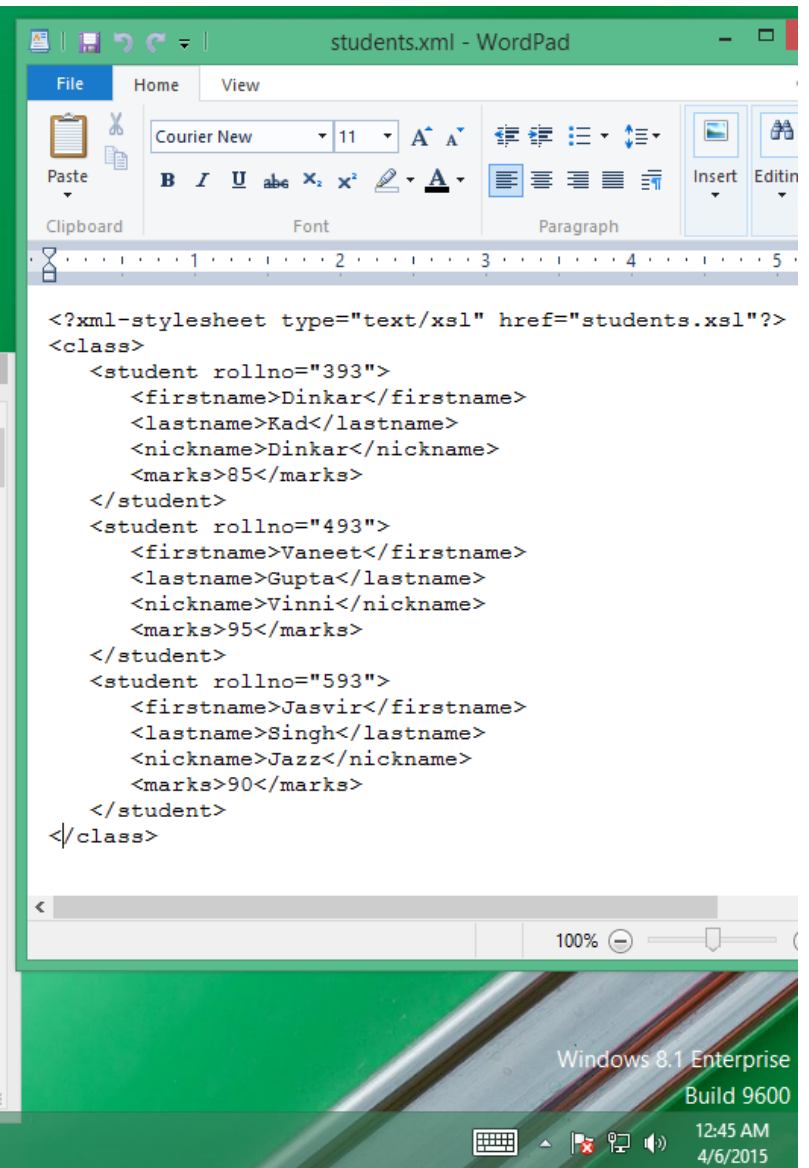

```
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
```

```
$ git push
```

```
warning: push.default is unset; its implicit value is changing in  
Git 2.0 from 'matching' to 'simple'. To squelch this message  
and maintain the current behavior after the default changes, use:
```

```
git config --global push.default matching
```

```
To squelch this message and adopt the new behavior now, use:
```

```
git config --global push.default simple
```

```
When push.default is set to 'matching', git will push local branches  
to the remote branches that already exist with the same name.
```

```
In Git 2.0, Git will default to the more conservative 'simple'  
behavior, which only pushes the current branch to the corresponding  
remote branch that 'git pull' uses to update the current branch.
```

```
See 'git help config' and search for 'push.default' for further information.  
(the 'simple' mode was introduced in Git 1.7.11. Use the similar mode  
'current' instead of 'simple' if you sometimes use older versions of Git)
```

```
Username for 'https://github.com': iauet-student
```

```
Password for 'https://iauet-student@github.com':
```

```
Counting objects: 4, done.
```

```
Delta compression using up to 4 threads.
```

```
Compressing objects: 100% (3/3), done.
```

```
Writing objects: 100% (3/3), 492 bytes | 0 bytes/s, done.
```

```
Total 3 (delta 0), reused 0 (delta 0)
```

```
To https://github.com/iauet-student/simple-project.git
```

```
62fbf26..c3b7bba master -> master
```

```
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
```

```
$
```

simple-project

File Home Share View

workspaces \iauet-student2 \simple-project

Search simple-project

Name	Date modified	Type	Size
.git	4/6/2015 12:54 AM	File folder	
README.md	4/6/2015 12:53 AM	MD File	1 K
students.xml	4/6/2015 12:53 AM	XML File	1 K
students.xml	4/6/2015 12:36 AM	XSL Stylesheet	1 K

MINGW32:/C:/Users/developer/workspaces/iauet-student2/simple-project

```
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student2
$ git clone https://github.com/iauet-student/simple-project.git
Cloning into 'simple-project'...
remote: Counting objects: 6, done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 0), reused 3 (delta 0), pack-reused 0
Unpacking objects: 100% (6/6), done.
Checking connectivity... done.

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student2
$ git status
fatal: Not a git repository (or any of the parent directories): .git

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student2
$ cd simple-project/

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git status
On branch master
Your branch is up-to-date with 'origin/master'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)

    students.xml

nothing added to commit but untracked files present (use "git add" to track)

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student2/simple-project (master)
$
```

students.xml - WordPad

File Home View

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="1.0"
xmlns:xsl="http://www.w3.org/1999/XSL/Transform">

<xsl:template match="/">
  <html>
  <body>
  <h2>Students</h2>
  <table border="1">
    <tr bgcolor="#9acd32">
      <th>Roll No</th>
      <th>First Name</th>
      <th>Last Name</th>
      <th>Nick Name</th>
      <th>Marks</th>
    </tr>
    <xsl:for-each select="class/student">
      <tr>
        <td>
          <xsl:value-of select="@rollno"/>
        </td>
        <td><xsl:value-of select="firstname"/></td>
        <td><xsl:value-of select="lastname"/></td>
        <td><xsl:value-of select="nickname"/></td>
        <td><xsl:value-of select="marks"/></td>
      </tr>
    </xsl:for-each>
  </table>
  </body>
  </html>
</xsl:template>

</xsl:stylesheet>
```

100%

```
MINGW32:/C:/Users/developer/workspaces/iau-et-student2/simple-project
developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$ git commit -m "add students.xml"
[master 484752f] add students.xml
warning: LF will be replaced by CRLF in students.xml.
The file will have its original line endings in your working directory.
1 file changed, 33 insertions(+)
create mode 100644 students.xml

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$ git push
warning: push.default is unset; its implicit value is changing in
Git 2.0 from 'matching' to 'simple'. To squelch this message
and maintain the current behavior after the default changes, use:

    git config --global push.default matching

To squelch this message and adopt the new behavior now, use:

    git config --global push.default simple

When push.default is set to 'matching', git will push local branches
to the remote branches that already exist with the same name.

In Git 2.0, Git will default to the more conservative 'simple'
behavior, which only pushes the current branch to the corresponding
remote branch that 'git pull' uses to update the current branch.

See 'git help config' and search for 'push.default' for further information.
(the 'simple' mode was introduced in Git 1.7.11. Use the similar mode
'current' instead of 'simple' if you sometimes use older versions of Git)

Username for 'https://github.com': iau-et-student2
Password for 'https://iau-et-student2@github.com':
Counting objects: 4, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 643 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To https://github.com/iau-et-student/simple-project.git
   c3b7bba..484752f  master -> master

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
```

←

→

https://github.com/iauet-student/simple-project

GitHub, Inc. [US]

iauet-student/simple-project

🏠

★

⚙️

🐙

This repository

Search

Explore

Gist

Blog

Help

iauet-student

+

📄

⚙️

🔗

📁

iauet-student / simple-project

👁️ Unwatch

2

★ Star

0

🔗 Fork

0

Description

Website

Short description of this repository

Website for this repository (optional)

Save or Cancel

🕒 3 commits

🌿 1 branch

📦 0 releases

👤 1 contributor

🌿 branch: master

simple-project / +

☰

add students.xml

iauet-student2

 authored 12 minutes ago

latest commit 484752f015

📄 README.md

Initial commit

an hour ago

📄 students.xml

add students.xml

26 minutes ago

📄 students.xml

add students.xml

12 minutes ago

📖 README.md

simple-project

<> Code

🔔 Issues 0

🔗 Pull requests 0

📖 Wiki

📊 Pulse

📈 Graphs

⚙️ Settings

HTTPS clone URL

https://github.com/iauet-

You can clone with [HTTPS](#), [SSH](#), or [Subversion](#).

📁 Clone in Desktop

📦 Download ZIP


```
MINGW32:/C:/Users/developer/workspaces/iauet-student/simple-project

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$ git pull
remote: Counting objects: 3, done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0
Unpacking objects: 100% (3/3), done.
From https://github.com/iauet-student/simple-project
   c3b7bba..484752f  master    -> origin/master
Updating c3b7bba..484752f
Fast-forward
 students.xml | 33 ++++++
 1 file changed, 33 insertions(+)
 create mode 100644 students.xml

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$ git log
commit 484752f0154027fc906784889a7e03ba73e9d184
Author: iauet-student2 <iauet_student2@gmail.com>
Date:   Mon Apr 6 00:57:34 2015 +0430

    add students.xml

commit c3b7bba4ef28aa43699bc364068508e68914c363
Author: iauet-student <iauet_student@gmail.com>
Date:   Mon Apr 6 00:43:31 2015 +0430

    add students.xml

commit 62fbf269d49ddc75541ab3ddef84e319508d6570
Author: iauet-student <iauet_student@emeil.ir>
Date:   Mon Apr 6 00:08:01 2015 +0430

    Initial commit

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$ _
```

C:\Windows\system32\cmd.exe

Microsoft Windows [Version 6.3.9600]
(c) 2013 Microsoft Corporation. All rights reserved.

C:\Users\developer>pushd C:\Users\developer\workspaces\iauet-student\simple-project

C:\Users\developer\workspaces\iauet-student\simple-project
Folder PATH listing
Volume serial number is 000000BB 4873:8B6A
C:.
 README.md
 students.xml

No subfolders exist

C:\Users\developer\workspaces\iauet-student\simple-project

simple-project

File Home Share View

Navigation: < > << >> <<< >>> <<<< >>>>

Address bar: << iauet-student > simple-project >

	Name	Date
★ Favorites		
Desktop		
Downloads		
Recent places		
Homegroup		
This PC		
Desktop		
Documents		
Downloads		

	Name	Date
	.git	4/6/
	README.md	4/6/
	students.xml	4/6/
	students.xml	4/6/

```
MINGW32:/C:/Users/developer/workspaces/iauet-student/simple-project
developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$ git commit "change xml version 1.1"
error: pathspec 'change xml version 1.1' did not match any file(s) known to git.

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$ git commit -m "change xml version 1.1"
[master 952b4da] change xml version 1.1
1 file changed, 1 insertion(+), 1 deletion(-)

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$ git push
warning: push.default is unset; its implicit value is changing in
Git 2.0 from 'matching' to 'simple'. To squelch this message
and maintain the current behavior after the default changes, use:

    git config --global push.default matching

To squelch this message and adopt the new behavior now, use:

    git config --global push.default simple

When push.default is set to 'matching', git will push local branches
to the remote branches that already exist with the same name.

In Git 2.0, Git will default to the more conservative 'simple'
behavior, which only pushes the current branch to the corresponding
remote branch that 'git pull' uses to update the current branch.

See 'git help config' and search for 'push.default' for further information.
(the 'simple' mode was introduced in Git 1.7.11. Use the similar mode
'current' instead of 'simple' if you sometimes use older versions of Git)

Username for 'https://github.com': iauet-student
Password for 'https://iauet-student@github.com':
Counting objects: 5, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 360 bytes | 0 bytes/s, done.
Total 3 (delta 1), reused 0 (delta 0)
To https://github.com/iauet-student/simple-project.git
484752f..952b4da master -> master

developer@DEVELOP_PC /C:/Users/developer/workspaces/iauet-student/simple-project (master)
$
```

```
students.xml - WordPad
File Home View
Clipboard Font Paragraph Insert Editing
Courier New 11
B I U abc x x
<?xml version="1.1"?>
<?xml-stylesheet type="text/xsl" href="students..
<class>
  <student rollno="393">
    <firstname>Dinkar</firstname>
    <lastname>Kad</lastname>
    <nickname>Dinkar</nickname>
    <marks>85</marks>
  </student>
  <student rollno="493">
    <firstname>Vaneet</firstname>
    <lastname>Gupta</lastname>
    <nickname>Vinni</nickname>
    <marks>95</marks>
  </student>
  <student rollno="593">
    <firstname>Jasvir</firstname>
    <lastname>Singh</lastname>
    <nickname>Jazz</nickname>
    <marks>90</marks>
  </student>
</class>
```



```
MINGW32:/C/Users/developer/workspaces/iauet-student2/simple-project
developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git status
On branch master
Your branch is up-to-date with 'origin/master'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   students.xml

no changes added to commit (use "git add" and/or "git commit -a")

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git add students.xml
students.xml

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git add students.xml

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git commit -m "change xml version 2.0"
[master f795e9e] change xml version 2.0
1 file changed, 1 insertion(+), 1 deletion(-)

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ _
```

simple-project

File Home Share View

Navigation: < > << >> << iauet-student2 >> simple-project >

Favorites: Desktop, Downloads, Recent places, Homegroup

Name	Date
.git	4/6/2
README.md	4/6/2
students.xml	4/6/2
students.xml	4/6/2

File Edit Format View Help

```
<?xml version="2.0"?>
<?xml-stylesheet type="text/xsl" href="students.xsl"?>
<class>
  <student rollno="393">
    <firstname>Dinkar</firstname>
    <lastname>Kad</lastname>
    <nickname>Dinkar</nickname>
    <marks>85</marks>
  </student>
  <student rollno="493">
    <firstname>Vaneet</firstname>
    <lastname>Gupta</lastname>
    <nickname>Vinni</nickname>
    <marks>95</marks>
  </student>
  <student rollno="593">
    <firstname>Jasvir</firstname>
    <lastname>Singh</lastname>
    <nickname>Jazz</nickname>
    <marks>90</marks>
  </student>
</class>
```

```
MINGW32:/C/Users/developer/workspaces/iauet-student2/simple-project
developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git add students.xml

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git commit -m "change xml version 2.0"
[master f795e9e] change xml version 2.0
1 file changed, 1 insertion(+), 1 deletion(-)

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git push
warning: push.default is unset; its implicit value is changing in
Git 2.0 from 'matching' to 'simple'. To squelch this message
and maintain the current behavior after the default changes, use:

    git config --global push.default matching

To squelch this message and adopt the new behavior now, use:

    git config --global push.default simple

When push.default is set to 'matching', git will push local branches
to the remote branches that already exist with the same name.

In Git 2.0, Git will default to the more conservative 'simple'
behavior, which only pushes the current branch to the corresponding
remote branch that 'git pull' uses to update the current branch.

See 'git help config' and search for 'push.default' for further information.
(the 'simple' mode was introduced in Git 1.7.11. Use the similar mode
'current' instead of 'simple' if you sometimes use older versions of Git)

Username for 'https://github.com': iauet-student2
Password for 'https://iauet-student2@github.com':
To https://github.com/iauet-student/simple-project.git
! [rejected]        master -> master (fetch first)
error: failed to push some refs to 'https://github.com/iauet-student/simple-project.git'
hint: Updates were rejected because the remote contains work that you do
hint: not have locally. This is usually caused by another repository pushing
hint: to the same ref. You may want to first integrate the remote changes
hint: (e.g., 'git pull ...') before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$
```

simple-project

File Home Share View

Navigation: < > << >> << iauet-student2 >> simple-project >

Name	Date
.git	4/6/2
README.md	4/6/2
students.xml	4/6/2
students.xml	4/6/2

Homegroup

stude

File Edit Format View Help

```
<?xml version="2.0"?>
<?xml-stylesheet type="text/xsl" href="students.xsl"?>
<class>
  <student rollno="393">
    <firstname>Dinkar</firstname>
    <lastname>Kad</lastname>
    <nickname>Dinkar</nickname>
    <marks>85</marks>
  </student>
  <student rollno="493">
    <firstname>Vaneet</firstname>
    <lastname>Gupta</lastname>
    <nickname>Vinni</nickname>
    <marks>95</marks>
  </student>
  <student rollno="593">
    <firstname>Jasvir</firstname>
    <lastname>Singh</lastname>
    <nickname>Jazz</nickname>
    <marks>90</marks>
  </student>
</class>
```

```
MINGW32:/C:/Users/developer/workspaces/iau-et-student2/simple-project

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$ git status
On branch master
Your branch is ahead of 'origin/master' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working directory clean

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$ git fetch
fatal: unable to access 'https://github.com/iau-et-student/simple-project.git/': Could not connect to github.com

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$ git fetch
remote: Counting objects: 6, done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 2), reused 5 (delta 1), pack-reused 0
Unpacking objects: 100% (6/6), done.
From https://github.com/iau-et-student/simple-project
   484752f..9a25f7e  master       -> origin/master

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$ git status
On branch master
Your branch and 'origin/master' have diverged,
and have 1 and 2 different commits each, respectively.
  (use "git pull" to merge the remote branch into yours)

nothing to commit, working directory clean

developer@DEVELOP_PC /C:/Users/developer/workspaces/iau-et-student2/simple-project (master)
$
```

```
developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
```

```
$ git status
```

```
On branch master
```

```
Your branch and 'origin/master' have diverged,  
and have 1 and 2 different commits each, respectively.  
(use "git pull" to merge the remote branch into yours)
```

```
nothing to commit, working directory clean
```

```
developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
```

```
$ git pull
```

```
Auto-merging students.xml
```

```
CONFLICT (content): Merge conflict in students.xml
```

```
Automatic merge failed; fix conflicts and then commit the result.
```

```
developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master|MERGING)
```

```
$ git diff master origin/master
```

```
diff --git a/students.xml b/students.xml
```

```
index 0fb65f9..6fb51c2 100644
```

```
--- a/students.xml
```

```
+++ b/students.xml
```

```
@@ -1,4 +1,4 @@
```

```
-<?xml version="2.0"?>
```

```
+<?xml version="1.1"?>
```

```
<?xml-stylesheet type="text/xsl" href="students.xsl"?>
```

```
<class>
```

```
<student rollno="393">
```

```
@@ -19,4 +19,4 @@
```

```
<nickname>Jazz</nickname>
```

```
<marks>90</marks>
```

```
</student>
```

```
-</class>
```

```
+</class>
```

```
\ No newline at end of file
```

```
developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master|MERGING)
```

```
$
```

```
MINGW32:/C/Users/developer/workspaces/iauet-student2/simple-project
<student rollno="393">
@@ -19,4 +19,4 @@
  <nickname>Jazz</nickname>
  <marks>90</marks>
</student>
-</class>
+</class>
\ No newline at end of file

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master|MERGING)
$ git status
On branch master
Your branch and 'origin/master' have diverged,
and have 1 and 2 different commits each, respectively.
(use "git pull" to merge the remote branch into yours)

All conflicts fixed but you are still merging.
(use "git commit" to conclude merge)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in working directory)

        modified:   students.xml

no changes added to commit (use "git add" and/or "git commit -a")

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master|MERGING)
$ git add students.xml

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master|MERGING)
$ git commit -m "merge students.xml files"
[master 6a4c705] merge students.xml files

developer@DEVELOP_PC /C/Users/developer/workspaces/iauet-student2/simple-project (master)
$ git push
warning: push.default is unset; its implicit value is changing in
Git 2.0 from 'matching' to 'simple'. To squelch this message
and maintain the current behavior after the default changes, use:

    git config --global push.default matching


To squelch this message and adopt the new behavior now, use:
```

```
simple-project
share View
<< iauet-student2 >> simple-project
Name Date
.git 4/6/2
README.md 4/6/2
students.xml 4/6/2
students.xml 4/6/2




File Edit Format View Help
?xml version="1.2"?>
?xml-stylesheet type="text/xsl" href="stuc
class>
<student rollno="393">
  <firstname>Dinkar</firstname>
  <lastname>Kad</lastname>
  <nickname>Dinkar</nickname>
  <marks>85</marks>
</student>
<student rollno="493">
  <firstname>Vaneet</firstname>
  <lastname>Gupta</lastname>
  <nickname>Vinni</nickname>
  <marks>95</marks>
</student>
<student rollno="593">
  <firstname>Jasvir</firstname>
  <lastname>Singh</lastname>
  <nickname>Jazz</nickname>
  <marks>90</marks>
```


```
MINGW32/C:/Users/develop
See 'git help config' and search for '
(the 'simple' mode was introduced in G
'current' instead of 'simple' if you s
fatal: unable to access 'https://github
t: github.com
developer@DEVELOP_PC /C:/Users/develop
$ git push
warning: push.default is unset; its im
Git 2.0 from 'matching' to 'simple'. T
and maintain the current behavior afte
git config --global push.default mat
To squelch this message and adopt the
git config --global push.default sim
When push.default is set to 'matching'
to the remote branches that already ex
In Git 2.0, Git will default to the mo
behavior, which only pushes the curren
remote branch that 'git pull' uses to
See 'git help config' and search for '
(the 'simple' mode was introduced in G
'current' instead of 'simple' if you s
Username for 'https://github.com': iau
Password for 'https://iauet-student2@g
Counting objects: 10, done.
Delta compression using up to 4 thread
Compressing objects: 100% (6/6), done.
Writing objects: 100% (6/6), 723 bytes
Total 6 (delta 2), reused 0 (delta 0)
To https://github.com/iauet-student/si
9a25f7e..6a4c705 master -> master
developer@DEVELOP_PC /C:/Users/develop
$
```






[←](#) [→](#) <https://github.com/iauet-student/simple-project> [iauet-student/simple-project](#)

 This repository

Explore Gist Blog Help

 iauet-student  

 iauet-student / simple-project

 Unwatch   Star  





Description



Short description of this repository

Website


Website for this repository (optional)


Save or Cancel


 7 commits  1 branch  0 releases  1 contributor


 branch: master [simple-project / +](#) 


merge students.xml files


 iauet-student2 authored 20 minutes ago

latest commit 6a4c705621 

 [README.md](#) Initial commit 2 hours ago

 [students.xml](#) [merge students.xml files](#) 20 minutes ago

 [students.xml](#) add students.xml 2 hours ago

 README.md


simple-project


Activate Windows
Go to PC settings to activate Windows.








<https://github.com/iauet-student/simple-project/commit/6a4c7056212d6f04bae47057bb7bc26f7a489...>





HTTPS clone URL

You can clone with [HTTP](#) or [Subversion](#).

 Clone in C

 Download

2:33 AM
4/6/2015