LAB REPORT

NETWORK TRAFFIC ANALYSIS USING HPING3

1. Introduction

HPING3 is a command-line network tool used for network testing, packet generation, and security analysis. It allows users to send customized TCP, UDP, and ICMP packets to a target system.

In this experiment, HPING3 was used in a Kali Linux environment to generate different types of network packets. Wireshark was used to capture and analyze the generated packets and observe the responses from the target machine.

2. Objectives

1. To understand the basic functionality of HPING3.
2. To generate TCP, UDP, and ICMP packets.
3. To test network connectivity between two systems.
4. To observe TCP packet flags such as SYN, ACK, FIN, and RST.
5. To analyze network traffic using Wireshark.
6. To understand how a target system responds to different types of packets.

3. Tools and Environment

Tool	Purpose
Kali Linux	Operating system for performing the experiments
HPING3	Generating customized network packets
Wireshark	Capturing and analyzing network traffic
VMware	Virtual environment for testing

Network configuration recorded in the experiment:

- Attacker machine: 192.168.10.132
- Target machine: 192.168.10.130
- Network interface: eth0

4. Experimental Procedures

Experiment 1: TCP SYN Packet Testing

Command:

```
hping3 -S -p 80 -c 5 192.168.10.130
```

Command explanation:

- -S: Sets the SYN flag in TCP packets.
- -p 80: Specifies destination port 80 (HTTP).
- -c 5: Sends 5 packets.
- 192.168.10.130: Specifies the target IP address.

Observation: The target system responded with TCP SYN-ACK packets. Wireshark captured the outgoing SYN packets and incoming SYN-ACK responses.

Result: The target system was reachable through TCP port 80.

Experiment 2: TCP Port 22 Testing

Command:

```
hping3 -S -p 22 -c 3 192.168.10.130
```

Command explanation:

- -S: Sends TCP SYN packets.
- -p 22: Targets port 22 (SSH).
- -c 3: Sends 3 packets.

Observation: Wireshark captured TCP SYN packets and SYN-ACK responses from the target machine.

Result: The target responded to TCP connection requests on port 22.

Experiment 3: TCP FIN Packet Testing

Command:

```
TCP FIN packet test (refer to the command shown in the source PDF)
```

Command explanation:

- FIN is a TCP flag associated with connection termination.

Observation: Wireshark displayed TCP FIN packets sent from the source machine toward the target system.

Result: The experiment demonstrated how TCP FIN packets can be observed during network analysis.

Experiment 4: TCP Testing with a Spoofed Source Address

Command:

```
hping3 -a 192.168.10.129 -p 80 -S -c 10 -i u100000 192.168.10.130
```

Command explanation:

- -a: Specifies a spoofed source IP address.
- -p 80: Targets port 80.
- -S: Sets the TCP SYN flag.

- -c 10: Sends 10 packets.
- -i u100000: Sets the packet interval to 100,000 microseconds.
- 192.168.10.130: Target IP address.

Observation: The terminal displayed 10 packets transmitted, 0 packets received, and 100% packet loss.

Result: No responses were received during this test. With a spoofed source address, replies may be sent to the forged address rather than the actual sender.

Experiment 5: UDP Packet Testing

Command:

```
hping3 -2 -p 53 -c 4 192.168.10.130
```

Command explanation:

- -2: Enables UDP mode.
- -p 53: Targets port 53 (DNS).
- -c 4: Sends 4 UDP packets.
- 192.168.10.130: Target IP address.

Observation: The terminal displayed 4 packets transmitted, 0 packets received, and 100% packet loss.

Result: No UDP responses were received during this experiment.

Experiment 6: ICMP Packet Testing

Command:

```
hping3 -1 -c 5 192.168.10.130
```

Command explanation:

- -1: Enables ICMP mode.
- -c 5: Sends 5 ICMP packets.
- 192.168.10.130: Target IP address.

Observation: The target system responded to ICMP Echo Requests with ICMP Echo Replies. Wireshark captured both request and reply packets.

Result: Five packets were transmitted and five packets were received, with 0% packet loss.

5. Wireshark Traffic Analysis

Wireshark was used to monitor the packets generated by HPING3. It helped identify packet protocols, source and destination addresses, and TCP flags.

Packet Type	Description
SYN	Requests to establish a TCP connection.
SYN-ACK	Response to a TCP SYN request.
ACK	Acknowledges received TCP data or connection information.
FIN	Indicates termination of a TCP connection.

RST	Resets or refuses a TCP connection.
ICMP Echo Request	Tests network connectivity.
ICMP Echo Reply	Response to an ICMP request.
UDP	Connectionless network communication.

6. Results and Observations

- TCP SYN testing received responses from the target on ports 80 and 22.
- TCP FIN packets were generated and observed in Wireshark.
- The spoofed-source TCP test transmitted 10 packets without receiving responses.
- UDP testing on port 53 transmitted 4 packets without receiving responses.
- ICMP testing successfully transmitted and received 5 packets.
- Wireshark provided a visual representation of the network traffic generated by HPING3.

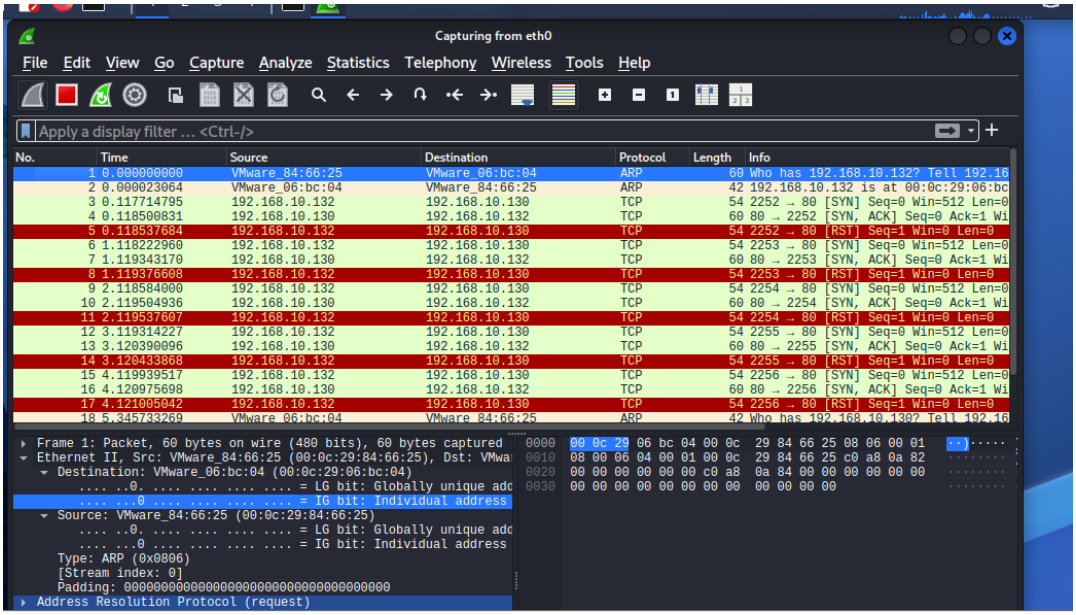
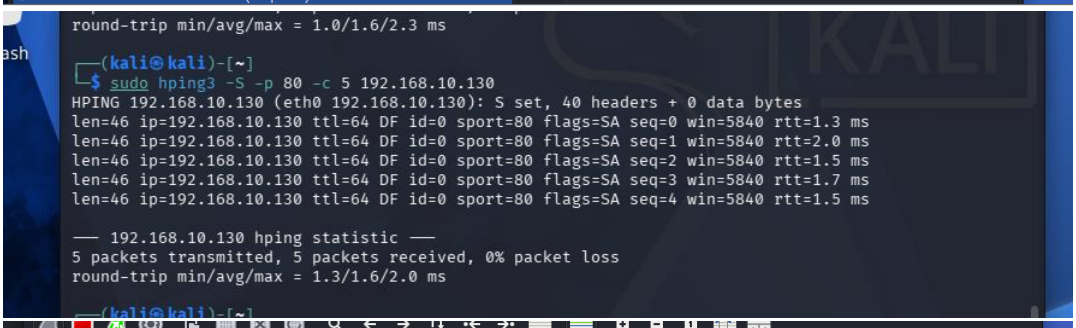
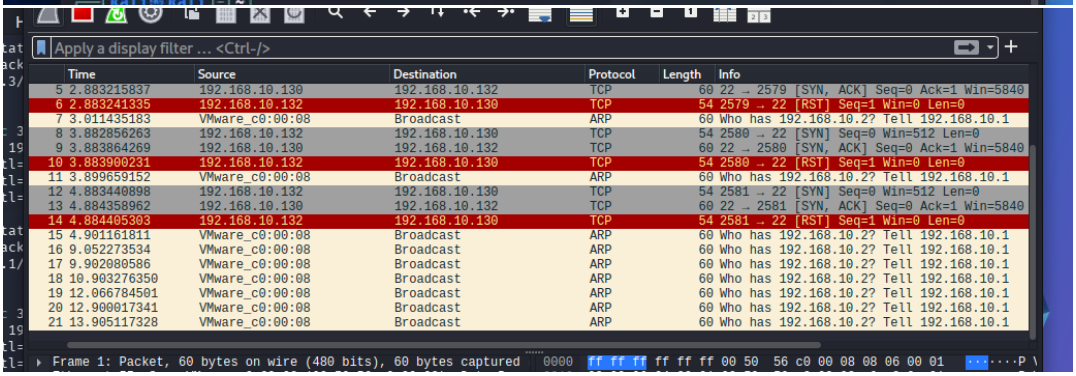
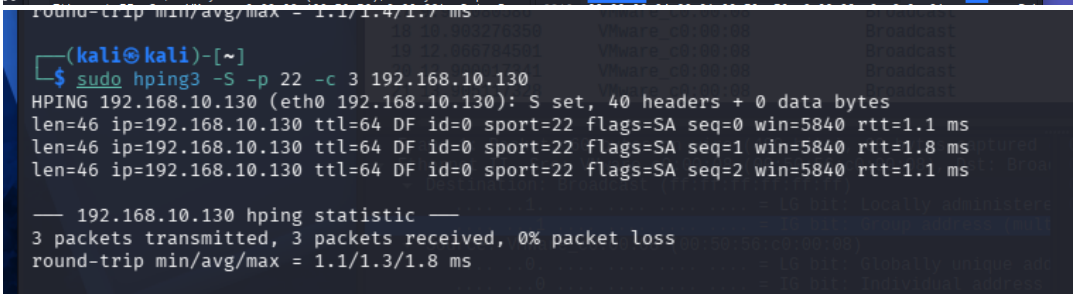
7. Conclusion

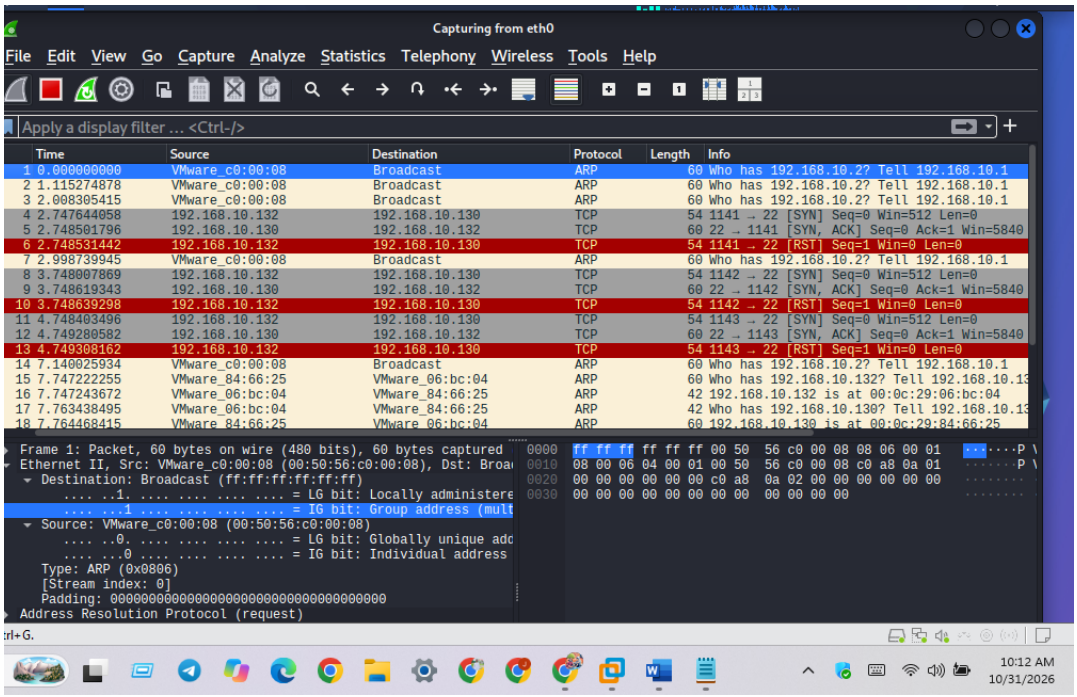
In this laboratory experiment, HPING3 was used to generate different types of network packets, including TCP, UDP, and ICMP. The generated packets were captured and analyzed using Wireshark.

The experiment helped develop an understanding of TCP flags, packet transmission, network connectivity testing, and the behavior of a target system when receiving different types of packets. Overall, this practical exercise improved our understanding of network troubleshooting, packet analysis, and basic network security testing.

8. Precautions

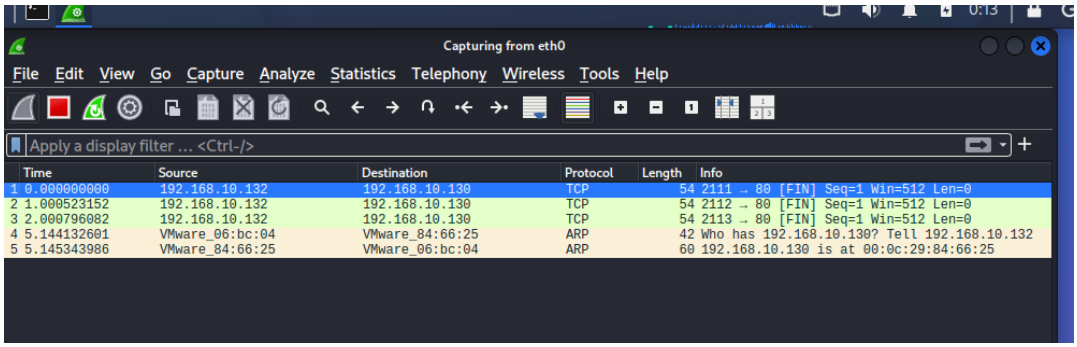
- Perform packet-generation experiments only in an authorized laboratory environment.
- Verify the target IP address before sending packets.
- Use a controlled virtual network for testing.
- Monitor generated traffic using Wireshark.
- Avoid sending excessive packets to production systems.

- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
No. Time Source Destination Protocol Length Info
1 0.000000000 VMware_84:66:25 VMware_06:bc:04 ARP 60 Who has 192.168.10.132? Tell 192.16
2 0.000023064 VMware_06:bc:04 VMware_84:66:25 ARP 42 192.168.10.132 is at 00:0c:29:06:bc
3 0.117714795 192.168.10.132 192.168.10.130 TCP 54 2252 → 80 [SYN] Seq=0 Win=512 Len=0
4 0.118500831 192.168.10.130 192.168.10.132 TCP 60 80 → 2252 [SYN, ACK] Seq=0 Ack=1 Wi
5 0.118537684 192.168.10.132 192.168.10.130 TCP 54 2252 → 80 [RST] Seq=1 Win=0 Len=0
6 1.118222960 192.168.10.132 192.168.10.130 TCP 54 2253 → 80 [SYN] Seq=0 Win=512 Len=0
7 1.119343170 192.168.10.130 192.168.10.132 TCP 60 80 → 2253 [SYN, ACK] Seq=0 Ack=1 Wi
8 1.119376608 192.168.10.132 192.168.10.130 TCP 54 2253 → 80 [RST] Seq=1 Win=0 Len=0
9 2.118584000 192.168.10.132 192.168.10.130 TCP 54 2254 → 80 [SYN] Seq=0 Win=512 Len=0
10 2.119504936 192.168.10.130 192.168.10.132 TCP 60 80 → 2254 [SYN, ACK] Seq=0 Ack=1 Wi
11 2.119537607 192.168.10.132 192.168.10.130 TCP 54 2254 → 80 [RST] Seq=1 Win=0 Len=0
12 3.119314227 192.168.10.132 192.168.10.130 TCP 54 2255 → 80 [SYN] Seq=0 Win=512 Len=0
13 3.120390096 192.168.10.130 192.168.10.132 TCP 60 80 → 2255 [SYN, ACK] Seq=0 Ack=1 Wi
14 3.120433868 192.168.10.132 192.168.10.130 TCP 54 2255 → 80 [RST] Seq=1 Win=0 Len=0
15 4.119939517 192.168.10.132 192.168.10.130 TCP 54 2256 → 80 [SYN] Seq=0 Win=512 Len=0
16 4.120975698 192.168.10.130 192.168.10.132 TCP 60 80 → 2256 [SYN, ACK] Seq=0 Ack=1 Wi
17 4.121005042 192.168.10.132 192.168.10.130 TCP 54 2256 → 80 [RST] Seq=1 Win=0 Len=0
18 5.345733269 VMware_06:bc:04 VMware_84:66:25 ARP 42 Who has 192.168.10.130? Tell 192.16
Frame 1: Packet, 60 bytes on wire (480 bits), 60 bytes captured
Ethernet II, Src: VMware_84:66:25 (00:0c:29:84:66:25), Dst: VMwa
Destination: VMware_06:bc:04 (00:0c:29:06:bc:04)
.... ..0. .... = LG bit: Globally unique add
....0 .... = IG bit: Individual address
Source: VMware_84:66:25 (00:0c:29:84:66:25)
.... ..0. .... = LG bit: Globally unique add
....0 .... = IG bit: Individual address
Type: ARP (0x0806)
[Stream index: 0]
Padding: 00000000000000000000000000000000000000
Address Resolution Protocol (request)
0000 00 0c 29 06 bc 04 00 0c 29 84 66 25 08 06 00 01
0010 08 00 06 04 00 01 00 0c 29 84 66 25 c0 a8 0a 82
0020 00 00 00 00 00 00 c0 a8 0a 84 00 00 00 00 00 00
0030 00 00 00 00 00 00 00 00 00 00 00 00
- 
round-trip min/avg/max = 1.0/1.6/2.3 ms
(kali㉿kali)-[~]
$ sudo hping3 -S -p 80 -c 5 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): S set, 40 headers + 0 data bytes
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=0 win=5840 rtt=1.3 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=1 win=5840 rtt=2.0 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=2 win=5840 rtt=1.5 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=3 win=5840 rtt=1.7 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=4 win=5840 rtt=1.5 ms
— 192.168.10.130 hping statistic —
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.3/1.6/2.0 ms
- 
Apply a display filter ... <Ctrl-/>
Time Source Destination Protocol Length Info
5 2.883215837 192.168.10.130 192.168.10.132 TCP 60 22 → 2579 [SYN, ACK] Seq=0 Ack=1 Win=5840
6 2.883241335 192.168.10.132 192.168.10.130 TCP 54 2579 → 22 [RST] Seq=1 Win=0 Len=0
7 3.011435183 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
8 3.882856263 192.168.10.132 192.168.10.130 TCP 54 2580 → 22 [SYN] Seq=0 Win=512 Len=0
9 3.883864269 192.168.10.130 192.168.10.132 TCP 60 22 → 2580 [SYN, ACK] Seq=0 Ack=1 Win=5840
10 3.883900231 192.168.10.132 192.168.10.130 TCP 54 2580 → 22 [RST] Seq=1 Win=0 Len=0
11 3.899659152 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
12 4.883440898 192.168.10.132 192.168.10.130 TCP 54 2581 → 22 [SYN] Seq=0 Win=512 Len=0
13 4.884358962 192.168.10.130 192.168.10.132 TCP 60 22 → 2581 [SYN, ACK] Seq=0 Ack=1 Win=5840
14 4.884405303 192.168.10.132 192.168.10.130 TCP 54 2581 → 22 [RST] Seq=1 Win=0 Len=0
15 4.901161811 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
16 9.052273534 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
17 9.902080586 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
18 10.903276350 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
19 12.066784501 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
20 12.900017341 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
21 13.905117328 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
Frame 1: Packet, 60 bytes on wire (480 bits), 60 bytes captured
0000 ff ff ff ff ff ff 00 50 56 c0 00 08 08 06 00 01
- 
(kali㉿kali)-[~]
$ sudo hping3 -S -p 22 -c 3 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): S set, 40 headers + 0 data bytes
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=22 flags=SA seq=0 win=5840 rtt=1.1 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=22 flags=SA seq=1 win=5840 rtt=1.8 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=22 flags=SA seq=2 win=5840 rtt=1.1 ms
— 192.168.10.130 hping statistic —
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 1.1/1.3/1.8 ms

- 

- ```
  ┌──(kali㉿kali)-[~]
  └─$ sudo hping3 -S -p 22 -c 3 192.168.10.130
  HPING 192.168.10.130 (eth0 192.168.10.130): S set, 40 headers + 0 data bytes
  len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=22 flags=SA seq=0 win=5840 rtt=1.1 ms
  len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=22 flags=SA seq=1 win=5840 rtt=1.6 ms
  len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=22 flags=SA seq=2 win=5840 rtt=1.2 ms

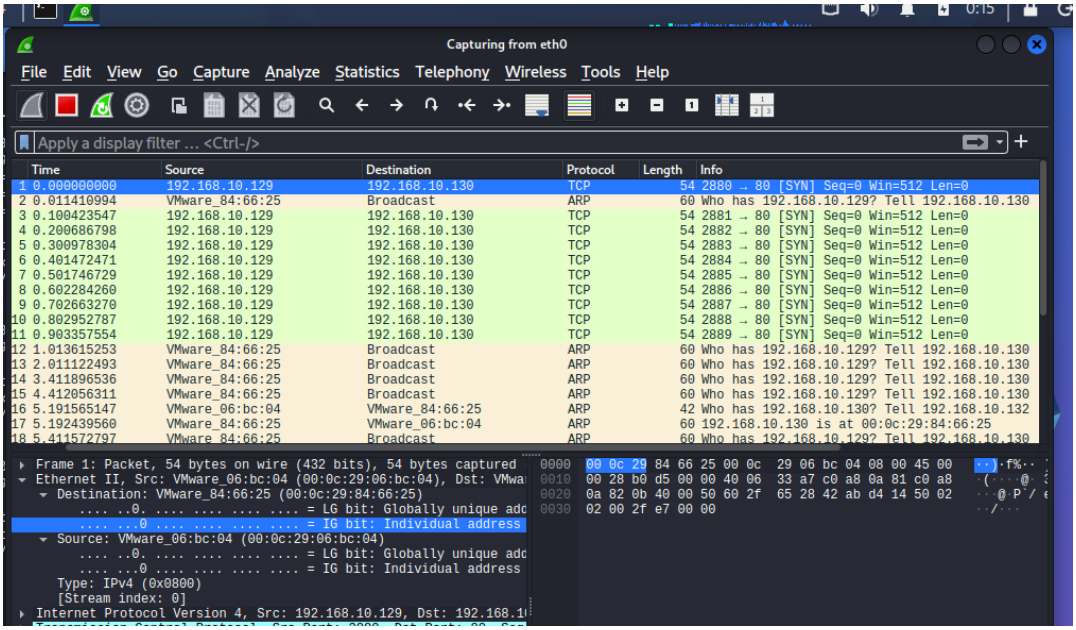
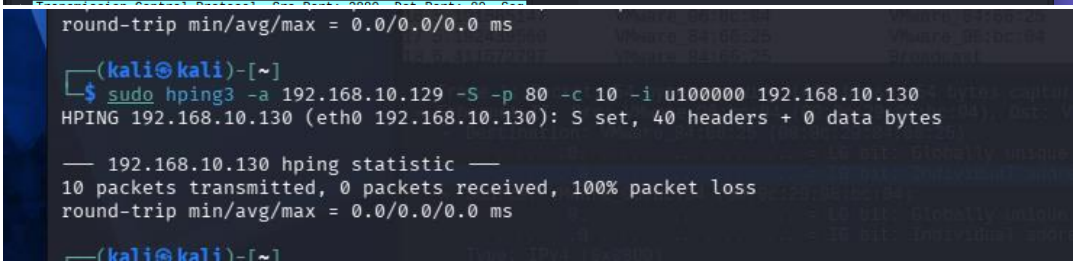
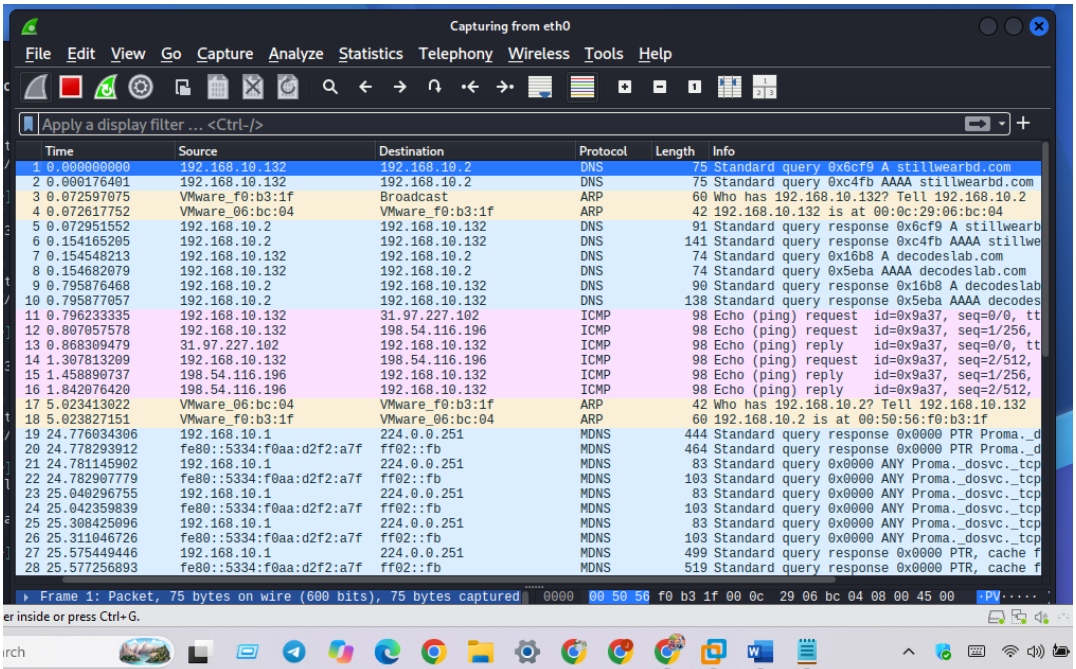
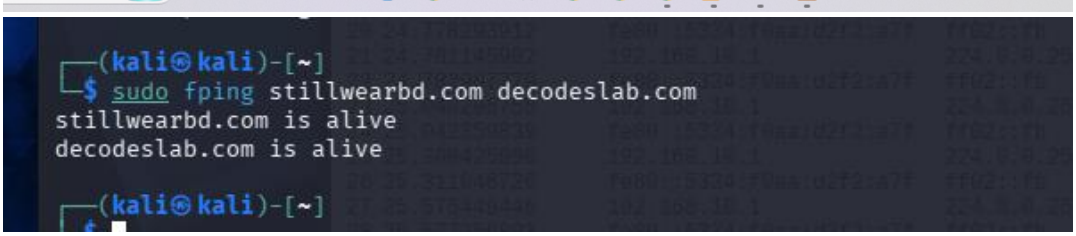
  ── 192.168.10.130 hping statistic ──
  3 packets transmitted, 3 packets received, 0% packet loss
  round-trip min/avg/max = 1.1/1.3/1.6 ms

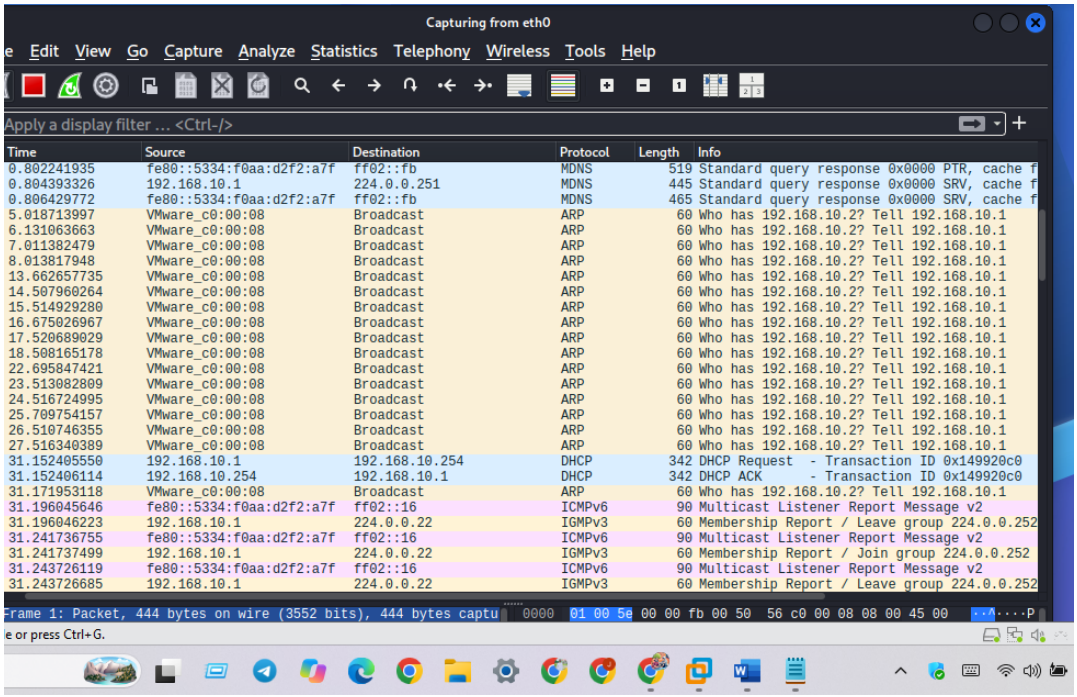
  ┌──(kali㉿kali)-[~]
  ```
- 

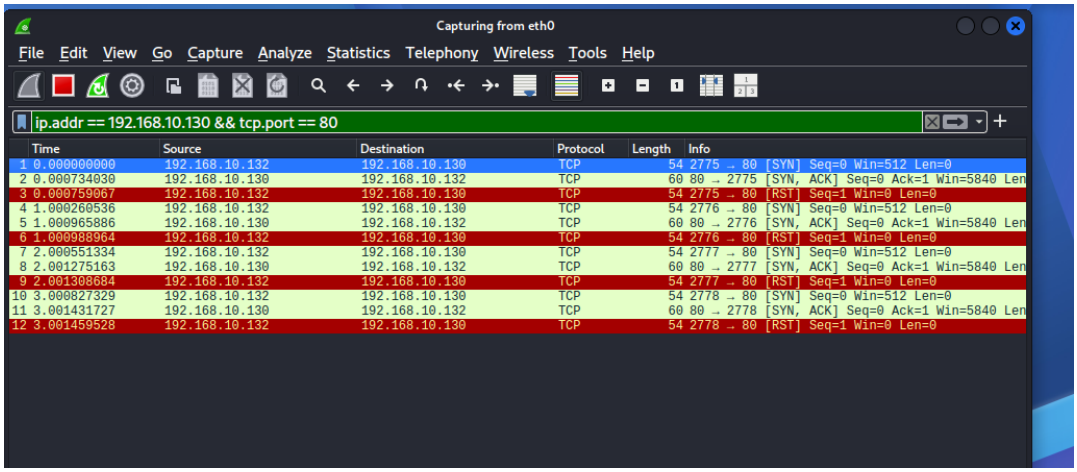
- ```
  ┌──(kali㉿kali)-[~]
  └─$ sudo hping3 -F -p 80 -c 3 192.168.10.130
  HPING 192.168.10.130 (eth0 192.168.10.130): F set, 40 headers + 0 data bytes

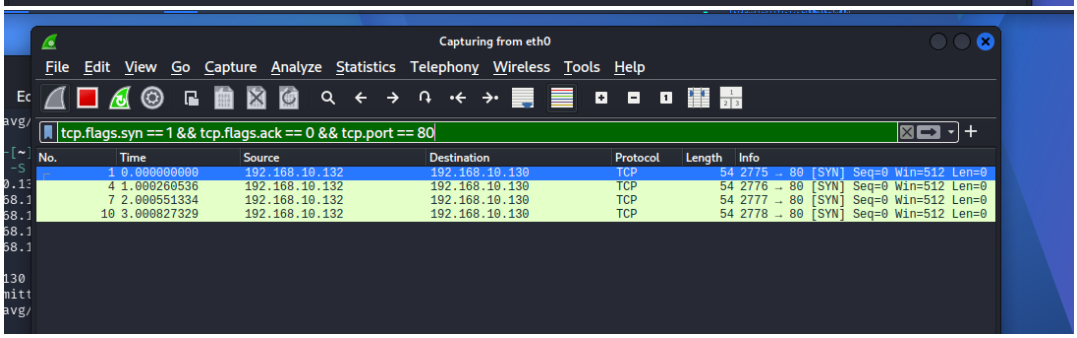
  ── 192.168.10.130 hping statistic ──
  3 packets transmitted, 0 packets received, 100% packet loss
  round-trip min/avg/max = 0.0/0.0/0.0 ms

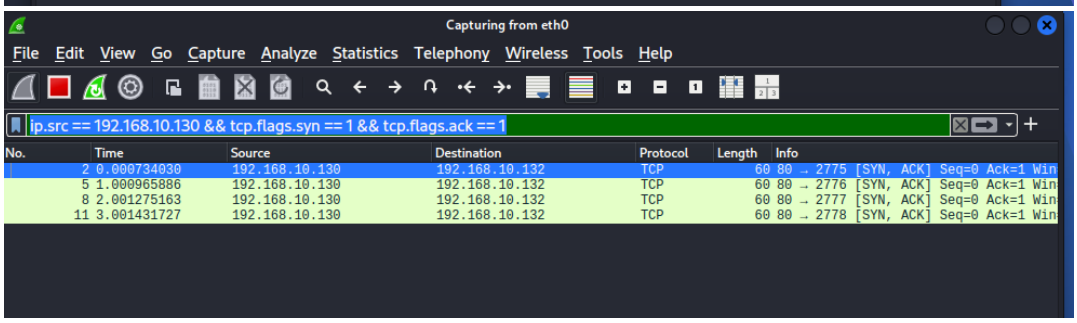
  ┌──(kali㉿kali)-[~]
  └─$
  ```

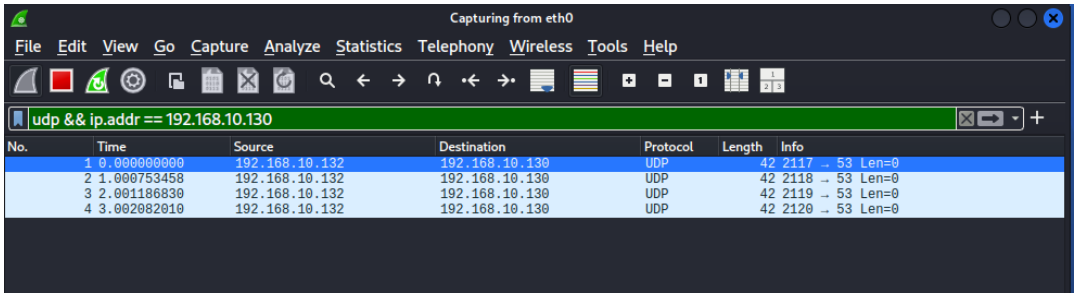
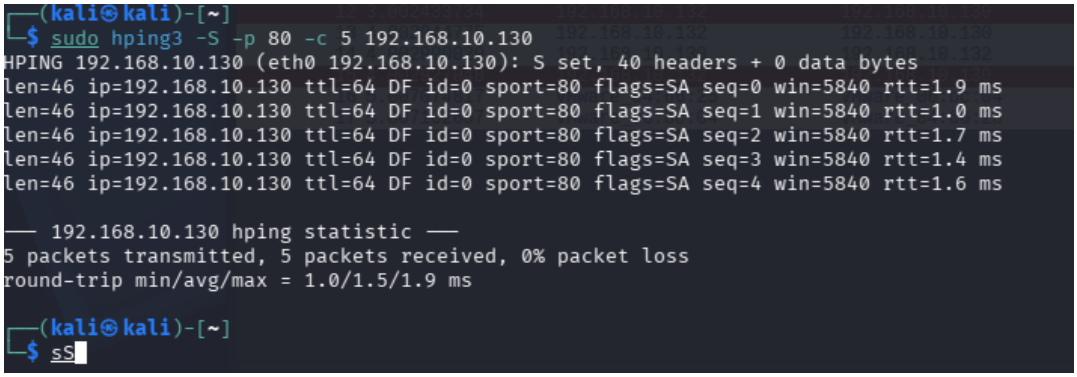
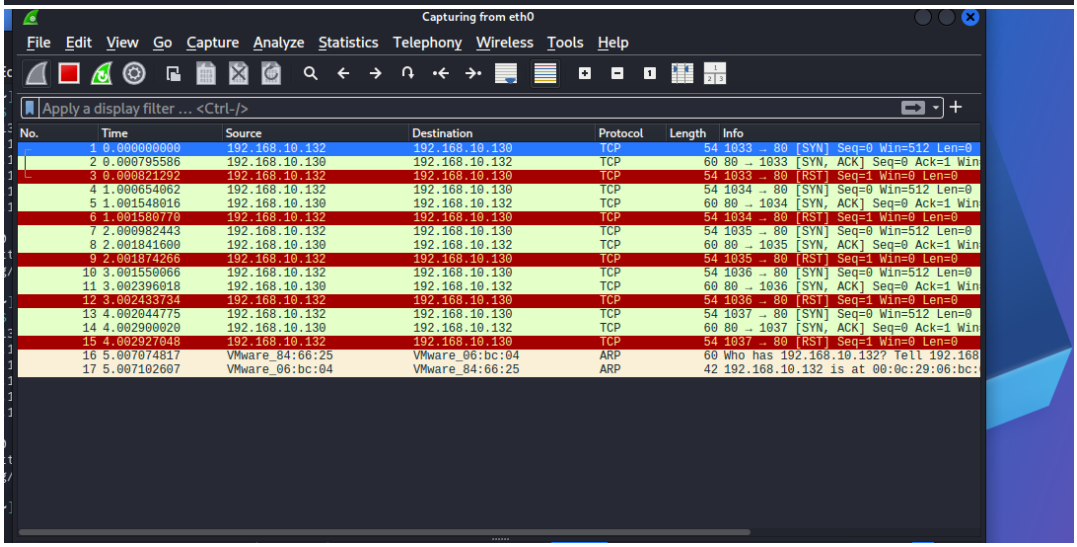
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.129 192.168.10.130 TCP 54 2880 → 80 [SYN] Seq=0 Win=512 Len=0
2 0.011410994 VMware_84:66:25 Broadcast ARP 60 Who has 192.168.10.129? Tell 192.168.10.130
3 0.100423547 192.168.10.129 192.168.10.130 TCP 54 2881 → 80 [SYN] Seq=0 Win=512 Len=0
4 0.200686798 192.168.10.129 192.168.10.130 TCP 54 2882 → 80 [SYN] Seq=0 Win=512 Len=0
5 0.300978304 192.168.10.129 192.168.10.130 TCP 54 2883 → 80 [SYN] Seq=0 Win=512 Len=0
6 0.401472471 192.168.10.129 192.168.10.130 TCP 54 2884 → 80 [SYN] Seq=0 Win=512 Len=0
7 0.501746729 192.168.10.129 192.168.10.130 TCP 54 2885 → 80 [SYN] Seq=0 Win=512 Len=0
8 0.602284260 192.168.10.129 192.168.10.130 TCP 54 2886 → 80 [SYN] Seq=0 Win=512 Len=0
9 0.702663270 192.168.10.129 192.168.10.130 TCP 54 2887 → 80 [SYN] Seq=0 Win=512 Len=0
10 0.802952787 192.168.10.129 192.168.10.130 TCP 54 2888 → 80 [SYN] Seq=0 Win=512 Len=0
11 0.903357554 192.168.10.129 192.168.10.130 TCP 54 2889 → 80 [SYN] Seq=0 Win=512 Len=0
12 1.013615253 VMware_84:66:25 Broadcast ARP 60 Who has 192.168.10.129? Tell 192.168.10.130
13 2.011122493 VMware_84:66:25 Broadcast ARP 60 Who has 192.168.10.129? Tell 192.168.10.130
14 3.411896536 VMware_84:66:25 Broadcast ARP 60 Who has 192.168.10.129? Tell 192.168.10.130
15 4.412056311 VMware_84:66:25 Broadcast ARP 60 Who has 192.168.10.129? Tell 192.168.10.130
16 5.191565147 VMware_06:bc:04 VMware_84:66:25 ARP 42 Who has 192.168.10.130? Tell 192.168.10.132
17 5.192439560 VMware_84:66:25 VMware_06:bc:04 ARP 60 192.168.10.130 is at 00:0c:29:84:66:25
18 5.411572797 VMware_84:66:25 Broadcast ARP 60 Who has 192.168.10.129? Tell 192.168.10.130
Frame 1: Packet, 54 bytes on wire (432 bits), 54 bytes captured
Ethernet II, Src: VMware_06:bc:04 (00:0c:29:06:bc:04), Dst: VMwa
Destination: VMware_84:66:25 (00:0c:29:84:66:25)
.... ..0. .... = LG bit: Globally unique adc
....0 .... = IG bit: Individual address
Source: VMware_06:bc:04 (00:0c:29:06:bc:04)
.... ..0. .... = LG bit: Globally unique adc
....0 .... = IG bit: Individual address
Type: IPv4 (0x0800)
[Stream index: 0]
Internet Protocol Version 4, Src: 192.168.10.129, Dst: 192.168.1
0000 00 0c 29 84 66 25 00 0c 29 06 bc 04 08 00 45 00
0010 00 28 b0 d5 00 00 40 06 33 a7 c0 a8 0a 81 c0 a8
0020 0a 82 0b 40 00 50 60 2f 65 28 42 ab d4 14 50 02
0030 02 00 2f e7 00 00
- 
round-trip min/avg/max = 0.0/0.0/0.0 ms
(kali㉿kali)-[~]
$ sudo hping3 -a 192.168.10.129 -S -p 80 -c 10 -i u100000 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): S set, 40 headers + 0 data bytes
— 192.168.10.130 hping statistic —
10 packets transmitted, 0 packets received, 100% packet loss
round-trip min/avg/max = 0.0/0.0/0.0 ms
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.2 DNS 75 Standard query 0x6cf9 A stillwearbd.com
2 0.000176401 192.168.10.132 192.168.10.2 DNS 75 Standard query 0xc4fb AAAA stillwearbd.com
3 0.072597075 VMware_f0:b3:1f Broadcast ARP 60 Who has 192.168.10.132? Tell 192.168.10.2
4 0.072617752 VMware_06:bc:04 VMware_f0:b3:1f ARP 42 192.168.10.132 is at 00:0c:29:06:bc:04
5 0.072951552 192.168.10.2 192.168.10.132 DNS 91 Standard query response 0x6cf9 A stillwearb
6 0.154165205 192.168.10.2 192.168.10.132 DNS 141 Standard query response 0xc4fb AAAA stillwe
7 0.154548213 192.168.10.132 192.168.10.2 DNS 74 Standard query 0x16b8 A decodeslab.com
8 0.154682079 192.168.10.132 192.168.10.2 DNS 74 Standard query 0x5eba AAAA decodeslab.com
9 0.795876468 192.168.10.2 192.168.10.132 DNS 90 Standard query response 0x16b8 A decodeslab
10 0.795877057 192.168.10.2 192.168.10.132 DNS 138 Standard query response 0x5eba AAAA decodes
11 0.796233335 192.168.10.132 31.97.227.102 ICMP 98 Echo (ping) request id=0x9a37, seq=0/0, tt
12 0.807057578 192.168.10.132 198.54.116.196 ICMP 98 Echo (ping) request id=0x9a37, seq=1/256,
13 0.868309479 31.97.227.102 192.168.10.132 ICMP 98 Echo (ping) reply id=0x9a37, seq=0/0, tt
14 1.307813209 192.168.10.132 198.54.116.196 ICMP 98 Echo (ping) request id=0x9a37, seq=2/512,
15 1.458890737 198.54.116.196 192.168.10.132 ICMP 98 Echo (ping) reply id=0x9a37, seq=1/256,
16 1.842076420 198.54.116.196 192.168.10.132 ICMP 98 Echo (ping) reply id=0x9a37, seq=2/512,
17 5.023413022 VMware_06:bc:04 VMware_f0:b3:1f ARP 42 Who has 192.168.10.2? Tell 192.168.10.132
18 5.023827151 VMware_f0:b3:1f VMware_06:bc:04 ARP 60 192.168.10.2 is at 00:50:56:f0:b3:1f
19 24.776034306 192.168.10.1 224.0.0.251 MDNS 444 Standard query response 0x0000 PTR Proma._d
20 24.778293912 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 464 Standard query response 0x0000 PTR Proma._d
21 24.781145902 192.168.10.1 224.0.0.251 MDNS 83 Standard query 0x0000 ANY Proma._dosvc._tcp
22 24.782907779 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 103 Standard query 0x0000 ANY Proma._dosvc._tcp
23 25.040296755 192.168.10.1 224.0.0.251 MDNS 83 Standard query 0x0000 ANY Proma._dosvc._tcp
24 25.042359839 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 103 Standard query 0x0000 ANY Proma._dosvc._tcp
25 25.308425096 192.168.10.1 224.0.0.251 MDNS 83 Standard query 0x0000 ANY Proma._dosvc._tcp
26 25.311046726 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 103 Standard query 0x0000 ANY Proma._dosvc._tcp
27 25.575449446 192.168.10.1 224.0.0.251 MDNS 499 Standard query response 0x0000 PTR, cache f
28 25.577256893 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 519 Standard query response 0x0000 PTR, cache f
Frame 1: Packet, 75 bytes on wire (600 bits), 75 bytes captured
0000 00 50 56 f0 b3 1f 00 0c 29 06 bc 04 08 00 45 00
er inside or press Ctrl+G.
- 
(kali㉿kali)-[~]
$ sudo fping stillwearbd.com decodeslab.com
stillwearbd.com is alive
decodeslab.com is alive
(kali㉿kali)-[~]

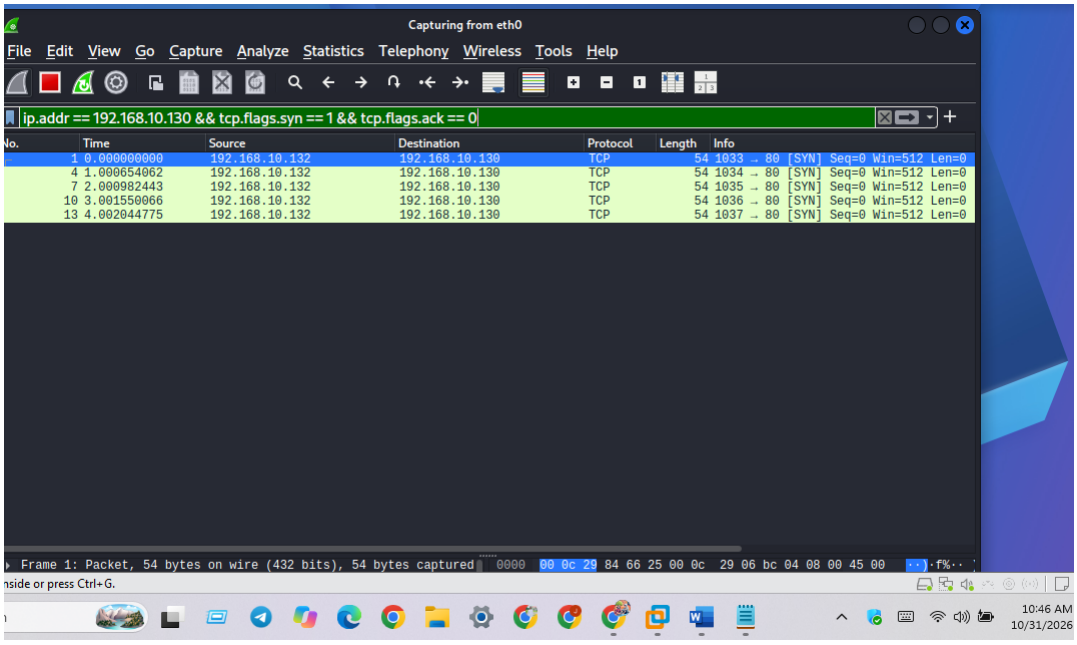
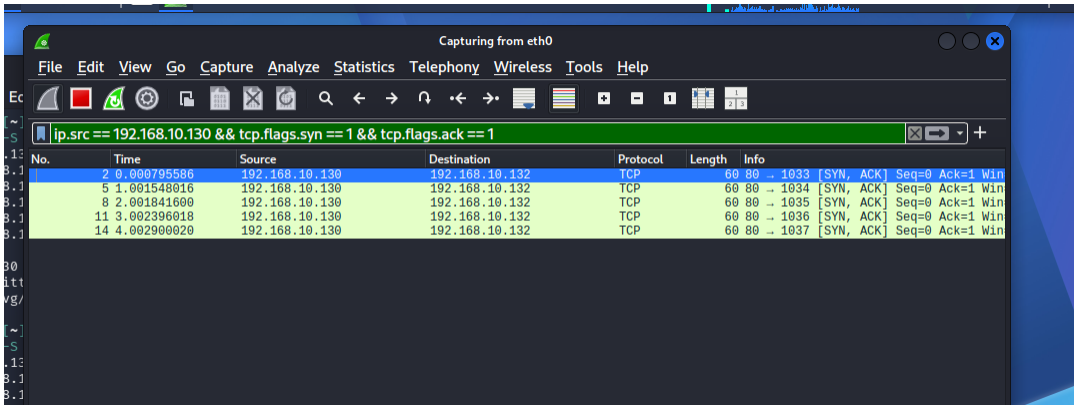
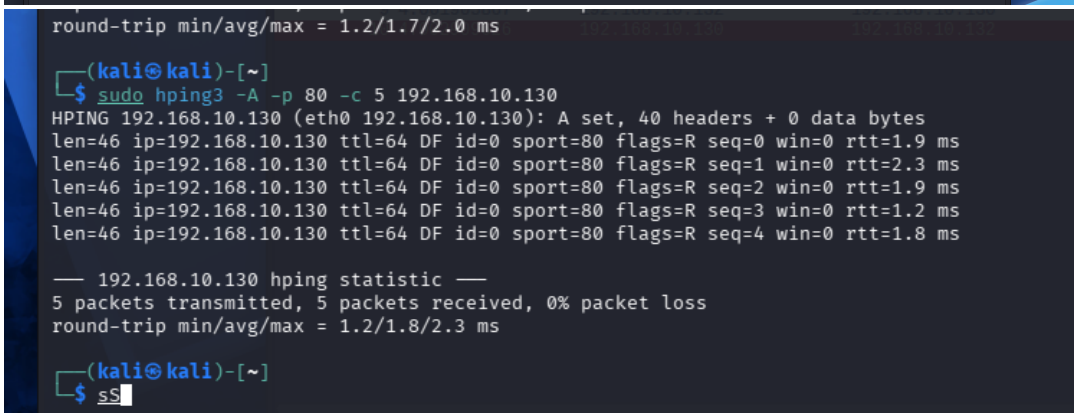

Capturing from eth0
e Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
Time Source Destination Protocol Length Info
0.802241935 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 519 Standard query response 0x0000 PTR, cache f
0.804393326 192.168.10.1 224.0.0.251 MDNS 445 Standard query response 0x0000 SRV, cache f
0.806429772 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 465 Standard query response 0x0000 SRV, cache f
5.018713997 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
6.131063663 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
7.011382479 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
8.013817948 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
13.662657735 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
14.507960264 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
15.514929280 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
16.675026967 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
17.520689029 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
18.508165178 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
22.695847421 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
23.513082809 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
24.516724995 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
25.709754157 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
26.510746355 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
27.516340389 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
31.152405550 192.168.10.1 192.168.10.254 DHCP 342 DHCP Request - Transaction ID 0x149920c0
31.152406114 192.168.10.254 192.168.10.1 DHCP 342 DHCP ACK - Transaction ID 0x149920c0
31.171953118 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
31.196045646 fe80::5334:f0aa:d2f2:a7f ff02::16 ICMPv6 90 Multicast Listener Report Message v2
31.196046223 192.168.10.1 224.0.0.22 IGMPv3 60 Membership Report / Leave group 224.0.0.252
31.241736755 fe80::5334:f0aa:d2f2:a7f ff02::16 ICMPv6 90 Multicast Listener Report Message v2
31.241737499 192.168.10.1 224.0.0.22 IGMPv3 60 Membership Report / Join group 224.0.0.252
31.243726119 fe80::5334:f0aa:d2f2:a7f ff02::16 ICMPv6 90 Multicast Listener Report Message v2
31.243726685 192.168.10.1 224.0.0.22 IGMPv3 60 Membership Report / Leave group 224.0.0.252
Frame 1: Packet, 444 bytes on wire (3552 bits), 444 bytes captu 0000 01 00 5e 00 00 fb 00 50 56 c0 00 08 08 00 45 00
e or press Ctrl+G.

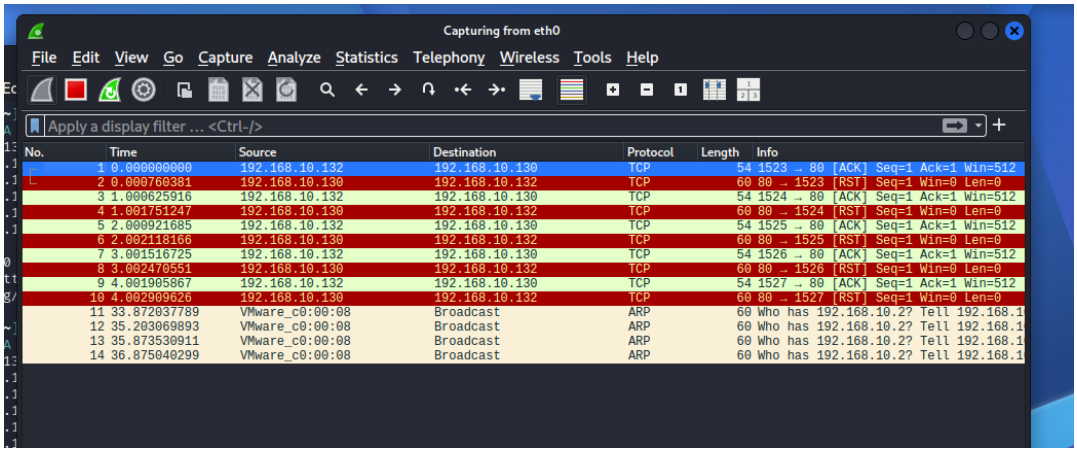
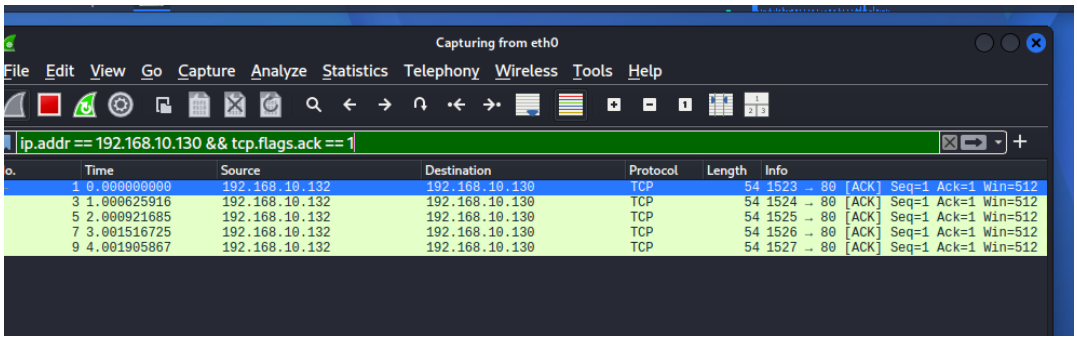
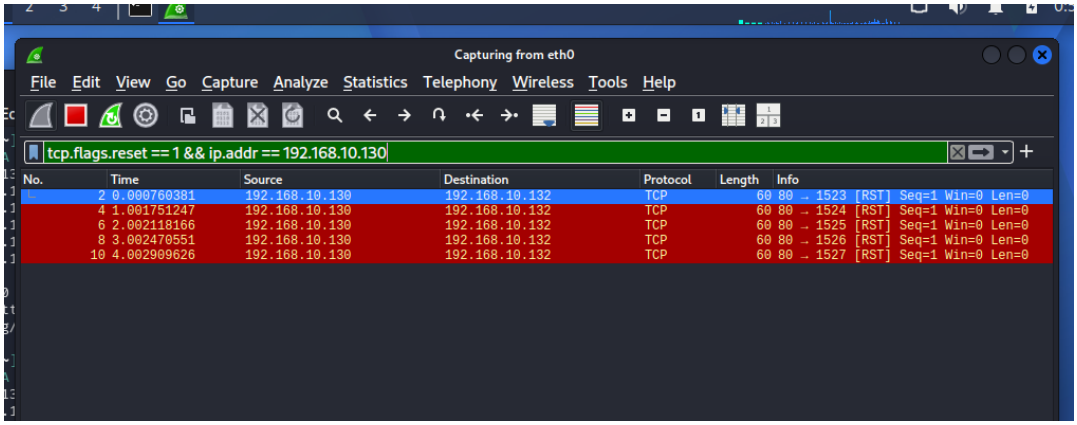
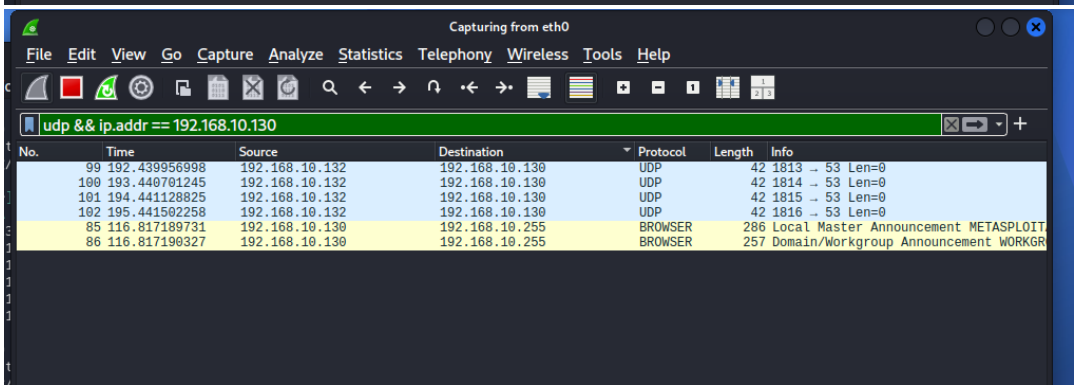

Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.addr == 192.168.10.130 && tcp.port == 80
Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 2775 → 80 [SYN] Seq=0 Win=512 Len=0
2 0.000734030 192.168.10.130 192.168.10.132 TCP 60 80 → 2775 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len
3 0.000759067 192.168.10.132 192.168.10.130 TCP 54 2775 → 80 [RST] Seq=1 Win=0 Len=0
4 1.000260536 192.168.10.132 192.168.10.130 TCP 54 2776 → 80 [SYN] Seq=0 Win=512 Len=0
5 1.000965886 192.168.10.130 192.168.10.132 TCP 60 80 → 2776 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len
6 1.000988964 192.168.10.132 192.168.10.130 TCP 54 2776 → 80 [RST] Seq=1 Win=0 Len=0
7 2.000551334 192.168.10.132 192.168.10.130 TCP 54 2777 → 80 [SYN] Seq=0 Win=512 Len=0
8 2.001275163 192.168.10.130 192.168.10.132 TCP 60 80 → 2777 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len
9 2.001308684 192.168.10.132 192.168.10.130 TCP 54 2777 → 80 [RST] Seq=1 Win=0 Len=0
10 3.000827329 192.168.10.132 192.168.10.130 TCP 54 2778 → 80 [SYN] Seq=0 Win=512 Len=0
11 3.001431727 192.168.10.130 192.168.10.132 TCP 60 80 → 2778 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len
12 3.001459528 192.168.10.132 192.168.10.130 TCP 54 2778 → 80 [RST] Seq=1 Win=0 Len=0


Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.flags.syn == 1 && tcp.flags.ack == 0 && tcp.port == 80
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 2775 → 80 [SYN] Seq=0 Win=512 Len=0
4 1.000260536 192.168.10.132 192.168.10.130 TCP 54 2776 → 80 [SYN] Seq=0 Win=512 Len=0
7 2.000551334 192.168.10.132 192.168.10.130 TCP 54 2777 → 80 [SYN] Seq=0 Win=512 Len=0
10 3.000827329 192.168.10.132 192.168.10.130 TCP 54 2778 → 80 [SYN] Seq=0 Win=512 Len=0


Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.src == 192.168.10.130 && tcp.flags.syn == 1 && tcp.flags.ack == 1
No. Time Source Destination Protocol Length Info
2 0.000734030 192.168.10.130 192.168.10.132 TCP 60 80 → 2775 [SYN, ACK] Seq=0 Ack=1 Win
5 1.000965886 192.168.10.130 192.168.10.132 TCP 60 80 → 2776 [SYN, ACK] Seq=0 Ack=1 Win
8 2.001275163 192.168.10.130 192.168.10.132 TCP 60 80 → 2777 [SYN, ACK] Seq=0 Ack=1 Win
11 3.001431727 192.168.10.130 192.168.10.132 TCP 60 80 → 2778 [SYN, ACK] Seq=0 Ack=1 Win

- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
udp && ip.addr == 192.168.10.130
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 UDP 42 2117 → 53 Len=0
2 1.000753458 192.168.10.132 192.168.10.130 UDP 42 2118 → 53 Len=0
3 2.001186830 192.168.10.132 192.168.10.130 UDP 42 2119 → 53 Len=0
4 3.002082010 192.168.10.132 192.168.10.130 UDP 42 2120 → 53 Len=0
- 
┌──(kali㉿kali)-[~]
└─$ sudo hping3 -S -p 80 -c 5 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): S set, 40 headers + 0 data bytes
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=0 win=5840 rtt=1.9 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=1 win=5840 rtt=1.0 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=2 win=5840 rtt=1.7 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=3 win=5840 rtt=1.4 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=4 win=5840 rtt=1.6 ms
— 192.168.10.130 hping statistic —
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.0/1.5/1.9 ms
┌──(kali㉿kali)-[~]
└─$ sS
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1033 → 80 [SYN] Seq=0 Win=512 Len=0
2 0.000795586 192.168.10.130 192.168.10.132 TCP 60 80 → 1033 [SYN, ACK] Seq=0 Ack=1 Win
3 0.000821292 192.168.10.132 192.168.10.130 TCP 54 1033 → 80 [RST] Seq=1 Win=0 Len=0
4 1.000654062 192.168.10.132 192.168.10.130 TCP 54 1034 → 80 [SYN] Seq=0 Win=512 Len=0
5 1.001548016 192.168.10.130 192.168.10.132 TCP 60 80 → 1034 [SYN, ACK] Seq=0 Ack=1 Win
6 1.001580770 192.168.10.132 192.168.10.130 TCP 54 1034 → 80 [RST] Seq=1 Win=0 Len=0
7 2.000982443 192.168.10.132 192.168.10.130 TCP 54 1035 → 80 [SYN] Seq=0 Win=512 Len=0
8 2.001841600 192.168.10.130 192.168.10.132 TCP 60 80 → 1035 [SYN, ACK] Seq=0 Ack=1 Win
9 2.001874266 192.168.10.132 192.168.10.130 TCP 54 1035 → 80 [RST] Seq=1 Win=0 Len=0
10 3.001550066 192.168.10.132 192.168.10.130 TCP 54 1036 → 80 [SYN] Seq=0 Win=512 Len=0
11 3.002396018 192.168.10.130 192.168.10.132 TCP 60 80 → 1036 [SYN, ACK] Seq=0 Ack=1 Win
12 3.002433734 192.168.10.132 192.168.10.130 TCP 54 1036 → 80 [RST] Seq=1 Win=0 Len=0
13 4.002044775 192.168.10.132 192.168.10.130 TCP 54 1037 → 80 [SYN] Seq=0 Win=512 Len=0
14 4.002900020 192.168.10.130 192.168.10.132 TCP 60 80 → 1037 [SYN, ACK] Seq=0 Ack=1 Win
15 4.002927048 192.168.10.132 192.168.10.130 TCP 54 1037 → 80 [RST] Seq=1 Win=0 Len=0
16 5.007074817 VMware_84:66:25 VMware_06:bc:04 ARP 60 Who has 192.168.10.132? Tell 192.168
17 5.007102607 VMware_06:bc:04 VMware_84:66:25 ARP 42 192.168.10.132 is at 00:0c:29:06:bc:

- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.addr == 192.168.10.130 && tcp.flags.syn == 1 && tcp.flags.ack == 0
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1033 → 80 [SYN] Seq=0 Win=512 Len=0
4 1.000654062 192.168.10.132 192.168.10.130 TCP 54 1034 → 80 [SYN] Seq=0 Win=512 Len=0
7 2.000982443 192.168.10.132 192.168.10.130 TCP 54 1035 → 80 [SYN] Seq=0 Win=512 Len=0
10 3.001550066 192.168.10.132 192.168.10.130 TCP 54 1036 → 80 [SYN] Seq=0 Win=512 Len=0
13 4.002044775 192.168.10.132 192.168.10.130 TCP 54 1037 → 80 [SYN] Seq=0 Win=512 Len=0
Frame 1: Packet, 54 bytes on wire (432 bits), 54 bytes captured
0000 00 0c 29 84 66 25 00 0c 29 06 bc 04 08 00 45 00
10:46 AM
10/31/2026
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.src == 192.168.10.130 && tcp.flags.syn == 1 && tcp.flags.ack == 1
No. Time Source Destination Protocol Length Info
2 0.000795586 192.168.10.130 192.168.10.132 TCP 60 80 → 1033 [SYN, ACK] Seq=0 Ack=1 Win
5 1.001548016 192.168.10.130 192.168.10.132 TCP 60 80 → 1034 [SYN, ACK] Seq=0 Ack=1 Win
8 2.001841600 192.168.10.130 192.168.10.132 TCP 60 80 → 1035 [SYN, ACK] Seq=0 Ack=1 Win
11 3.002396018 192.168.10.130 192.168.10.132 TCP 60 80 → 1036 [SYN, ACK] Seq=0 Ack=1 Win
14 4.002900020 192.168.10.130 192.168.10.132 TCP 60 80 → 1037 [SYN, ACK] Seq=0 Ack=1 Win
- 
round-trip min/avg/max = 1.2/1.7/2.0 ms
(kali㉿kali)-[~]
$ sudo hping3 -A -p 80 -c 5 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): A set, 40 headers + 0 data bytes
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=R seq=0 win=0 rtt=1.9 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=R seq=1 win=0 rtt=2.3 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=R seq=2 win=0 rtt=1.9 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=R seq=3 win=0 rtt=1.2 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=R seq=4 win=0 rtt=1.8 ms
— 192.168.10.130 hping statistic —
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.2/1.8/2.3 ms
(kali㉿kali)-[~]
$ sS
-

- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
3 1.000625916 192.168.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
5 2.000921685 192.168.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
7 3.001516725 192.168.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
9 4.001905867 192.168.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
11 33.872037789 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.1
12 35.203069893 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.1
13 35.873530911 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.1
14 36.875040299 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.1
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.addr == 192.168.10.130 && tcp.flags.ack == 1
Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512
3 1.000625916 192.168.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512
5 2.000921685 192.168.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512
7 3.001516725 192.168.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512
9 4.001905867 192.168.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.flags.reset == 1 && ip.addr == 192.168.10.130
No. Time Source Destination Protocol Length Info
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
udp && ip.addr == 192.168.10.130
No. Time Source Destination Protocol Length Info
99 192.439956998 192.168.10.132 192.168.10.130 UDP 42 1813 → 53 Len=0
100 193.440701245 192.168.10.132 192.168.10.130 UDP 42 1814 → 53 Len=0
101 194.441128825 192.168.10.132 192.168.10.130 UDP 42 1815 → 53 Len=0
102 195.441502258 192.168.10.132 192.168.10.130 UDP 42 1816 → 53 Len=0
85 116.817189731 192.168.10.130 192.168.10.255 BROWSER 286 Local Master Announcement METASPLOIT
86 116.817190327 192.168.10.130 192.168.10.255 BROWSER 257 Domain/Workgroup Announcement WORKGR

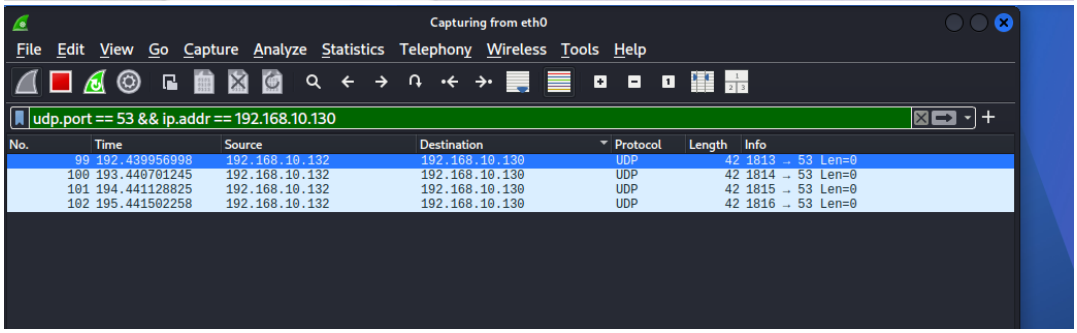
```
round-trip min/avg/max = 1.2/1.8/2.3 ms

┌──(kali㉿kali)-[~]
└─$ sudo hping3 --udp -p 53 -c 4 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): udp mode set, 28 headers + 0 data bytes

--- 192.168.10.130 hping statistic ---
4 packets transmitted, 0 packets received, 100% packet loss
round-trip min/avg/max = 0.0/0.0/0.0 ms

┌──(kali㉿kali)-[~]
└─$ sS
```

- this VM, move the mouse pointer inside or press Ctrl+G.



-

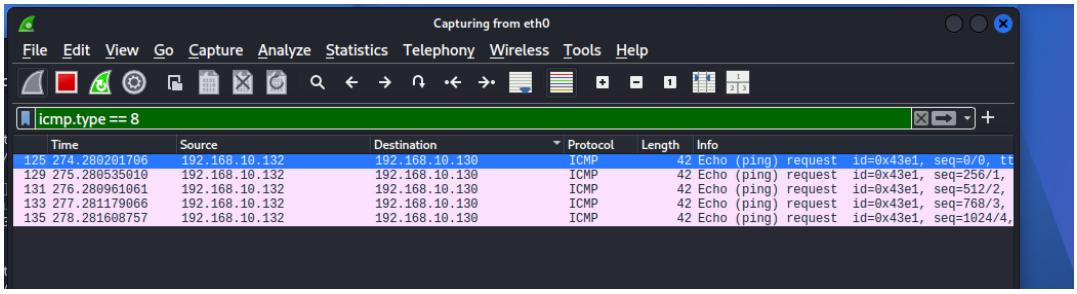
```
round-trip min/avg/max = 0.0/0.0/0.0 ms

┌──(kali㉿kali)-[~]
└─$ sudo hping3 -1 -c 5 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): icmp mode set, 28 headers + 0 data bytes
len=46 ip=192.168.10.130 ttl=64 id=1885 icmp_seq=0 rtt=11.5 ms
len=46 ip=192.168.10.130 ttl=64 id=1886 icmp_seq=1 rtt=1.2 ms
len=46 ip=192.168.10.130 ttl=64 id=1887 icmp_seq=2 rtt=2.0 ms
len=46 ip=192.168.10.130 ttl=64 id=1888 icmp_seq=3 rtt=1.5 ms
len=46 ip=192.168.10.130 ttl=64 id=1889 icmp_seq=4 rtt=2.0 ms

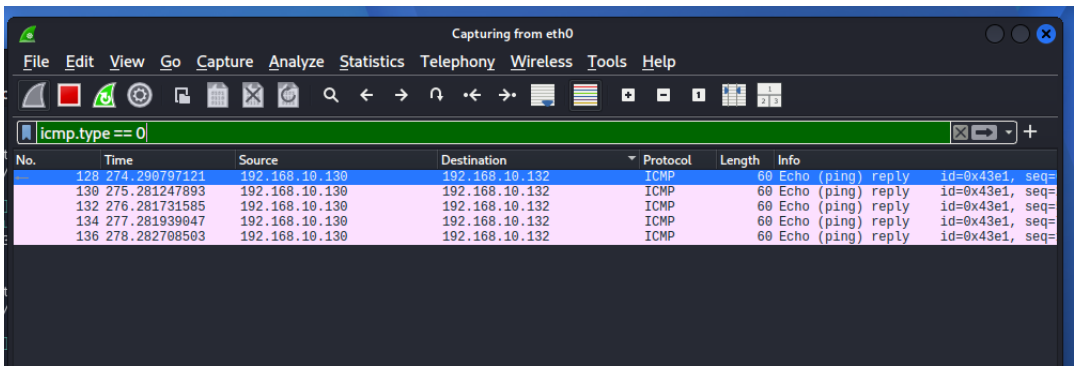
--- 192.168.10.130 hping statistic ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.2/3.7/11.5 ms

┌──(kali㉿kali)-[~]
```

-

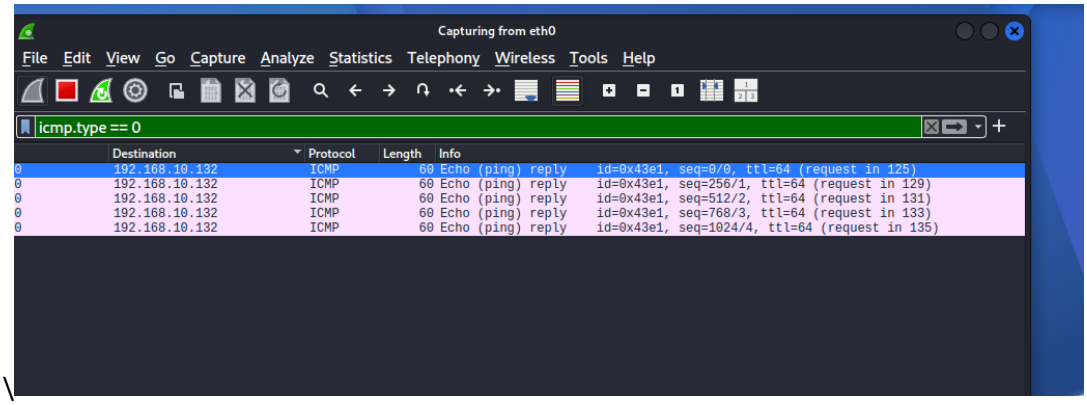


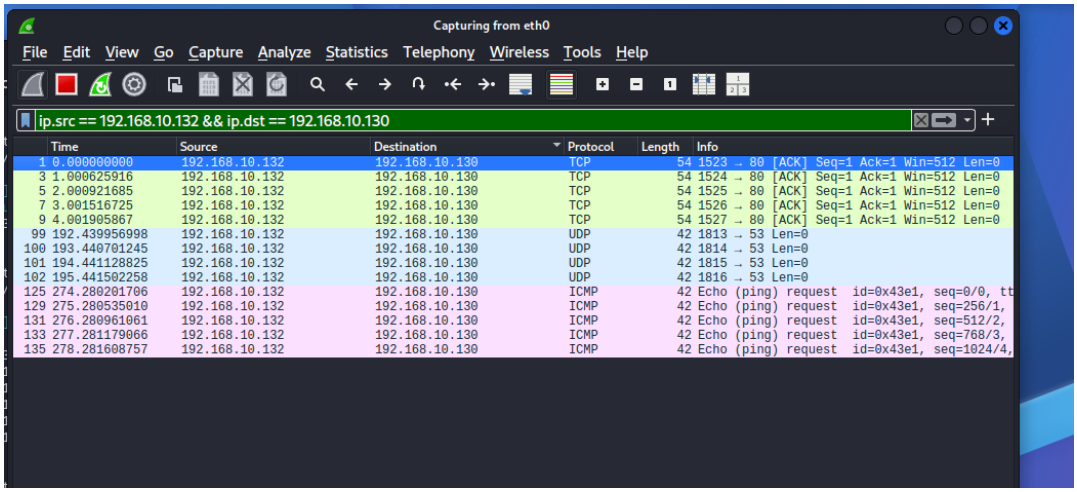
-
-

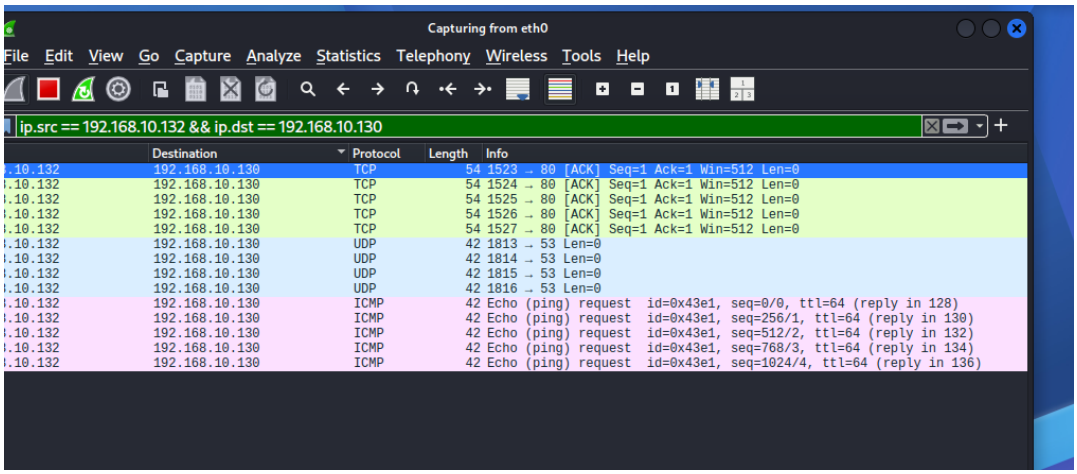


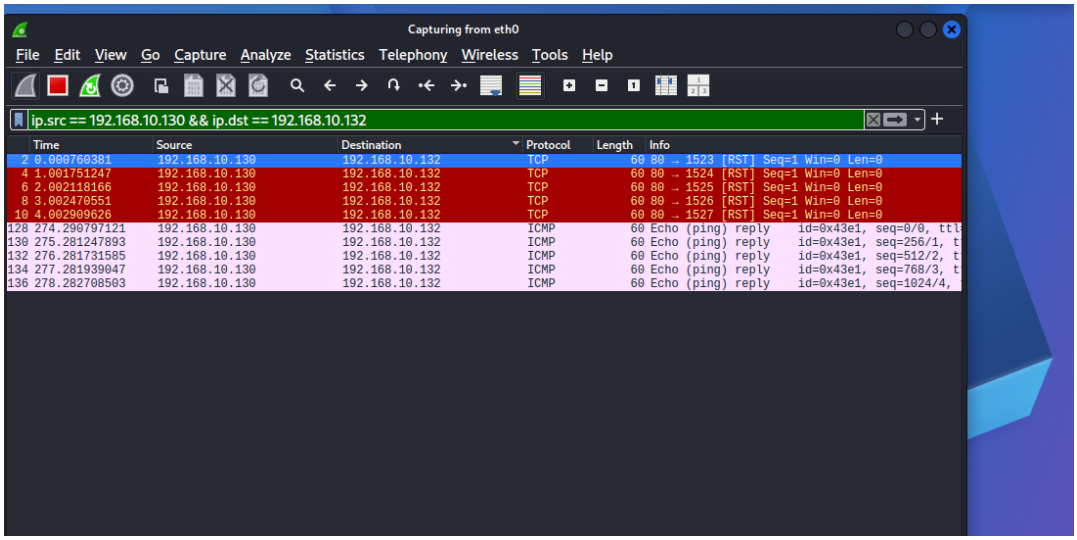
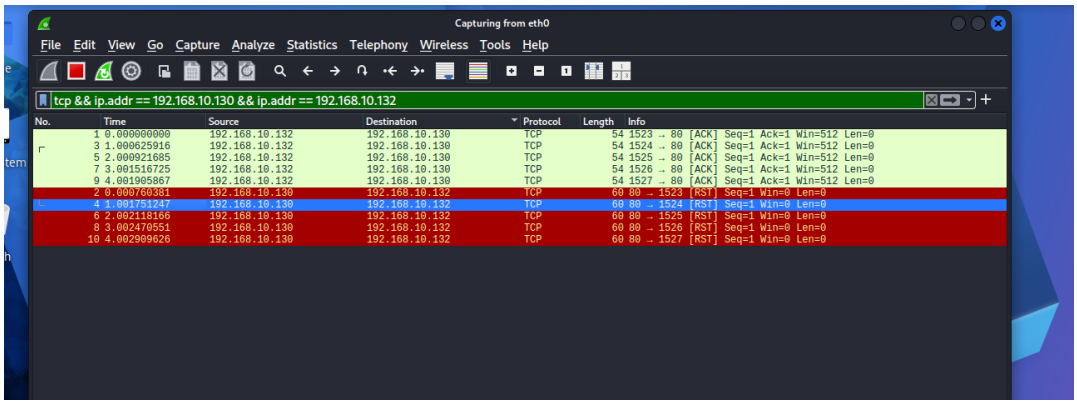
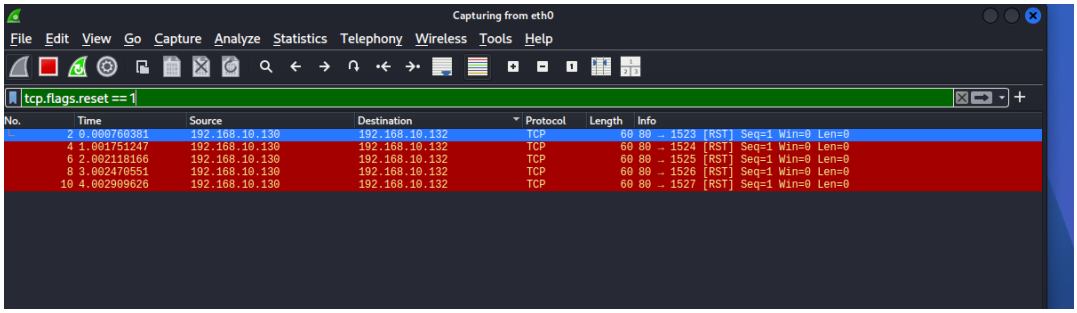
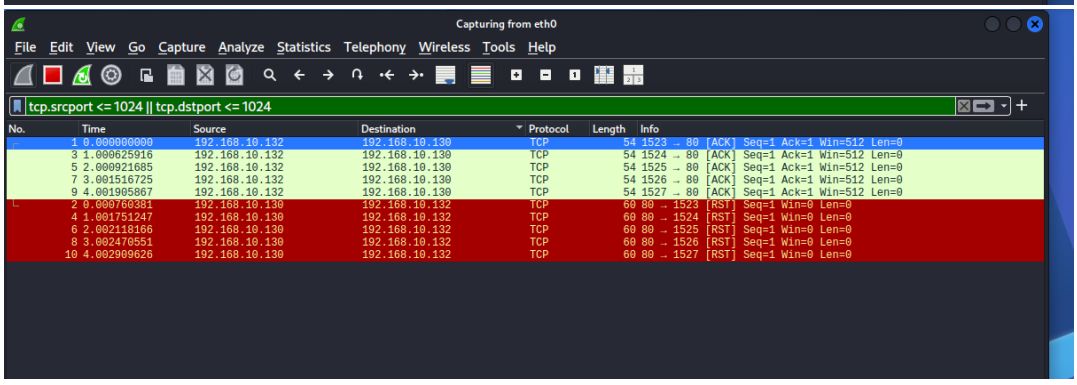
-

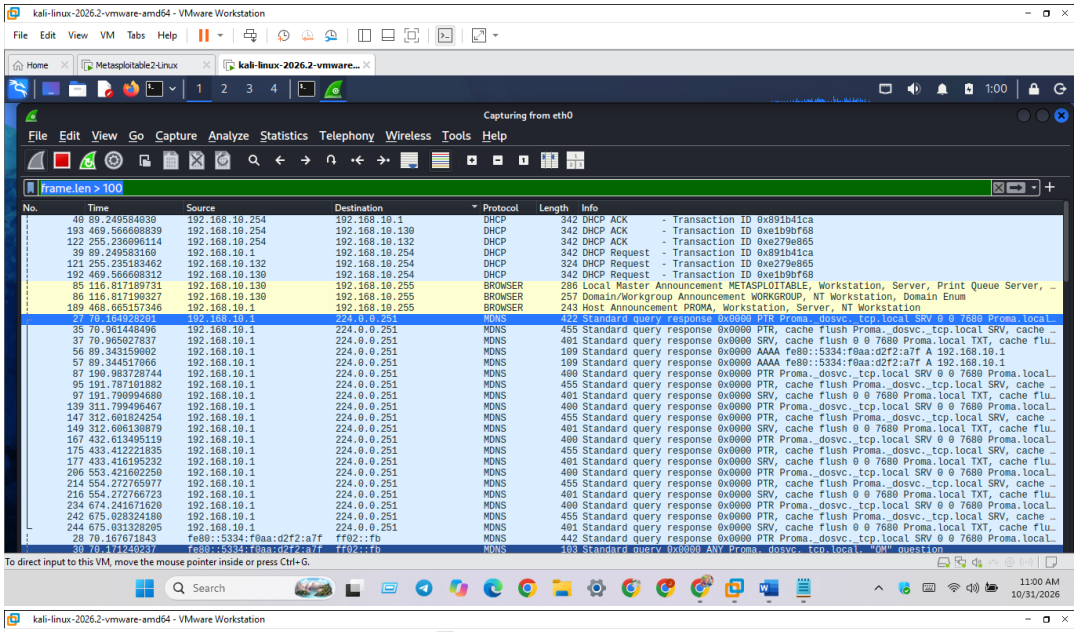
- \

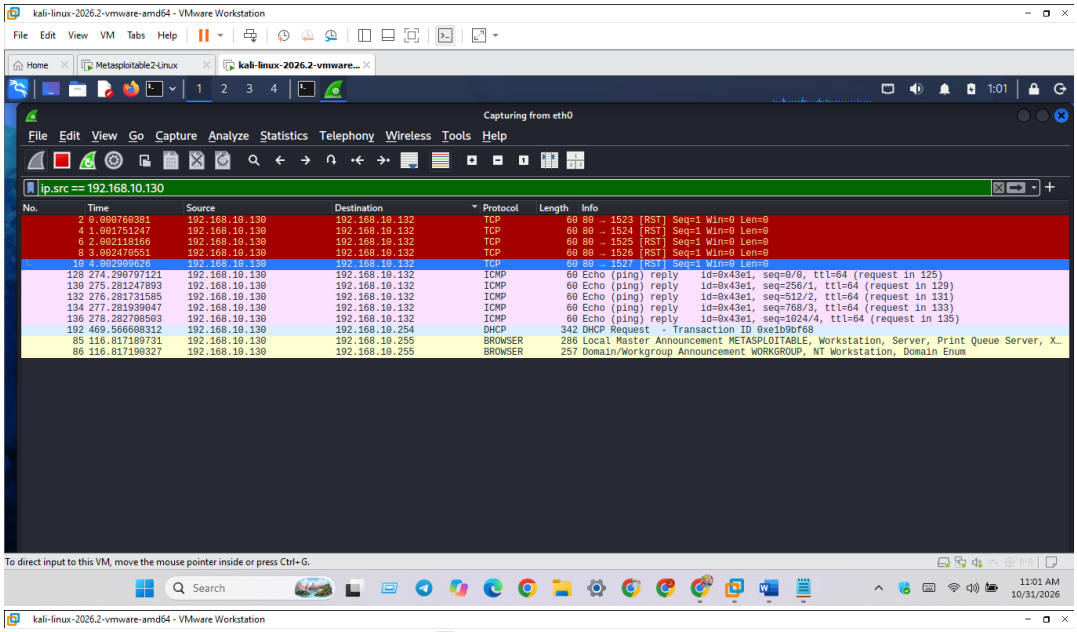

Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
icmp.type == 0
Destination Protocol Length Info
0 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=0/0, ttl=64 (request in 125)
0 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=256/1, ttl=64 (request in 129)
0 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=512/2, ttl=64 (request in 131)
0 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=768/3, ttl=64 (request in 133)
0 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=1024/4, ttl=64 (request in 135)

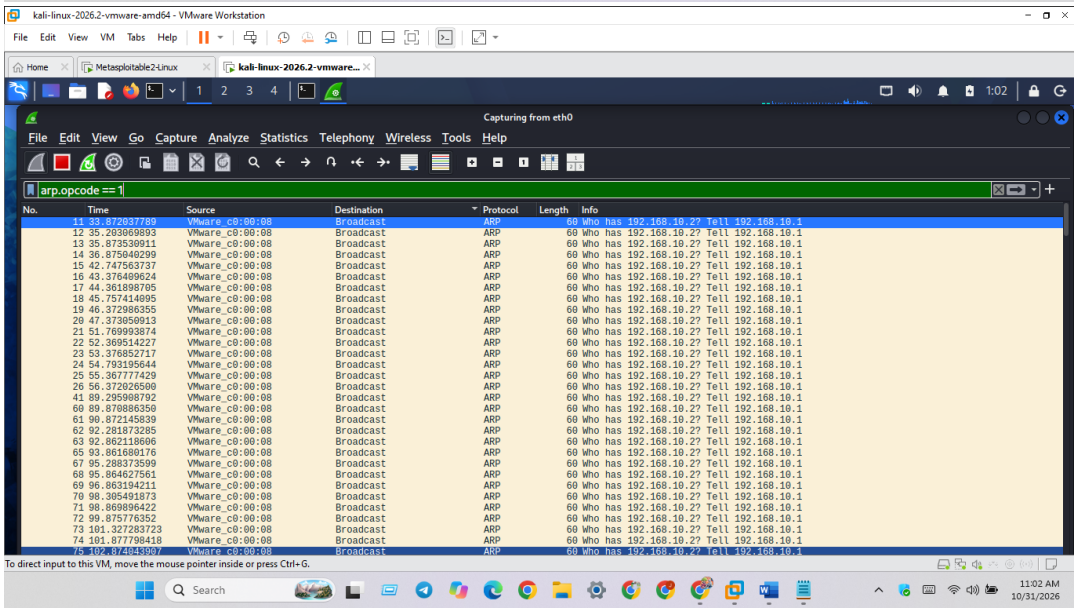
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.src == 192.168.10.132 && ip.dst == 192.168.10.130
Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
3 1.000625916 192.168.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
5 2.000921685 192.168.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
7 3.001516725 192.168.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
9 4.001905867 192.168.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
99 192.439956998 192.168.10.132 192.168.10.130 UDP 42 1813 → 53 Len=0
100 193.440701245 192.168.10.132 192.168.10.130 UDP 42 1814 → 53 Len=0
101 194.441128825 192.168.10.132 192.168.10.130 UDP 42 1815 → 53 Len=0
102 195.441502258 192.168.10.132 192.168.10.130 UDP 42 1816 → 53 Len=0
125 274.280201706 192.168.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=0/0, tt
129 275.280535010 192.168.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=256/1,
131 276.280961061 192.168.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=512/2,
133 277.281179066 192.168.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=768/3,
135 278.281608757 192.168.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=1024/4,

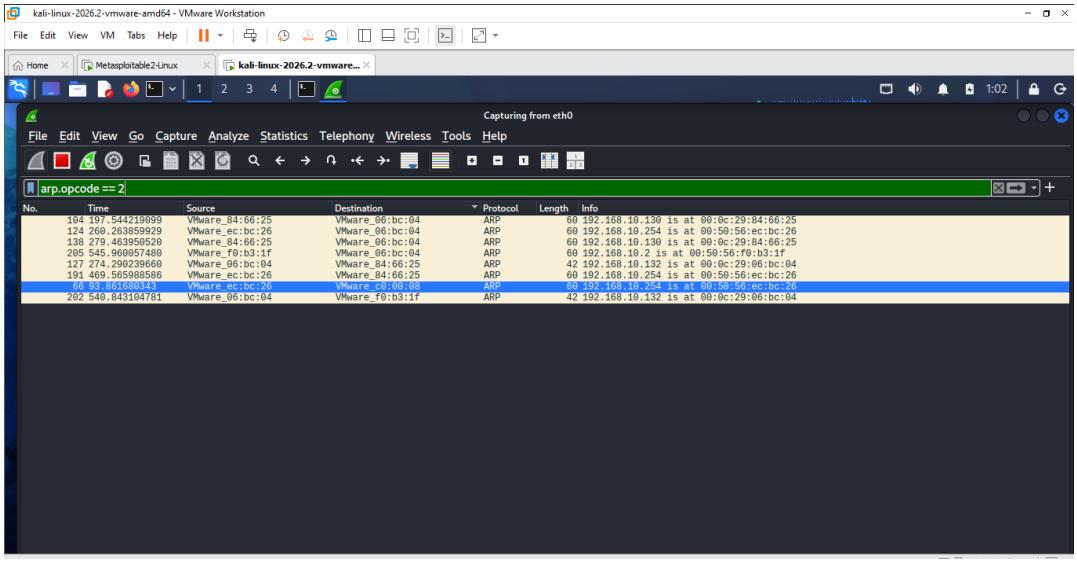
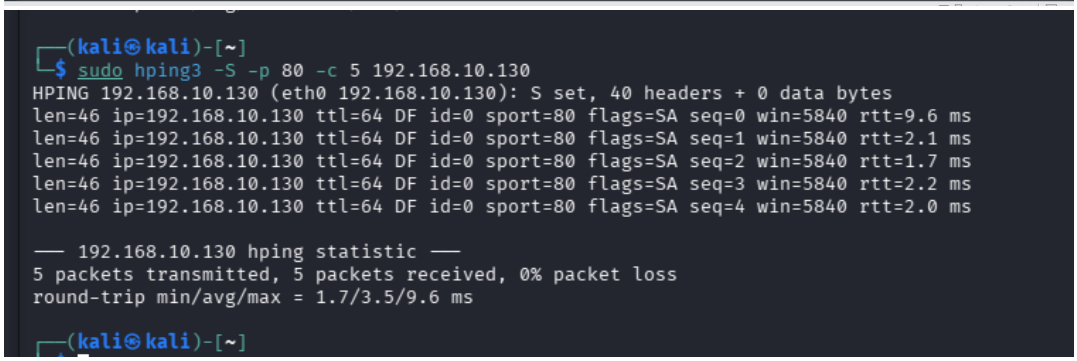
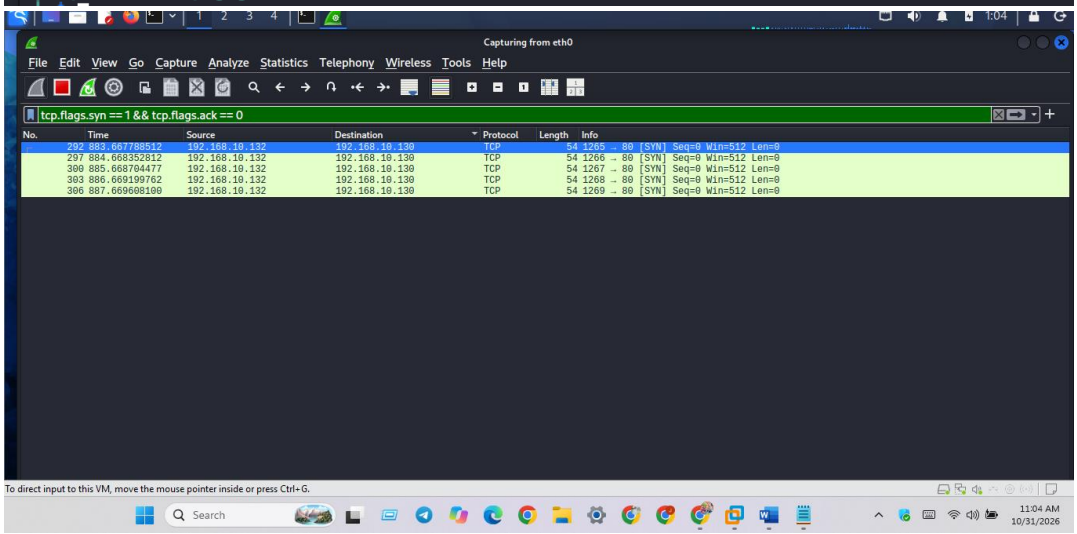
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.src == 192.168.10.132 && ip.dst == 192.168.10.130
Destination Protocol Length Info
.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
.10.132 192.168.10.130 UDP 42 1813 → 53 Len=0
.10.132 192.168.10.130 UDP 42 1814 → 53 Len=0
.10.132 192.168.10.130 UDP 42 1815 → 53 Len=0
.10.132 192.168.10.130 UDP 42 1816 → 53 Len=0
.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=0/0, ttl=64 (reply in 128)
.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=256/1, ttl=64 (reply in 130)
.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=512/2, ttl=64 (reply in 132)
.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=768/3, ttl=64 (reply in 134)
.10.132 192.168.10.130 ICMP 42 Echo (ping) request id=0x43e1, seq=1024/4, ttl=64 (reply in 136)

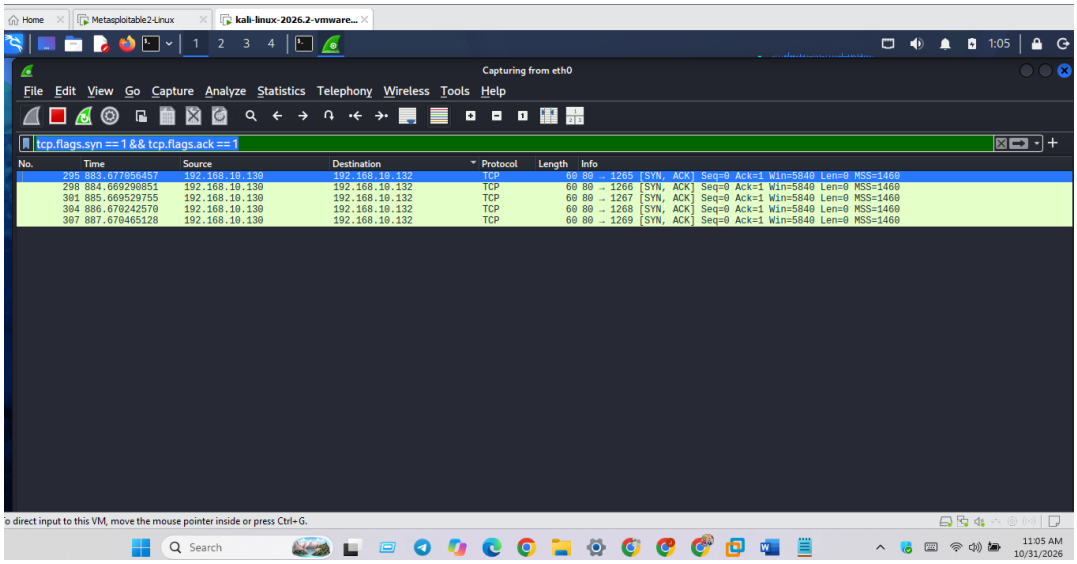
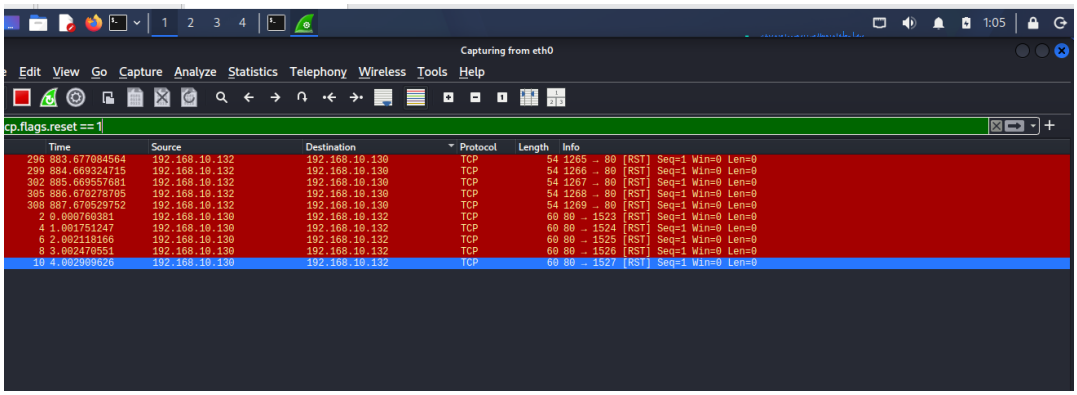
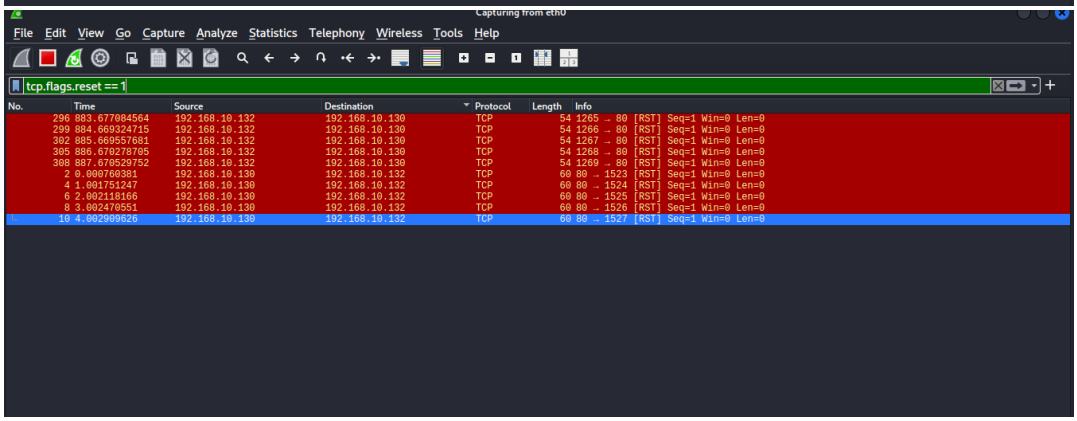
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.src == 192.168.10.130 && ip.dst == 192.168.10.132
Time Source Destination Protocol Length Info
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
128 274.290797121 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=0/0, ttl
130 275.281247893 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=256/1, t
132 276.281731585 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=512/2, t
134 277.281939047 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=768/3, t
136 278.282708503 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=1024/4,
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp && ip.addr == 192.168.10.130 && ip.addr == 192.168.10.132
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
3 1.000625916 192.168.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
5 2.000921685 192.168.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
7 3.001516725 192.168.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
9 4.001905867 192.168.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.flags.reset == 1
No. Time Source Destination Protocol Length Info
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.srcport <= 1024 || tcp.dstport <= 1024
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
3 1.000625916 192.168.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
5 2.000921685 192.168.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
7 3.001516725 192.168.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
9 4.001905867 192.168.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0

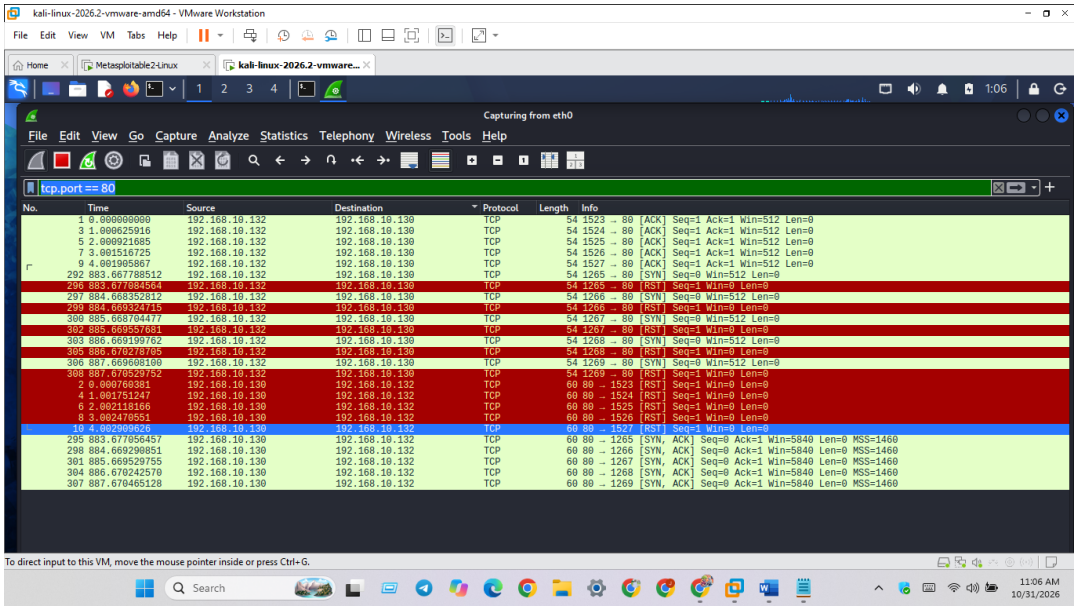

kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
frame.len > 100
No. Time Source Destination Protocol Length Info
40 89.249584030 192.168.10.254 192.168.10.1 DHCP 342 DHCP ACK - Transaction ID 0x891b41ca
193 469.566608839 192.168.10.254 192.168.10.130 DHCP 342 DHCP ACK - Transaction ID 0xe1b9bf68
122 255.236096114 192.168.10.254 192.168.10.132 DHCP 342 DHCP ACK - Transaction ID 0xe279e865
39 89.249583160 192.168.10.1 192.168.10.254 DHCP 342 DHCP Request - Transaction ID 0x891b41ca
121 255.235183462 192.168.10.132 192.168.10.254 DHCP 324 DHCP Request - Transaction ID 0xe279e865
192 469.566608312 192.168.10.130 192.168.10.254 DHCP 342 DHCP Request - Transaction ID 0xe1b9bf68
85 116.817189731 192.168.10.130 192.168.10.255 BROWSER 286 Local Master Announcement METASPLOITABLE, Workstation, Server, Print Queue Server, …
86 116.817190327 192.168.10.130 192.168.10.255 BROWSER 257 Domain/Workgroup Announcement WORKGROUP, NT Workstation, Domain Enum
189 468.665157346 192.168.10.1 192.168.10.255 BROWSER 243 Host Announcement PROMA, Workstation, Server, NT Workstation
27 70.164928201 192.168.10.1 224.0.0.251 MDNS 422 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
35 70.961448496 192.168.10.1 224.0.0.251 MDNS 455 Standard query response 0x0000 PTR, cache flush Proma._dosvc._tcp.local SRV, cache …
37 70.965027837 192.168.10.1 224.0.0.251 MDNS 401 Standard query response 0x0000 SRV, cache flush 0 0 7680 Proma.local TXT, cache flu…
56 89.343159002 192.168.10.1 224.0.0.251 MDNS 109 Standard query response 0x0000 AAAA fe80::5334:f0aa:d2f2:a7f A 192.168.10.1
57 89.344517066 192.168.10.1 224.0.0.251 MDNS 109 Standard query response 0x0000 AAAA fe80::5334:f0aa:d2f2:a7f A 192.168.10.1
87 190.983728744 192.168.10.1 224.0.0.251 MDNS 400 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
95 191.787101882 192.168.10.1 224.0.0.251 MDNS 455 Standard query response 0x0000 PTR, cache flush Proma._dosvc._tcp.local SRV, cache …
97 191.790994680 192.168.10.1 224.0.0.251 MDNS 401 Standard query response 0x0000 SRV, cache flush 0 0 7680 Proma.local TXT, cache flu…
139 311.799496467 192.168.10.1 224.0.0.251 MDNS 400 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
147 312.601824254 192.168.10.1 224.0.0.251 MDNS 455 Standard query response 0x0000 PTR, cache flush Proma._dosvc._tcp.local SRV, cache …
149 312.606130879 192.168.10.1 224.0.0.251 MDNS 401 Standard query response 0x0000 SRV, cache flush 0 0 7680 Proma.local TXT, cache flu…
167 432.613495119 192.168.10.1 224.0.0.251 MDNS 400 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
175 433.412221835 192.168.10.1 224.0.0.251 MDNS 455 Standard query response 0x0000 PTR, cache flush Proma._dosvc._tcp.local SRV, cache …
177 433.416195232 192.168.10.1 224.0.0.251 MDNS 401 Standard query response 0x0000 SRV, cache flush 0 0 7680 Proma.local TXT, cache flu…
206 553.421602250 192.168.10.1 224.0.0.251 MDNS 400 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
214 554.272765977 192.168.10.1 224.0.0.251 MDNS 455 Standard query response 0x0000 PTR, cache flush Proma._dosvc._tcp.local SRV, cache …
216 554.272766723 192.168.10.1 224.0.0.251 MDNS 401 Standard query response 0x0000 SRV, cache flush 0 0 7680 Proma.local TXT, cache flu…
234 674.241671620 192.168.10.1 224.0.0.251 MDNS 400 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
242 675.028324180 192.168.10.1 224.0.0.251 MDNS 455 Standard query response 0x0000 PTR, cache flush Proma._dosvc._tcp.local SRV, cache …
244 675.031328205 192.168.10.1 224.0.0.251 MDNS 401 Standard query response 0x0000 SRV, cache flush 0 0 7680 Proma.local TXT, cache flu…
28 70.167671843 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 442 Standard query response 0x0000 PTR Proma._dosvc._tcp.local SRV 0 0 7680 Proma.local…
30 70.171240237 fe80::5334:f0aa:d2f2:a7f ff02::fb MDNS 403 Standard query 0x0000 ANY Proma._dosvc._tcp.local, "QM" question
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
11:00 AM
10/31/2026


kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.src == 192.168.10.130
No. Time Source Destination Protocol Length Info
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909026 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
128 274.290797121 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=0/0, ttl=64 (request in 125)
130 275.281247893 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=256/1, ttl=64 (request in 129)
132 276.281731585 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=512/2, ttl=64 (request in 131)
134 277.281939047 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=768/3, ttl=64 (request in 133)
136 278.282708503 192.168.10.130 192.168.10.132 ICMP 60 Echo (ping) reply id=0x43e1, seq=1024/4, ttl=64 (request in 135)
192 469.566608312 192.168.10.130 192.168.10.254 DHCP 342 DHCP Request - Transaction ID 0xe1b9bf68
85 116.817189731 192.168.10.130 192.168.10.255 BROWSER 286 Local Master Announcement METASPLOITABLE, Workstation, Server, Print Queue Server, …
86 116.817190327 192.168.10.130 192.168.10.255 BROWSER 257 Domain/Workgroup Announcement WORKGROUP, NT Workstation, Domain Enum
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
11:01 AM
10/31/2026

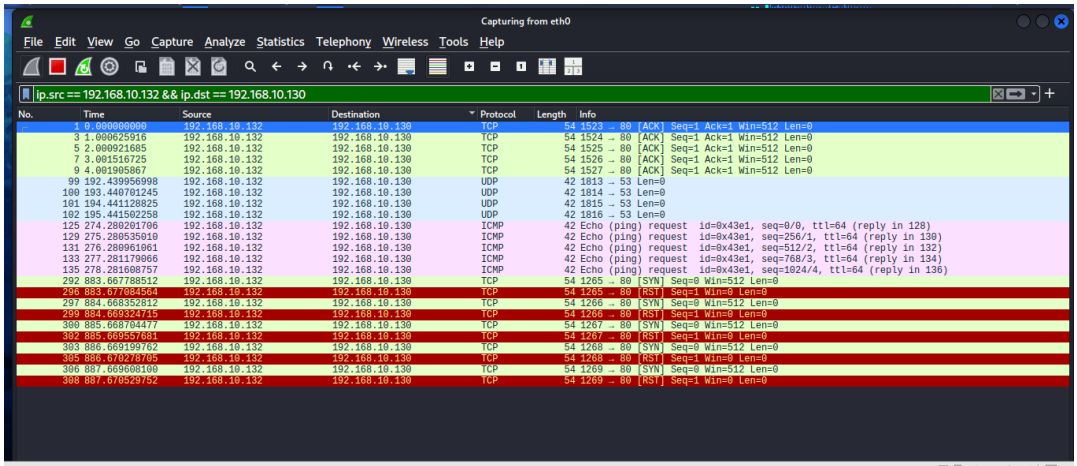

kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
arp.opcode == 1
No. Time Source Destination Protocol Length Info
11 33.872037789 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
12 35.203069893 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
13 35.873530911 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
14 36.875040299 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
15 42.747563737 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
16 43.376409624 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
17 44.361898705 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
18 45.757414095 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
19 46.372986355 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
20 47.373050913 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
21 51.769993874 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
22 52.369514227 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
23 53.376852717 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
24 54.793195644 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
25 55.367777429 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
26 56.372026500 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
41 89.295908792 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
60 89.870886350 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
61 90.872145839 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
62 92.281873285 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
63 92.862118606 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
65 93.861680176 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
67 95.288373599 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
68 95.864627561 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
69 96.863194211 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
70 98.305491873 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
71 98.869896422 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
72 99.875776352 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
73 101.327283723 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
74 101.877798418 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
75 102.874494907 VMware_c0:00:08 Broadcast ARP 60 Who has 192.168.10.2? Tell 192.168.10.1
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
11:02 AM
10/31/2026

- 
kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
arp.opcode == 2
No. Time Source Destination Protocol Length Info
104 197.544219099 VMware_84:66:25 VMware_06:bc:04 ARP 60 192.168.10.130 is at 00:0c:29:84:66:25
124 260.263859929 VMware_ec:bc:26 VMware_06:bc:04 ARP 60 192.168.10.254 is at 00:50:56:ec:bc:26
138 279.463950520 VMware_84:66:25 VMware_06:bc:04 ARP 60 192.168.10.130 is at 00:0c:29:84:66:25
205 545.960057480 VMware_f0:b3:1f VMware_06:bc:04 ARP 60 192.168.10.2 is at 00:50:56:f0:b3:1f
127 274.290239660 VMware_06:bc:04 VMware_84:66:25 ARP 42 192.168.10.132 is at 00:0c:29:06:bc:04
191 469.565988586 VMware_ec:bc:26 VMware_84:66:25 ARP 60 192.168.10.254 is at 00:50:56:ec:bc:26
66 93.861680343 VMware_ec:bc:26 VMware_c0:00:08 ARP 60 192.168.10.254 is at 00:50:56:ec:bc:26
202 540.843104781 VMware_06:bc:04 VMware_f0:b3:1f ARP 42 192.168.10.132 is at 00:0c:29:06:bc:04
- 
(kali㉿kali)-[~]
$ sudo hping3 -S -p 80 -c 5 192.168.10.130
HPING 192.168.10.130 (eth0 192.168.10.130): S set, 40 headers + 0 data bytes
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=0 win=5840 rtt=9.6 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=1 win=5840 rtt=2.1 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=2 win=5840 rtt=1.7 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=3 win=5840 rtt=2.2 ms
len=46 ip=192.168.10.130 ttl=64 DF id=0 sport=80 flags=SA seq=4 win=5840 rtt=2.0 ms
— 192.168.10.130 hping statistic —
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 1.7/3.5/9.6 ms
(kali㉿kali)-[~]
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.flags.syn == 1 && tcp.flags.ack == 0
No. Time Source Destination Protocol Length Info
292 883.667788512 192.168.10.132 192.168.10.130 TCP 54 1265 → 80 [SYN] Seq=0 Win=512 Len=0
297 884.668352812 192.168.10.132 192.168.10.130 TCP 54 1266 → 80 [SYN] Seq=0 Win=512 Len=0
300 885.668704477 192.168.10.132 192.168.10.130 TCP 54 1267 → 80 [SYN] Seq=0 Win=512 Len=0
303 886.669199762 192.168.10.132 192.168.10.130 TCP 54 1268 → 80 [SYN] Seq=0 Win=512 Len=0
306 887.669608100 192.168.10.132 192.168.10.130 TCP 54 1269 → 80 [SYN] Seq=0 Win=512 Len=0
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
11:04 AM
10/31/2026

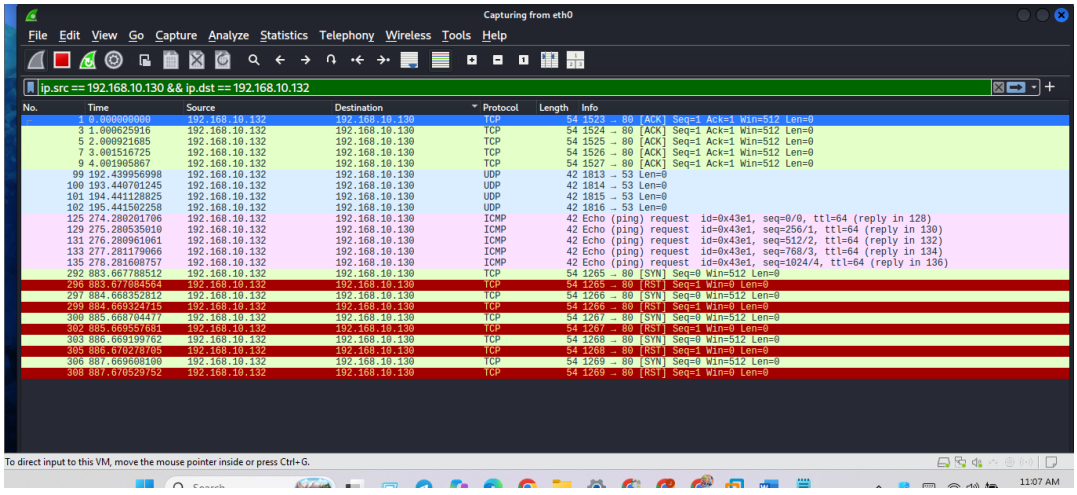
- 
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.flags.syn == 1 && tcp.flags.ack == 1
No. Time Source Destination Protocol Length Info
295 883.677056457 192.168.10.130 192.168.10.132 TCP 60 80 → 1265 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
298 884.669290851 192.168.10.130 192.168.10.132 TCP 60 80 → 1266 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
301 885.669529755 192.168.10.130 192.168.10.132 TCP 60 80 → 1267 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
304 886.670242570 192.168.10.130 192.168.10.132 TCP 60 80 → 1268 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
307 887.670465128 192.168.10.130 192.168.10.132 TCP 60 80 → 1269 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
o direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
11:05 AM
10/31/2026
- 
Capturing from eth0
Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
cp.flags.reset == 1
Time Source Destination Protocol Length Info
296 883.677084564 192.168.10.132 192.168.10.130 TCP 54 1265 → 80 [RST] Seq=1 Win=0 Len=0
299 884.669324715 192.168.10.132 192.168.10.130 TCP 54 1266 → 80 [RST] Seq=1 Win=0 Len=0
302 885.669557681 192.168.10.132 192.168.10.130 TCP 54 1267 → 80 [RST] Seq=1 Win=0 Len=0
305 886.670278705 192.168.10.132 192.168.10.130 TCP 54 1268 → 80 [RST] Seq=1 Win=0 Len=0
308 887.670529752 192.168.10.132 192.168.10.130 TCP 54 1269 → 80 [RST] Seq=1 Win=0 Len=0
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
tcp.flags.reset == 1
No. Time Source Destination Protocol Length Info
296 883.677084564 192.168.10.132 192.168.10.130 TCP 54 1265 → 80 [RST] Seq=1 Win=0 Len=0
299 884.669324715 192.168.10.132 192.168.10.130 TCP 54 1266 → 80 [RST] Seq=1 Win=0 Len=0
302 885.669557681 192.168.10.132 192.168.10.130 TCP 54 1267 → 80 [RST] Seq=1 Win=0 Len=0
305 886.670278705 192.168.10.132 192.168.10.130 TCP 54 1268 → 80 [RST] Seq=1 Win=0 Len=0
308 887.670529752 192.168.10.132 192.168.10.130 TCP 54 1269 → 80 [RST] Seq=1 Win=0 Len=0
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0


kali-linux-2026.2-vmware-amd64 - VMware Workstation
Capturing from eth0
tcp.port == 80

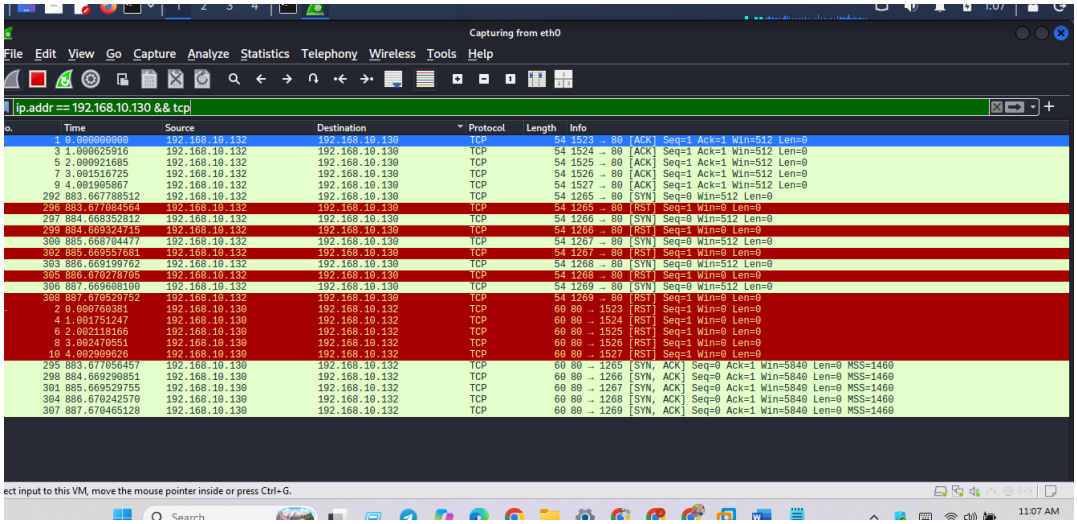
-


Capturing from eth0
ip.src == 192.168.10.132 && ip.dst == 192.168.10.130

-


Capturing from eth0
ip.src == 192.168.10.130 && ip.dst == 192.168.10.132

-

- 
Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
ip.addr == 192.168.10.130 && tcp
No. Time Source Destination Protocol Length Info
1 0.000000000 192.168.10.132 192.168.10.130 TCP 54 1523 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
3 1.000625916 192.168.10.132 192.168.10.130 TCP 54 1524 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
5 2.000921685 192.168.10.132 192.168.10.130 TCP 54 1525 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
7 3.001516725 192.168.10.132 192.168.10.130 TCP 54 1526 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
9 4.001905867 192.168.10.132 192.168.10.130 TCP 54 1527 → 80 [ACK] Seq=1 Ack=1 Win=512 Len=0
292 883.667780512 192.168.10.132 192.168.10.130 TCP 54 1265 → 80 [SYN] Seq=0 Win=512 Len=0
296 883.677084564 192.168.10.132 192.168.10.130 TCP 54 1265 → 80 [RST] Seq=1 Win=0 Len=0
297 884.668352812 192.168.10.132 192.168.10.130 TCP 54 1266 → 80 [SYN] Seq=0 Win=512 Len=0
299 884.669324715 192.168.10.132 192.168.10.130 TCP 54 1266 → 80 [RST] Seq=1 Win=0 Len=0
300 885.668704477 192.168.10.132 192.168.10.130 TCP 54 1267 → 80 [SYN] Seq=0 Win=512 Len=0
302 885.669557681 192.168.10.132 192.168.10.130 TCP 54 1267 → 80 [RST] Seq=1 Win=0 Len=0
303 886.669199702 192.168.10.132 192.168.10.130 TCP 54 1268 → 80 [SYN] Seq=0 Win=512 Len=0
305 886.670278705 192.168.10.132 192.168.10.130 TCP 54 1268 → 80 [RST] Seq=1 Win=0 Len=0
306 887.669608100 192.168.10.132 192.168.10.130 TCP 54 1269 → 80 [SYN] Seq=0 Win=512 Len=0
308 887.670529752 192.168.10.132 192.168.10.130 TCP 54 1269 → 80 [RST] Seq=1 Win=0 Len=0
2 0.000760381 192.168.10.130 192.168.10.132 TCP 60 80 → 1523 [RST] Seq=1 Win=0 Len=0
4 1.001751247 192.168.10.130 192.168.10.132 TCP 60 80 → 1524 [RST] Seq=1 Win=0 Len=0
6 2.002118166 192.168.10.130 192.168.10.132 TCP 60 80 → 1525 [RST] Seq=1 Win=0 Len=0
8 3.002470551 192.168.10.130 192.168.10.132 TCP 60 80 → 1526 [RST] Seq=1 Win=0 Len=0
10 4.002909626 192.168.10.130 192.168.10.132 TCP 60 80 → 1527 [RST] Seq=1 Win=0 Len=0
295 883.677056457 192.168.10.130 192.168.10.132 TCP 60 80 → 1265 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
298 884.669290851 192.168.10.130 192.168.10.132 TCP 60 80 → 1266 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
301 885.669529755 192.168.10.130 192.168.10.132 TCP 60 80 → 1267 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
304 886.670242570 192.168.10.130 192.168.10.132 TCP 60 80 → 1268 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
307 887.670465128 192.168.10.130 192.168.10.132 TCP 60 80 → 1269 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1460
ect input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
11:07 AM