THEHARVESTER OSINT REPORT

Target Domain: stillwearbd.com

Tool: theHarvester v4.11.1

Prepared: 29 October 2026

1. Executive Summary

theHarvester v4.11.1 was used to perform preliminary OSINT reconnaissance for stillwearbd.com. The available results identify four unique hostnames from the Hackertarget source. The CommonCrawl, URLScan, and Wayback Archive JSON reports examined contained zero entries in their hosts fields. Other earlier discovery observations also mentioned the root domain and www hostname. These results represent public asset discovery only; they do not confirm a security vulnerability.

The consolidated CSV currently attributes the four extracted hostnames to Hackertarget only. This means the current parser did not extract hosts from the other JSON files; it should not be interpreted as proof that no other public records exist for the domain.

2. Scope and Methodology

Target domain	stillwearbd.com
Tool	theHarvester v4.11.1
Purpose	Discover publicly indexed hostnames and related OSINT data
Sources represented in saved JSON	Hackertarget, CommonCrawl, URLScan, Wayback Archive
Output files	JSON and XML source reports; consolidated_hosts.csv
Collection type	Public-source OSINT enumeration; no vulnerability testing implied

3. Results: Discovered Hostnames

The following four hostnames were returned in the saved Hackertarget report:

Hostname	IP address reported by source	Source
img.mail.stillwearbd.com	104.17.159.243	Hackertarget
r.mail.stillwearbd.com	172.246.243.65	Hackertarget
server.stillwearbd.com	172.67.180.100	Hackertarget
server2.stillwearbd.com	34.131.102.20	Hackertarget

4. Source Coverage

Source report	Hosts in saved JSON	Interpretation
hackertarget.json	4	Four host entries present
commoncrawl.json	0	No host entries in this saved report
urlscan.json	0	No host entries in this saved report
waybackarchive.json	0	No host entries in this saved report

5. DNS and Third-Party Context

Earlier DNS observations in the working notes associated img.mail.stillwearbd.com with Brevo-related mail/image infrastructure, r.mail.stillwearbd.com with Brevo-related tracking infrastructure, server.stillwearbd.com with track.pixelfly.io, and server2.stillwearbd.com with in.stape.io. These are contextual

DNS observations from earlier checks, not proof of ownership, exposure, or a vulnerability. Current DNS should be checked before treating these relationships as current.

6. Findings and Security Interpretation

- Four unique hostnames were extracted from the saved Hackertarget JSON report.
- No email addresses or people were reported in the shown Hackertarget output.
- CommonCrawl, URLScan, and Wayback Archive saved reports contained no hosts in their hosts arrays.
- No confirmed vulnerability is demonstrated by theHarvester results.
- An identified hostname or IP should be treated as an asset to validate, not as a security weakness by itself.

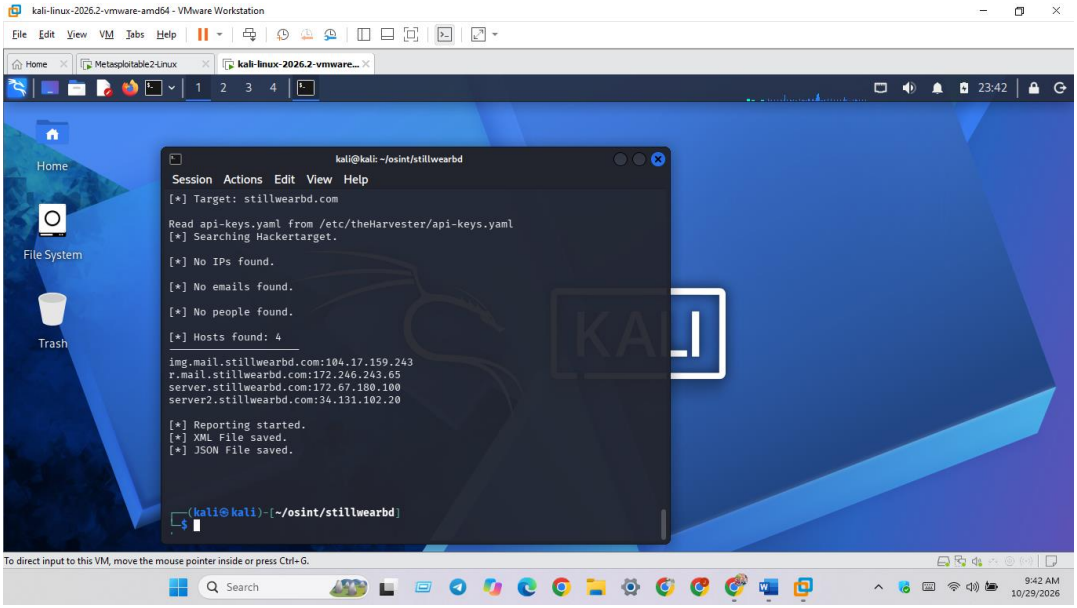
7. Limitations

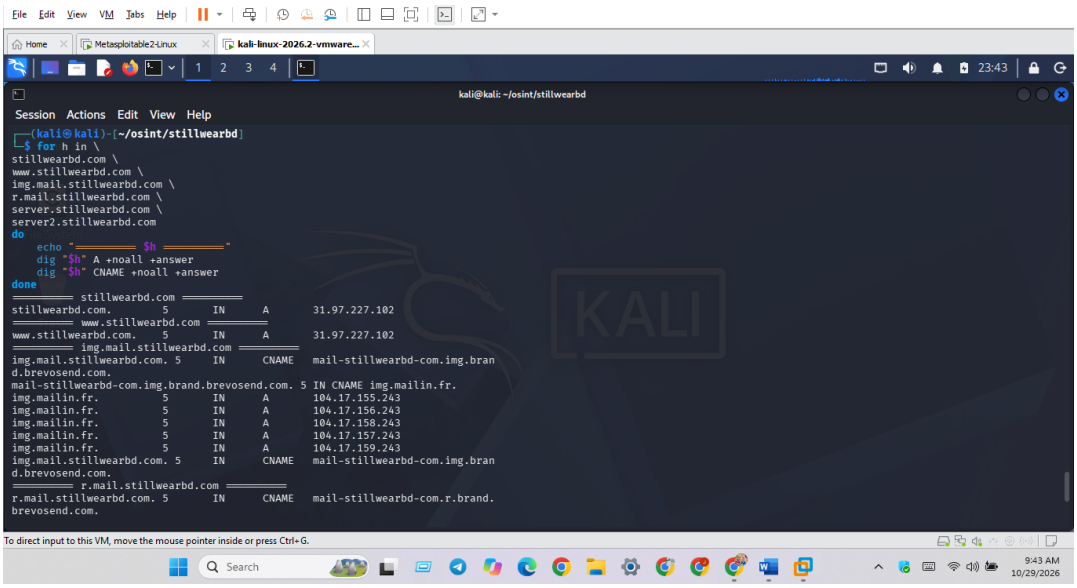
- Results depend on the public sources queried and their coverage at collection time.
- Empty source output does not prove that a domain has no other subdomains.
- The current merge script extracts host entries from JSON hosts fields; other formats or fields may require separate parsing.
- DNS records and third-party relationships can change over time.
- theHarvester is an OSINT discovery tool; this report does not claim that active vulnerability testing was performed.

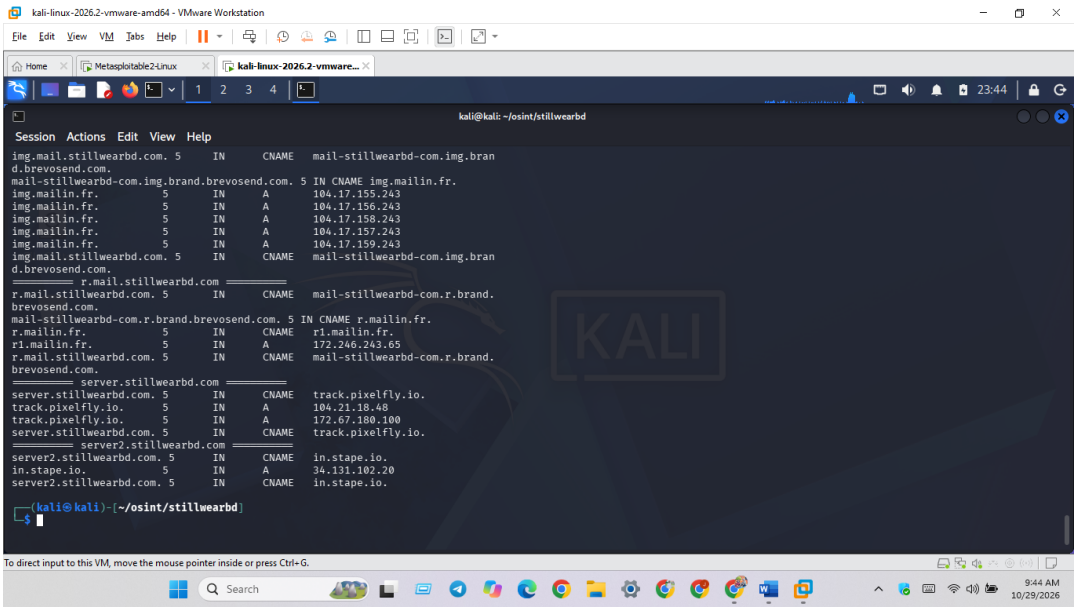
8. Conclusion

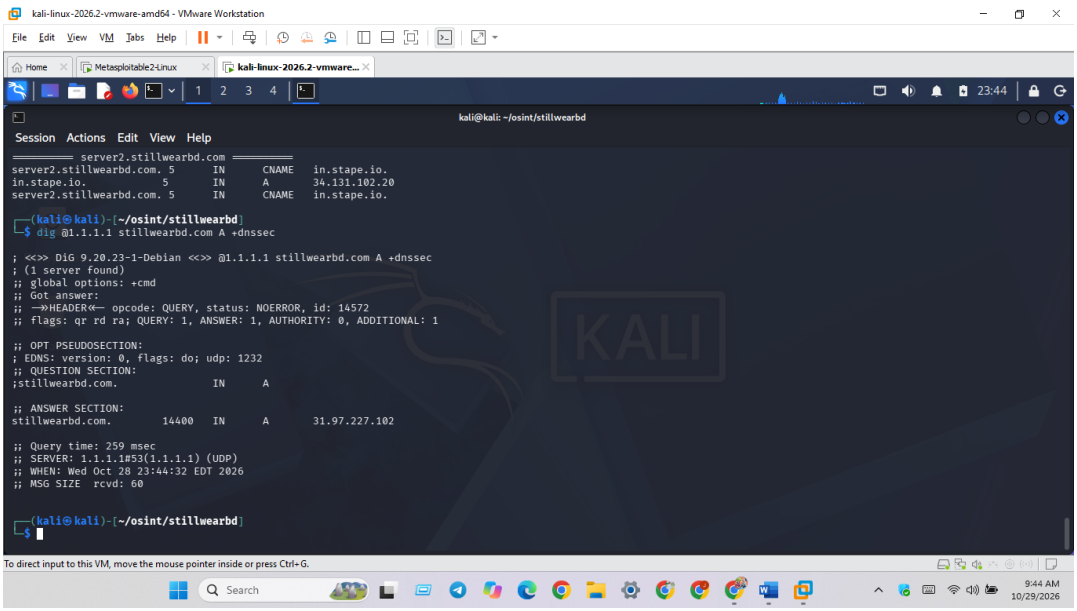
theHarvester identified four unique hostnames in the available Hackertarget output for stillwearbd.com. The saved reports from CommonCrawl, URLScan, and Wayback Archive did not contain host entries. Earlier discovery notes also refer to the root domain and www hostname, but the four-host consolidated CSV currently reflects Hackertarget entries only. The results provide a preliminary asset inventory and do not establish any confirmed security vulnerability. Further source review and DNS validation are recommended to improve completeness.

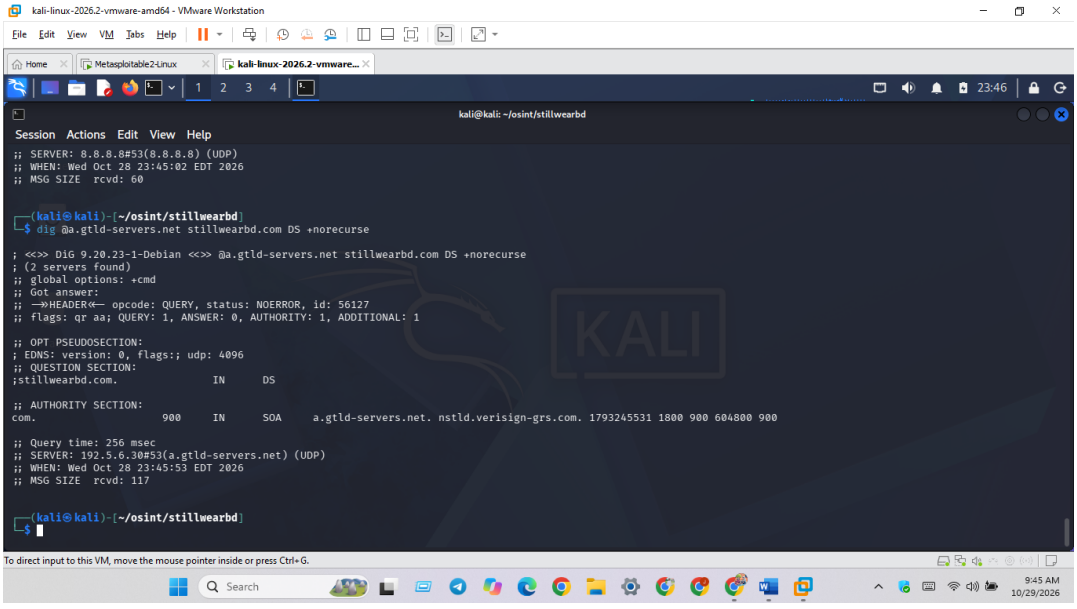
Screenshot

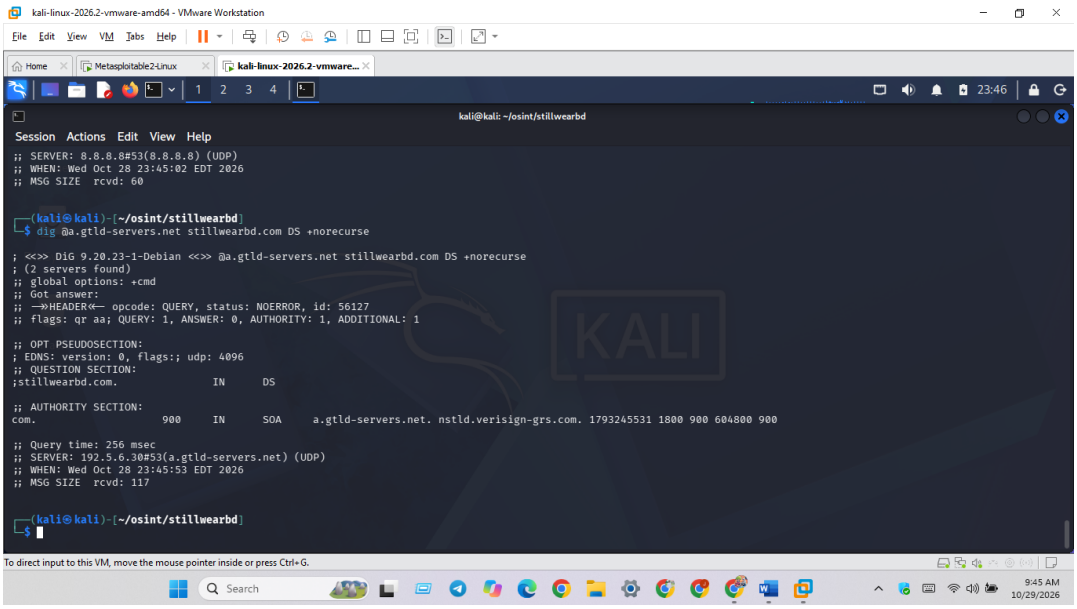


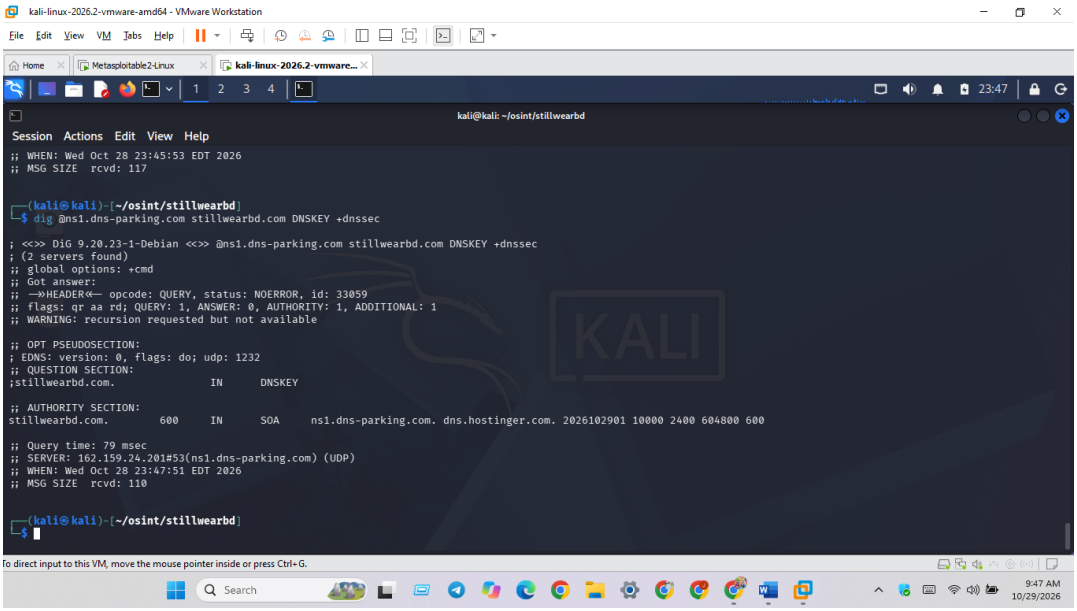

File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
23:43
kali@kali: ~/osint/stillwearbd
Session Actions Edit View Help
┌──(kali㉿kali)-[~/osint/stillwearbd]
└─$ for h in \
stillwearbd.com \
www.stillwearbd.com \
img.mail.stillwearbd.com \
r.mail.stillwearbd.com \
server.stillwearbd.com \
server2.stillwearbd.com
do
echo "========== $h =========="
dig "$h" A +noall +answer
dig "$h" CNAME +noall +answer
done
========== stillwearbd.com ==========
stillwearbd.com. 5 IN A 31.97.227.102
========== www.stillwearbd.com ==========
www.stillwearbd.com. 5 IN A 31.97.227.102
========== img.mail.stillwearbd.com ==========
img.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.img.bran
d.brevosend.com.
mail-stillwearbd-com.img.brand.brevosend.com. 5 IN CNAME img.mailin.fr.
img.mailin.fr. 5 IN A 104.17.155.243
img.mailin.fr. 5 IN A 104.17.156.243
img.mailin.fr. 5 IN A 104.17.158.243
img.mailin.fr. 5 IN A 104.17.157.243
img.mailin.fr. 5 IN A 104.17.159.243
img.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.img.bran
d.brevosend.com.
========== r.mail.stillwearbd.com ==========
r.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.r.brand.
brevosend.com.
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
9:43 AM
10/29/2026

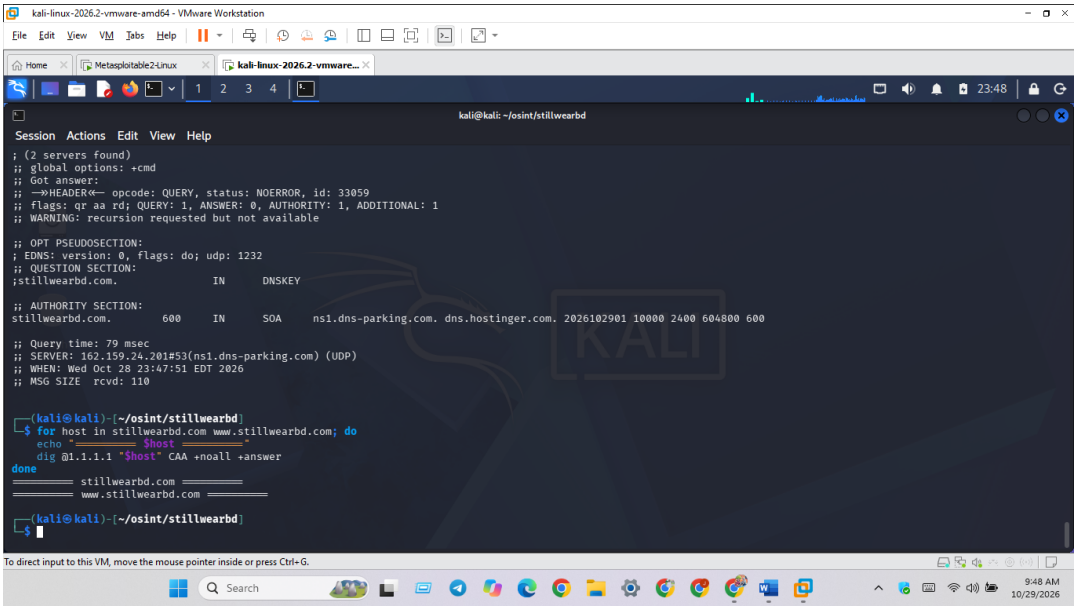

kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
23:44
kali@kali: ~/osint/stillwearbd
Session Actions Edit View Help
img.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.img.bran
d.brevosend.com.
mail-stillwearbd-com.img.brand.brevosend.com. 5 IN CNAME img.mailin.fr.
img.mailin.fr. 5 IN A 104.17.155.243
img.mailin.fr. 5 IN A 104.17.156.243
img.mailin.fr. 5 IN A 104.17.158.243
img.mailin.fr. 5 IN A 104.17.157.243
img.mailin.fr. 5 IN A 104.17.159.243
img.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.img.bran
d.brevosend.com.
========== r.mail.stillwearbd.com ==========
r.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.r.brand.
brevosend.com.
mail-stillwearbd-com.r.brand.brevosend.com. 5 IN CNAME r.mailin.fr.
r.mailin.fr. 5 IN CNAME r1.mailin.fr.
r1.mailin.fr. 5 IN A 172.246.243.65
r.mail.stillwearbd.com. 5 IN CNAME mail-stillwearbd-com.r.brand.
brevosend.com.
========== server.stillwearbd.com ==========
server.stillwearbd.com. 5 IN CNAME track.pixelfly.io.
track.pixelfly.io. 5 IN A 104.21.18.48
track.pixelfly.io. 5 IN A 172.67.180.100
server.stillwearbd.com. 5 IN CNAME track.pixelfly.io.
========== server2.stillwearbd.com ==========
server2.stillwearbd.com. 5 IN CNAME in.stape.io.
in.stape.io. 5 IN A 34.131.102.20
server2.stillwearbd.com. 5 IN CNAME in.stape.io.
┌──(kali㉿kali)-[~/osint/stillwearbd]
└─$
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
9:44 AM
10/29/2026


kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
23:44
kali@kali: ~/osint/stillwearbd
Session Actions Edit View Help
server2.stillwearbd.com
server2.stillwearbd.com. 5 IN CNAME in.stape.io.
in.stape.io. 5 IN A 34.131.102.20
server2.stillwearbd.com. 5 IN CNAME in.stape.io.
(kali㉿kali)-[~/osint/stillwearbd]
$ dig @1.1.1.1 stillwearbd.com A +dnssec
; <<>> DiG 9.20.23-1-Debian <<>> @1.1.1.1 stillwearbd.com A +dnssec
; (1 server found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 14572
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1
;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags: do; udp: 1232
;; QUESTION SECTION:
;stillwearbd.com. IN A
;; ANSWER SECTION:
stillwearbd.com. 14400 IN A 31.97.227.102
;; Query time: 259 msec
;; SERVER: 1.1.1.1#53(1.1.1.1) (UDP)
;; WHEN: Wed Oct 28 23:44:32 EDT 2026
;; MSG SIZE rcvd: 60
(kali㉿kali)-[~/osint/stillwearbd]
$
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
9:44 AM
10/29/2026


kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
23:46
kali@kali: ~/osint/stillwearbd
Session Actions Edit View Help
;; SERVER: 8.8.8.8#53(8.8.8.8) (UDP)
;; WHEN: Wed Oct 28 23:45:02 EDT 2026
;; MSG SIZE rcvd: 60
(kali㉿kali)-[~/osint/stillwearbd]
$ dig @a.gtld-servers.net stillwearbd.com DS +norecurse
; <<>> DiG 9.20.23-1-Debian <<>> @a.gtld-servers.net stillwearbd.com DS +norecurse
; (2 servers found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 56127
;; flags: qr aa; QUERY: 1, ANSWER: 0, AUTHORITY: 1, ADDITIONAL: 1
;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
;; QUESTION SECTION:
;stillwearbd.com. IN DS
;; AUTHORITY SECTION:
com. 900 IN SOA a.gtld-servers.net. nstld.verisign-grs.com. 1793245531 1800 900 604800 900
;; Query time: 256 msec
;; SERVER: 192.5.6.30#53(a.gtld-servers.net) (UDP)
;; WHEN: Wed Oct 28 23:45:53 EDT 2026
;; MSG SIZE rcvd: 117
(kali㉿kali)-[~/osint/stillwearbd]
$
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
9:45 AM
10/29/2026


kali-linux-2026.2-vmware-amd64 - VMware Workstation
File Edit View VM Tabs Help
Home
Metasploitable2-Linux
kali-linux-2026.2-vmware...
23:46
kali@kali: ~/osint/stillwearbd
Session Actions Edit View Help
;; SERVER: 8.8.8.8#53(8.8.8.8) (UDP)
;; WHEN: Wed Oct 28 23:45:02 EDT 2026
;; MSG SIZE rcvd: 60
(kali㉿kali)-[~/osint/stillwearbd]
$ dig @a.gtld-servers.net stillwearbd.com DS +norecurse
; <<>> DiG 9.20.23-1-Debian <<>> @a.gtld-servers.net stillwearbd.com DS +norecurse
; (2 servers found)
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 56127
;; flags: qr aa; QUERY: 1, ANSWER: 0, AUTHORITY: 1, ADDITIONAL: 1
;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 4096
;; QUESTION SECTION:
;stillwearbd.com. IN DS
;; AUTHORITY SECTION:
com. 900 IN SOA a.gtld-servers.net. nstld.verisign-grs.com. 1793245531 1800 900 604800 900
;; Query time: 256 msec
;; SERVER: 192.5.6.30#53(a.gtld-servers.net) (UDP)
;; WHEN: Wed Oct 28 23:45:53 EDT 2026
;; MSG SIZE rcvd: 117
(kali㉿kali)-[~/osint/stillwearbd]
$
To direct input to this VM, move the mouse pointer inside or press Ctrl+G.
Search
9:45 AM
10/29/2026





1. Objective

The objective was to identify publicly discoverable subdomains associated with stillwearbd.com using theHarvester and consolidate the collected results.

2. Methodology

Four existing theHarvester JSON reports were examined: Hackertarget, Commoncrawl, URLScan, and Wayback Archive. The results were processed using Python to remove duplicate hostnames and record their associated sources and IP addresses.

3. Results

The Hackertarget report contained four unique subdomains:

1. img.mail.stillwearbd.com
2. r.mail.stillwearbd.com
3. server.stillwearbd.com
4. server2.stillwearbd.com

The Commoncrawl, URLScan, and Wayback Archive JSON reports contained no hosts in their respective hosts fields.

4. Conclusion

Four unique subdomains were identified in the available reports, all originating from Hackertarget. These results represent preliminary external asset discovery, not a complete inventory of the domain's subdomains. No security vulnerability can be confirmed from subdomain enumeration alone.