

Fully autonomous agents

Agent can launch other agents + write and run new code.



```
if llm("Create price-monitor agent? (yes/no)") == "yes":  
    spec = llm("Draft YAML spec for a fare-watcher agent")  
    Path("agents/fare_watch.yaml").write_text(spec)  
    subprocess.Popen([  
        "agent_runner",  
        "agents/fare_watch.yaml"  
    ])
```

Sets up a background price-monitor that keeps rebooking if the fare drops.


What LLMs





Routes

To allers




















FullAutonomy









Fully autonomous agents

Agent can **launch other agents** + **write and run new code**.




```
if llm("Create price-monitor agent? (yes/no)") == "yes":  
    spec = llm("Draft YAML spec for a fare-watcher agent")  
    Path("agents/fare_watch.yaml").write_text(spec)  
    subprocess.Popen([  
        "agent_runner",  
        "agents/fare_watch.yaml"  
    ])
```


Sets up a background price-monitor that keeps rebooking if the fare drops.



Chat LLMs



Routers



Tool callers




Iterators



Full Autonomy

Fully autonomous agents


Agent can **launch other agents** + **write and run new code**.

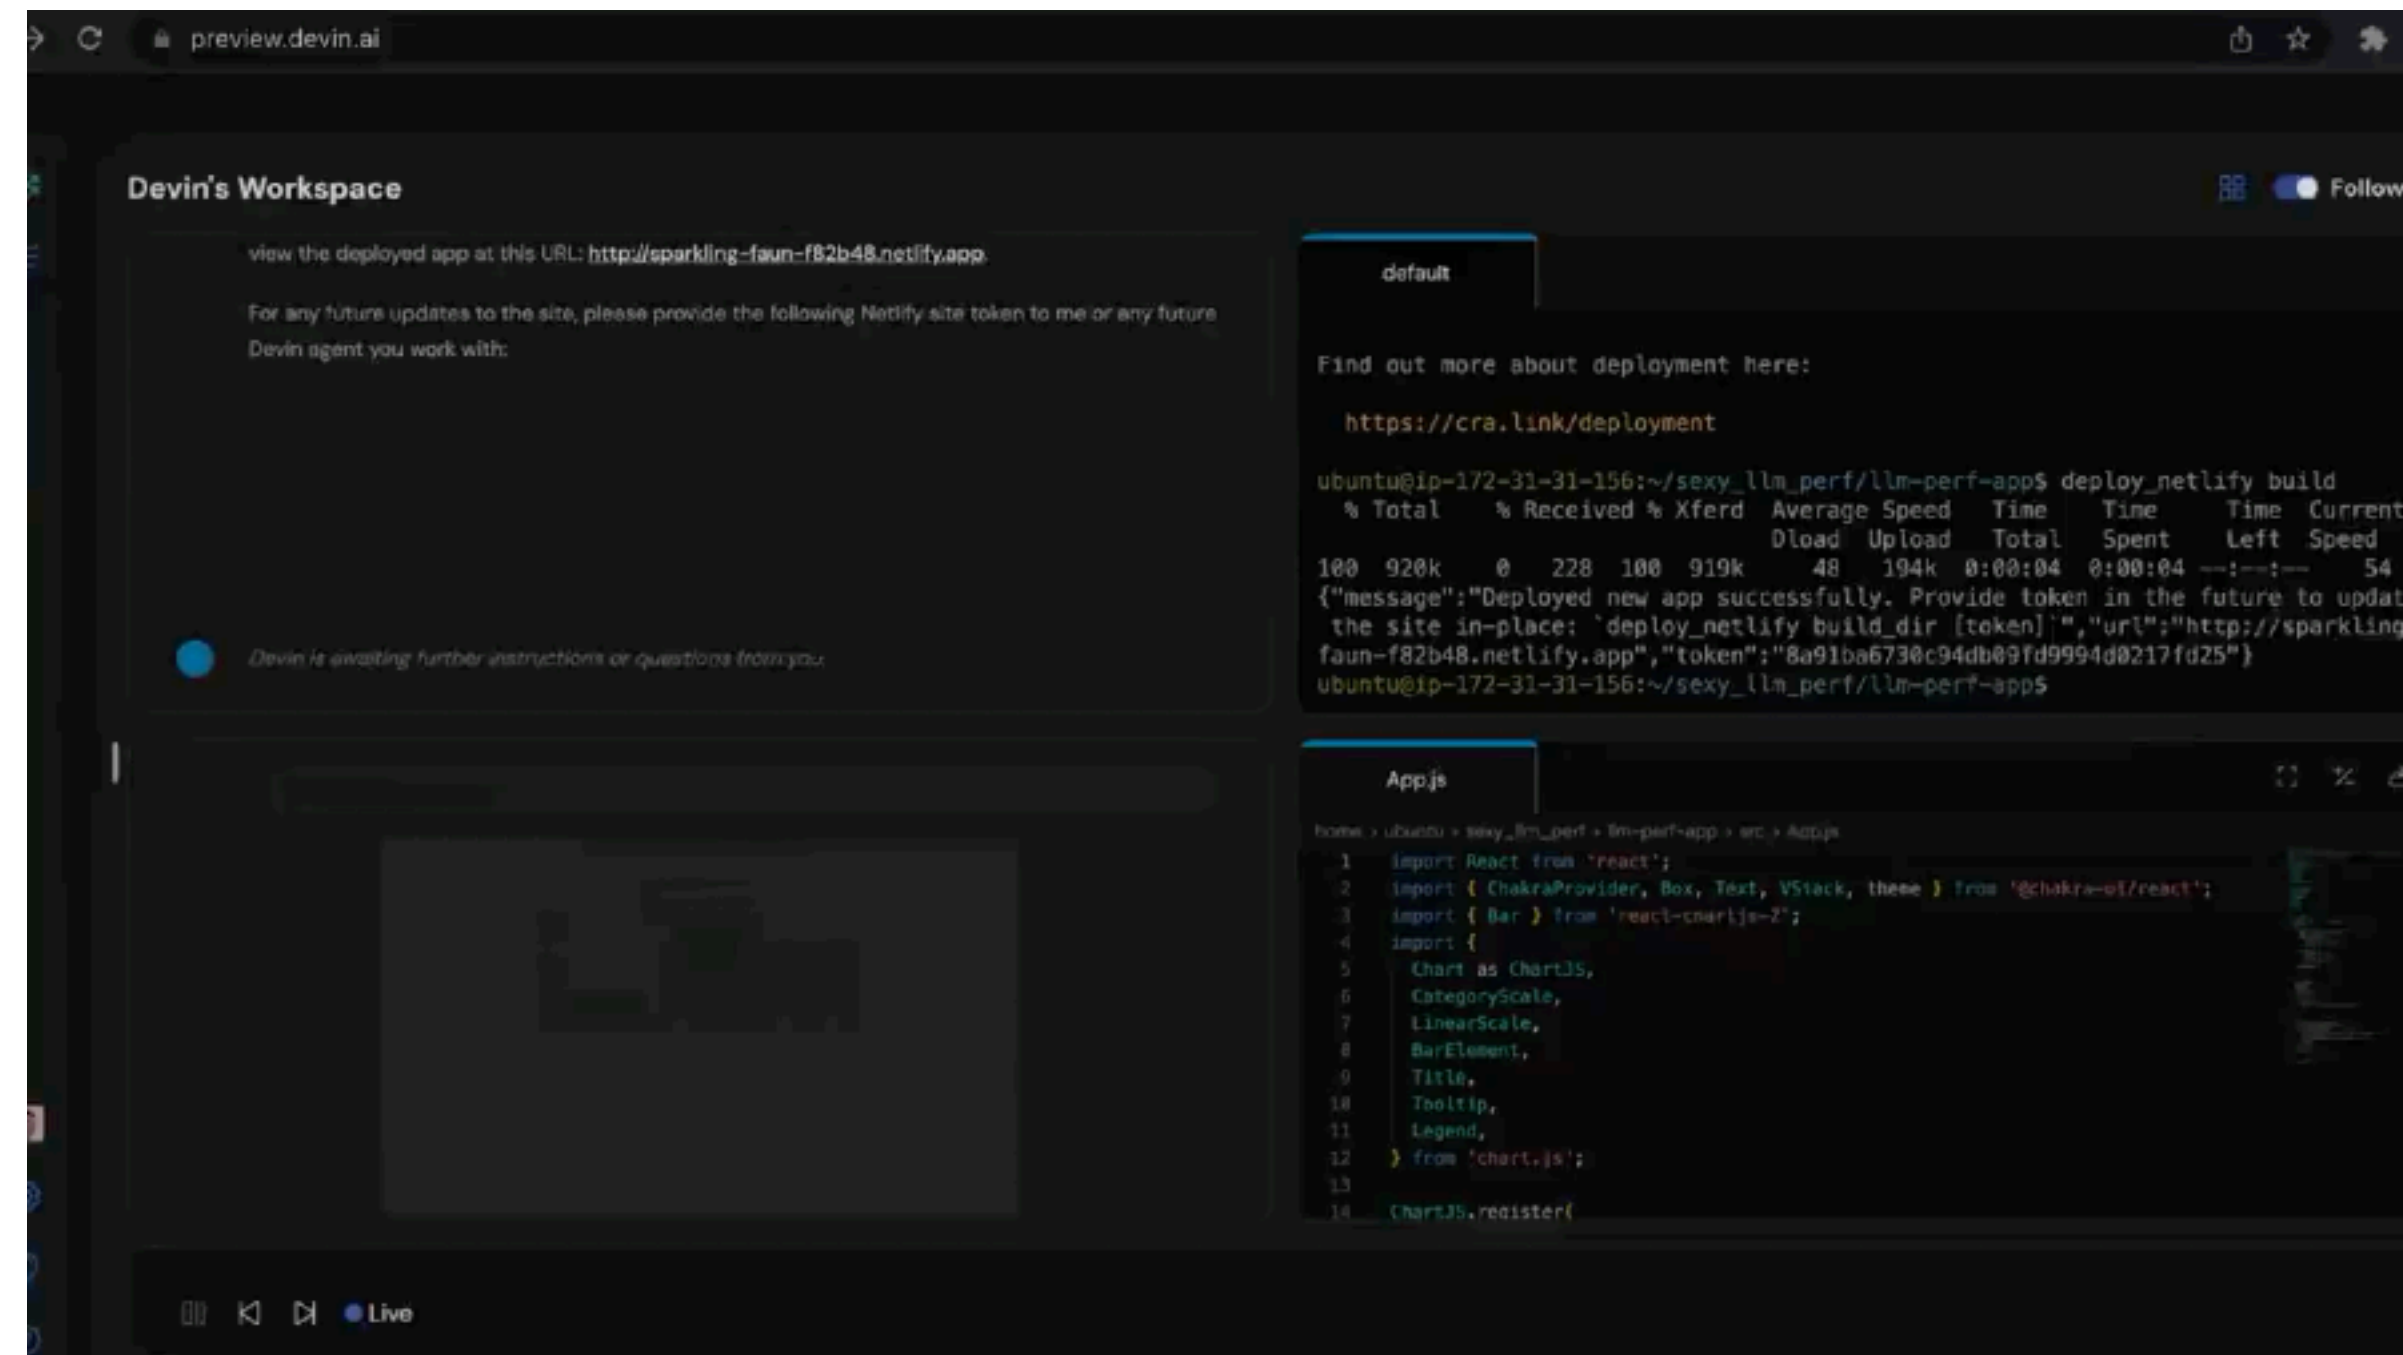


Devin



Chat LLMs



Routers



Tool callers



Iterators



Full Autonomy