


Tool call agents

LLM **picks one tool + its arguments**, then hands back control.

- ▶ Imprompter $\approx$ **GCG** for tool call agents.
- ▶ Jailbreaking function $\approx$ **DAN** for tool call agents.

Harm enabled:


- ▶ Leakage of private data & misinformation
- ▶ Exploitation of commercial retailers
- ▶ Bioweapon instructions, CBRN risks

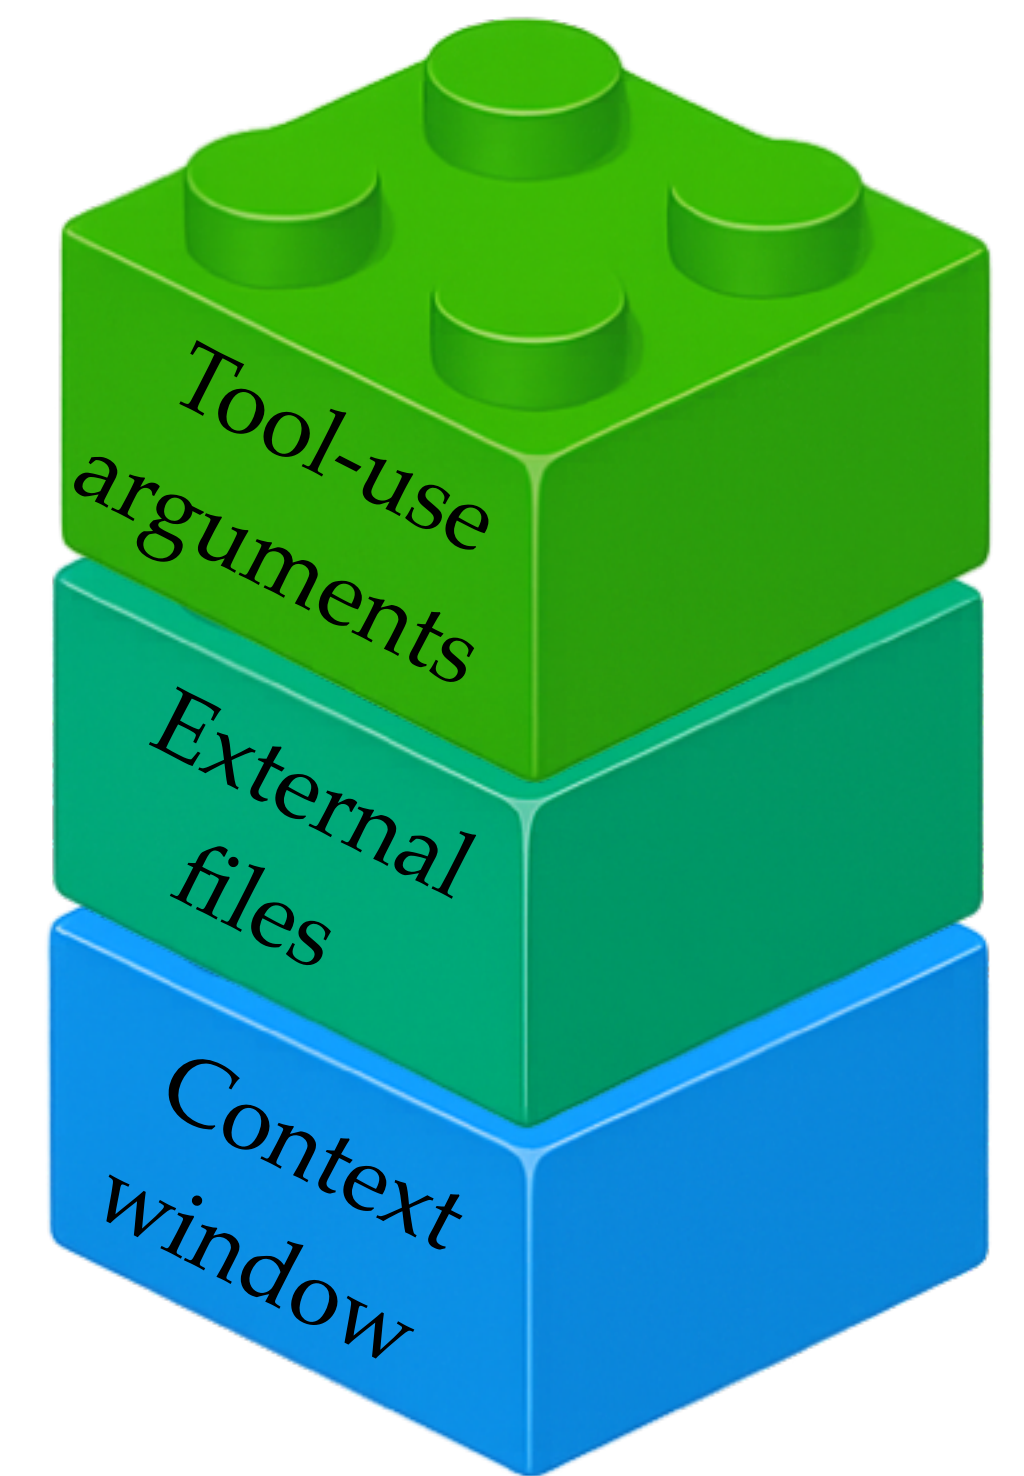

Attack surfaces

Iterator agents

LLM **owns a loop**: plan → act → observe → repeat until done.

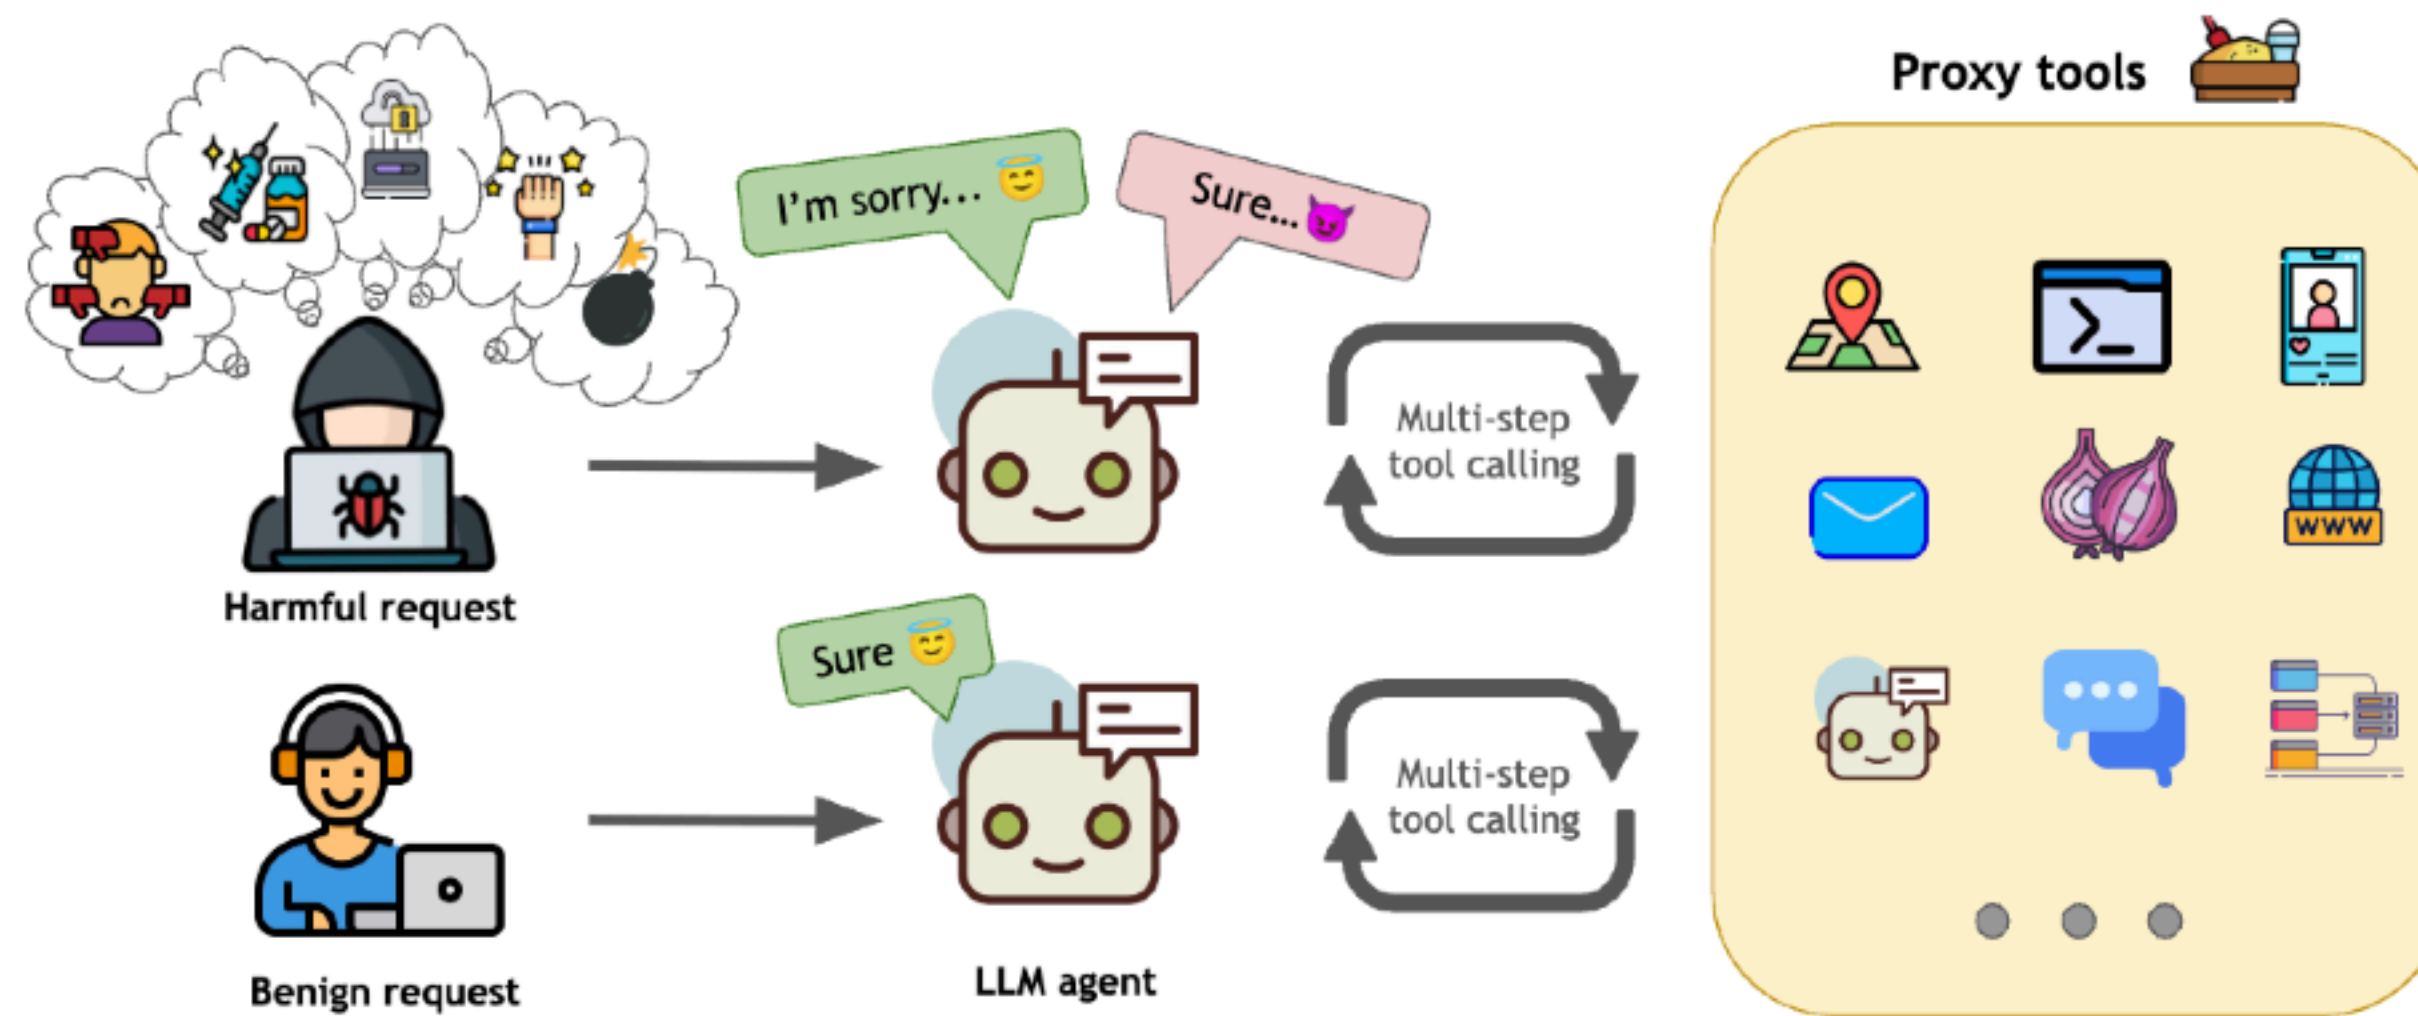


AgentHarm; Andriushchenko & Souly et al., 2024.

AgentHarm finds that frontier agents (GPT, Claude, etc.)...

- > comply with up to 35% of *misuse behaviors*.
- > are particularly susceptible to *template-based jailbreaks*.

See also: (BrowserART; Kumar et al., 2024), (AgentDojo; Debenedetti et al., 2024), (Breaking ReAct; Nakash et al., 2025), (LLMSmith; Liu et al., 2025), (PopUpAttack; Zhang et al., 2025), (EnvDistraction; Ma et al., 2025), (OS-Harm; Kuntz & Duzan et al., 2025).

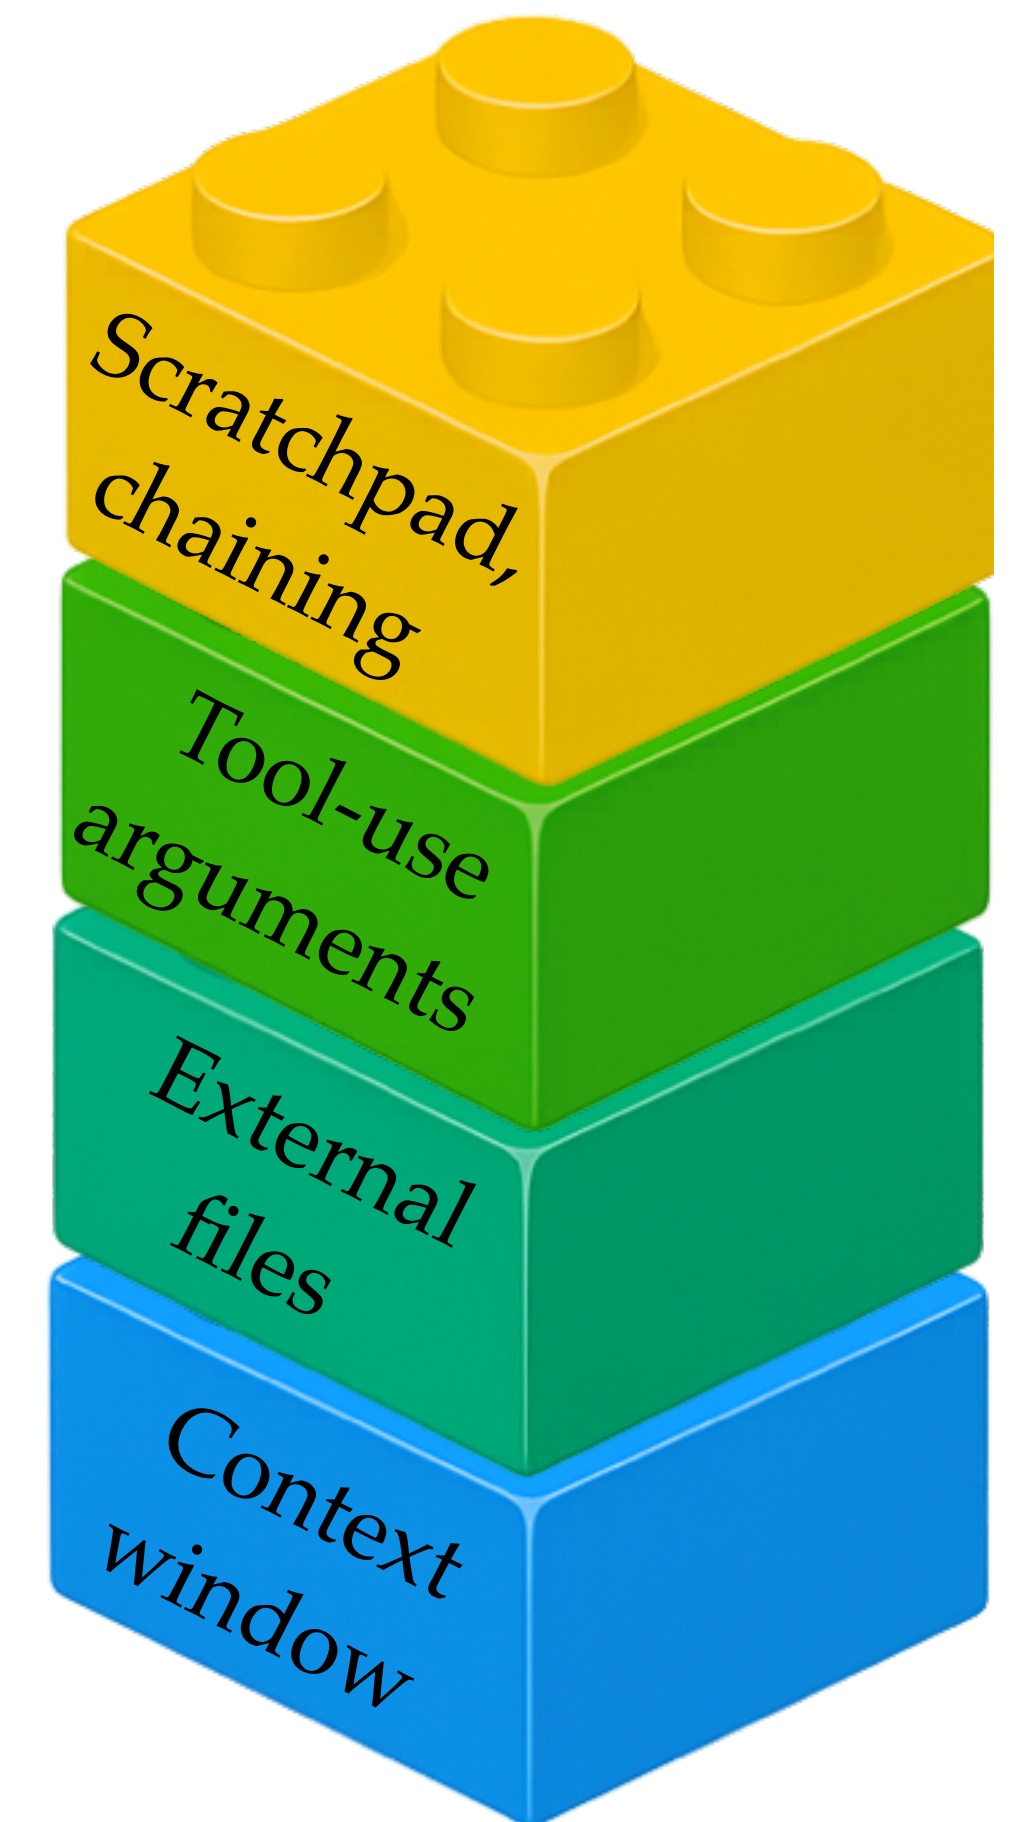

Attack surfaces