

Router agents

LLM chooses which predefined branch to take.



```
route = llm("Domestic or International? Reply D/I.")  
if route.startswith("D"):  
    handle_domestic()  
else:  
    handle_international()
```


Predefined program logic depends on an LLM's answer to user input.


What LLMs


To allers

FullAutonomy






















Routes









Router agents

LLM chooses **which predefined branch** to take.



```
route = llm("Domestic or International? Reply D/I.")
if route.startswith("D"):
    handle_domestic()
else:
    handle_international()
```

Predefined program logic depends on an LLM's answer to user input.



Chat LLMs




Routers



Tool callers



Iterators




Full Autonomy

Router agents

LLM chooses **which predefined branch** to take.



Perplexity

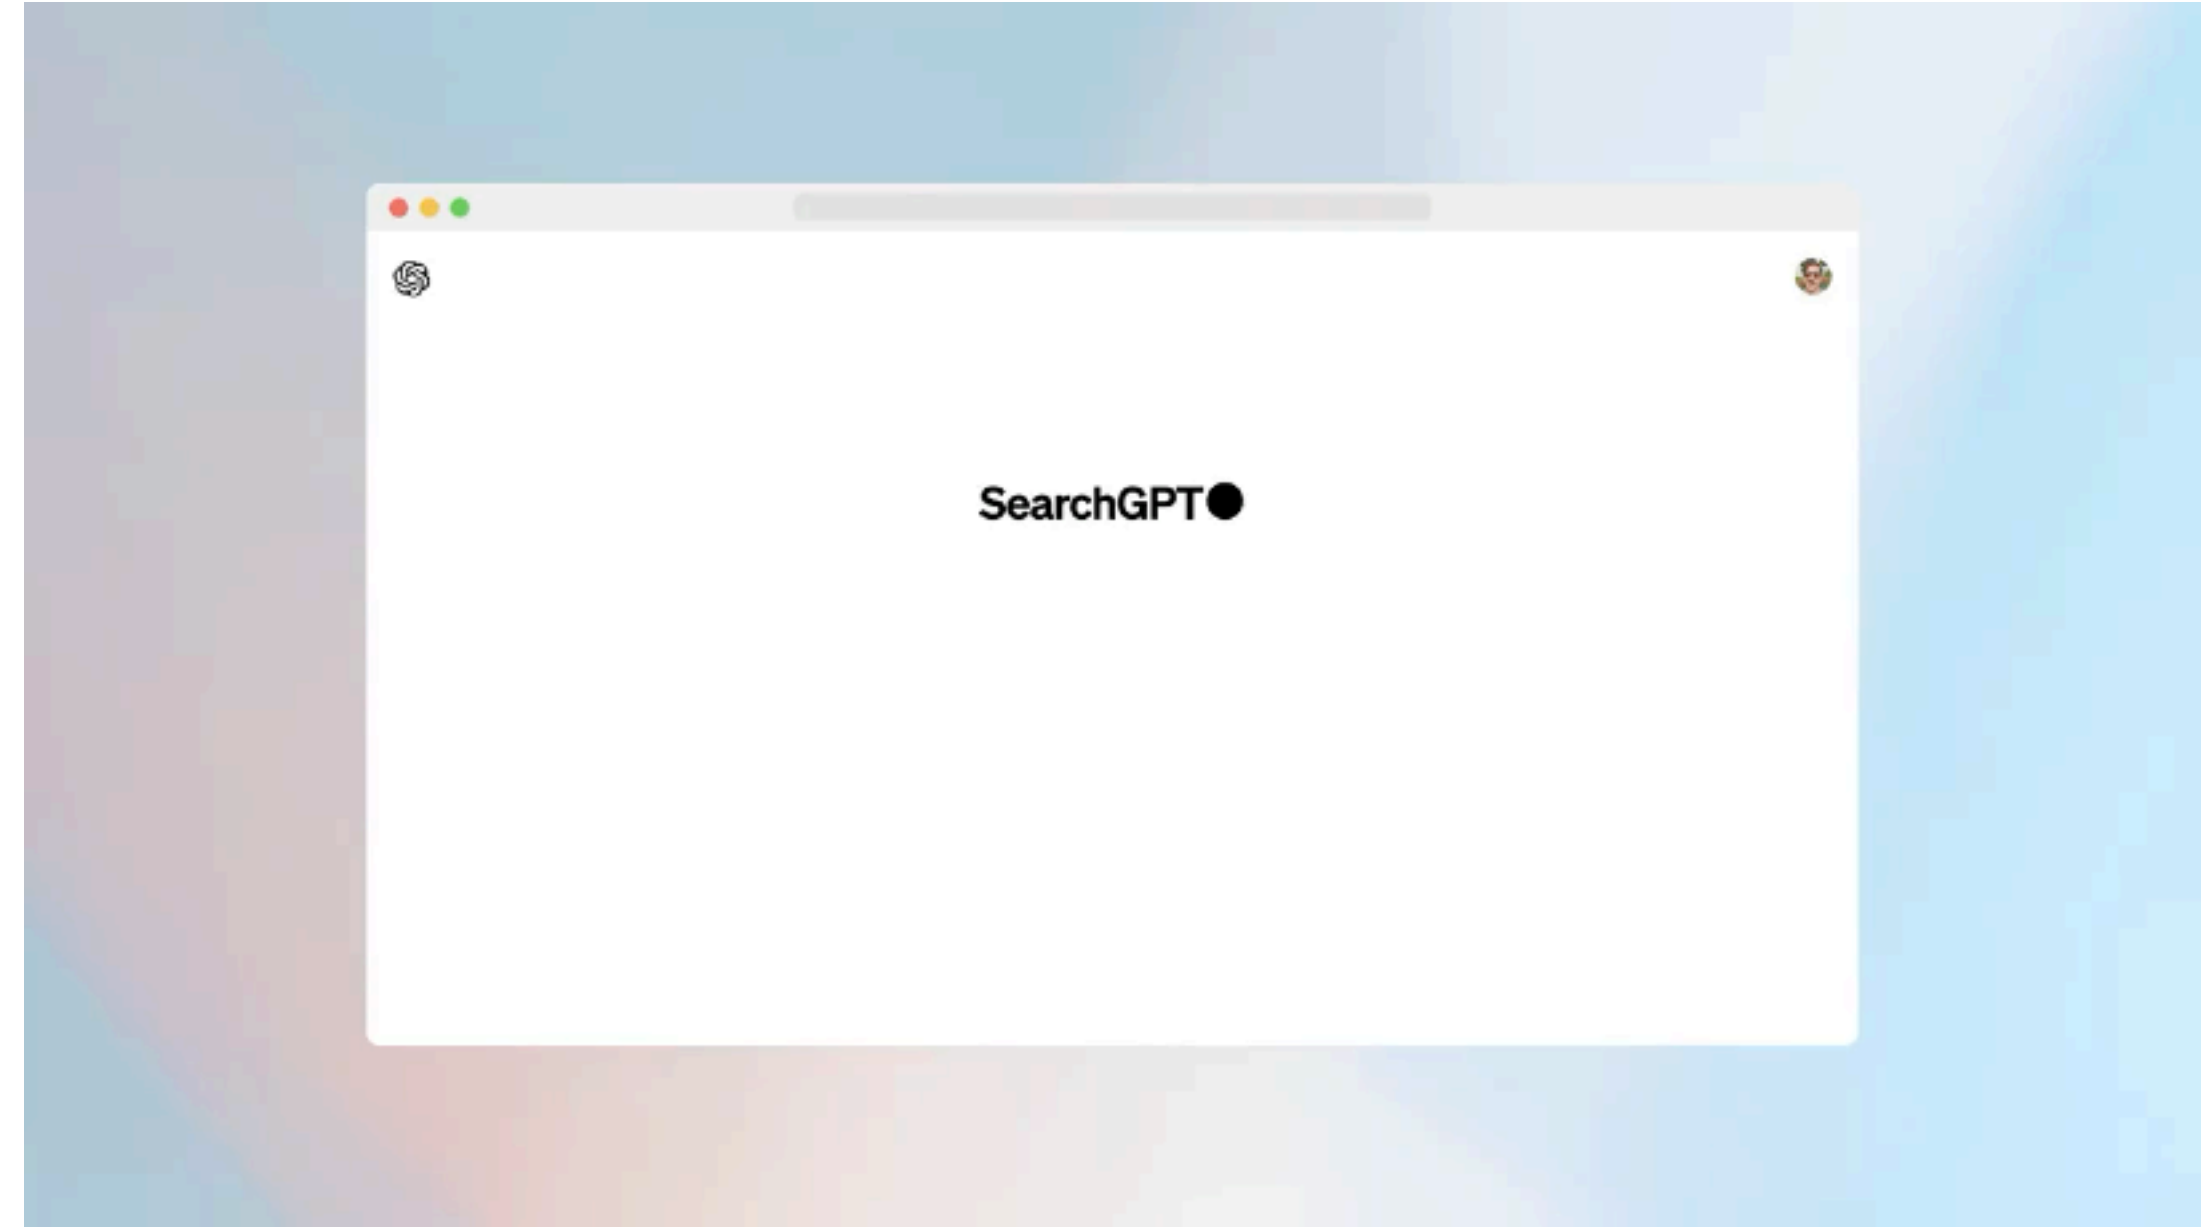

SearchGPT


Other examples: Google AI overviews, Notion Q&A, WikiChat, OtterPilot, SlackGPT



Chat LLMs




Routers



Tool callers



Iterators



Full Autonomy