


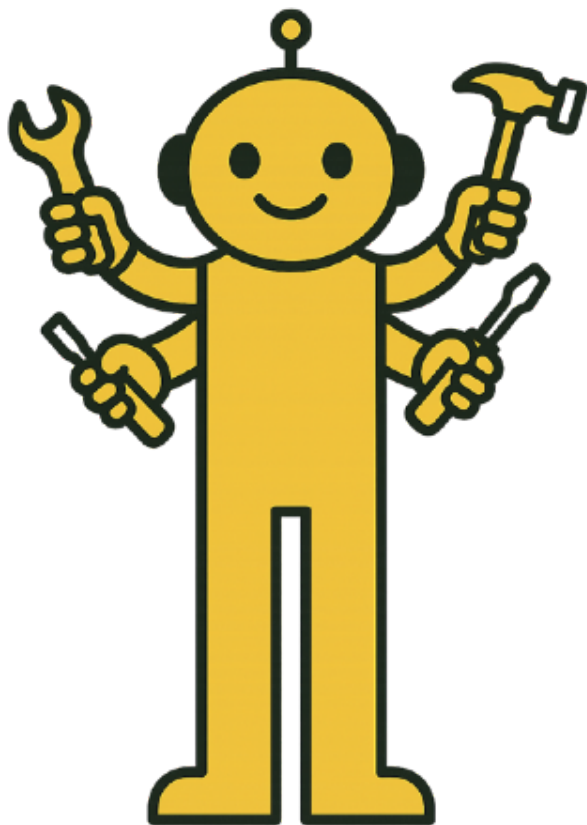

```
54 54 /// A transport implementation
55 55 #[derive(Clone)]
56 56 pub struct Transport {
57 57     addr: SocketAddr,
58 58     tls_enabled: bool,
59 59 }
60 60
61 61 impl Transport {
62 62     pub async fn new(config: TransportConfig) -> Result<Self, Box<dyn std::error::Er
63 63         Ok(Self {
64 64             addr: config.addr,
65 65             tls_enabled: config.tls_config.is_some(),
66 66         })
67 67     }
68 68
69 69     pub fn local_addr(&self) -> Result<SocketAddr, Box<dyn std::error::Error>> {
70 70         Ok(self.addr)
71 71     }
72 72
73 73     pub async fn accept(&self) -> Result<Stream, Box<dyn std::error::Error>> {
74 74         Ok(Stream::new())
75 75     }
76 76 }
77 77
78 78 /// A transport stream
79 79 pub struct Stream {}
80 80
81 81 impl Stream {
82 82     pub(crate) fn new() -> Self {
83 83         Self {}
84 84     }
85 85
86 86     pub async fn read(&mut self, _buf: &mut [u8]) -> std::io::Result<usize> {
87 87         Ok(0)
88 88     }
89 89 }
```

New Chat

+ ☁ ⌚ ⋮

🔍 @ transport.rs

add graceful shutdown end to end

🔍 Agent claude-3.5-sonnet MAX

🗨 ⬆

Past Chats >

Gvrsor

Claude Computer Use

Other examples: GitHub Copilot, Amazon Q Developer Agents, Windsurf Agents, Zapier Agents

Left click

Move to 147, 69

Left click

Type

Sunrise at Battery Spencer
tomorrow at 7:22am

Key ↵

Screenshot


Now let me add a note by
clicking "Add Notes, URL, or
Attachments":

Move to 575, 383

Left click

Type

Leave Pacific Heights by 6:45am
to arrive with time to park and
set up before sunrise. Drive
time is approximately 20
minutes to Battery Spencer.
Bring warm layers as it can be
chilly in the morning!

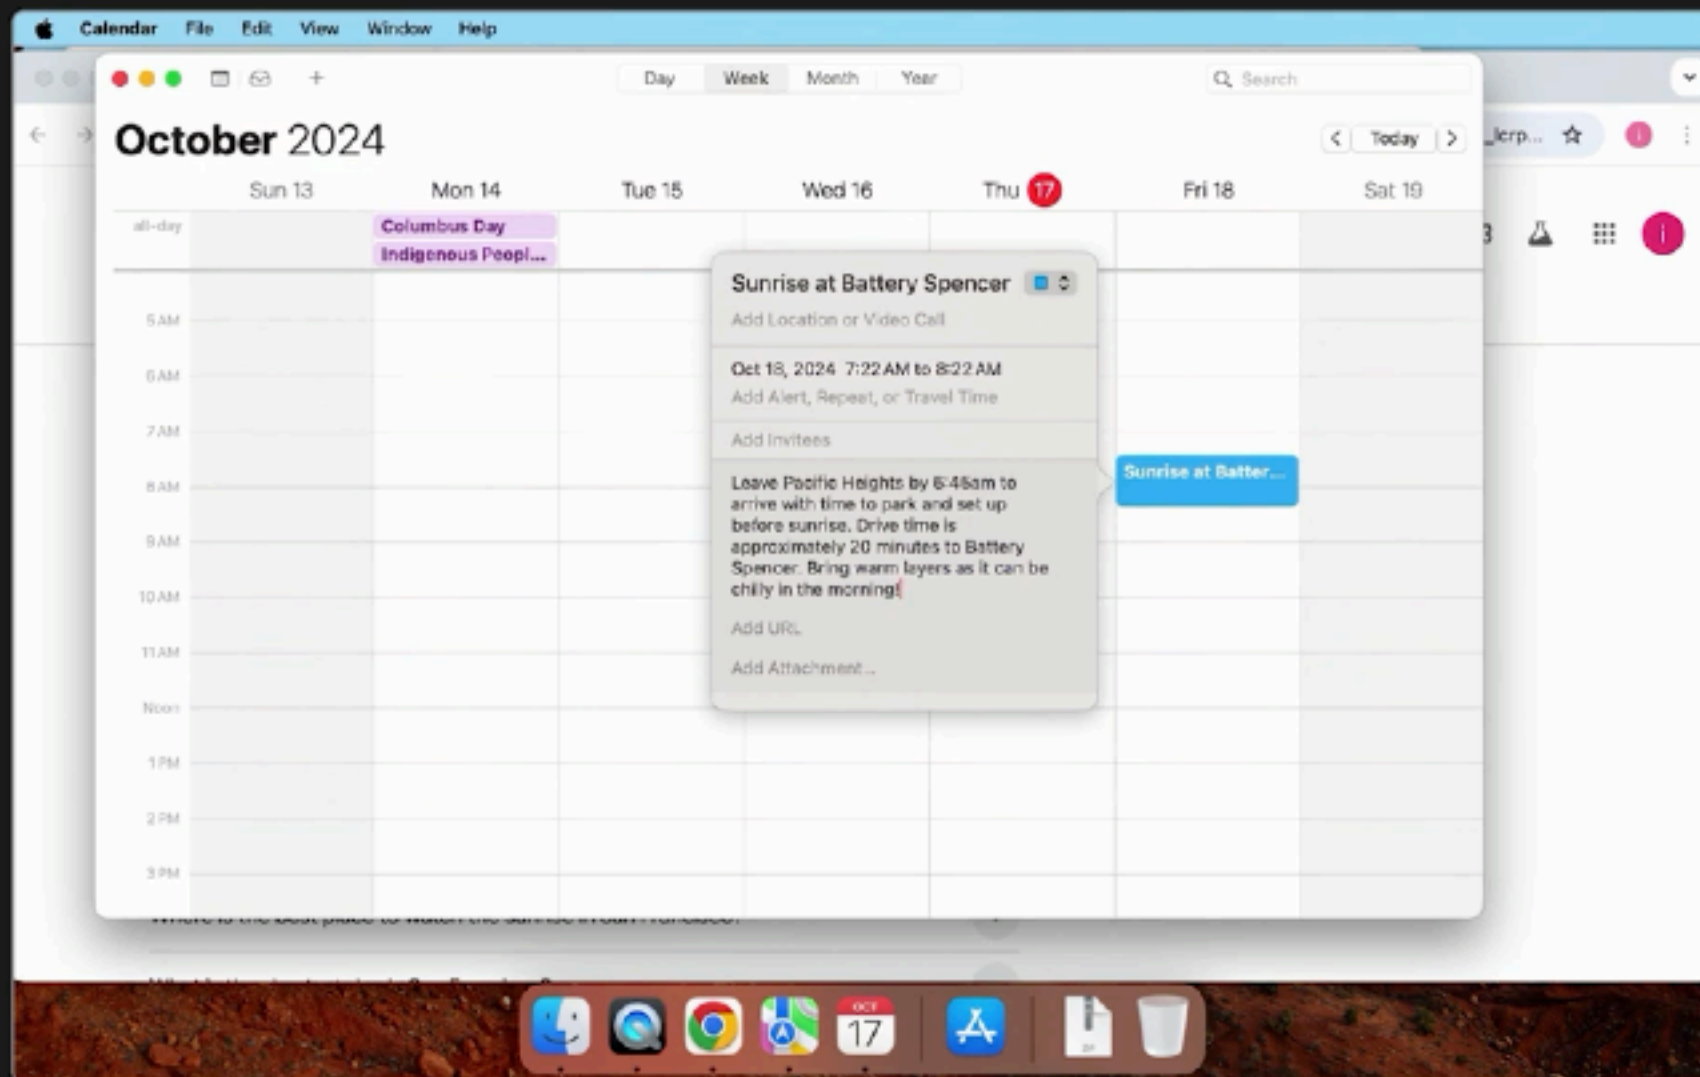

Iterators agents

LLM **owns a loop**: plan $\rightarrow$ act $\rightarrow$ observe $\rightarrow$ repeat until done.

What LLMs




Routes


To allers

FullAutonomy























Iterators



```
54 54 /// A transport implementation
55 55 #[derive(Clone)]
56 56 pub struct Transport {
57 57     addr: SocketAddr,
58 58     tls_enabled: bool,
59 59 }
60 60
61 61 impl Transport {
62 62     pub async fn new(config: TransportConfig) -> Result<Self, Box<dyn std::error::Er
63 63         Ok(Self {
64 64             addr: config.addr,
65 65             tls_enabled: config.tls_config.is_some(),
66 66         })
67 67     }
68 68
69 69     pub fn local_addr(&self) -> Result<SocketAddr, Box<dyn std::error::Error>> {
70 70         Ok(self.addr)
71 71     }
72 72
73 73     pub async fn accept(&self) -> Result<Stream, Box<dyn std::error::Error>> {
74 74         Ok(Stream::new())
75 75     }
76 76 }
77 77
78 78 /// A transport stream
79 79 pub struct Stream {}
80 80
81 81 impl Stream {
82 82     pub(crate) fn new() -> Self {
83 83         Self {}
84 84     }
85 85
86 86     pub async fn read(&mut self, _buf: &mut [u8]) -> std::io::Result<usize> {
87 87         Ok(0)
88 88     }
```

New Chat

+ ☁ ⌚ ⋮

🔍 @ transport.rs

add graceful shutdown end to end

🔍 Agent claude-3.5-sonnet MAX



Past Chats >

```
54 54 /// A transport implementation
55 55 #[derive(Clone)]
56 56 pub struct Transport {
57 57     addr: SocketAddr,
58 58     tls_enabled: bool,
59 59 }
60 60
61 61 impl Transport {
62 62     pub async fn new(config: TransportConfig) -> Result<Self, Box<dyn std::error::Er
63 63         Ok(Self {
64 64             addr: config.addr,
65 65             tls_enabled: config.tls_config.is_some(),
66 66         })
67 67     }
68 68
69 69     pub fn local_addr(&self) -> Result<SocketAddr, Box<dyn std::error::Error>> {
70 70         Ok(self.addr)
71 71     }
72 72
73 73     pub async fn accept(&self) -> Result<Stream, Box<dyn std::error::Error>> {
74 74         Ok(Stream::new())
75 75     }
76 76 }
77 77
78 78 /// A transport stream
79 79 pub struct Stream {}
80 80
81 81 impl Stream {
82 82     pub(crate) fn new() -> Self {
83 83         Self {}
84 84     }
85 85
86 86     pub async fn read(&mut self, _buf: &mut [u8]) -> std::io::Result<usize> {
87 87         Ok(0)
88 88     }
```

New Chat

+ ☁ ↺ ⋮

@ transport.rs

add graceful shutdown end to end

∞ Agent Claude-3.5-Sonnet MAX



Past Chats >

Left click

Move to 147, 69

Left click

Type

Sunrise at Battery Spencer
tomorrow at 7:22am

Key ↵

Screenshot


Now let me add a note by
clicking "Add Notes, URL, or
Attachments":

Move to 575, 383

Left click

Type

Leave Pacific Heights by 6:45am
to arrive with time to park and
set up before sunrise. Drive
time is approximately 20
minutes to Battery Spencer.
Bring warm layers as it can be
chilly in the morning!

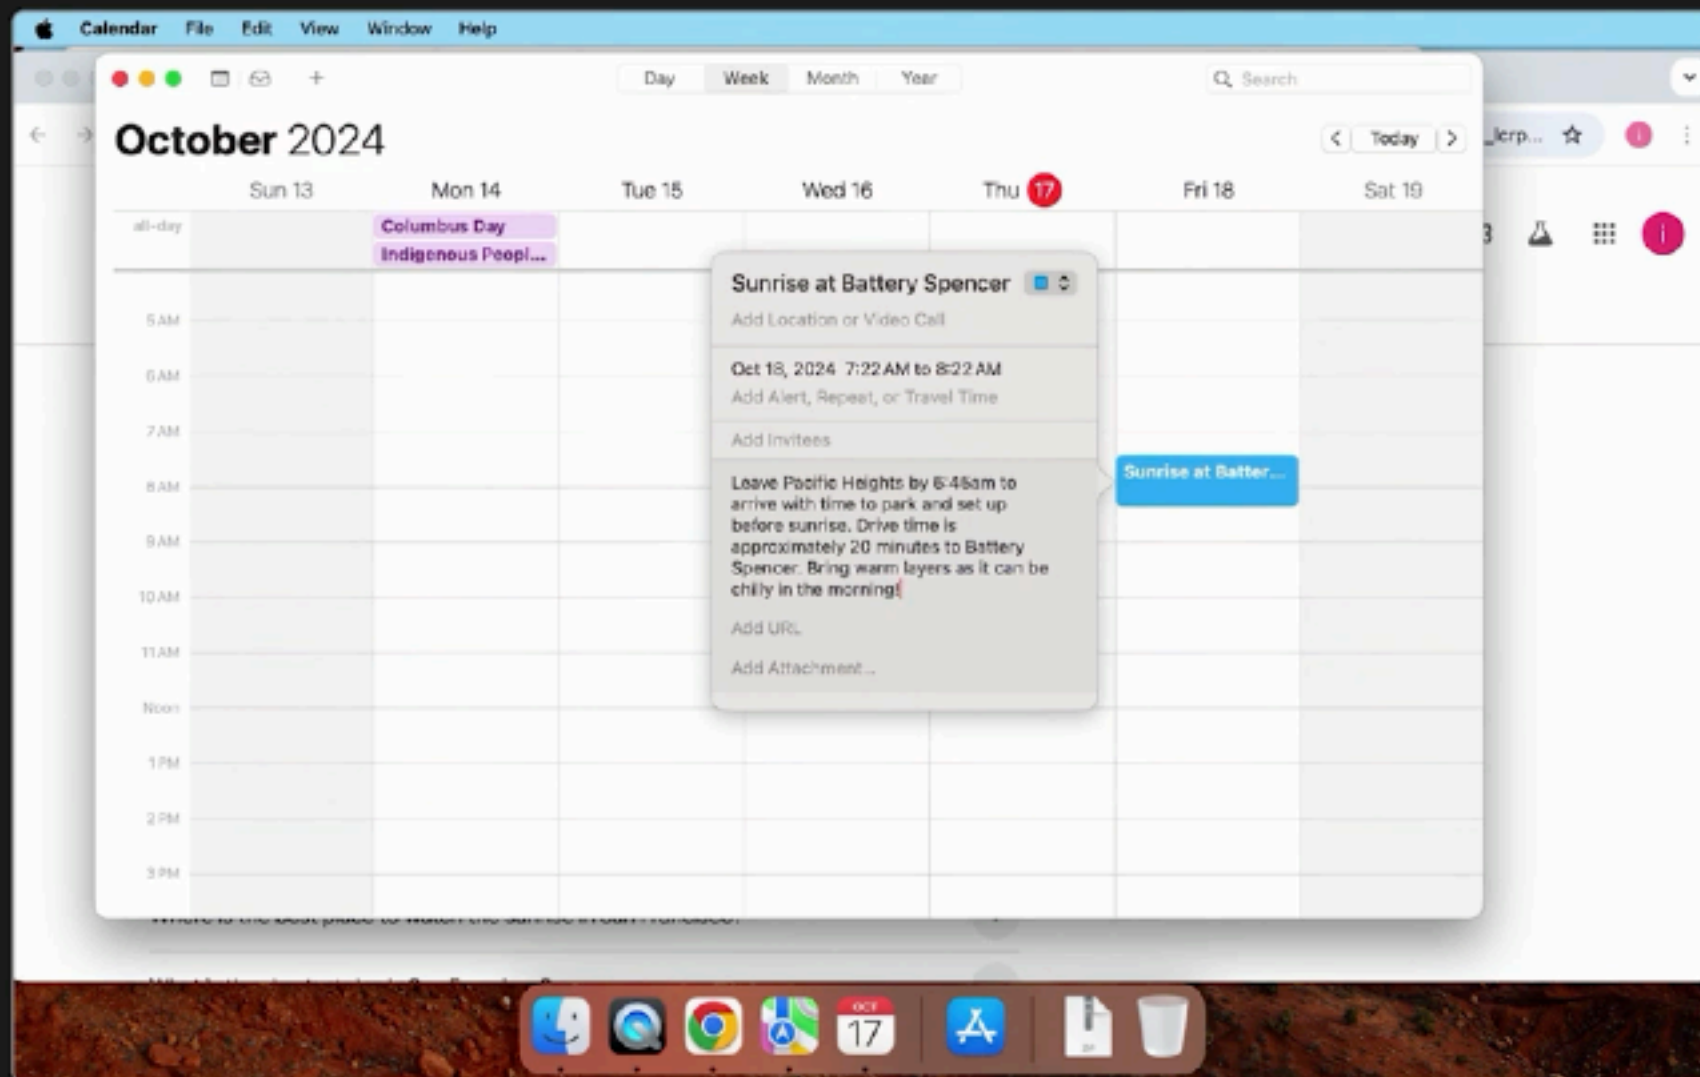

Left click

Move to 147, 69

Left click

Type

Sunrise at Battery Spencer
tomorrow at 7:22am

Key ↵

Screenshot


Now let me add a note by
clicking "Add Notes, URL, or
Attachments":

Move to 575, 383

Left click

Type

Leave Pacific Heights by 6:45am
to arrive with time to park and
set up before sunrise. Drive
time is approximately 20
minutes to Battery Spencer.
Bring warm layers as it can be
chilly in the morning!

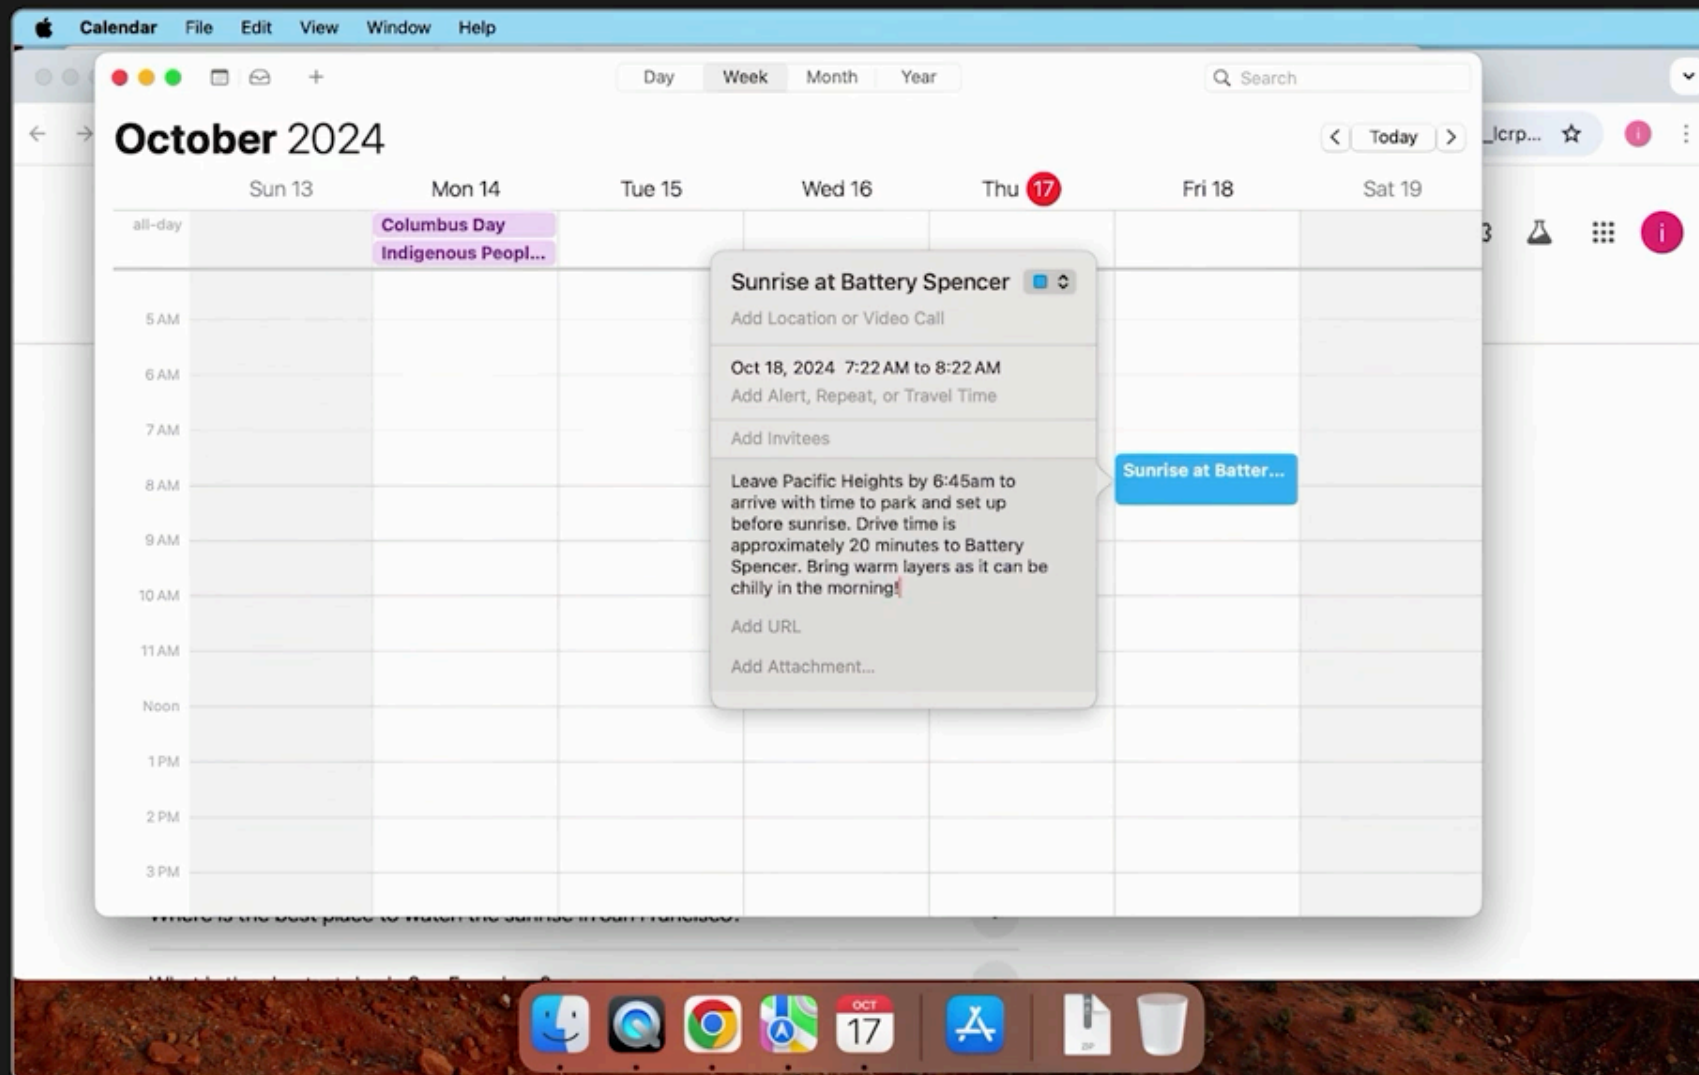


Iterator agents

LLM **owns a loop**: plan → act → observe → repeat until done.



```
54 54 /// A transport implementation
55 55 #[derive(Clone)]
56 56 pub struct Transport {
57 57     addr: SocketAddr,
58 58     tls_enabled: bool,
59 59 }
60 60
61 61 impl Transport {
62 62     pub async fn new(config: TransportConfig) -> Result<Self, Box<dyn std::error::Er
63 63     {
64 64         Ok(Self {
65 65             addr: config.addr,
66 66             tls_enabled: config.tls_config.is_some(),
67 67         })
68 68     }
69 69
70 70     pub fn local_addr(&self) -> Result<SocketAddr, Box<dyn std::error::Error>> {
71 71         Ok(self.addr)
72 72     }
73 73
74 74     pub async fn accept(&self) -> Result<Stream, Box<dyn std::error::Error>> {
75 75         Ok(Stream::new())
76 76     }
77 77
78 78 /// A transport stream
79 79 pub struct Stream {}
80 80
81 81 impl Stream {
82 82     pub(crate) fn new() -> Self {
83 83         Self {}
84 84     }
85 85
86 86     pub async fn read(&mut self, _buf: &mut [u8]) -> std::io::Result<usize> {
87 87         Ok(0)
88 88     }
89 89 }
```

Cursor

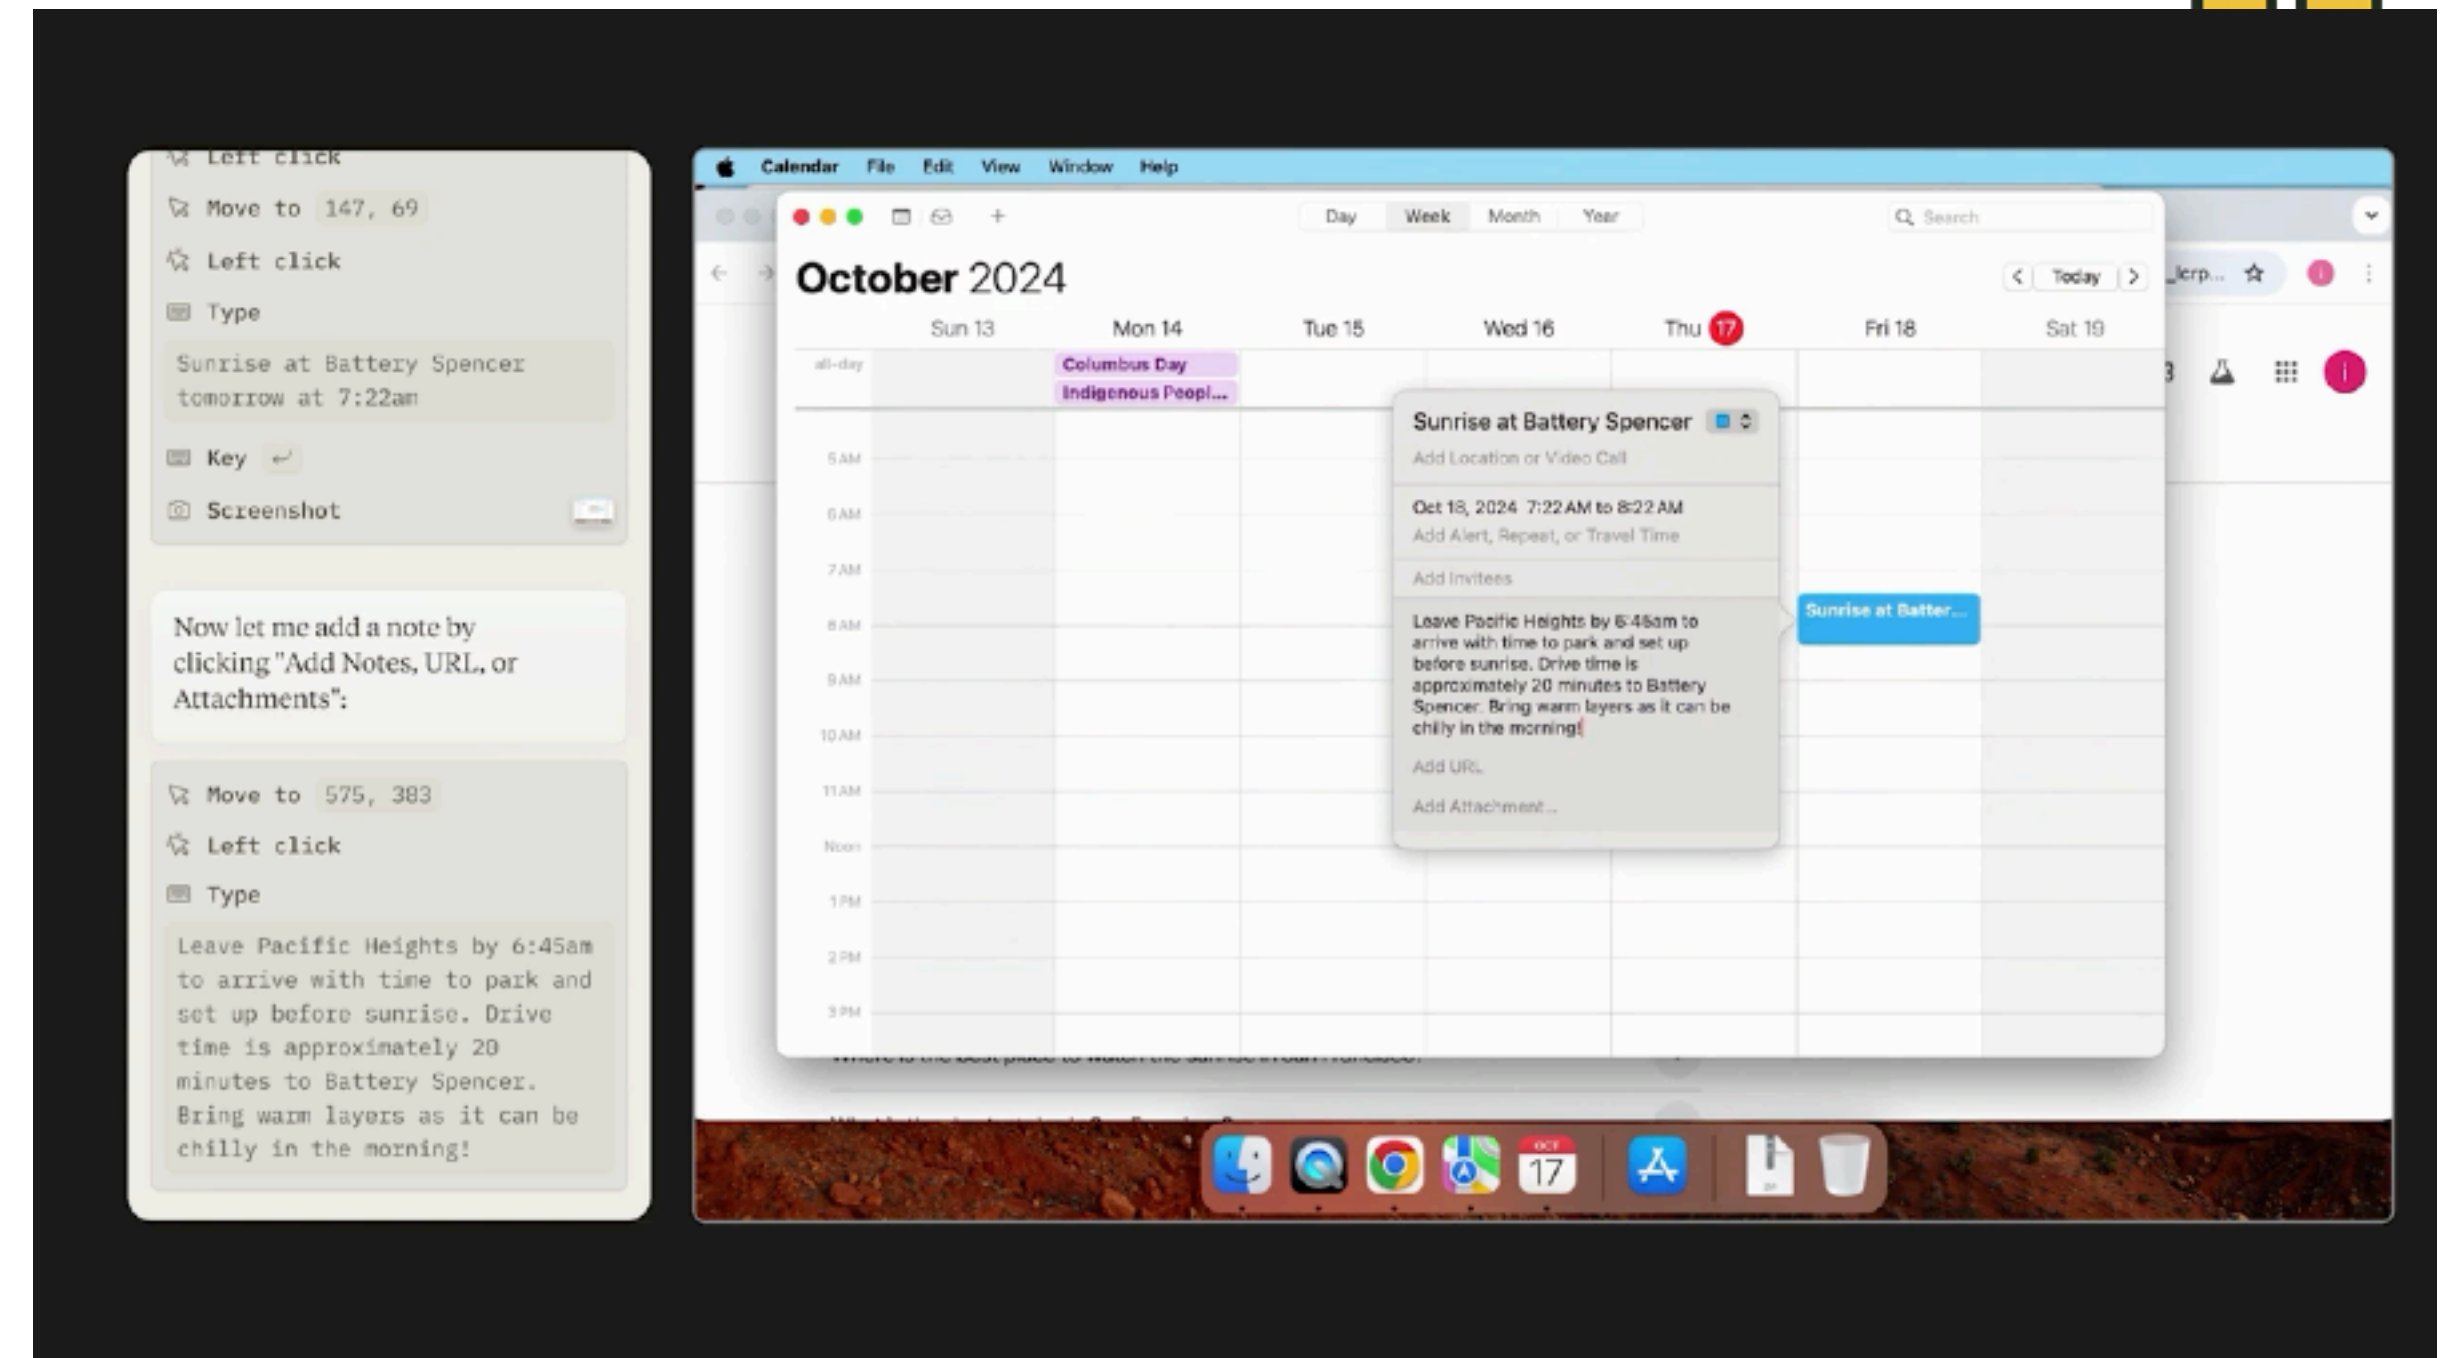

Claude Computer Use

Other examples: GitHub Copilot, Amazon Q Developer agents, Windsurf agents, Zapier agents

Chat LLMs

Routers

Tool callers

Iterators

Full Autonomy

Fully autonomous agents

Agent can **launch other agents** + **write and run new code**.

