

Toolcall agents

LLM **picks one tool + its arguments**, then hands back control.



```
call = llm("Return JSON with: tool, args:{from,to,depart,return}").json()  
run_tool(call["tool"], **call["args"])
```


LLM fills calls a flight-search API once, then yields control.


What LLMs




Routes


FullAutonomy




















Iterators

To allers









Tool call agents

LLM **picks one tool + its arguments**, then hands back control.




```
call = llm("Return JSON with: tool, args:{from,to,depart,return}").json()  
run_tool(call["tool"], **call["args"])
```

LLM fills calls a flight-search API once, then yields control.



Chat LLMs




Routers



Tool callers




Iterators




Full Autonomy

Tool call agents

LLM **picks one tool + its arguments**, then hands back control.

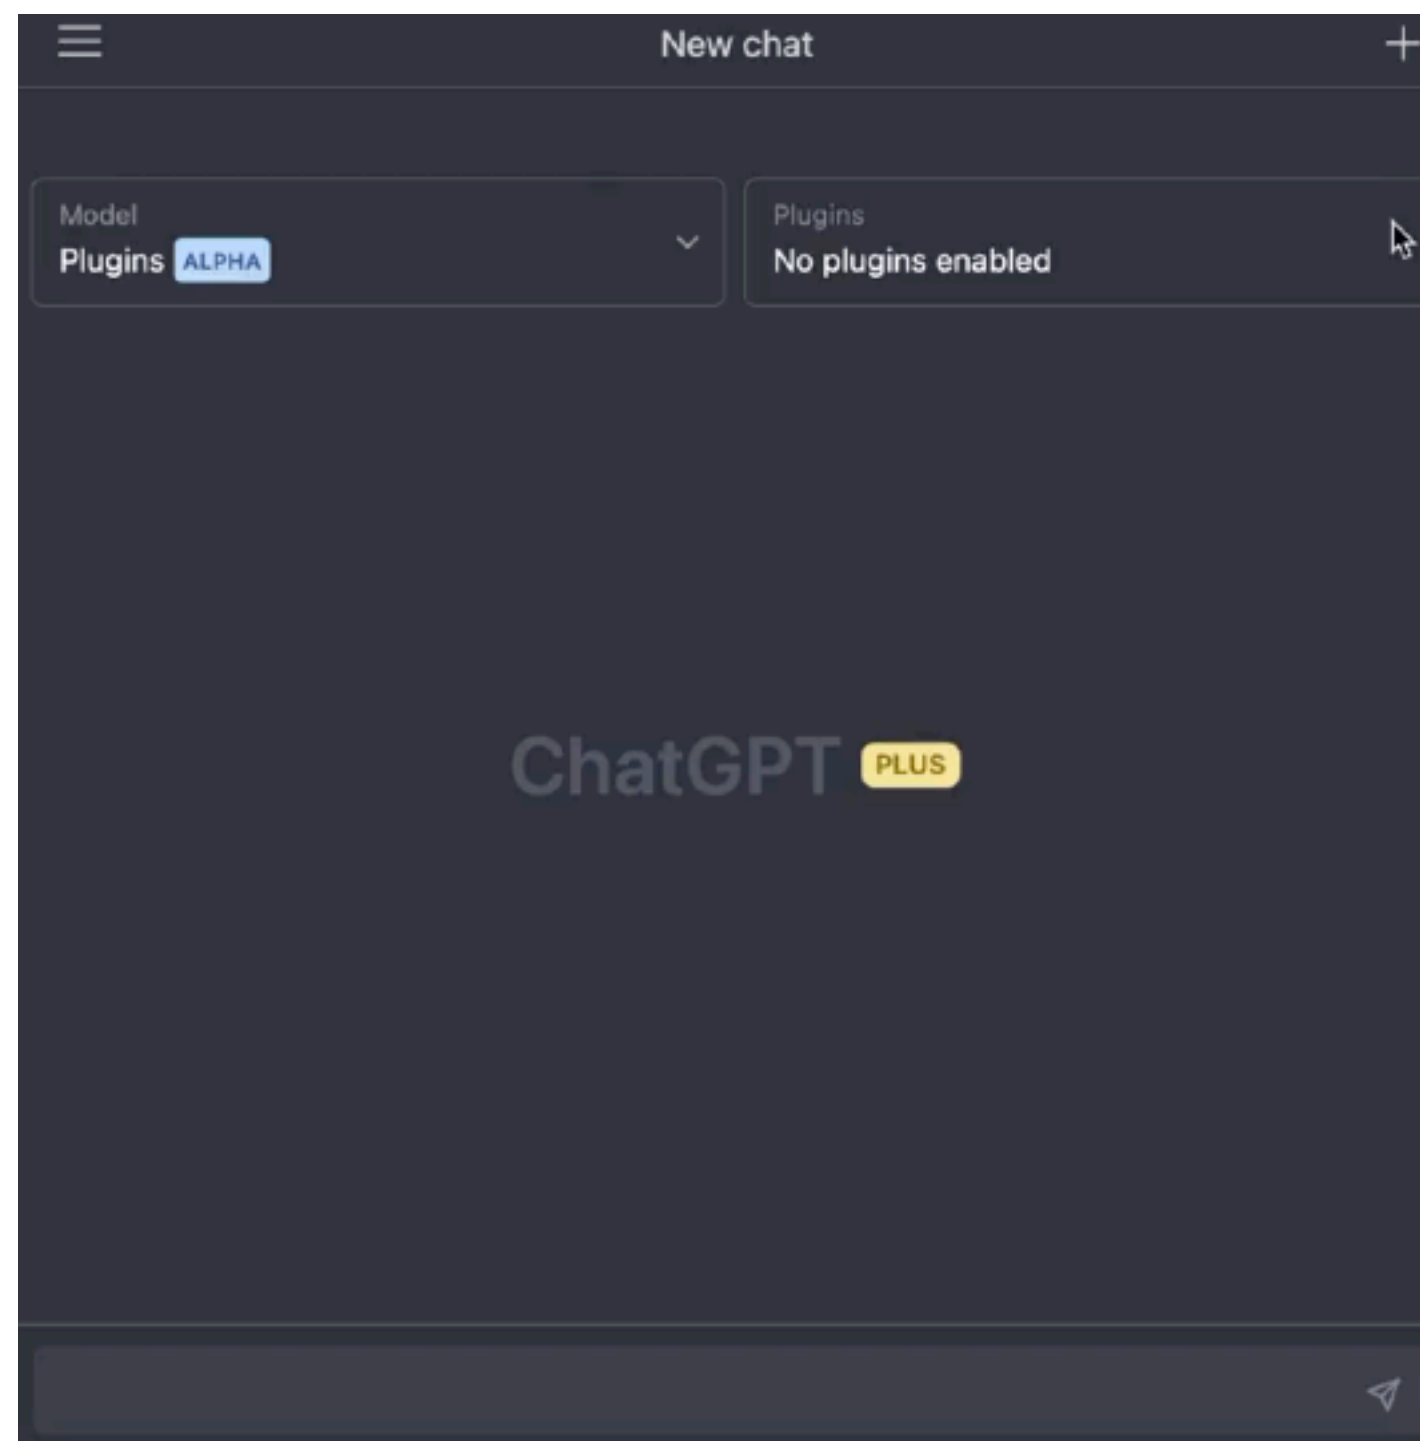


GPT + WolframAlpha

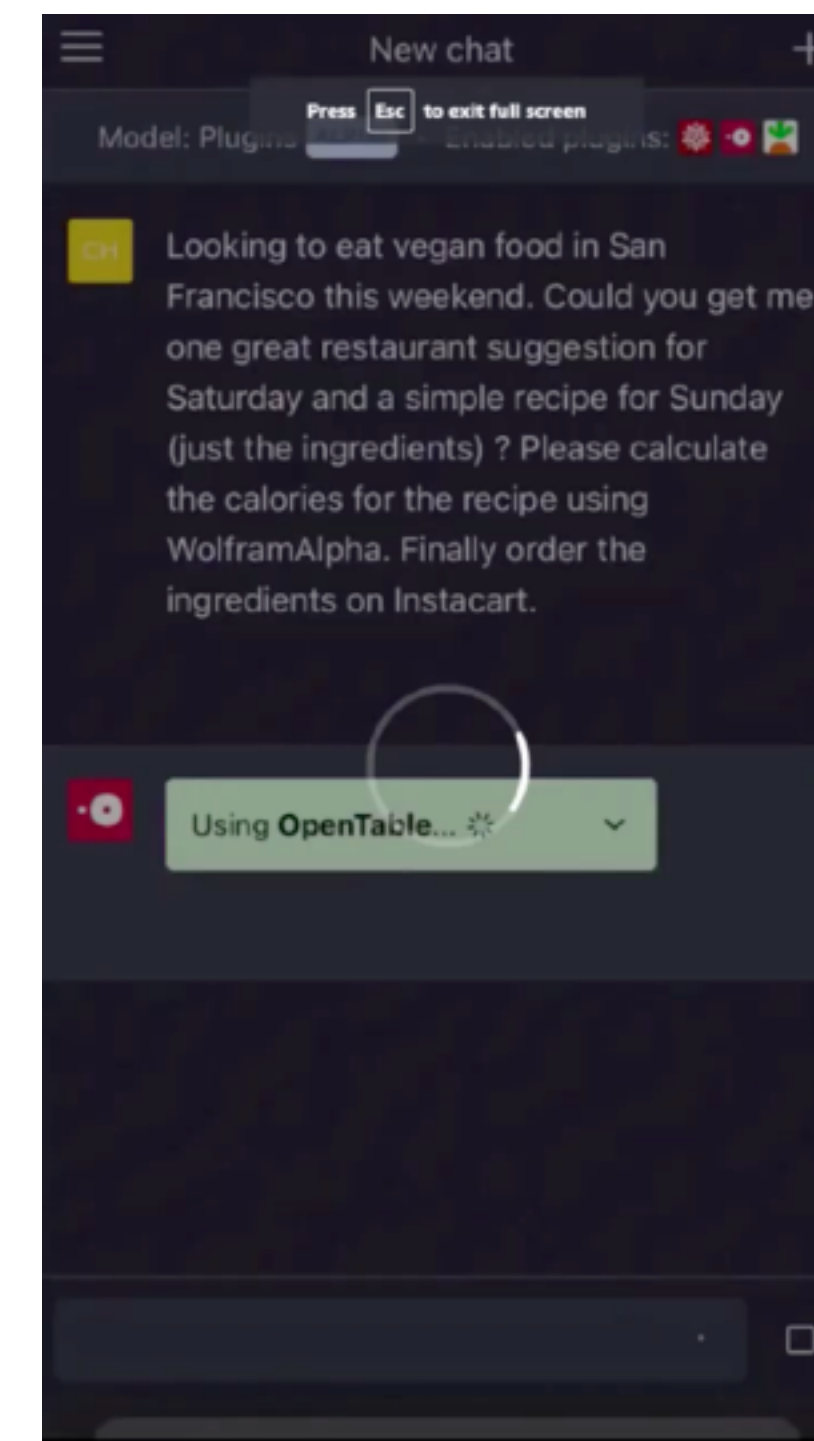


GPT + OpenTable



Chat LLMs




Routers



Tool callers



Iterators



Full Autonomy