



جمارك أبوظبي
ABU DHABI CUSTOMS

ADC – ICRMS
Integration Control Document



Version Control				
Ver	Date	Name	Role	Summary of Changes
1.0	13-Feb-2024	John Fraser	Senior Specialist – Technical Specifications Writer	Initial Draft
		Hassan Mohammed Saleem Riaz	Senior Specialist - Oracle Systems Development	
1.1	26-Mar-2024	John Fraser	Senior Specialist – Technical Specifications Writer	New: - Added Service Number & Registration Number parameters in (6.1.2) - Get Document IDs API - Get Document Content API

Version Reviewers / Approvers			
Name	Role	Signoff	Comments
Moath Abd Al Kareem Amayreh	Digital Systems & Solutions Development and Governance Team Leader		
Waseem Waleed Qouteshat	Digital Systems & Solutions Development and Governance Team Leader		



Table of Contents

1	Introduction	5
1.1	Purpose.....	5
1.2	Objective.....	5
1.3	Scope	5
1.4	Overview.....	5
1.5	Document Structure	5
1.6	Process Flow	6
1.7	Definition of Terms, Acronyms and Abbreviations	7
1.8	Intended Audience	7
2	Interface Technical Specifications	7
3	Functional Requirements	8
4	Non-Functional Requirements.....	8
4.1	Security	8
4.2	Reliability	8
4.3	Volumetric	9
5	Push Declaration API.....	9
5.1	Submit / Amend / Cancel Declaration	9
5.1.1	Overview	9
5.1.2	Request and Response Elements	9
5.2	Schema Definition.....	27
5.3	Request and Response Samples	27
6	Push Manifest Land API	27
6.1	New / Amend / Cancel Land Manifest.....	27
6.1.1	Overview	27
6.1.2	Push Manifest Land (Empty/Loaded)	27
6.1.3	Request and Response Elements	28
6.2	Schema Definition.....	32
6.3	Request and Response Samples	32
7	Push Manifest Sea API	33
7.1	New / Amend / Cancel Sea Manifest.....	33
7.1.1	Overview	33
7.1.2	Push Manifest Sea	33



7.1.3	Request and Response Elements	33
7.2	Schema Definition.....	36
7.3	Request and Response Samples	36
8	Push Manifest Air API	37
8.1	New / Amend / Cancel Air Manifest.....	37
8.1.1	Overview	37
8.1.2	Push Manifest Air	37
8.1.3	Request and Response Elements	37
8.2	Schema Definition.....	38
8.3	Request and Response Samples	38
9	Get Document IDs.....	38
9.1	Overview.....	38
9.2	Request and Response Elements.....	38
9.3	Schema Definition.....	40
9.4	Request and Response Samples	40
10	Get Document Content	41
10.1	Overview.....	41
10.2	Request and Response Elements.....	41
10.3	Schema Definition.....	42
10.4	Request and Response Samples	42
11	Response Codes & Error Handling.....	43
12	Get Lookup Values Interface	43
12.1	Overview.....	43
12.2	Request and Response Elements.....	44
12.3	Schema Definition.....	45
12.4	Request and Response Samples	45
13	Interface End Points	45
14	Appendix – Enclosures	45



1 Introduction

1.1 Purpose

This document defines the integration specifications between ADC and ICRMS. Through this integrations ADC will push all types of declarations to ICRMS to obtain the channeling information from ICRMS. This integration will provide ADC to submit the clearance of goods information for Air, Sea, and Land (to determine the risk channeling) and Manifest information from all channels (Air, Sea, and Land).

1.2 Objective

ADC provides the structure of the APIs to be developed by ICRMS and ICRMS will build the services in the same way and provide APIs to ADC.

1.3 Scope

The scope of this document is to establish an integration channel between ADC and ICRMS, specifying the functional and non-functional requirements, services list, services signature, transport protocol and exchanged messages for the integration between ADC and ICRMS.

1.4 Overview


In the UAE, cargo risk assessment is completed using data ingested from several sources electronically (TAMM portal, ATLP, Express Couriers, Dhabi system etc.). ADC is a major source of trade data for ICRMS. ADC accepts declarations from Traders for all kinds of shipments. ICRMS utilizes the Dhabi system through this integration to ingest all declaration types and provide the Risk channeling assessment result back to ADC.

1.5 Document Structure

This ICD document contains services specifications that serve ADC integration with ICRMS.



1.6 Process Flow

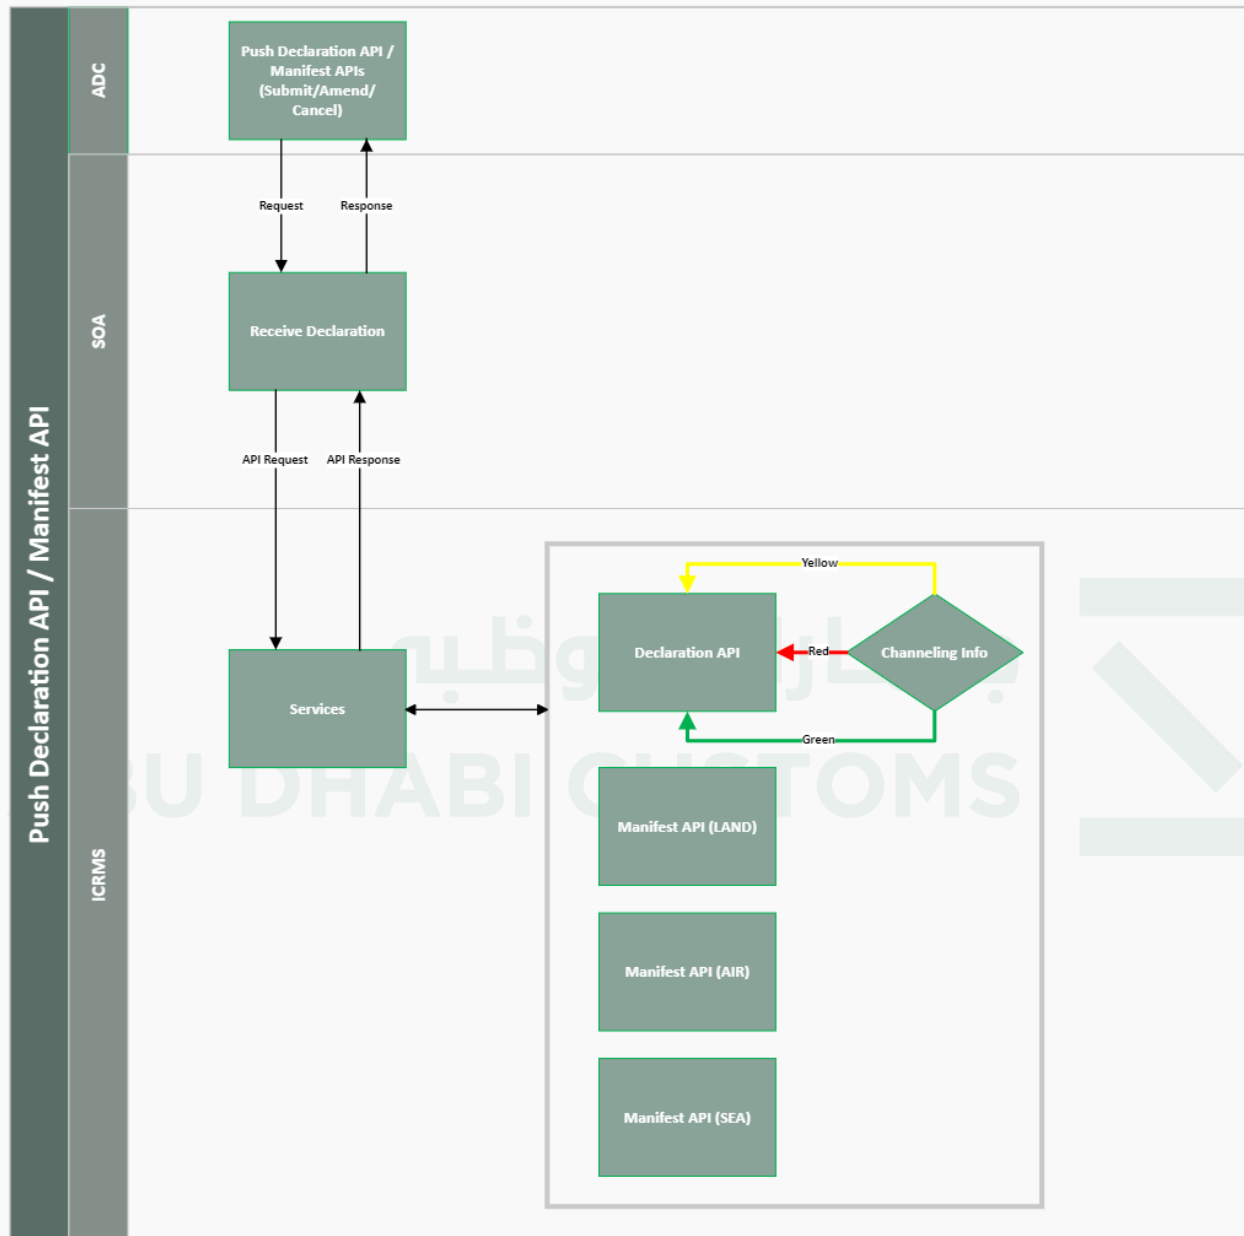

Integration Process Flow



1.7 Definition of Terms, Acronyms and Abbreviations

Term	Definition
ADC	Abu Dhabi Customs
SOA	Service Oriented Architecture
ICRMS	Integration Customs Risk Management System
ICD	Integration Control Document
DR	Disaster Recovery

1.8 Intended Audience

S. No	Group	Definition
1	ADC	Abu Dhabi Customs
2	SOA	Service Oriented Architecture (Middle Ware)
3	ICRMS	Integration Customs Risk Management System

2 Interface Technical Specifications

S. No	Service Name	Provider	Consumer	Mode of Integration	Description
1.	Declaration API (Land/Sea/Air)	ADC	ICRMS	REST API	ADC will provide declaration API information to ICRMS to assess the channeling result and return to ADC
2.	Manifest API (Land)	ADC	ICRMS	REST API	ADC will provide manifest land information to ICRMS
3.	Manifest API (Sea)	ADC	ICRMS	REST API	ADC will provide manifest sea information to ICRMS
4.	Manifest API (Air)	ADC	ICRMS	REST API	ADC will provide manifest air information to ICRMS
5.	Get Document IDs	ADC	ICRMS	SOAP	ICRMS fetch the document IDs associated with the Job Number



6.	Get Document Content	ADC	ICRMS	SOAP	ICRMS to get the document content for specific Document ID
----	----------------------	-----	-------	------	--

3 Functional Requirements

ADC will publish declaration messages to ICRMS in real-time. Customs declaration will be published in real-time and in case of any updated / deleted data it will be repushed to ICRMS.

- For Trade data ingestion, ADC will send all Declarations (AD declarations) to ICRMS, for Import, export, transit in, transit out, temp entry and re-export. For reference data, ADC will send **traders profiles (not yet confirmed)** and all lookup values through lookup integration and historical statistics for traders.
- Traders' profiles, and historical statistics (for the last 24 months) will be ingested as an initial load at the time of ICRMS go live, then updates to these profiles to be ingested later through online services. **(Need Confirmation)**
- Declarations will be ingested to ICRMS through online services right after end user submission. ICRMS will perform risk assessment and returns the channeling result to ADC synchronously.
- ICRMS includes the channeling info (Red, Green, Yellow) in response to the DHABI declaration integration.
- In case potential risk detected in ICRMS risk engine, ICRMS will send assessment result or alerts to ADC and will wait for inspection response from ADC. **(Need Confirmation)**
- Potential risk detection in ICRMS is based on prearrival information ingested to ICRMS or declarations ingested to ICRMS.

4 Non-Functional Requirements

4.1 Security

Connectivity between ADC and ICRMS will be through SOA network which will ensure secure communication of all messages exchanged between both the parties. Authentication will be done using basic authentication with username and password.

4.2 Reliability

High Availability

Each entity has high availability for the production environment at all levels.

Disaster Recovery

DR failover on any of the two sides will be done manually. In case of source failure, the DR switchover is seamless on the target side. But when the target fails, the source needs to point to the new target.



4.3 Volumetric

Average response time to send back the Assessment result from ICRMS to ADC authorities is ??? seconds.
(ICRMS confirmation required)

5 Push Declaration API

5.1 Submit / Amend / Cancel Declaration

5.1.1 Overview

This method allows for the submission of a new customs declaration or to cancel/amend a previously submitted declaration. To create a new or update or delete an existing declaration header a POST method must be sent. The content of the data payload should be in the following format. The mandatory status applies to submit, amend, and delete, however, all required populated fields must be sent for an update.

Operation Name	SubmitDeclaration
Request URL	Will be provided by ICRMS
Data Provider	ADC
Consumer	ICRMS
Business Purpose	ADC to push declaration data to ICRMS
Pattern	Synchronous
Method	POST
Endpoint	Will be provided by ICRMS

5.1.2 Request and Response Elements

Request Elements

S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
DO						
1.	Transaction Type	String-10	M		This field describes the transaction type, in case if declaration is submitted first time, value will be	INSERT / UPDATE/DELETE



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
					passed as INSERT, in case of any update, value will be passed as UPDATE, in case if declaration is deleted or cancelled value will be passed as DELETE.	
2.	docode	Number - 20	M		Declaration Number generated from Dhabi system. It may refer as Job number by customers.	20043435
3.	doDcmMcmVmCentCode	String - 5	M	1	ADC Center codes. To map the value, user need to call lookup API with lookup id 1.	"centerCode": 5, "centerCode": A, Etc.
4.	doDcmMcmAgCode	String - 10	M	95	Clearing Agent companies' code which are registered under ADC System. To map the value lookup id is provided.	C032, C076 etc.
5.	doImpCode	Number - 10	M	9	importer companies' or individual/personal importer accounts which are registered	404705, 983 etc.



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
					under Abu Dhabi Customs System.	
6.	doImpCatCode	String - 3	M	100	Importer Company Category Code	DIP, GEN etc.
7.	doImpCityCode	String - 10	O	41	Importer Company City Code	1
8.	doFreightCur	String - 10	O	10	Freight Currency Code	DHS
9.	doFreightAmt	Number 15,4	O		Freight Amount	1234
10.	doFreightExRate	Number 15,6	O		Freight Exchange Rate	1.2234
11.	doAgCode	String - 10	O	11	Car Agent Code value, which is registered under the Dhabi System. To get the available codes user need to call getLookupDetails service API.	V14, V15,V99
12.	doDate	DATE	M		Delivery order date which will be calculated by the Dhabi System. yyyy-MM-dd'T'HH:mm:ss.SSS'Z'	2024-10-22T20:45:00.212Z
13.	doAgentDoNumber	Number - 15	M		DO Agent number value required for SEA centers in Dhabi System.	It's an open Numeric field and supports up to 15 numeric digits
14.	dcmVmType	String - 1	M	5	Available Bill Types	I=Import



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
						E=Export etc.
15.	doCargoAgentCode	String - 10	O	4	Available Cargo Agents code in the Dhabi System. To get the available codes user need to call getLookupDetails service API.	Sample values can be: - A10 - A101 etc.
16.	dcmstoragetype	String - 5	O		Storage Type	Ex: S or C
17.	dcmDate	DATE	M		Expiry date for delivery orders in the Dhabi System. Format: yyyy-MM-dd'T'HH:mm:ss.SSS'Z'	2019-10-22T20:45:00.212Z
18.	doAtaCarnetFlag	String - 1	O		ATA carnet information flag in COG request. Once it is checked then information related to ATA carnet is provided in request payload.	Y=Yes, N=No Default=N
19.	wTariffSystem	Number	M		Harmonized System (HS) code Tariff Year	Ex: 2022
BOL						
20.	doDcmHouseBlnNo	String - 30	M		EAWB Bill number value in COG request. Value will be passed as	121122



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
					mandatory field for AIR shipments.	
21.	doDcmMcmVmVesCode	String - 50	M	2	Vessel codes available in Dhabi for COG/FZ/PRCW or PUCW requests.	TRUCK
22.	doDcmMcmVmVoyageNo	String - 30	M		Voyage number in Dhabi for COG/FZ/PRCW or PUCW requests. It can be flight number for AIR center shipments, truck number for land centers etc. It's an open text filed.	Ex: BAH0141
23.	doDcmMcmVmArrivalDate	DATE	M		Arrival date for COG/FZ/PRCW or PUCW requests. Format: yyyy-MM-dd'T'HH:mm:ss.SSS'Z'	2024-01-30T20:55:32.000Z
24.	doDcmMcmMastBlNo	String - 30	M		Master AWB for COG/FZ/PRCW or PUCW requests.	MBL464986654
25.	dcmUomCode	String - 5	M	8	Measuring unit code for goods to be declared in COG/FZ/PRCW or PUCW requests. To get the available codes users need to call	KG, BAGS etc. Ex: 1000C



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
					getLookupDetails service API. With lookup id	
26.	dcmShipper	String - 50	O		Shipper's name value in COG/FZ/PRCW or PUCW requests.	NEWEGG INC
27.	dcmConsignee	String - 50	O		Consignee's name value in COG/FZ/PRCW or PUCW requests.	HERMAN VON STRAATE
28.	dcmMarksNo	String - 500	O		Free Text	
29.	dcmQty	Number - 15,3	M		The total quantity value of submitted declaration.	1 or 1.5 etc
30.	dcmGoodsDesc	String - 500	M		Free Text Goods description in the AWB (for whole shipment)	J3040G32GX2-TZ
31.	dcmWeight	Number - 15,3	M		The total weight value of submitted declaration.	0.3
32.	dcmVolume	Number - 15,4	O		The total volume of goods value in declaration.	0.64
33.	dcmFclFlag	String - 1	M	7	The Cargo Type code for goods to be declared in COG/FZ/PRCW or PUCW requests.	G or X
34.	mcmPortCode	String - 10	M	6	Field that provides port information where import/export occurs	BHBAH



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
35.	dcmWeightGross	Number - 15,3	M		The total Gross weight value in declaration.	0.5
36.	importerKsaCode	Number - 30	O		Field value will be passed for Declarations like Re-Export, Export, Transit to KSA	0 or KSA Importer number
37.	importerKwtCode	String - 50	O		Field value will be passed for Declarations like Re-Export, Export, Transit to Kuwait	12345
38.	dcmShipmentValueCif	Number - 30	O		Shipment Value in National Currency	12345
39.	bcpArrivalDate	Date	O		Border crossing permit Arrival date	2024-10-22T20:45:00.212Z
40.	bcpSlotFrom	String - 30	O		Border crossing permit Time slot From	13, 16, etc.
41.	bcpSlotTo	String - 30	O		Border crossing permit Time slot To	18, 22, etc.
CustBillHdrs						
42.	bhCurYear	Number - 4	M		Bill Current Year	2022
43.	bhCntryCode	String - 5	O	41	Shipment Country From Code	USA
44.	bhEmara	String - 1	M	29	The Emara value in declaration. To get the available codes user need to call getLookupDetails service API	A



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
45.	bhSharedVessel	String - 1	O		Shared declaration flag for COG request. Check flag for Land ports with multiple Declarations on same Truck	Y or N
46.	bhVchrType	String - 1	M		Payment Method Type	2=> Debit 3=> Deposit 4=> Transit 5=> LCL 6=> ePay
47.	bhTransExitPort	String - 30	O	42	Exit port code for Transit In/Out declaration.	261
48.	bhDestCntryCode	String - 30	O		Destination Country Code	KWT
49.	bhGccAttribute14	String - 80	O		MAQASA Number 65 Characters value will be filled automatically from DHABI system	263000201000000 004240102700000 216761784326300 010000000003224 01018
50.	bhExciseDeclarationId	String - 15	O		Excise Declaration ID	456413153
51.	bhGccReference	String - 1	O		This will be filled for re-export Maqasa	Y or N
52.	bhTransExitFlag	String - 1	O		Transit Exit Flag	Y or N
53.	bhTransExitDate	Date	O		Transit Exit Date	12-01-2024
54.	bhTransExitRemarks	String - 500	O		Transit Exit Remarks	
55.	bhFacilityImpCode	Number - 10	O		Customer's Credit account to charge the duties.	14110



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
56.	bhSharedRefNo	String - 30	O		Shared Job for Land ports with multiple Declarations on same Truck	245854222
57.	bhBoeReference	String - 20	O		For ReExport declaration user must provide Import Declaration Number It is used in a case like for re-export, any new declaration which is been created based on old import declaration. Then this will be used to link to current declaration. This is applicable to whatever the use case falls in to this pattern.	645675432
58.	bhFanrRefNum	Number - 10	O		FANR Reference number	464864
59.	bhMohapRefNum	String - 30	O		MOHAP Reference Number	Unique reference Number - to identify the trading of goods inside and outside UAE which is subject to approval from Ministry of Health
60.	bhEsmaRefNum	String - 100	O		MOIAT Reference Number	Unique reference Number - to identify the



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
						declaration containing goods which is subject to approval from MOIAT
61.	bhValuationFlag	String - 1	O		Exit entry certificate for VAT refund or any other applicable reasons. If selected for non-transit, system will automatically add MAT, RTI, RTC fees	Y or N Parameter to match the goods, based on the parameter active value system will enable fees for that declaration
62.	bhAdafsaRefNum	String - 30	O		ADAFSA Reference number	Unique reference Number - to identify the declaration containing goods which is subject to approval from ADAFSA. On obtaining successful approval gate pass will be issued
63.	bhEcommerceFlag	String - 1	O		Ecommerce flag in Dhabi system. Applicable for only Imports bill type. The category of importer should be ECM. The total value of the shipment should not exceed 50000.	Possible Values Y or N The parameter should pass when the importer category is E-Commerce and shipment value should not exceed the business limitation.



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
64.	bhMcyRefNum	String - 100	O		MCY Reference Number	MC-01-0019
65.	bhTdraRefNum	String - 100	O		TDRA Reference Number	CCL-154643
66.	bhDedRefNum	String - 30	O		DED Reference Number	123-456---
67.	bhOrgDoCodeFz	Number - 10	O		If submitting request belongs to Freezone or Private warehouse which is based on existing declaration, then existing declaration Number - should be entered in this field. For After EXIT scenarios from FZ/PRCW requests this field describes the EXIT request number and is mandatory to pass.	25673565
CustBillDtls						
68.	BdSrlNo	Number 20	M		Invoice group Serial Number	12132434
69.	BdInvoiceExRate	Number 10,6	O		Group Invoice currency Exchange Rate	0.012
70.	BdFreightExRate	Number 10,6	O		Freight currency Exchange Rate	0.023
71.	BdFreightAmtFc	Number 15,4	O		Freight Amount	32434



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
72.	BdCntryCode	String - 5	M	41	Origin Country of goods in Dhabi system. To get the available codes user need to call getLookupDetails service API	SGP
73.	BdInvoiceCur	String - 3	M	10	Currency code in Dhabi system. To get the available codes user need to call getLookupDetails service API	DHS, USD etc.
74.	BdInvoiceNo	String - 30	O		Random Number entered by User - which holds reference for invoice.	1234
75.	BdExmCode	Number - 2	O	28	Exemption duty code in Dhabi system.	IDB, CEPA Agreements, etc.
76.	BdFreightType	String - 1	M		values for INCO TYPES are mentioned in remarks. To get the available codes please check the example column	• CIF = 1 • C & F = 2 • C&I = 3 • FOB = 4
77.	BdInsuranceAmtFc	Number	O		Insurance Amount	If: there is no insurance mentioned then, this will be computed in local currency with 1% of the invoice



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
						value, otherwise it will use actual value provided in this field as it is.
78.	BdGccAttribute14	String - 80	O		MAQASA DUE number in Dhabi. User will pass the valid DUE number in case if exemption 33 is used and declaration type is import MAQASA.	263000201000000 004240102700000 216761784326300 010000000003224 01018
79.	BdMofaicAttestRef	String - 100	O		MOFAIC Attestation Reference Number	Unique reference Number - to identify the invoice attestation Number - from Ministry of Foreign Affairs Applicable if invoice value is greater than 10000 DHS
CustBillInvoices						
80.	CbiSrlNo	Number - 20	M		Invoices Serial Number	9352848
81.	CbiBdSrlNo	Number - 20	M		Group invoice serial number	5811538
82.	sayHarmCode	String - 20	M	21	HS code at item level in request payload	02071090, 13680221
83.	cbiQty	Number - 8	M		HS code quantity at item level in request payload.	1



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
84.	cbiSitHarmDesc	String - 1000	O		If HS code is provided as "others" in description, then user need to provide the description for HS code entered, else system will auto fill the HS code description.	With internal combustion piston engine of a cylinder capacity not exceeding 50 cc
85.	CbiSitHarmDescAra	String - 1000	O		HS CODE description in Arabic	مجهزة بمحركات ذات مكابس للإشتعال الداخلي لا تزيد سعة اسطواناتها عن 50 سم ³
86.	CbiSitHarmDescEng	String - 1000	O		HS CODE description in English	With internal combustion piston engine of a cylinder capacity not exceeding 50 cc
87.	cbiWeight	Number - 15	M		HS code weight at item level in request payload.	1
88.	cbiGrossWeight	Number - 15	M		HS code Gross weight at item level in request payload.	1
89.	cbiAmountFc	Number - 18	M		HS code amount at item level in request payload.	It is the cost against each line item
90.	CbiCifAmount	Number - 18,3	M		Amount calculated in DHS currency	232434
91.	SayDutyPerc	Number - 5,2	M		Duty percentage for HS code	5



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
92.	SayCbiUomCode	String - 5	M	8	UOM code for HS code	KG
CustBillCharges						
93.	cbcDtCode	String - 3	O	118	Charges duty code	BIL, GPF, etc
94.	cbcAmount	Number - 15,3	O		Charges duty amount	34343
ManifestContainers						
95.	ctrDoCode	Number - 10	M		Container Declaration Number	20027122
96.	ctrNum	String - 20	M		Container Number 4 letters and 7 Numbers	AAAA8883477
97.	ctrSealNo	String - 20	O		Seal number value	123,5676
98.	ctrSize	Number - 2	O		Container Size value	11
99.	ctrService	Number - 5	O		Container service value	1
100.	ctrWeight	Number - (15,3)	O		Container Weight value	11
101.	ctrMeasure	Number - (15,3)	O		Container Measure value	100
102.	ctrRemarks	String - 50	O		Remarks	
ManifestDrivers						
103.	mdTruckNum	String - 20	M		Truck Plate number	1455273
104.	mdTruckNat	String - 20	O		Truck nationality	560
105.	mdTruckType	String - 20	O		Truck Type	مرسيدس تنكر مرسيدس تريلا
106.	mdTruckDriver	String - 40	O		Truck Driver Name	ALI



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
107.	mdDriverNat	String - 20	O		Truck Driver Nationality	11
108.	vehiclePermitNo	Number - 10	O		Vehicle Permit number	51076373
VehicleRegister						
109.	carPlateNo	String - 20	M		Car plate number	1455273
110.	carPlateColor	Number - 3	M	44	Car plate number To get the available codes user need to call getLookupDetails service API.	2
111.	carPlateOrigion	Number - 3	M	45	Car plate Origin To get the available codes user need to call getLookupDetails service API.	12
112.	carPlateCategory	Number - 3	M	46	Car plate Category To get the available codes user need to call getLookupDetails service API.	10
113.	carDateOpen	date time	O		Car Date open	2022-09-07T10:43:30.000+04:00
114.	carChassisNo	String - 30	O		Chassis Number	WD4WG3E19K3574273
115.	carVstCode	Number - 5	O	51	Car Vehicle Sub type To get the available codes	5374



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
					user need to call getLookupDetails service API.	
116.	carOwnerNat	Number - 3	O	97	Car Owner Nationality	10
117.	carcolor	String - 20	O	35	Car Color To get the available codes user need to call getLookupDetails service API.	1
118.	carDriverNatOpen	Number - 3	O	97	Car Driver Nationality Open	11
119.	carPassangerNoOpen	Number - 3	O		Car Passenger Number Open	2
120.	carLoadFlagOpen	String - 1	O		Carload Flag Open	Y
121.	carLoadFlagClose	String - 1	O		Carload Flag Close	N
122.	carLoadTypeOpen	String - 50	O	118	Carload Type Open To get the available codes user need to call getLookupDetails service API.	بطا
123.	carLoadTypeClose	String - 50	O	118	Carload Type Close To get the available codes user need to call getLookupDetails service API.	بطا
124.	carVctCode	Number - 5	O	47	Vehicle Category	278



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
125.	carReferenceNo	Number - 20	M		System generated Vehicle Permit number	51076373
126.	carBhDoCodeOpen	Number - 20	O		If declaration is linked to car, then this field represents the job number	20026387
127.	carEDate	date time	O		Car expiry Date	2022-10-24T04
128.	carT2Desc	String - 300	O	35	Arabic description of color code from lookup API response To get the available codes user need to call getLookupDetails service API.	1203
129.	carDriverIdTypeOpen	String - 100	O	55	Type of ID	LICENSE
130.	carDriverIdNoOpen	String - 100	O		Car Driver ID number open	Q234
131.	carDestCountryOpen	Number - 20	O	45	To get the available codes user need to call getLookupDetails service API.	10
132.	carDriverIdDateOpen	date time	O		Driver ID expiry date	2022-10-27T04
133.	carOwnerName1	String - 100	O		Car Owner First Name	AHMAD
134.	carDriverNameOpen1	String - 100	O		Car Driver First Name	ALI



S. No	Attributes	Data Type - Length	Condition (Mandatory / Optional)	Lookup id	Format/Derivation logic for fields	Data Example
135.	carVehModel	Number - 20	O		Vehicle model	2022

Response elements

Will be provided by ICRMS.

5.2 Schema Definition

5.3 Request and Response Samples



6 Push Manifest Land API

6.1 New / Amend / Cancel Land Manifest

6.1.1 Overview

This method allows for the submission of a new manifest land or to cancel/amend a previously submitted manifest information.

6.1.2 Push Manifest Land (Empty/Loaded)

Operation Name	PushmanifestLand
Request URL	Will be provided by ICRMS
Data Provider	ADC
Consumer	ICRMS
Business Purpose	ADC to push manifest data to ICRMS
Pattern	Synchronous
Method	POST
Endpoint	Will be provided by ICRMS



6.1.3 Request and Response Elements

Request Elements

S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
SubmitBCPEmpty/Loaded Request						
BORDER_CROSS_PERMIT						
1.	BcpSerial	Number - 10	M		Serial Number	781867
2.	ReqNum	String - 150	M		Request Number	REQ_453670
3.	EntityName	String - 30	M		Name of the Entity	TAMM
4.	DraftId	Number	M		Draft ID	4655053
5.	CustomsProfileId	String - 30	M	95	Profile ID of the customer	C031
6.	ServiceSubtype	String-5	M		Service Sub Type	5
7.	Service Code	Decimal – 10	M		Code 52 is static value	52
8.	CentCode	String – 1	M	1	Abu Dhabi Customs Center codes.	G
9.	AgentCode	String - 10	M	95	Registered Agent Code	C004
10.	ArrivalDateFrom	Date	M		Border Arrival From date	"2024-02-12"
11.	ArrivalDateTo	Date	M		Border Arrival To date	"2024-02-12"
12.	HouseBIno	String - 30	O		House Bill Number (For Exit only)	1
13.	FirstNameEng	String - 150	M		Requestor First Name in English	AHMED
14.	FirstNameArb	String - 150	M		Requestor First Name in Arabic	احمد
15.	LastNameEng	String - 150	M		Requestor Last Name in English	ELTELLINI
16.	LastNameArb	String - 150	M		Requestor Last Name in Arabic	التلينى
17.	FullNameEng	String - 150	M		Requestor Full Name in English	AHMED,ELHUSSE INI,MAHMOUD,E LTELLINI



S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
SubmitBCPEmpty/Loaded Request						
18.	FullNameArb	String - 150	M		Requestor Full Name in Arabic	احمد, الحسيني, محم د, التليني
19.	EmailAddress	String - 150	M		Requestor Email Address	vpn.eltlini@gmai l.com
20.	MobileNo	String - 30	M		Requestor Mobile Number	971506075744
21.	Nationality	String - 10	M		Requestor Nationality	EGY
22.	EmiratesID	Number	M		Requestor Emirates ID	7841987743658 23
23.	GateType	String - 1	M	82	if bill type is in ('I', 'T', 'N') then entry and value will be 1 or if bill type is in ('E', 'R', 'O') then it would be Exit and value will be 2	1 – Entry 2- Exit
24.	COGjobnumber	Number	O		Declaration number	For loaded Truck only
25.	ArrivalDate	Date	M		Truck Arrival date	2024-02-12
26.	SlotFrom	String - 10	M		Allotted Slot From time	14
27.	SlotTo	String - 10	M		Allotted Slot To time	15
28.	KsaAppointmentNum	String - 30	O		KSA Appointment Number	TAS2024021207 5541616
29.	ArrivalTimeFrom	String -10	O		Truck Arrival Time From	14
30.	ArrivalTimeTo	String -10	O		Truck Arrival Time To	15
31.	KsaAppointmentDate	Date	O		User preferred date for KSA appointment	2024-02-12
32.	Ksa SlotFrom	String - 10	O		KSA Allotted Slot From time	18
33.	KsaSlotTo	String - 10	O		KSA Allotted Slot To time	19
34.	TruckType	String - 1	M	86	Type of Truck	Ex: E, L E – Empty L - Loaded
CAR_REG_TAB-M(Array)						



S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
SubmitBCPEmpty/Loaded Request						
35.	CarPlateNo	String - 20	M		Car Plate Number	16548
36.	CarPlateColor	Number - 3	M	44	Color of the car plate To get the available codes user need to call getLookupDetails service API.	3
37.	CarPlateCategory	Number - 3	M	46	Car plate Category	2
38.	CarPlateOrigion	Number - 3	M	45	Car plate Origin To get the available codes user need to call getLookupDetails service API.	3
39.	CarChasisNo	String - 30	O		Chassis Number	YV2AG30A1DB64 1572
40.	CarVstCode	Number - 5	O	51	Car Vehicle Sub type	722
41.	CarOwnerNat	Number - 3	O	45	Car Owner Nationality	1
42.	CarTripTicket	String - 30	O		If Trip ticket is passed as "999" system will not generate permit in this case.	
43.	CarTrailerNo	String - 30	O		Car Trailer Number	8170
44.	CarColor	String - 20	O	35	Car Color To get the available codes user need to call getLookupDetails service API.	1
45.	CarDriverNatOpen	Number - 3	O	45	Car Driver Nationality Open	19



S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
SubmitBCPEmpty/Loaded Request						
46.	CarDriverNatClose	Number - 3	O	45	Car Driver Nationality Close	19
47.	CarPassangerNoOpen	Number - 3	O		Car Passenger Number Open	1
48.	CarPassangerNoClose	Number - 3	O		Car Passenger Number Close	1
49.	CarRemarksOpen	String - 100	O		Open Remarks	
50.	CarRemarksClose	String - 100	O		Close Remarks	
51.	CarVctCode	Number - 5	O	47	Vehicle Category	11
52.	CarEDate	Date	O		Car expiry Date	2024-08-12
53.	CarDriverIdTypeOpen	String - 100	O	55	Car ID Type Open	PASSPORT
54.	CarDriverIdTypeClose	String - 100	O	55	Car ID Type Close	PASSPORT
55.	CarDriverIdNoOpen	String - 100	O		Driver ID Number Open	A23216945
56.	CarDriverIdNoClose	String - 100	O		Driver ID Number close	A23216945
57.	CarDestCountryOpen	Number - 20	O	45	To get the available codes user need to call getLookupDetails service API.	1
58.	CarDestCountryClose	Number - 20	O	45	To get the available codes user need to call getLookupDetails service API.	1
59.	CarDriverIDDateOpen	Date	O		Driver ID expiry date	2029-01-0
60.	CarDriverIDDateClose	Date	O		Driver ID expiry date	2029-01-0
61.	CarOwnerName1	String - 100	O		Car Owner First Name	المتولي
62.	CarOwnerName2	String - 100	O		Car Owner Second Name	للتقليات
63.	CarOwnerName3	String - 100	O		Car Owner Third Name	ش
64.	CarOwnerName4	String - 100	O		Car Owner Fourth Name	ذ م م



S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
SubmitBCPEmpty/Loaded Request						
65.	CarDriverNameOpen1	String - 100	O		Car Driver First Name	احمد
66.	CarDriverNameOpen2	String - 100	O		Car Driver Second Name	صلاح
67.	CarDriverNameOpen3	String - 100	O		Car Driver Third Name	الزغبى
68.	CarDriverNameOpen4	String - 100	O		Car Driver Fourth Name	عبيد
69.	CarDriverNameClose1	String - 100	O		Car Driver First Name	احمد
70.	CarDriverNameClose2	String - 100	O		Car Driver Second Name	صلاح
71.	CarDriverNameClose3	String - 100	O		Car Driver Third Name	الزغبى
72.	CarDriverNameClose4	String - 100	O		Car Driver Fourth Name	عبيد
73.	CarVehModel	Number - 20	O		Vehicle Model	2013
74.	CarDriverMobile	String	O		Driver Mobile number	+971523723613

Response Elements

Will be provided by ICRMS.

6.2 Schema Definition

6.3 Request and Response Samples



ENTRY EMPTY
payload(24).xml



EXIT LOADED
payload(18).xml



7 Push Manifest Sea API

7.1 New / Amend / Cancel Sea Manifest

7.1.1 Overview

This method allows for the submission of a new manifest Sea or to cancel/amend a previously submitted manifest sea information.

7.1.2 Push Manifest Sea

Operation Name	Pushmanifestsea
Request URL	Will be provided by ICRMS
Data Provider	ADC
Consumer	ICRMS
Business Purpose	ADC to push manifest data to ICRMS
Pattern	Synchronous
Method	POST
Endpoint	Will be provided by ICRMS

7.1.3 Request and Response Elements

Request Elements

S. No	Attributes	Data Type-Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
Manifest						
1.	evmCentCode	String - 5	M	1	Manifest Center Code	V,M etc
2.	evmRotationNo	Number	O		Manifest Rotation Number	32434
3.	evmVesCode	String - 10	M	2	Manifest Vessel Code	0810
4.	evmVoyageNo	String - 30	M		Manifest Voyage Number	GE748E
5.	evmArrivalDate	Date	M		Arrival date	2013-10-12
6.	evmType	String - 1	O	5	Manifest Bill Type	I,E etc.



S. No	Attributes	Data Type-Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
7.	evmAgCode	String - 10	O	4	Manifest Agent Code	A174
Manifest Agent Access						
8.	emaaAgCode	String - 10	M	4	Agent Access Code	A174
Manifest Master Cargos						
9.	emcmPortCode	String - 10	O	6	Cargo Port Code	ITSPE
10.	emcmMastBlnNo	String - 30	M		Master Bill of Lading Number	ITGOA156640
11.	emcmAgCode	String - 10	M	4	Cargo Agent code	A174
Manifest Detail Cargos						
12.	edcmMcmMastBlnNo	String - 30	O		Master BL Number	ITGOA156640
13.	edcmHouseBlnNo	String - 30	M		House BL Number	ITGOA156640
14.	edcmMcmAgCode	String - 10	M	4	Agent Code	A3
15.	edcmConsignee	String - 50	O		Consignee Name	JORDAN STONE MARBLE CENTRE
16.	edcmShipper	String - 50	O		Name of the Shipper	FORNACE S.ANSELMO SPA
17.	edcmNotifyParty	String - 50	O		Notify party name	JORDAN STONE MARBLE CENTRE
18.	edcmGoodsDesc	String - 500	O		Goods Description	3X20 DC STC 84 PLTS ROOF TILES
19.	edcmMarksNo	String - 500	O		Marks Number	NIL MARKS
20.	edcmQty	Number (15,3)	O		Quantity	23
21.	edcmWeight	Number (15,3)	O		Weight	50
22.	edcmVolume	Number (15,4)	O		Volume	0



S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
23.	edcmUomCode	String - 5	O	8	Unit of Measurement Code	CTR
Manifest Containers						
24.	ectrNum	String - 20	M		Container Number 4 letters and 7 Numbers	UACU3173970
25.	ectrSealNo	String - 20	M		Container Seal Number	323
26.	ectrSize	Number - 2	O		Size of the Container	Ex: 20,40..
27.	ectrService	String -5	O		Container Service	DC
28.	ectrWeight	Number (15,3)	O		Container weight	2324
29.	ectrMeasure	Number (15,3)	O		Container Measurements	0
Manifest Chasis						
30.	echsChassisNum	String - 30	M		Vehicle Chassis Number	1J4AA2D1XB152 6700
31.	chsVstVtpCode	Number - 10	O	32	Vehicle Manufacturer	Make
32.	chsModelYear	String - 4	M		Vehicle Model	Ex: 2024
33.	echsEngineNo	String - 30	O		Vehicle Engine Number	32324433
34.	echsEnginePower	Number -6	O		Vehicle Engine Power	2500
35.	echsPayload	Number -6	O		Vehicle Payload	2240
36.	echsWeight	Number -6	O		Vehicle Weight	2000
37.	echsModel	Number -4	O		Model of the vehicle	2020
38.	echsColor	String - 30	O		Color of the vehicle	SILVER
Manifest Detail Cargos						



S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Lookup id	Format/ Derivation logic for fields	Data Example
Manifest Delivery Orders						
39.	doAgentdoNumber	Number -15	O		Shipping Agent code	8006359
40.	doConsignee	String - 200	O		Consignee	ABU DHABI MARITIME
41.	doDate	Date	O		Date of delivery	2014-04-17
42.	doImpCode	Number -10	O	9	Importer code	32433
43.	doAgCode	String - 10	O	4	Agent code	A8
44.	doDcmMcmVmVesCode	String - 50	M	2	Vessel Code	KATHRS
45.	doDcmMcmVmVoyage	String - 30	M		Vessel Code Voyage Number	406S
46.	doDcmMcmVmArrival date	Date			Arrival Date	2014-04-25
47.	doDcmMcmMastBINO	String - 30	M		Master AWB for COG/FZ/PRC W or PUCW requests.	2
48.	doDcmMcmAgCode	String - 10	M	95	Agent Code	C031

Response Elements

Will be provided by ICRMS.

7.2 Schema Definition

7.3 Request and Response Samples



Manifest Sea
Sample1.txt



8 Push Manifest Air API

8.1 New / Amend / Cancel Air Manifest

8.1.1 Overview

This method allows for the submission of a new manifest air or to cancel/amend a previously submitted manifest air information. ADC will submit this information as XML string value.

8.1.2 Push Manifest Air

Operation Name	PushmanifestAir
Request URL	Will be provided by ICRMS
Data Provider	ADC
Consumer	ICRMS
Business Purpose	ADC to push manifest data to ICRMS
Pattern	Synchronous
Method	POST
Endpoint	Will be provided by ICRMS

8.1.3 Request and Response Elements

Request Elements

S. No	Attributes	Data Type- Length	Condition (Mandatory/ Optional)	Look up id	Format/ Derivation logic for fields	Data Example
Waybill						
1.	ID	String - 100	M		ID	XFWB
2.	Name	String - 100	M		Name	Air Waybill
3.	IssueDateTime	Date	M		Issue Date and Time	2023-10-01T04:09:37
4.	XML String	CLOB	M		Manifest Air Payload in XML format	Sample provided below



Response Elements

Will be provided by ICRMS.

8.2 Schema Definition

8.3 Request and Response Samples



Air Sample6.txt

9 Get Document IDs

9.1 Overview

This service provides document IDs against the job Number. These document IDs are unique reference numbers from the document management system.

Operation Name	GetDocIDs
SOAP URL	https://uat-esb.adcustoms.gov.ae/soa-infra/services/UTILITIES/ProcessAttachmentsUtility/processattachmentsutility_client_ep?WSDL
REST URL	https://uat-esb.adcustoms.gov.ae/soa-infra/resources/B2G/AttachmentUtilityAPI/Service/getDocIDs
Service Provider	ADC
Consumer	ICRMS
Business Purpose	ICRMS fetch the document IDs associated with the Job Number.
Service	SOAP / REST
Pattern	Synchronous
Security	Basic Authentication

9.2 Request and Response Elements

Request Elements

S. No	Attributes	Data Type-Length	Condition (Mandatory/Optional)	Format/ Derivation logic for fields	Data Example
1.	JobId	String - 30	M	Pass the doCode in this field.	23888022



S. No	Attributes	Data Type- Length	Condition (Mandatory/ Optional)	Format/ Derivation logic for fields	Data Example
2.	ModuleId	String - 3	M	Module ID defined in DHABI system as per business module	1
3.	SubModuleId	String - 3	M	Sub-module ID defined in DHABI system as per business module	1
4.	ServiceId	String - 10	M	Unique ID defined in DHABI for each service	17
5.	SubServiceId	String - 10	M	Unique IDs defined in DHABI under every service ID, which represents multiple scenarios for the specific service ID.	1
6.	EntityName	String - 100	O	Name of the Entity that submitted the request	ADC


Response Elements

S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Format/ Derivation logic for fields	Data Example
WSResponse					
1.	methodResponse	String - 500	M	Available codes (200, 401 & 500)	200
2.	methodResponseCode	String – 20	M	Success message Response code as defined	200
3.	methodResponseDescription	String - 500	M	Description as per response code	Search executed successfully....
4.	AttachmentCount	String - 5	M	If attachments exist, then attachment count displays	1
DOF_DOC – Array - Always displays for one file					
5.	docID	String - 100	O	Unique document id in DMS	{0902f6498028 4b08}




S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Format/ Derivation logic for fields	Data Example
6.	docTitle	String - 256	O	This is file name	45695
7.	jobNumber	String - 30	O	Job Number associated to document ID	23888022
8.	docType	String - 50	O	Document type will be given in this field that is defined in ADC dhabi.	100
9.	moduleDesc	String - 150	O	Description of the module regarding attachment.	BOE Attachments
10.	subModuleDesc	String - 150	O	Description of the sub-module regarding attachment.	BOE Attachments
11.	dateCreated	String - 50	O	Doc ID Created Date & Time	25/03/2024 09:36:58
12.	contentSize	String - 30	O	This content size will be the file size that is converted to KB	1101542

9.3 Schema Definition



9.4 Request and Response Samples

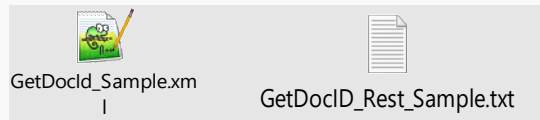

10 Get Document Content

10.1 Overview

This service provides the document content against provided document ID submitted in the request. This document content will be in base64 format.

Operation Name	GetDocumentContent
SOAP URL	https://uat-esb.adcustoms.gov.ae/soa-infra/services/UTILITIES/ProcessAttachmentsUtility/processattachmentsutility_client_ep?WSDL
REST URL	https://uat-esb.adcustoms.gov.ae/soa-infra/resources/B2G/AttachmentUtilityAPI/Service/getDocumentContent
Service Provider	ADC
Consumer	ICRMS
Business Purpose	ICRMS to get the document content for specific Document ID
Service	SOAP / REST
Pattern	Synchronous
Security	Basic Authentication

10.2 Request and Response Elements

Request Elements


S. No	Attributes	Data Type-Length	Condition (Mandatory/Optional)	Format/ Derivation logic for fields	Data Example
1.	JobId	String - 20	M	Job ID of Document ID	23888022
2.	ModuleId	String - 3	M	Related to service defined in system	1
3.	SubModuleId	String - 3	M	Related to service defined in system	1
4.	DocId	String - 100	M	Defined in ADC document management system	{0902f64980284b08}



Response Elements

S. No	Attributes	Data Type- Length	Condition (Mandatory /Optional)	Format/ Derivation logic for fields	Data Example
getDocumentContent					
1.	contentStream	Base64 binary	O	Base64 string of file, which needs to be decoded on user side to see the actual file.	JVBERi0xLjQKJeLjz9MKNSAwIG9iago8PC9GaWx0ZXJbL0FTQ0.....VPRgo=
2.	fileName	String - 256	O	Name of the file provided while uploading.	45695
3.	contentType	String - 500	O	Mime type of the file, DMS supports 400 + mime types FYI	application/pdf
4.	responseCode	String - 20	M	Available codes (200, 401 and 500)	200
5.	responseDescription	String - 500	M	Success response description	File Content Fetched successfully
6.	responseMessage	String - 500	O	Success message displays in response field	File Content Fetched successfully

10.3 Schema Definition



10.4 Request and Response Samples

GetDocContent_Rest_Sample.txt

getDocumentContent_Sample.txt



11 Response Codes & Error Handling

The response message will be different based on the submitted declaration message in case of a valid declaration message, an assessment response message will be sent back synchronously as a response to the submitted declaration, and in case of an invalid declaration an invalid response will be returned to describe the schema validation error.

Below is the list of supported response codes supported, for error scenarios:

S. No	Http Response Code	Description
1.	Success (200)	In case of valid request
2.	Bad Request (400)	In case of a bad request from the client side
3.	Unauthorized (401)	In case of wrong username and/or password
4.	API not found (404)	In case of wrong API endpoint
5.	Internal Server Error (500)	General server-side error

12 Get Lookup Values Interface

12.1 Overview

Operation Name	GetLookupDetails
Interface URL	https://uat-esb.adcustoms.gov.ae/api-adnet/group5b2g/V1/ServiceDetails?wsdl
Data Provider	ADC
Consumer	ICRMS
Business Purpose	To provide lookup values for each lookup id defined in ADC DHABI system.
Pattern	Synchronous



12.2 Request and Response Elements

Request Elements


S. No	Attributes	Data Type -Length	Condition (Mandatory /Optional)	Format/Derivation logic for fields	Example Data
1.	lookupId	Number - 5	M	This will accept lookupID in the number	49
2.	filterText	String - 300	O	Any free text	import
3.	parentId	String - 100	O	This is the additional filter	82
4.	skip	Number - 5	O	This is used for pagination	0
5.	take	Number - 5	O	This is used for pagination	-1

Response


S. No	Attributes	Data Type	Condition (Mandatory/ Optional)	Format/Derivation logic for fields	Example Data
GetLookupDetailsResult					
1.	ErrorCode	Number - 5	M	Error code (0/1)	0-Error/1-Success
Data Lookup					
2.	Code	String - 500	M	value of lookup code	9094008
3.	DescEng	String - 500	M	English description of Lookup	MOHAMMED SALIM HAMED MOHSIN AL HARTHY
4.	DescArb	String - 500	M	Arabic description of Lookup	محمد سالم حمد محسن الحارثي



12.3 Schema Definition

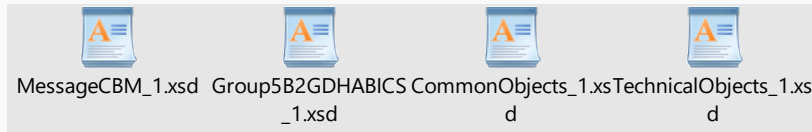

12.4 Request and Response Samples



13 Interface End Points

End points are shared by ICRMS through secured communication channels.

14 Appendix – Enclosures

1. Request and response structure.
2. Object definitions.

