HANDS-ON FOR CREATING A LINUX INSTANCE IN EC2

Screenshot 1: EC2 Launch Instance Page

1. Open the EC2 dashboard.
2. Click Launch instance to create a new Linux EC2 instance.

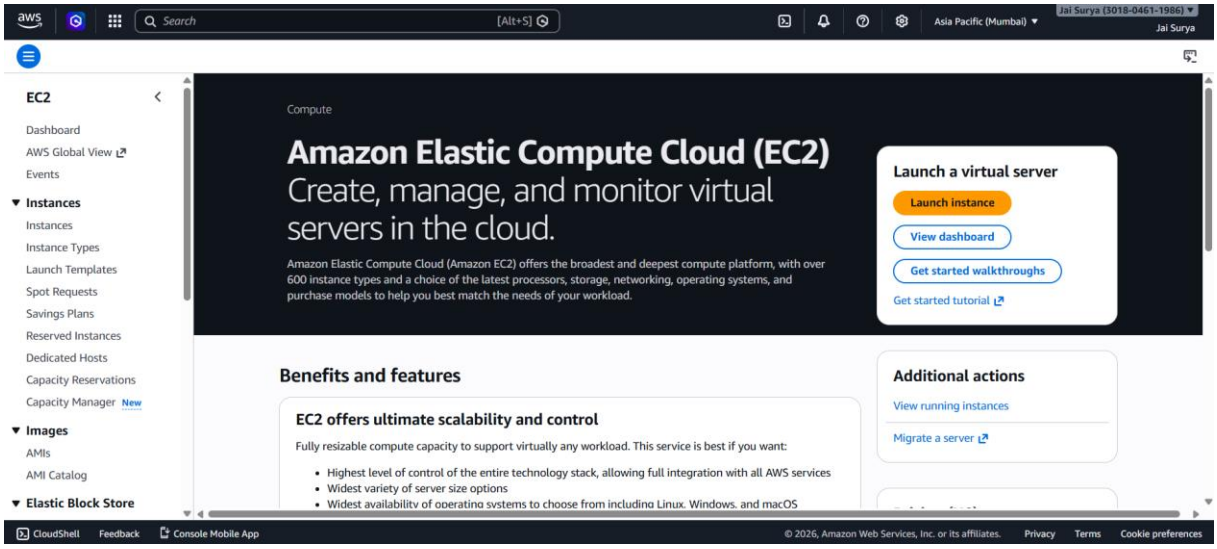

Screenshot 2: Enter Instance Name and Select Amazon Linux

1. Enter a name for the EC2 instance.
2. Select Amazon Linux AMI as the operating system.

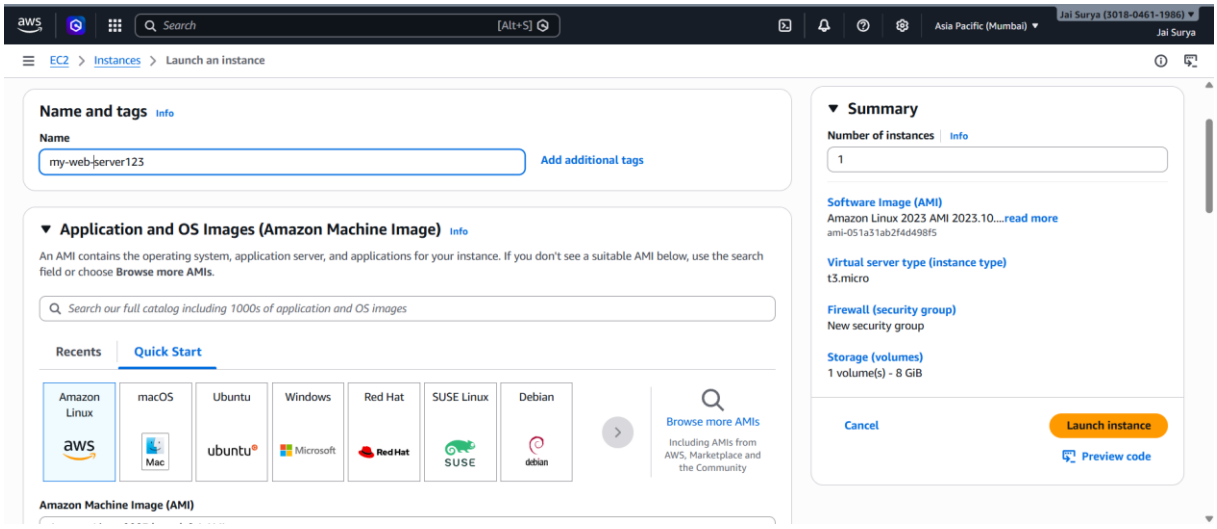

Screenshot 3: Create Key Pair

1. Click Create new key pair.
2. Enter a key pair name.
3. Download the key pair file.

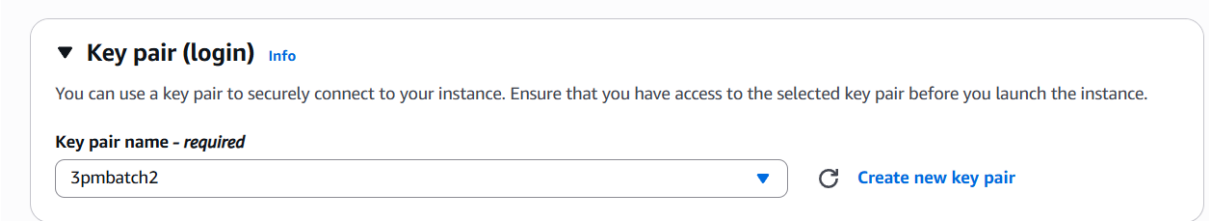

Screenshot 4: Allow SSH and Launch Instance

1. Enable Allow SSH traffic.
2. Click Launch instance.

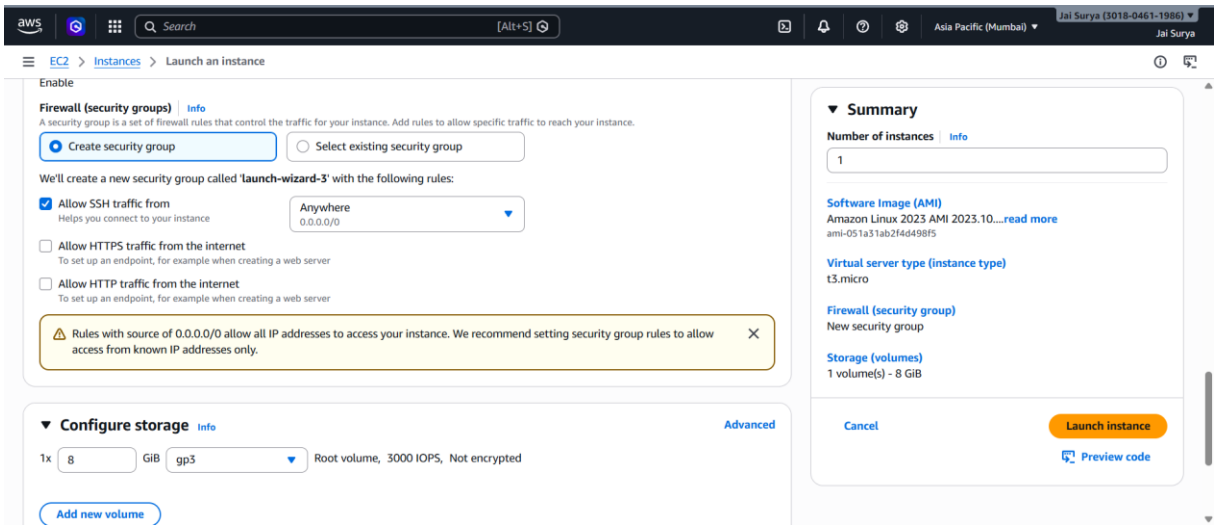

Screenshot 5: EC2 Instance Created Successfully

1. The Amazon EC2 instance is launched successfully.
2. Instance state shows Running.

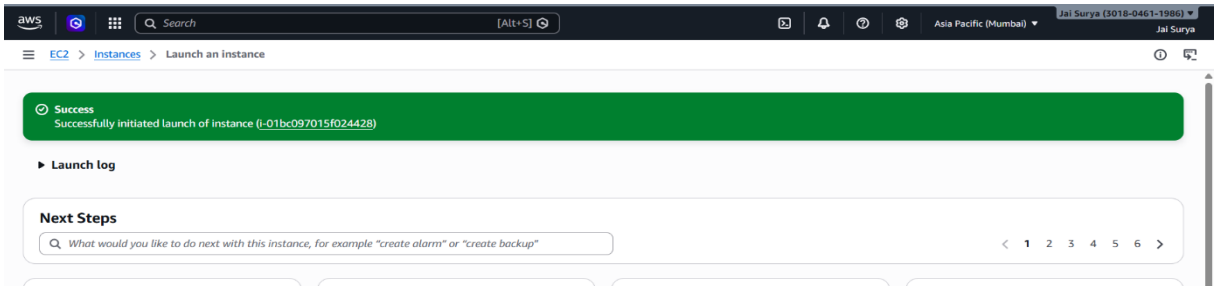

Screenshot 6: Connect to Linux EC2 Instance

1. Select the Linux EC2 instance.
2. Click Connect to access the instance.

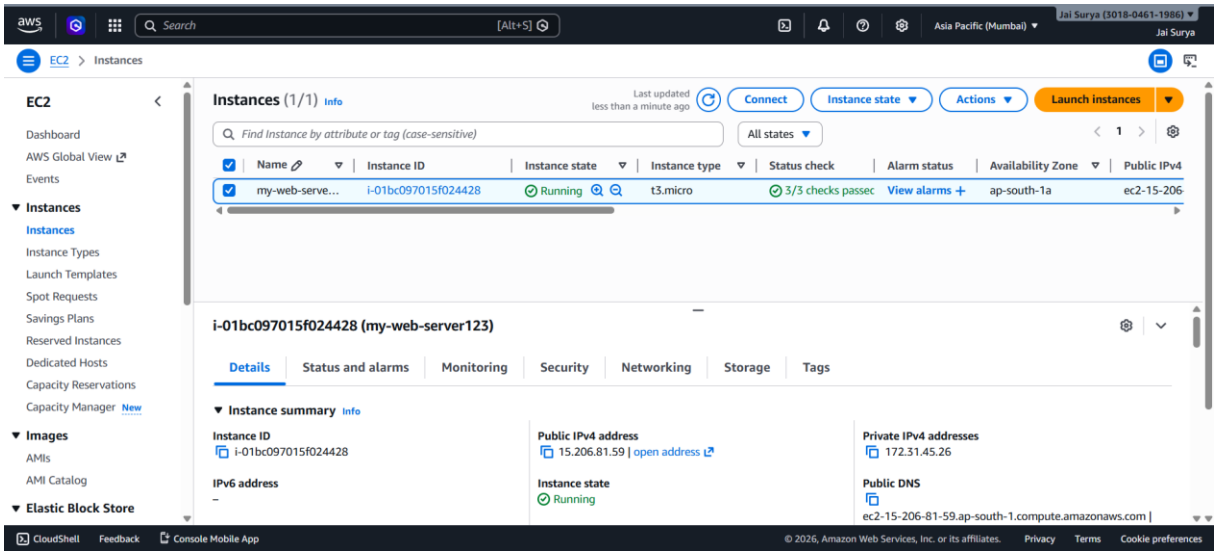

Screenshot 7: Connect Using Public IP

1. Select Connect using Public IP address.
2. Click Connect to access the Linux instance.

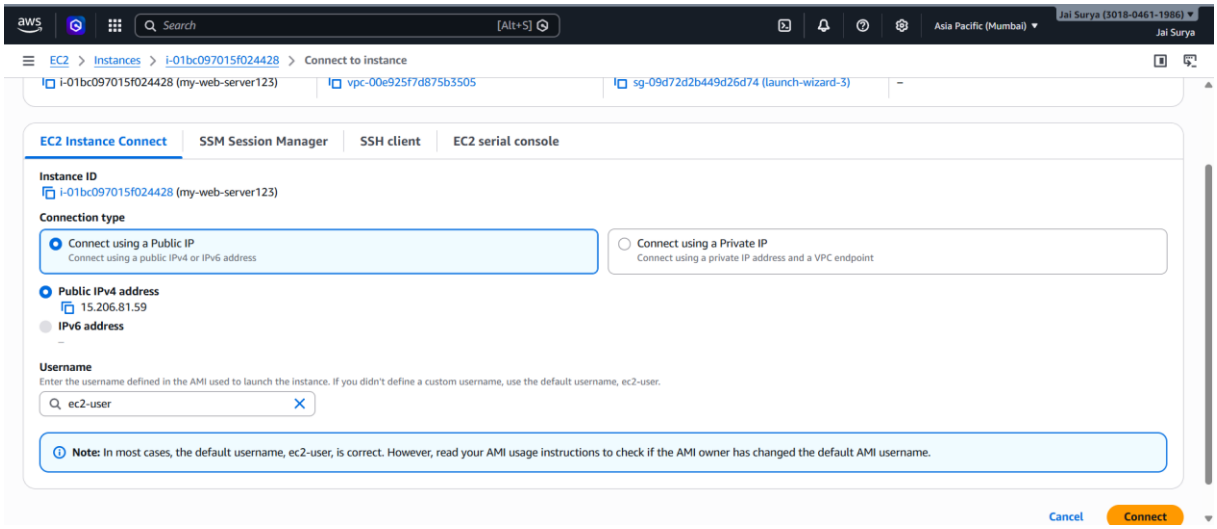

Screenshot 8: Linux terminal

1. The Linux terminal opens successfully.
2. EC2 instance is connected and ready for commands.

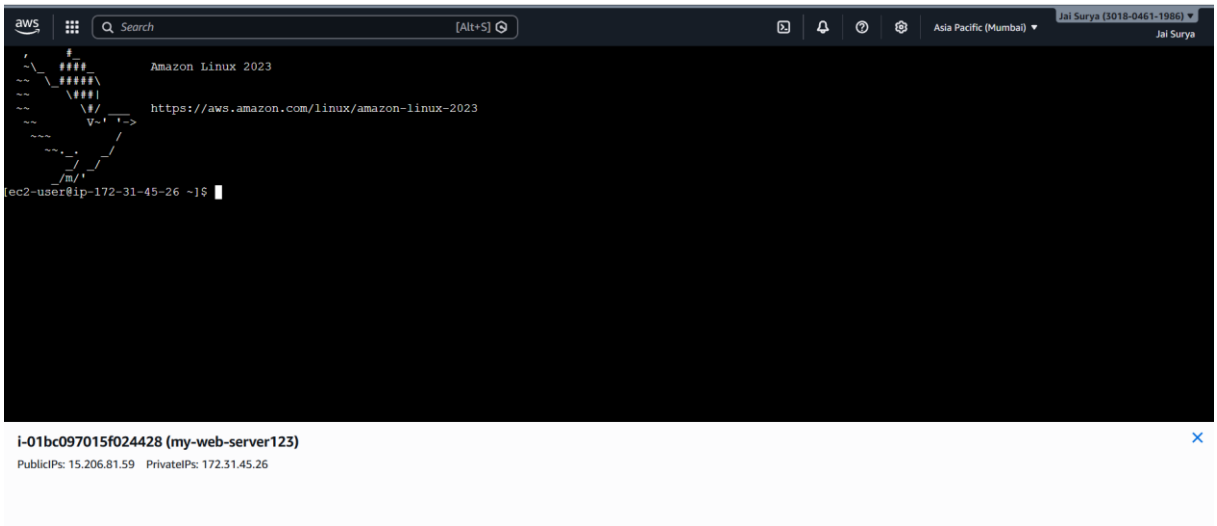

WORKING WITH LINUX COMMANDS

Basic Linux Commands Practiced

- **mkdir foldername**

  Creates a new directory.

- **ls**

  Lists files and directories in the current location.

- **pwd**

  Displays the present working directory.

- **cd foldername**

  Moves into the specified directory**.**

- **touch filename**

  Creates a new empty file.

- **nano filename**

  Opens the file in the Nano text editor.

  After editing: press Ctrl + X → Y → Enter to save and exit.

- **cat filename**

  Displays the content of the file.

- **vim filename**

  Opens the file in the Vim editor.

  Press i to edit → Esc → :wq → Enter to save and exit.

```
  ,     #_
  ~\_  ####_        Amazon Linux 2023
 ~~  \_#####\
 ~~     \###|
 ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
  ~~       V~' '->
   ~~~         /
     ~~._.   _/
        _/ _/
      _/m/'
[ec2-user@ip-172-31-45-26 ~]$ mkdir aws
[ec2-user@ip-172-31-45-26 ~]$ ls
aws
[ec2-user@ip-172-31-45-26 ~]$ pwd
/home/ec2-user
[ec2-user@ip-172-31-45-26 ~]$ cd aws
[ec2-user@ip-172-31-45-26 aws]$ pwd
/home/ec2-user/aws
[ec2-user@ip-172-31-45-26 aws]$ touch newfile
[ec2-user@ip-172-31-45-26 aws]$ nano newfile
[ec2-user@ip-172-31-45-26 aws]$
```

i-01bc097015f024428 (my-web-server123)

PublicIPs: 15.206.81.59 PrivateIPs: 172.31.45.26

```
  GNU nano 8.3                    newfile                    Modified
HELLO ALL
THIS MY NEW FILE

^G Help      ^O Write Out   ^F Where Is    ^K Cut       ^T Execute   ^C Location  M-U Undo     M-A Set Mark   M-] To Bracket  M-B Previous
^X Exit      ^R Read File   ^\ Replace     ^U Paste     ^J Justify   ^/ Go To Line M-E Redo     M-6 Copy       ^B Where Was    M-F Next
```

i-01bc097015f024428 (my-web-server123)

PublicIPs: 15.206.81.59 PrivateIPs: 172.31.45.26

```
this is my python file
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
:wq
```

```
[ec2-user@ip-172-31-45-26 aws]$ vim jai.py
[ec2-user@ip-172-31-45-26 aws]$ ls
jai.py  newfile
[ec2-user@ip-172-31-45-26 aws]$ cat jai.py
this is my python file
[ec2-user@ip-172-31-45-26 aws]$
```

Connect to Linux EC2 Instance Using Git Bash

Step 1: Navigate to Key Pair Location

1. Open Git Bash.
2. Type the following command to move to the folder containing the key pair file:

cd Downloads

Step 2: Connect to the Linux Instance

1. Use the SSH command to connect:

ssh -i keypair-name.pem ec2-user@<Public-IP>

2. After successful connection, the Linux terminal opens.

Step 3: Execute Linux Commands

Once connected, start executing basic Linux commands such as file and directory management commands.

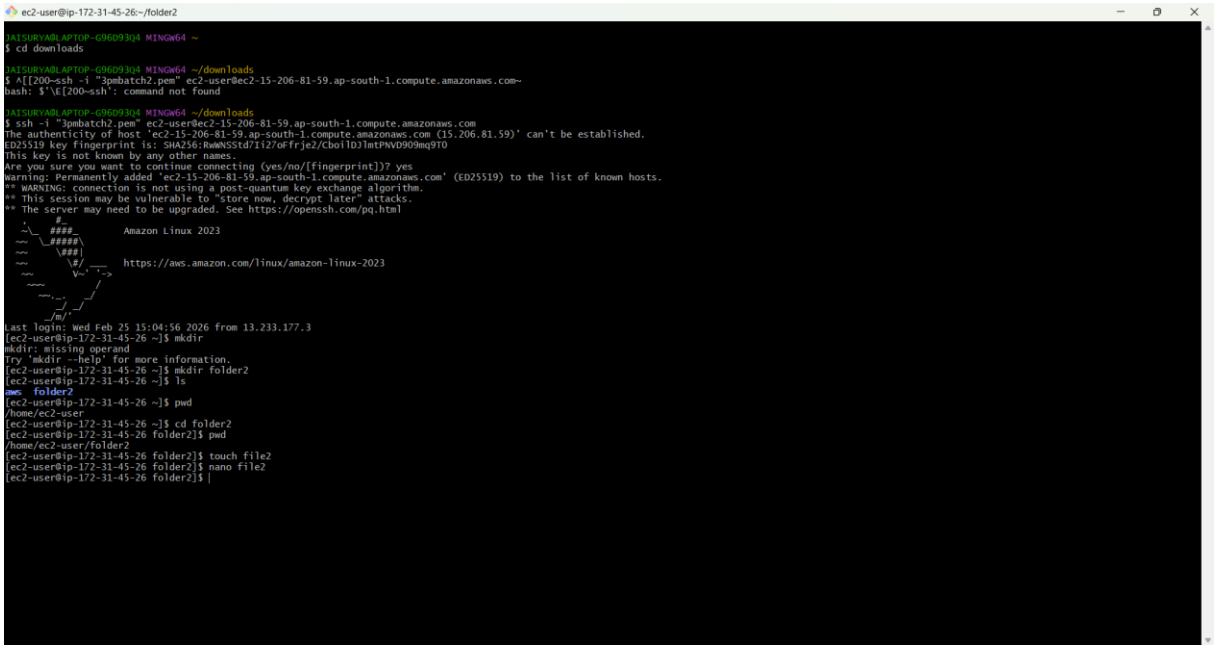

ec2-user@ip-172-31-45-26:~/folder2

```
  GNU nano 8.3
working git bash
```

ec2-user@ip-172-31-45-26:~/folder2

```
JAISURYA@LAPTOP-G96D93Q4 MINGW64 ~
$ cd downloads

JAISURYA@LAPTOP-G96D93Q4 MINGW64 ~/downloads
$ ^[[200~ssh -i "3pmbatch2.pem" ec2-user@ec2-15-206-81-59.ap-south-1.compute.amazonaws.com~
bash: $'\E[200~ssh': command not found

JAISURYA@LAPTOP-G96D93Q4 MINGW64 ~/downloads
$ ssh -i "3pmbatch2.pem" ec2-user@ec2-15-206-81-59.ap-south-1.compute.amazonaws.com
The authenticity of host 'ec2-15-206-81-59.ap-south-1.compute.amazonaws.com (15.206.81.59)' can't be established.
ED25519 key fingerprint is: SHA256:RwWNSStd7Ii27oFfrje2/CboilDJlmtPNVD9O9mq9T0
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-15-206-81-59.ap-south-1.compute.amazonaws.com' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
       #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
Last login: Wed Feb 25 15:04:56 2026 from 13.233.177.3
[ec2-user@ip-172-31-45-26 ~]$ mkdir
mkdir: missing operand
Try 'mkdir --help' for more information.
[ec2-user@ip-172-31-45-26 ~]$ mkdir folder2
[ec2-user@ip-172-31-45-26 ~]$ ls
aws  folder2
[ec2-user@ip-172-31-45-26 ~]$ pwd
/home/ec2-user
[ec2-user@ip-172-31-45-26 ~]$ cd folder2
[ec2-user@ip-172-31-45-26 folder2]$ pwd
/home/ec2-user/folder2
[ec2-user@ip-172-31-45-26 folder2]$ touch file2
[ec2-user@ip-172-31-45-26 folder2]$ nano file2
[ec2-user@ip-172-31-45-26 folder2]$ nano file2
[ec2-user@ip-172-31-45-26 folder2]$ cat file2
working git bash
[ec2-user@ip-172-31-45-26 folder2]$ |
```

ec2-user@ip-172-31-45-26:~/folder2

```
hello all this is my new file
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
```

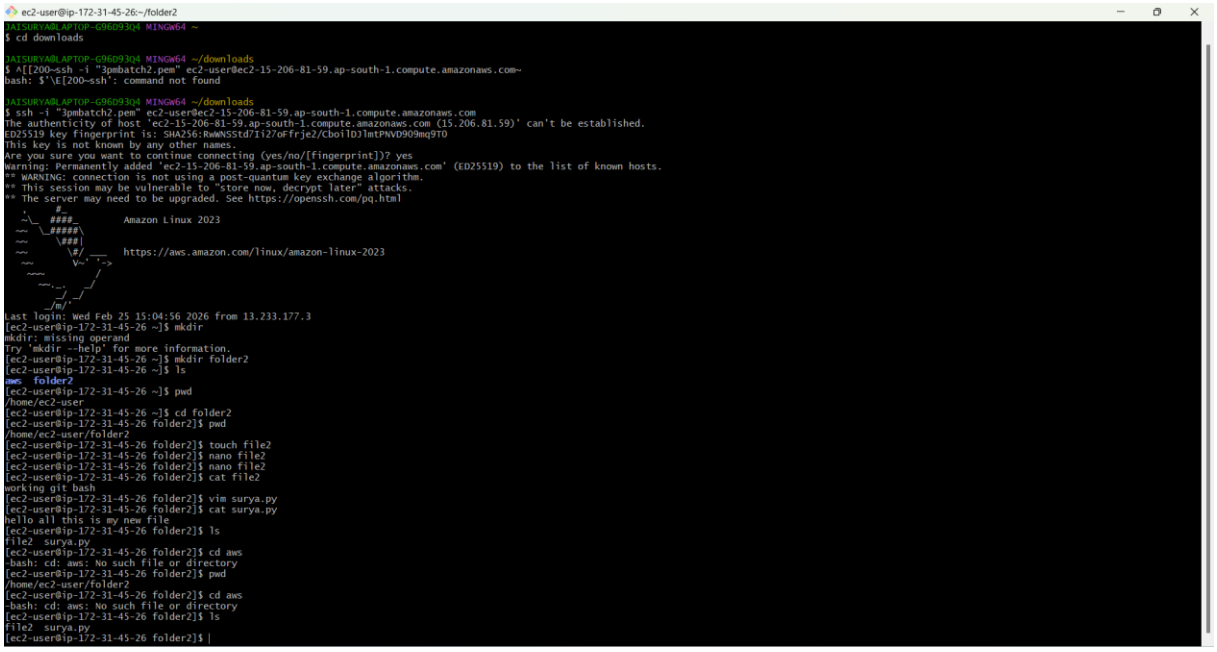

Screenshot 7: Terminate Linux EC2 Instance

1. Select the Linux EC2 instance.
2. Click Instance state.
3. Choose Terminate instance.

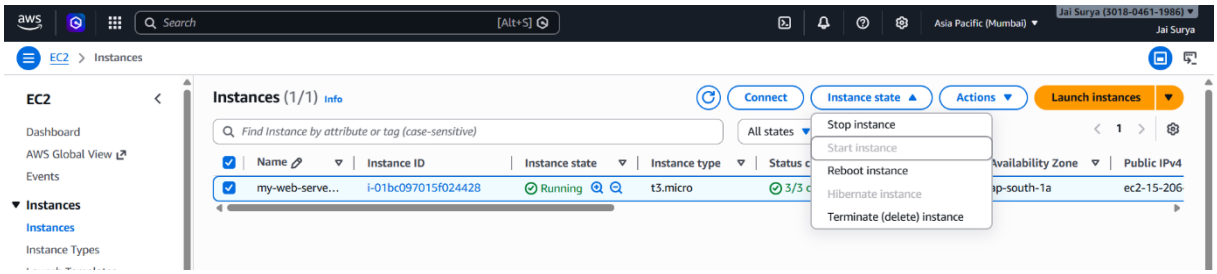

LAUNCHING INSTANCES IN EC2 FOR WINDOWS

Step 1:

- Go to EC2 and launching instances for windows

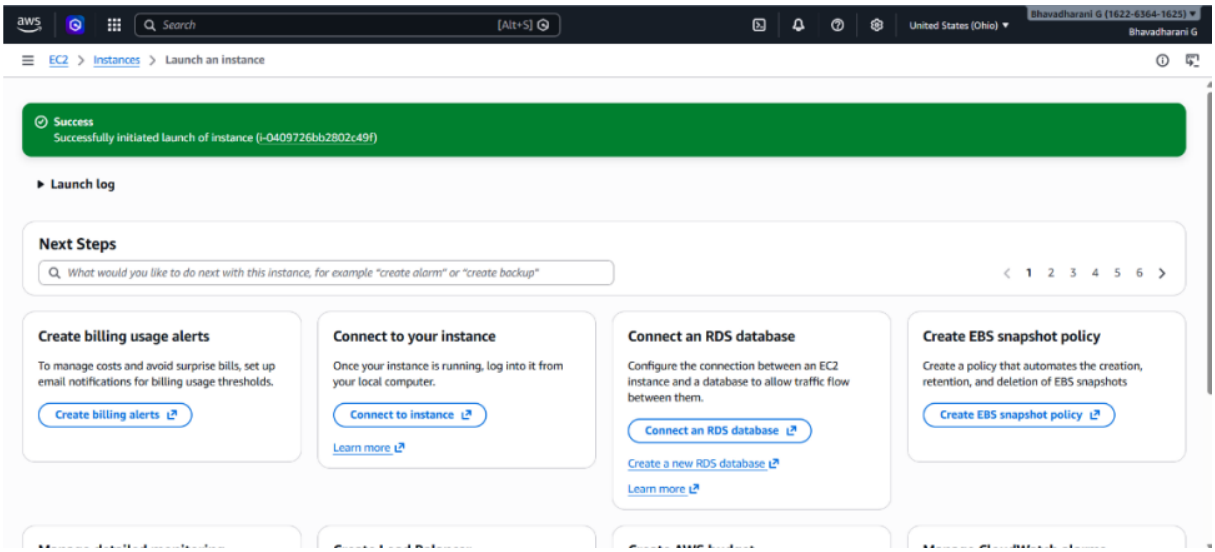

Step 2:

- Click the instances id and there you will get the user name and the password

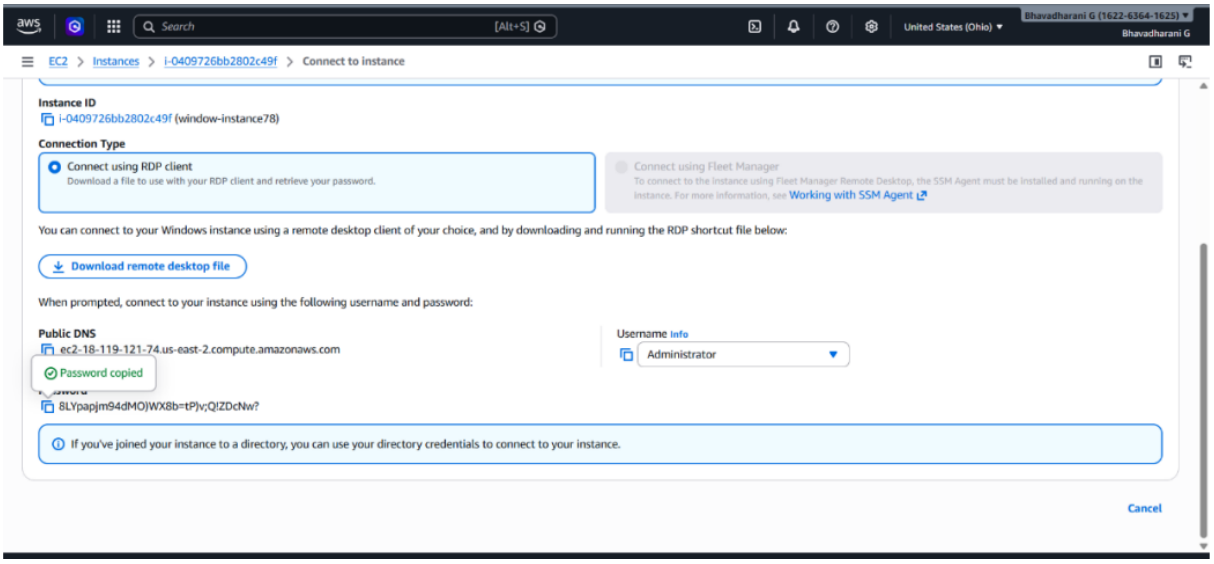

Step 3:
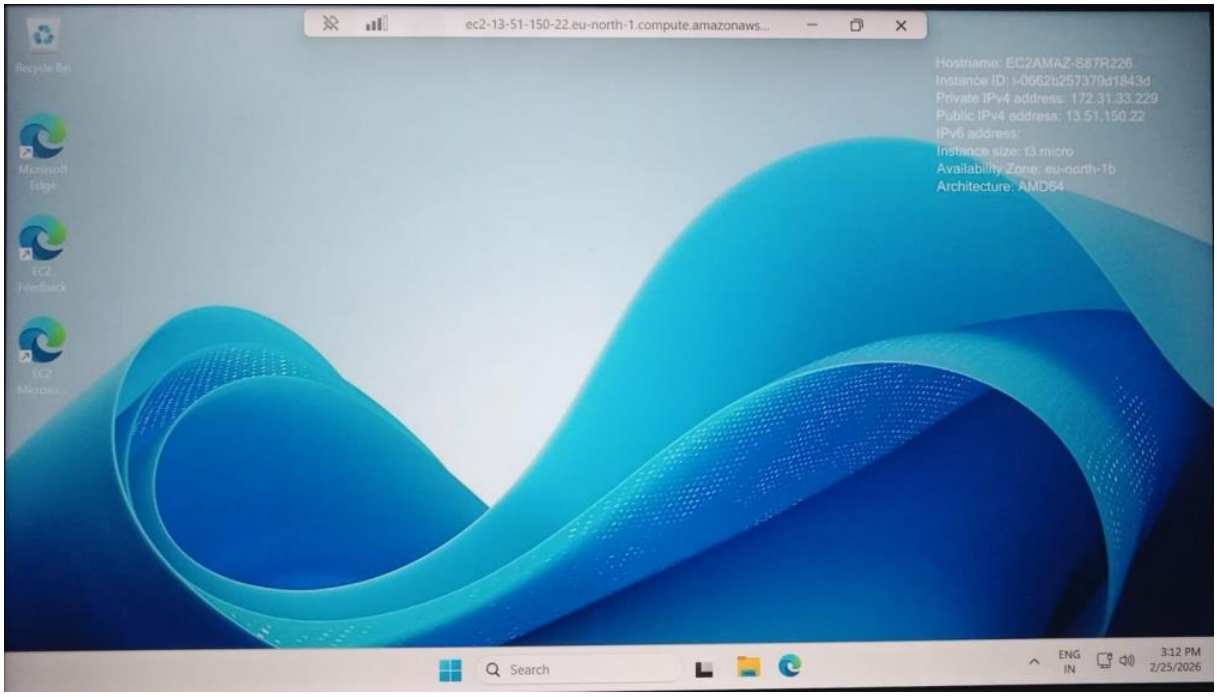
- Go to RDC and give public DNS
- Then give the username and password
- And now the windows instance is opened