


TRANSIT GATEWAY


Transit Gateway is a service that connects multiple VPCs and networks through a central hub. It simplifies network architecture by allowing VPCs to communicate with each other using one gateway instead of many peering connections.

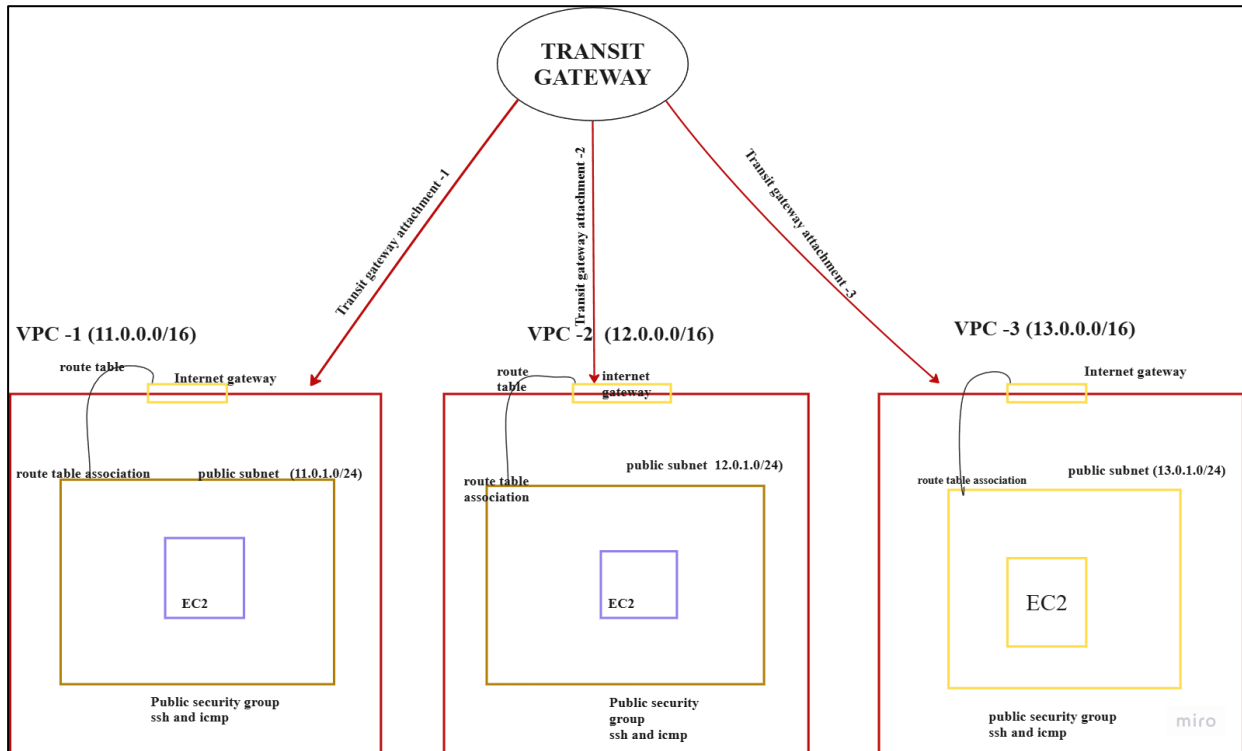

HANDS-ON SCREENSHOTS FOR TRANSIT GATEWAY

Screenshot

1. Go to **VPC**
2. Click **Create**

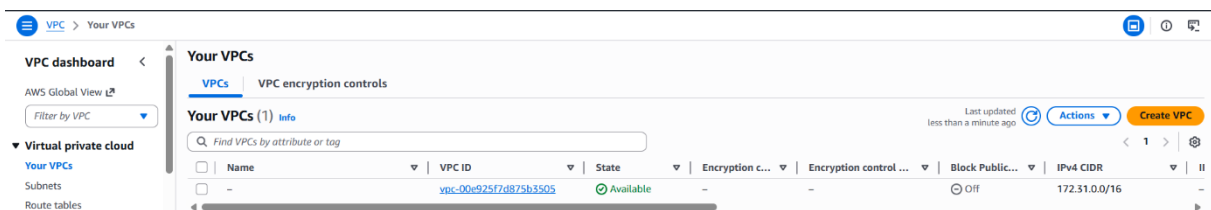

Screenshot: Create VPC 1

1. Enter **VPC name**
2. Set **CIDR** to **11.0.0.0/16**
3. Click **Create VPC**

Create VPC [Info](#)

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create [Info](#)
Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

vpc-1

IPv4 CIDR block [Info](#)

☒ IPv4 CIDR manual input ☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

11.0.0.0/16

CIDR block size must be between /16 and /28.

Screenshot: Create VPC 2

1. Enter **VPC name**
2. Set **CIDR** to **12.0.0.0/16**
3. Click **Create VPC**

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

vpc-2

IPv4 CIDR block [Info](#)

☒ IPv4 CIDR manual input ☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

12.0.0.0/16

CIDR block size must be between /16 and /28.

Screenshot: Create VPC 3

1. Enter **VPC name**
2. Set **CIDR** to **13.0.0.0/16**
3. Click **Create VPC**

Name tag - optional

Creates a tag with a key of 'Name' and a value that you specify.

vpc-3

IPv4 CIDR block [Info](#)

- ☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

13.0.0/16

CIDR block size must be between /16 and /28.

Screenshot: 3 VPCs Created

1. View 3 VPCs
2. All VPCs created successfully

The screenshot shows the AWS VPC dashboard. A green notification banner at the top states: "You successfully created vpc-08e84314c9d99291e / vpc-3". Below this, the "Your VPCs (4)" section displays a table of VPCs. The table has columns for Name, VPC ID, State, Encryption c..., Encryption control ..., Block Public..., and IPv4 CIDR. The VPCs listed are vpc-1, vpc-2, and vpc-3, all in an "Available" state. The IPv4 CIDR for vpc-1 is 172.31.0.0/16, for vpc-2 is 11.0.0.0/16, and for vpc-3 is 13.0.0.0/16. The dashboard also shows a sidebar with navigation options like Subnets, Route tables, and Internet gateways.

Name	VPC ID	State	Encryption c...	Encryption control ...	Block Public...	IPv4 CIDR
vpc-1	vpc-00e925f7d875b3505	Available	-	-	Off	172.31.0.0/16
vpc-2	vpc-06022ecf0918251ee	Available	-	-	Off	11.0.0.0/16
vpc-3	vpc-00cd176ff7880235	Available	-	-	Off	12.0.0.0/16
vpc-3	vpc-08e84314c9d99291e	Available	-	-	Off	13.0.0.0/16

Screenshot: Create Subnet

1. Go to Subnets
2. Click Create subnet

The screenshot shows the AWS Subnets dashboard. A notification banner at the top states: "Last updated 2 minutes ago". Below this, the "Subnets (3)" section displays a table of subnets. The table has columns for Name, Subnet ID, State, VPC, Block Public..., IPv4 CIDR, and IPv6 CIDR. The subnets listed are subnet-02af623bce16f5af0, subnet-0ff0131d339a7347d, and subnet-00cc3409b9fc886f5, all in an "Available" state. The IPv4 CIDR for subnet-02af623bce16f5af0 is 172.31.0.0/20, for subnet-0ff0131d339a7347d is 172.31.32.0/20, and for subnet-00cc3409b9fc886f5 is 172.31.16.0/20. The dashboard also shows a sidebar with navigation options like VPCs, Route tables, and Internet gateways.

Name	Subnet ID	State	VPC	Block Public...	IPv4 CIDR	IPv6 CIDR
-	subnet-02af623bce16f5af0	Available	vpc-00e925f7d875b3505	Off	172.31.0.0/20	-
-	subnet-0ff0131d339a7347d	Available	vpc-00e925f7d875b3505	Off	172.31.32.0/20	-
-	subnet-00cc3409b9fc886f5	Available	vpc-00e925f7d875b3505	Off	172.31.16.0/20	-

Screenshot: Create Subnet 1

1. Select VPC 1
2. Select Availability Zone
3. Set CIDR to 11.0.1.0/24
4. Click Create subnet

Create subnet [Info](#)

VPC

VPC ID

Create subnets in this VPC.

vpc-06022ecf0918251ee (vpc-1) ▼

Associated VPC CIDRs

IPv4 CIDRs

11.0.0.0/16

Subnet 1 of 1

Subnet name

Create a tag with a key of 'Name' and a value that you specify.

subnet-1

The name can be up to 256 characters long.

Availability Zone [Info](#)

Choose the zone in which your subnet will reside, or let Amazon choose one for you.

Asia Pacific (Mumbai) / ap-south-1 (ap-south-1a) ▼

IPv4 VPC CIDR block [Info](#)

Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

11.0.0.0/16 ▼

IPv4 subnet CIDR block

11.0.1.0/24

256 IPs

Screenshot: Create Subnet 2

1. Select **VPC 2**
2. Select **Availability Zone**
3. Set **CIDR** to **12.0.1.0/24**
4. Click **Create subnet**

VPC

VPC ID

Create subnets in this VPC.

vpc-00cdd176ff7880235 (vpc-2) ▼

Associated VPC CIDRs

IPv4 CIDRs

12.0.0.0/16

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name

Create a tag with a key of 'Name' and a value that you specify.

subnet-2

The name can be up to 256 characters long.

Availability Zone [Info](#)

Choose the zone in which your subnet will reside, or let Amazon choose one for you.

Asia Pacific (Mumbai) / ap-south-1 (ap-south-1a) ▼

IPv4 VPC CIDR block [Info](#)

Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

12.0.0.0/16 ▼

IPv4 subnet CIDR block

12.0.1.0/24

256 IPs

Screenshot: Create Subnet 3

1. Select **VPC 3**
2. Select **Availability Zone**
3. Set **CIDR** to **13.0.1.0/24**
4. Click **Create subnet**

VPC
VPC ID
Create subnets in this VPC.
vpc-08e84314c9d99291e (vpc-3)

Associated VPC CIDRs
IPv4 CIDRs
13.0.0.0/16

Subnet settings
Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1
Subnet name
Create a tag with a key of 'Name' and a value that you specify.
subnet-3
The name can be up to 256 characters long.
Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Asia Pacific (Mumbai) / ap-s1-az1 (ap-south-1a)
IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
13.0.0.0/16
IPv4 subnet CIDR block
13.0.1.0/24 256 IPs

Screenshot: 3 Subnets Created

1. View **3 Subnets**
2. All Subnets created successfully

Subnets (6) [Info](#)
Find subnets by attribute or tag

Last updated less than a minute ago [Actions](#) [Create subnet](#)

☐	Name	Subnet ID	State	VPC	Block Public...	IPv4 CIDR	IPv6 CIDR	IPv6 CIT
☐	-	subnet-02af623bce16f5af0	Available	vpc-00e925f7d875b3505	Off	172.31.0.0/20	-	-
☐	subnet-1	subnet-0214c270a37e0f360	Available	vpc-06022ecf0918251ee vpc-1	Off	11.0.1.0/24	-	-
☐	-	subnet-0fb0131d3339a7347d	Available	vpc-00e925f7d875b3505	Off	172.31.32.0/20	-	-
☐	subnet-2	subnet-00c03bc61fae47b0d	Available	vpc-00cdd176f7880235 vpc-2	Off	12.0.1.0/24	-	-
☐	subnet-3	subnet-05604aa8717ffecb1	Available	vpc-08e84314c9d99291e vpc-3	Off	13.0.1.0/24	-	-
☐	-	subnet-00cc3409b9fc886f5	Available	vpc-00e925f7d875b3505	Off	172.31.16.0/20	-	-

Screenshot: Create Route Table

1. Go to **Route Tables**
2. Click **Create route table**

VPC dashboard [AWS Global View](#)
Filter by VPC
Virtual private cloud
Your VPCs
Subnets
Route tables

Route tables (4) [Info](#)
Find route tables by attribute or tag

Last updated less than a minute ago [Actions](#) [Create route table](#)

☐	Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC	Owner ID
☐	-	rtb-06cab9396af074ba7	-	-	Yes	vpc-00e925f7d875b3505	301804611986
☐	-	rtb-0a1e0d416972a12c6	-	-	Yes	vpc-06022ecf0918251ee vpc-1	301804611986
☐	-	rtb-02a8877603799502d	-	-	Yes	vpc-00cdd176f7880235 vpc-2	301804611986
☐	-	rtb-061a286e95013dfd8	-	-	Yes	vpc-08e84314c9d99291e vpc-3	301804611986

Screenshot: Create Route Table 1

1. Enter **Route table name**
2. Select **VPC 1**
3. Click **Create route table**
4. Follow the same steps to create **Route Table 2** and **Route Table 3**.

Create route table [info](#)

A route table specifies how packets are forwarded between the subnets within your VPC, the internet, and your VPN connection.

Route table settings

Name - optional
Create a tag with a key of 'Name' and a value that you specify.

VPC
The VPC to use for this route table.

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key **Value - optional** [Remove](#)

[Add new tag](#)
You can add 49 more tags.

[Cancel](#) [Create route table](#)

Screenshot: Route Tables 1, 2, 3 Created

1. View **Route Table 1, Route Table 2, Route Table 3**
2. All **Route Tables created successfully**

Route tables (7) [info](#)

Find route tables by attribute or tag

☐	Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC	Owner ID
☐	-	rtb-06cab9396afdf74ba7	-	-	Yes	vpc-00e925f7d875b3505	301804611986
☐	-	rtb-0a1e0416072a12a6	-	-	Yes	vpc-06022ecf0918251ee vpc-1	301804611986
☐	-	rtb-02a88776037995d2d	-	-	Yes	vpc-00cd176f7880235 vpc-2	301804611986
☐	-	rtb-061a286d95013d4d8	-	-	Yes	vpc-08e84314c9d99291e vpc-3	301804611986
☐	rt-1	rtb-0a4d9dc72c635b758	-	-	No	vpc-06022ecf0918251ee vpc-1	301804611986
☐	rt-2	rtb-0387f720c4aaff4cd	-	-	No	vpc-00cd176f7880235 vpc-2	301804611986
☐	rt-3	rtb-0728c17a6b45479d2	-	-	No	vpc-08e84314c9d99291e vpc-3	301804611986

Screenshot: Create Internet Gateway

1. Go to **Internet Gateways**
2. Click **Create internet gateway**

Internet gateways (1) [info](#)

Find internet gateways by attribute or tag

☐	Name	Internet gateway ID	State	VPC ID	Owner
☐	-	igw-04656b4f3b3fde713f	Attached	vpc-00e925f7d875b3505	301804611986

Screenshot: Creating Internet Gateway 1

1. Enter **Internet Gateway name**
2. Click **Create internet gateway**

Create internet gateway [Info](#)

An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag
Creates a tag with a key of 'Name' and a value that you specify.

igateway-1

Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key **Value - optional**

Q Name X Q igateway-1 X Remove

Add new tag

You can add 49 more tags.

Cancel **Create internet gateway**

Screenshot: Attach Internet Gateway 1 to VPC

1. Select **Internet Gateway 1**
2. Click **Actions** → **Attach to VPC**
3. Select **VPC 1**
4. Click **Attach**
5. Follow the same steps for **Internet Gateway 2** and **Internet Gateway 3**.

VPC dashboard <

Internet gateways (1/2) [Info](#)

Find internet gateways by attribute or tag

Name	Internet gateway ID	State	VPC ID	Owner
-	igw-04656b4f5b0de713f	Attached	vpc-00e525f7d875b3505	301804611986
igateway-1	igw-03aafaea582fc32ee	Detached	-	301804611986

Actions **Create internet gateway**

View details
Attach to VPC
Detach from VPC
Manage tags
Delete internet gateway

Attach to VPC (igw-03aafaea582fc32ee) [Info](#)

VPC
Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs
Attach the internet gateway to this VPC.

Q vpc-06022ecf0918251ee X

Use: "vpc-06022ecf0918251ee"

vpc-08e84314cd99291e - vpc-3

vpc-06022ecf0918251ee - vpc-1


vpc-00cd176f7880235 - vpc-2

vpc-06022ecf0918251ee - vpc-1

Cancel **Attach internet gateway**


Screenshot: Internet Gateways Created and Attached

1. View **Internet Gateway 1, 2, 3**
2. All **Internet Gateways** created and attached to VPCs successfully.

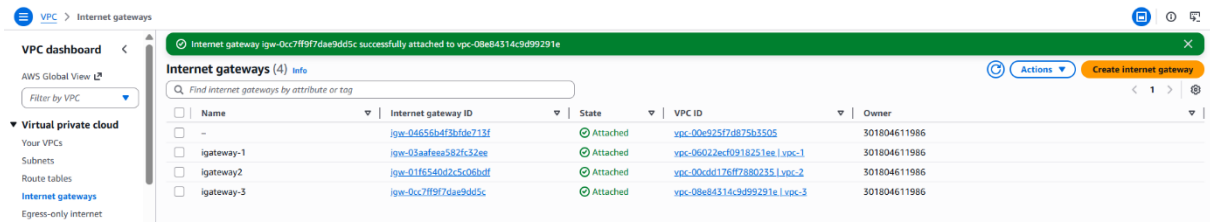

Screenshot: Create Security Group

1. Go to Security Groups
2. Click Create security group

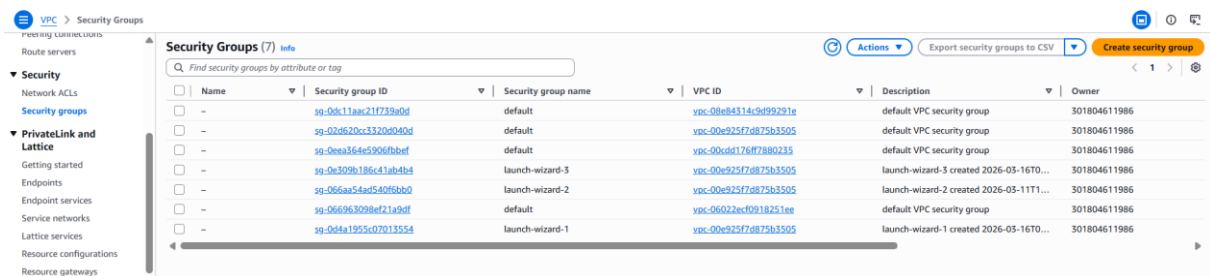

Screenshot: Security Group 1 Details

1. Enter Security group 1 name
2. Select VPC 1
3. Click Create security group

Create security group

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name

Name cannot be edited after creation.

Description

VPC

Inbound rules

This security group has no inbound rules.

[Add rule](#)

Screenshot: Add Inbound Rules

1. Click Add rule in Inbound rules
2. Add SSH – Anywhere
3. Add All ICMP IPv4 – Anywhere
4. Follow the same steps for Security Group 2 and Security Group 3.

Inbound rules info

Type	Protocol	Port range	Source	Description - optional	
SSH	TCP	22	Anywh...	0.0.0.0/0	Delete
All ICMP - IPv4	ICMP	All	Anywh...	0.0.0.0/0	Delete

[Add rule](#)

Screenshot: Security Groups 1 2 3 created

Security Groups (5/10) info

[Find security groups by attribute or tag](#)

Name	Security group ID	Security group name	VPC ID	Description	Owner	Int
☒ sgr-1	sg-02332c6a8b02a28dc	sgr-1	vpc-06022ecf0918251ee	sgr	301804611986	2 F
☐ default	sg-0dc11aac217739a0d	default	vpc-08e84314c9d99291e	default VPC security group	301804611986	1 F
☐ default	sg-02b620cc3320d040d	default	vpc-00e925f7d875b3505	default VPC security group	301804611986	2 F
☐ default	sg-0eaa364e590cfbbaef	default	vpc-00cd176f7880235	default VPC security group	301804611986	1 F
☐ launch-wizard-3	sg-0e309b186c41ab4b4	launch-wizard-3	vpc-00e925f7d875b3505	launch-wizard-3 created 2026-05-16T0...	301804611986	1 F
☒ sgr-2	sg-045b51e8b0d6ff1a6	sgr-2	vpc-00cd176f7880235	sgr2	301804611986	2 F
☐ launch-wizard-2	sg-066ae54ae540f6bb0	launch-wizard-2	vpc-00e925f7d875b3505	launch-wizard-2 created 2026-05-11T1...	301804611986	2 F
☐ default	sg-066963098cf21a5df	default	vpc-06022ecf0918251ee	default VPC security group	301804611986	1 F
☒ sgr-3	sg-03d48374941a25818	sgr-3	vpc-08e84314c9d99291e	sgr3	301804611986	2 F
☐ launch-wizard-1	sg-044a1955c07013554	launch-wizard-1	vpc-00e925f7d875b3505	launch-wizard-1 created 2026-05-16T0...	301804611986	1 F

Screenshot: Subnet Association for Route Table 1

1. Go to **Route Tables**
2. Select **Route Table 1**
3. Click **Subnet association** → **Edit**
4. Select **Subnet 1**
5. Click **Save**
6. Follow the same steps for **Route Table 2** and **Route Table 3**.

Virtual private cloud

Your VPCs

Subnets

Route tables

Name	Route table ID	Subnet ID	IPV4 CIDR	IPV6 CIDR	Route table ID
☐ rt-1	rtb-0a1e0d416072a12c6	-	-	Yes	vpc-06022ecf0918251ee vpc-1
☐ rt-2	rtb-02a88776037995e2d	-	-	Yes	vpc-00cd176f7880235 vpc-2
☐ rt-3	rtb-061a286e95013d1d8	-	-	Yes	vpc-08e84314c9d99291e vpc-3
☒ rt-1	rtb-0ada9de72c635b758	-	-	No	vpc-06022ecf0918251ee vpc-1
☐ rt-2	rtb-0387f270c4aaff4cd	-	-	No	vpc-00cd176f7880235 vpc-2
☐ rt-3	rtb-0728c17a6b45479d2	-	-	No	vpc-08e84314c9d99291e vpc-3

rtb-0ada9de72c635b758 / rt-1

Subnet associations

Explicit subnet associations (0)

Name	Subnet ID	IPV4 CIDR	IPV6 CIDR
------	-----------	-----------	-----------

Edit subnet associations

Change which subnets are associated with this route table.

Available subnets (1/1)

Name	Subnet ID	IPV4 CIDR	IPV6 CIDR	Route table ID
☒ subnet-1	subnet-0214c270a37e0f360	11.0.1.0/24	-	Main (rtb-0a1e0d416072a12c6)


Selected subnets

subnet-0214c270a37e0f360 / subnet-1

[Cancel](#) [Save associations](#)

Screenshot: Route Tables Associated Successfully

1. View **Route Table 1, 2, 3**
2. All **Route Tables associated with Subnets successfully.**

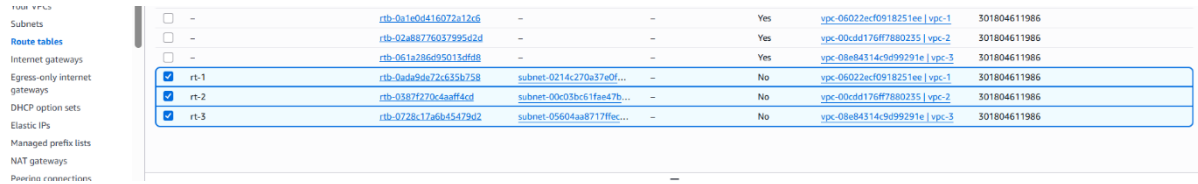


The screenshot shows the AWS VPC console interface. On the left sidebar, 'Route tables' is selected. The main area displays a table of route tables. Three route tables (rt-1, rt-2, and rt-3) are highlighted with blue selection boxes. Each row shows the route table ID, its name, the associated subnet, and the VPC it belongs to.

	Route Table ID	Route Table Name	Subnet	Associated Subnets	Propagated	VPC	VPC ID
☐	rt-1	rtb-0a1e0d416072a12c6	-	-	Yes	vpc-06022ecf0918251ee vpc-1	301804611986
☐	rt-2	rtb-02a88776037995d2d	-	-	Yes	vpc-00cdd176f7880235 vpc-2	301804611986
☐	rt-3	rtb-061a286e95013d9d8	-	-	Yes	vpc-08e84314c9d99291e vpc-3	301804611986
☒	rt-1	rtb-0ada9de72c635b758	subnet-0214c270a57e0f...	-	No	vpc-06022ecf0918251ee vpc-1	301804611986
☒	rt-2	rtb-0387f720c4aaff4cd	subnet-00c03bc61fae47b...	-	No	vpc-00cdd176f7880235 vpc-2	301804611986
☒	rt-3	rtb-0728c17a6b45479d2	subnet-05604aa8717ffec...	-	No	vpc-08e84314c9d99291e vpc-3	301804611986

Screenshot: Add Route in Route Table 1

1. Go to **Routes** in **Route Table 1**
2. Click **Edit routes**
3. Set **Destination** to **0.0.0.0/0**
4. Select **Internet Gateway** and choose **IG 1 ID**
5. Click **Save**
6. Follow the same steps for **Route Table 2** and **Route Table 3**.

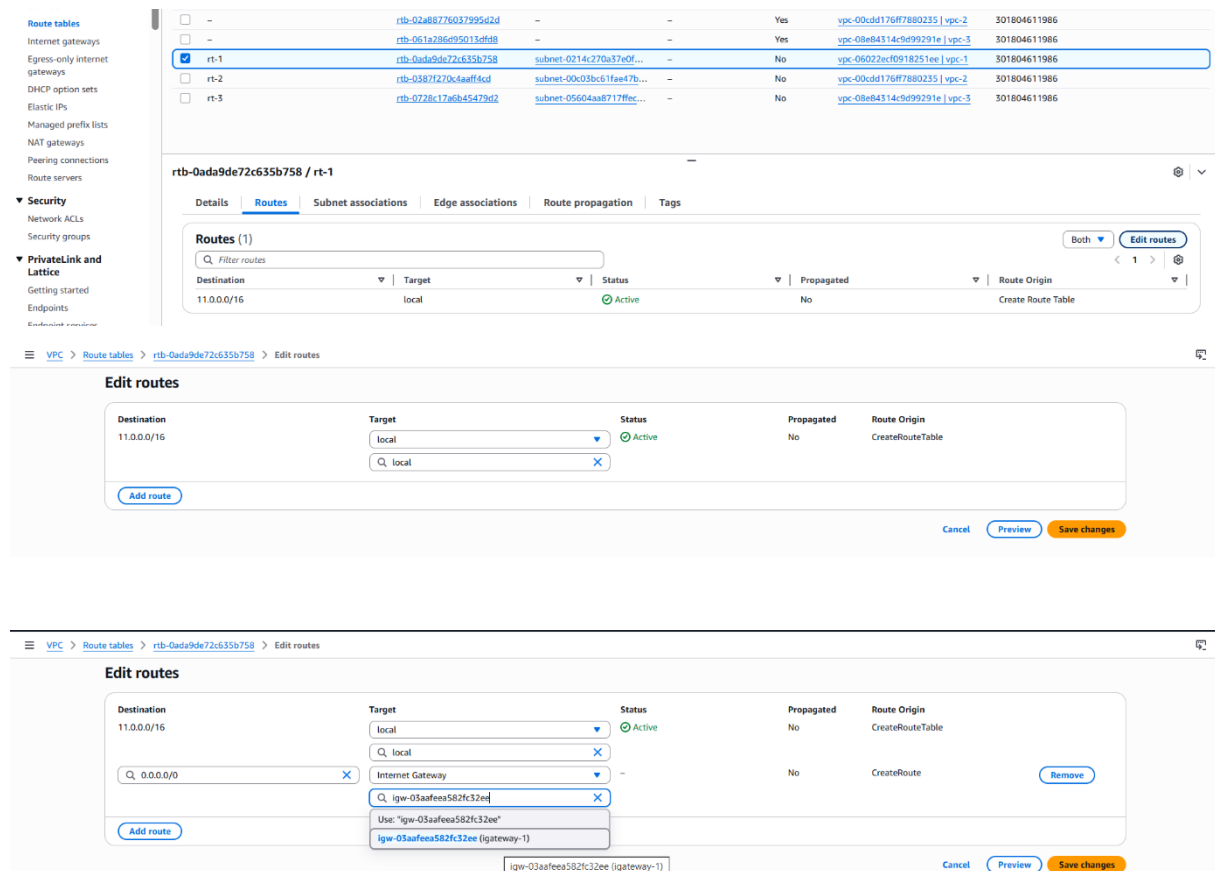

The screenshot shows the AWS VPC console interface. On the left sidebar, 'Route tables' is selected. The main area displays a table of route tables. Three route tables (rt-1, rt-2, and rt-3) are highlighted with blue selection boxes. Each row shows the route table ID, its name, the associated subnet, and the VPC it belongs to.

Below the table, the 'rtb-0ada9de72c635b758 / rt-1' route table is selected. The 'Routes' tab is active, showing a list of routes. The 'Edit routes' button is clicked, leading to the 'Edit routes' page.

The 'Edit routes' page shows the 'Destination' field set to '11.0.0.0/16'. The 'Target' field is set to 'local'. The 'Status' is 'Active'. The 'Propagated' checkbox is unchecked. The 'Route Origin' is 'CreateRouteTable'.


The 'Add route' button is clicked, leading to the 'Add route' page. The 'Destination' field is set to '0.0.0.0/0'. The 'Target' field is set to 'Internet Gateway'. The 'Status' is 'Active'. The 'Propagated' checkbox is unchecked. The 'Route Origin' is 'CreateRouteTable'.

The 'Add route' button is clicked, leading to the 'Add route' page. The 'Destination' field is set to '0.0.0.0/0'. The 'Target' field is set to 'Internet Gateway'. The 'Status' is 'Active'. The 'Propagated' checkbox is unchecked. The 'Route Origin' is 'CreateRouteTable'.

The 'Add route' button is clicked, leading to the 'Add route' page. The 'Destination' field is set to '0.0.0.0/0'. The 'Target' field is set to 'Internet Gateway'. The 'Status' is 'Active'. The 'Propagated' checkbox is unchecked. The 'Route Origin' is 'CreateRouteTable'.

Screenshot: Create Transit Gateway

1. Go to **Transit Gateways**
2. Click **Create transit gateway**

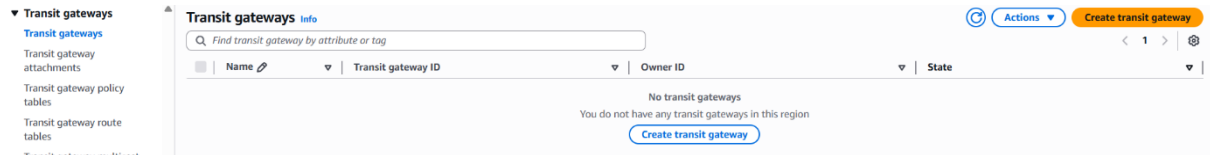

Screenshot: Transit Gateway Details

1. Enter **Name** and **Description**
2. Click **Create transit gateway**
3. Transit gateway **created successfully**.

Create transit gateway [Info](#)

A transit gateway (TGW) is a network transit hub that interconnects attachments (VPCs and VPNs) within the same AWS account or across AWS accounts.


Details - optional

Name tag
Creates a tag with the key set to Name and the value set to the specified string.

transit-gateway


Description [Info](#)
Set the description of your transit gateway to help you identify it in the future.

tg

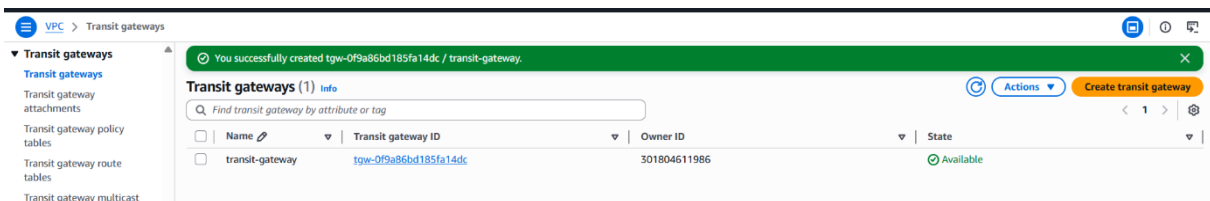

Screenshot: Create Transit Gateway Attachment

1. Go to **Transit Gateway Attachments**
2. Click **Create attachment**

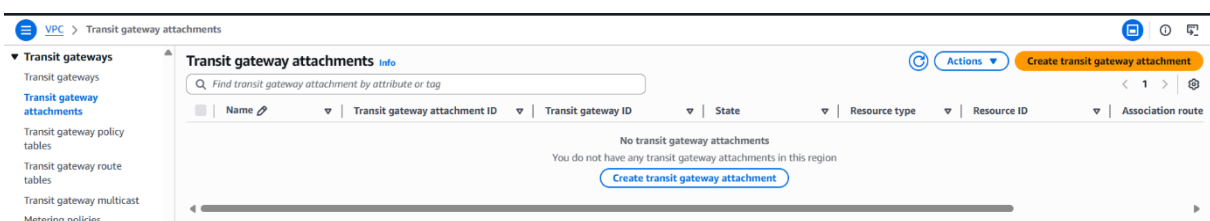

Screenshot: Create Transit Gateway Attachment 1

1. Enter **Attachment name**
2. Select **Transit Gateway ID**
3. Select **VPC 1**
4. Click **Create attachment**
5. **Transit Gateway Attachment 1 created successfully.**
6. Follow the same steps for **Transit Gateway Attachment 2** and **Transit Gateway Attachment 3**.

Create transit gateway attachment [Info](#)

A transit gateway (TGW) is a network transit hub that interconnects attachments (VPCs and VPNs) within the same AWS account or across AWS accounts.

Details

Name tag - optional
Creates a tag with the key set to Name and the value set to the specified string.
tga-1

Transit gateway ID [Info](#)
tgw-0f9a86bd185fa14dc

Attachment type [Info](#)
VPC

VPC attachment
Select and configure your VPC attachment.

☒ **DNS support** [Info](#)

☒ **Security Group Referencing support** [Info](#)

☐ **IPv6 support** [Info](#)

☐ **Appliance Mode support** [Info](#)

VPC ID
Select the VPC to attach to the transit gateway.

vpc-06022ecf0918251ee

Q

vpc-08e84314c9d99291e (vpc-3)
13.0.0.0/16

vpc-06022ecf0918251ee (vpc-1)
11.0.0.0/16

vpc-00cdd176ff7880235 (vpc-2)
12.0.0.0/16

vpc-00e925f7d875b3505
172.31.0.0/16

vpc-06022ecf0918251ee (vpc-1)

Screenshot: Transit Gateway Attachments Created Successfully

1. View **Transit Gateway Attachments 1, 2, 3**
2. All **Attachments created successfully.**

You successfully created VPC attachment tgw-attach-0857f2023e6cb43e4 / tga-3.

Transit gateway attachments (3) [Info](#)

Find transit gateway attachment by attribute or tag

	Name	Transit gateway attachment ID	Transit gateway ID	State	Resource type	Resource ID	Association route
☐	tga-1	tgw-attach-0279a8da5ab20bf07	tgw-0f9a86bd185fa14dc	Pending	VPC	vpc-06022ecf0918251ee	-
☐	tga-3	tgw-attach-0857f2023e6cb43e4	tgw-0f9a86bd185fa14dc	Pending	VPC	vpc-08e84314c9d99291e	-
☐	tga-2	tgw-attach-0da16cf82c6d17d6c	tgw-0f9a86bd185fa14dc	Pending	VPC	vpc-00cdd176ff7880235	-

Screenshot: Update Routes in Route Table 1

1. Go to **Routes in Route Table 1**
2. Click **Edit routes**
3. Add **12.0.0.0/16** → Select **Transit Gateway** → Select **Transit Gateway Attachment**
4. Add **13.0.0.0/16** → Select **Transit Gateway** → Select **Transit Gateway Attachment**
5. Click **Save**

Virtual private cloud

- Your VPCs
- Subnets
- Route tables**
- Internet gateways
- Egress-only internet gateways
- DHCP option sets
- Elastic IPs
- Managed prefix lists
- NAT gateways
- Peering connections
- Route servers

Security

- Network ACLs
- Security groups

PrivateLink and

rtb-0ada9de72c635b758 / rt-1

Details | **Routes** | Subnet associations | Edge associations | Route propagation | Tags

Routes (2)

Destination	Target	Status	Propagated	Route Origin
0.0.0.0/0	igw-03aafaea582fc32ee	Active	No	Create Route
11.0.0.0/16	local	Active	No	Create Route Table

Edit routes

Destination	Target	Status	Propagated	Route Origin
11.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
12.0.0.0/16	Transit Gateway	-	No	CreateRoute
13.0.0.0/16	Transit Gateway	-	No	CreateRoute

Add route **Cancel** **Preview** **Save changes**

Screenshot: Update Routes in Route Table 2

1. Go to **Routes in Route Table 2**
2. Click **Edit routes**
3. Add **11.0.0.0/16** → Select **Transit Gateway** → Select **Transit Gateway Attachment**
4. Add **13.0.0.0/16** → Select **Transit Gateway** → Select **Transit Gateway Attachment**
5. Click **Save**

VPC > **Route tables** > **rtb-0387f270c4aaff4cd** > **Edit routes**

Edit routes

Destination	Target	Status	Propagated	Route Origin
12.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
11.0.0.0/16	Transit Gateway	-	No	CreateRoute
13.0.0.0/16	Transit Gateway	-	No	CreateRoute

Add route **Cancel** **Preview** **Save changes**

Screenshot: Update Routes in Route Table 3

1. Go to **Routes** in **Route Table 3**
2. Click **Edit routes**
3. Add **11.0.0.0/16** → Select **Transit Gateway** → Select **Transit Gateway Attachment**
4. Add **12.0.0.0/16** → Select **Transit Gateway** → Select **Transit Gateway Attachment**
5. Click **Save**

Destination	Target	Status	Propagated	Route Origin
13.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
11.0.0.0/16	Transit Gateway	-	No	CreateRoute
12.0.0.0/16	Transit Gateway	-	No	CreateRoute

Screenshot: Create 3 Linux Instances

1. Go to **EC2**
2. Click **Launch instance**
3. Enter **name**
4. Select **Linux AMI**
5. Select **key pair**

Launch an instance

Name and tags

Name: linux-1

Application and OS Images (Amazon Machine Image)

Amazon Linux, macOS, Ubuntu, Windows, Red Hat, SUSE Linux, Debian

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

3pmbatch2

[Create new key pair](#)

Screenshot: Linux Instance 1 network Settings

1. Select **VPC 1**
2. Select **Subnet 1**
3. Select **Security Group 1**
4. Enable **Public IP (Auto-assign public IP)**
5. Click **Launch instance**
6. Follow the same **instance 2 and 3**

EC2 > Instances > Launch an instance

▼ Network settings [Info](#)

VPC - *required* [Info](#)

vpc-06022ecf0918251ee (vpc-1)
11.0.0.0/16

Subnet [Info](#)

subnet-0214c270a37e0f360
VPC: vpc-06022ecf0918251ee Owner: 301804611986 Availability Zone: ap-south-1a (aps1-az1)
Zone type: Availability Zone IP addresses available: 250 CIDR: 11.0.1.0/24

Auto-assign public IP [Info](#)

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☐ Create security group ☒ Select existing security group

Common security groups [Info](#)

Select security groups

sg-1 sg-023552ca6ab02a28dc
VPC: vpc-06022ecf0918251ee

Security groups that you add or remove here will be added to or removed from all your network interfaces.

► Advanced network configuration

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.10...[read more](#)
ami-0f559c3642608c138

Virtual server type (instance type)

t3.micro

Firewall (security group)

sg-1

Storage (volumes)

1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

Screenshot: 3 Linux Instances Created

1. View **Instance 1, Instance 2, Instance 3**
2. All **Linux instances created successfully**

EC2 > Instances

Instances (3/3) [Info](#)


Find Instance by attribute or tag (case-sensitive)

All states

☒	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS	Public
☒	linux-3	i-0e640f40a3a5b1649	Running	t3.micro	Initializing	View alarms +	ap-south-1a	-	43.205
☒	linux-2	i-08f7c301c5a5ee175	Running	t3.micro	Initializing	View alarms +	ap-south-1a	-	52.66.1
☒	Unselect instance: linux-2	i-0cb13d441aa6adaa8	Running	t3.micro	Initializing	View alarms +	ap-south-1a	-	13.127

Screenshot: Connect 3 Instances


1. Connect to **Linux Instance 1**
2. Connect to **Linux Instance 2**
3. Connect to **Linux Instance 3**
4. All instances connected successfully.

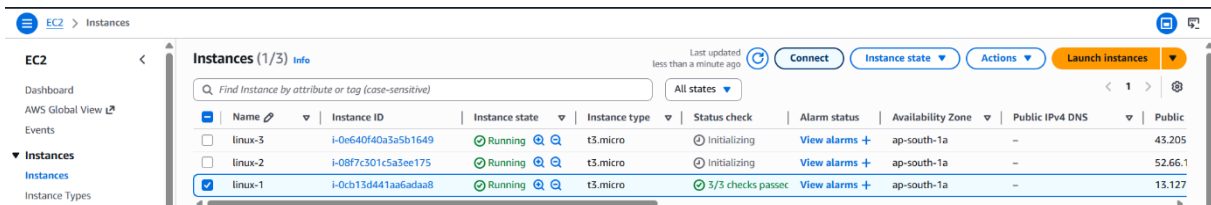

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IPv4 DNS	Public
☐	linux-3	i-0e640f40a3a5b1649	Running	t3.micro	Initializing	View alarms +	ap-south-1a	-	43.205
☐	linux-2	i-08f7c301c5a3ee175	Running	t3.micro	Initializing	View alarms +	ap-south-1a	-	52.66.1
☒	linux-1	i-0cb13d441aa6adaa8	Running	t3.micro	3/3 checks passed	View alarms +	ap-south-1a	-	13.127

Screenshot: Connectivity Test

1. Open **Linux Terminal**
2. Run **ping** using **Private IP of Instance 2**
3. Run **ping** using **Private IP of Instance 3**
4. Ping successful (connection working)

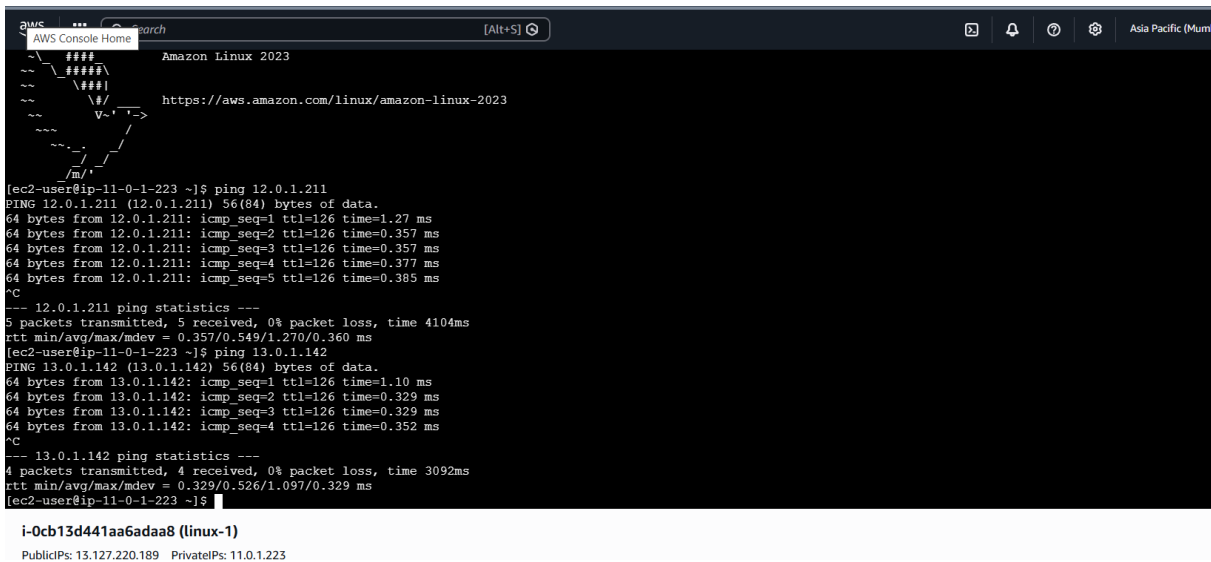

```
aws
AWS Console Home
Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023

[ec2-user@ip-11-0-1-223 ~]$ ping 12.0.1.211
PING 12.0.1.211 (12.0.1.211) 56(84) bytes of data:
64 bytes from 12.0.1.211: icmp_seq=1 ttl=126 time=1.27 ms
64 bytes from 12.0.1.211: icmp_seq=2 ttl=126 time=0.357 ms
64 bytes from 12.0.1.211: icmp_seq=3 ttl=126 time=0.357 ms
64 bytes from 12.0.1.211: icmp_seq=4 ttl=126 time=0.377 ms
64 bytes from 12.0.1.211: icmp_seq=5 ttl=126 time=0.385 ms
^C
--- 12.0.1.211 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4104ms
rtt min/avg/max/mdev = 0.357/0.549/1.270/0.360 ms
[ec2-user@ip-11-0-1-223 ~]$ ping 13.0.1.142
PING 13.0.1.142 (13.0.1.142) 56(84) bytes of data:
64 bytes from 13.0.1.142: icmp_seq=1 ttl=126 time=1.10 ms
64 bytes from 13.0.1.142: icmp_seq=2 ttl=126 time=0.329 ms
64 bytes from 13.0.1.142: icmp_seq=3 ttl=126 time=0.329 ms
64 bytes from 13.0.1.142: icmp_seq=4 ttl=126 time=0.352 ms
^C
--- 13.0.1.142 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3092ms
rtt min/avg/max/mdev = 0.329/0.526/1.097/0.329 ms
[ec2-user@ip-11-0-1-223 ~]$
```

i-0cb13d441aa6adaa8 (linux-1)
PublicIPs: 13.127.220.189 PrivateIPs: 11.0.1.223

Screenshot: Connectivity Test

1. Open **Linux Terminal 2**
2. Ping **Private IP of Instance 1** and **Instance 3**

```
aws [Alt+S] Q Search Jai Surya [3018-0461-1986] Asia Pacific (Mumbai) Ja%20Surya
```

```
-- \####  
-- _###  
-- \|/  
-- https://aws.amazon.com/linux/amazon-linux-2023  
-- v-^ ^>  
-- --  
-- /=  
-- =/  
  
[ec2-user@ip-12-0-0-1-211 ~]$ ping 11.0.1.223  
PING 11.0.1.223 (11.0.1.223) 56(84) bytes of data.  
64 bytes from 11.0.1.223: icmp_seq=1 ttl=126 time=0.520 ms  
64 bytes from 11.0.1.223: icmp_seq=2 ttl=126 time=0.309 ms  
64 bytes from 11.0.1.223: icmp_seq=3 ttl=126 time=0.367 ms  
64 bytes from 11.0.1.223: icmp_seq=4 ttl=126 time=0.348 ms  
^C  
--- 11.0.1.223 ping statistics ---  
4 packets transmitted, 4 received, 0% packet loss, time 3155ms  
rt min/avg/max/mdev = 0.348/0.406/0.520/0.067 ms  
[ec2-user@ip-12-0-0-1-211 ~]$ ping 13.0.1.142  
-bash: 13.0.1.142: command not found  
[ec2-user@ip-12-0-0-1-211 ~]$ ping 13.0.1.142  
PING 13.0.1.142 (13.0.1.142) 56(84) bytes of data.  
64 bytes from 13.0.1.142: icmp_seq=1 ttl=126 time=1.28 ms  
64 bytes from 13.0.1.142: icmp_seq=2 ttl=126 time=0.412 ms  
64 bytes from 13.0.1.142: icmp_seq=3 ttl=126 time=0.335 ms  
64 bytes from 13.0.1.142: icmp_seq=4 ttl=126 time=0.309 ms  
^C  
--- 13.0.1.142 ping statistics ---  
4 packets transmitted, 4 received, 0% packet loss, time 3114ms  
rt min/avg/max/mdev = 0.309/0.583/1.278/0.402 ms  
[ec2-user@ip-12-0-0-1-211 ~]$
```

i-08f7c301c5a3ee175 (linux-2)

PublicIPs: 52.66.150.95 PrivateIPs: 12.0.1.211

Screenshot: Connectivity Test

1. Open **Linux Terminal 3**
2. Ping **Private IP of Instance 1** and **Instance 2**
3. Ping successful (all instances connected)

```

aws [Alt+S] Search
Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023

[ec2-user@ip-13-0-1-142 ~]$ ping 11.0.1.223
PING 11.0.1.223 (11.0.1.223) 56(84) bytes of data:
64 bytes from 11.0.1.223: icmp_seq=1 ttl=126 time=0.983 ms
64 bytes from 11.0.1.223: icmp_seq=2 ttl=126 time=0.356 ms
64 bytes from 11.0.1.223: icmp_seq=3 ttl=126 time=0.348 ms
^C
--- 11.0.1.223 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2026ms
rtt min/avg/max/mdev = 0.348/0.562/0.983/0.297 ms
[ec2-user@ip-13-0-1-142 ~]$
[ec2-user@ip-13-0-1-142 ~]$ ping 12.0.1.211
PING 12.0.1.211 (12.0.1.211) 56(84) bytes of data:
64 bytes from 12.0.1.211: icmp_seq=1 ttl=126 time=0.845 ms
64 bytes from 12.0.1.211: icmp_seq=2 ttl=126 time=0.429 ms
64 bytes from 12.0.1.211: icmp_seq=3 ttl=126 time=0.329 ms
64 bytes from 12.0.1.211: icmp_seq=4 ttl=126 time=0.354 ms
^C
--- 12.0.1.211 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3087ms
rtt min/avg/max/mdev = 0.329/0.489/0.845/0.208 ms
[ec2-user@ip-13-0-1-142 ~]$

i-0e640f40a3a5b1649 (linux-3)
PublicIPs: 43.205.114.192 PrivateIPs: 13.0.1.142

```