

One population's average path through a trial


passive brain
(session 0)
3 axes hold 48%

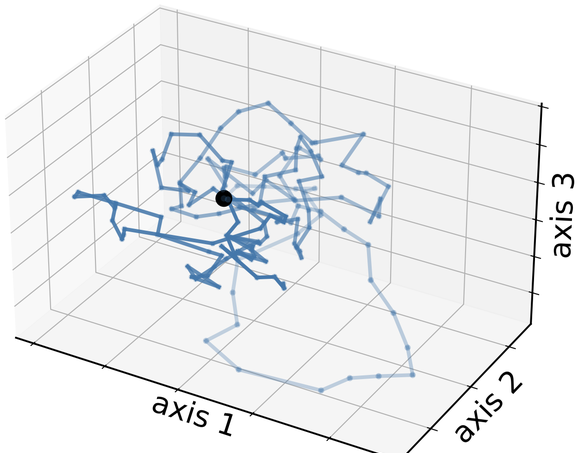

engaged brain
(session 0)
3 axes hold 79%

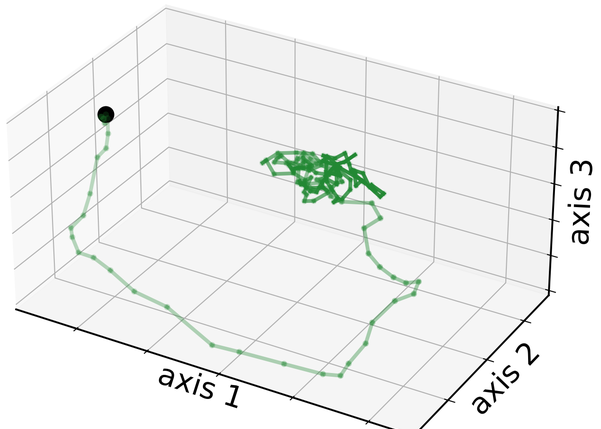

spiking model
(recurrent, adaptive)
3 axes hold 98%

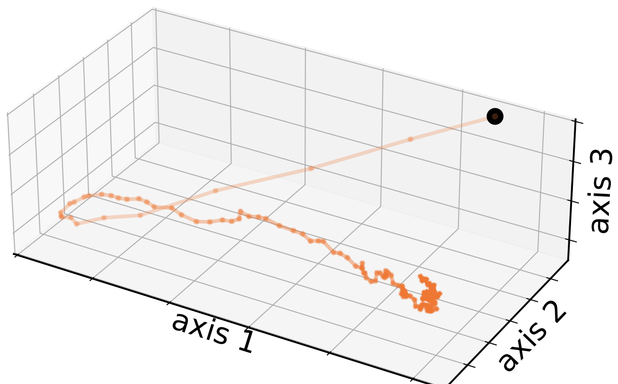

One example per group, the one nearest its group's median; 128 neurons x 100 trials. 150 points, 10 ms apart, from stimulus onset (black dot). Three of the ten axes measured.