COMP1511 PROGRAMMING FUNDAMENTALS

LECTURE 2

Throwing ourselves into the thick of it: Variables and IF Statements

ON TUESDAY, WE TALKED:

- Welcome and Introductions
- Course Administration
- How COMP1511 works
- How to get help and the best ways to approach learning Programming
- What is programming?
- What is Linux and working in Linux

TODAY...

- Variables and how we store information
- Maths in C!
- Organising code
- Conditionals running out code based on some sort of condition being met
- IF statements

66

WHERE IS THE CODE?



Live lecture code can be found here:

HTTPS://CGI.CSE.UNSW.EDU.AU/~CS1511/22T2/LIVE/WEEK_01/

A BRIEF RECAP

OUR FIRST PROGRAM

```
4 #include <stdio.h>
5
6 int main (void) {
7     printf("Hey!\n");
8     return 0;
9 }
10
```

ORGANISING CODE

PROCEDURES

- Help us group functionality into sections of code.
- Allow us to re-use code without retyping it.
- You've already used one (sort of)

```
4 void my_procedure(void) {
5     // this is a procedure,
6     // called my_procedure.
7 }
```

HOW DOES A COMPUTER REMEMBER THINGS?

ONES AND ZEROS!

- Computer memory is literally a big pile of on-off switches
 - We call these bits (smallest possible unit in computing, a bit is a choice between two things a 0 or a 1)
- We often collect these together into bunches of 8 bits
 - We call these bytes

WHAT DOES THIS LOOK LIKE?

When we execute code, the CPU will actually process the instructions and perform basic arithmetic, but the RAM will keep track of all the data needed in those instructions and operations.



stack

global/static variable

code

WHAT IS A VARIABLE?

- Our way of asking the computer to remember something for us
- Called a "variable" because it can change its value
- A certain number of bits that we use to represent something
- Made with a specific purpose in mind

WHAT KINDS OF VARIABLES WILL WE COVER TODAY?

We're going to start out with three data types of variables:

```
int integer, a whole number (eg: 0,1,2,3)
char a single character (eg. 'a', 'A', etc)
double floating point number (eg: 3.14159,
8.534, 7.11)
```

Each of these has a different number of bytes that are allocated in memory once the program is run...

NAMING OUR VARIABLES

IT IS AN ART CALL IT LIKE YOU
SEE IT, LIKE YOU
USE IT AND
SOMEONE ELSE
HAS TO SEE IT!

- Names are a quick description of what the variable is
 - Eg: "answer" and "diameter"
 - Rather than "a" and "b"
- We always use lower case letters to start our variable names
- C is case sensitive:
 - "ansWer" and "answer" are two different variables
- C also reserves some words
 - "return", "int" and "double" can't be used as variable names
- Multiple words
 - We can split words with underscores: "long_answer"

NAMING OUR VARIABLES

STYLE GUIDE

We name our variables in ways that make it obvious what they are representing. Remember someone else has to be able to skim your code and know what you are saying/doing!

INTEGER


DATA TYPE int

- A whole number, with no fractions or decimals
- Most commonly uses 32 bits (which is also 4 bytes)
- This gives us exactly 2³² different possible values
- The maximum is very large, but it's not infinite!

Exact ranges from $-2147483648 (-2^{31})$ to $2147483647 (2^{31} - 1)$

CHARACTER

DATA TYPE char

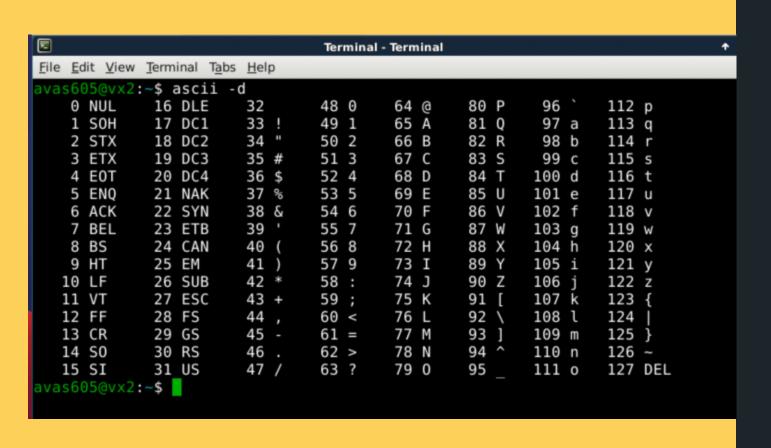

- A single character in C can also be represented as an int!
- This is because a single character variable holds an ASCII value (integers 0-127), as opposed to the character itself
- The syntax to assign a single character is to put the character in single quotes: 'a'
- So for a capital letter A:, the character is 'A' and the int stored is 65
- You use a char to declare a character: char letter = 'a' - this will assign 97 to the variable letter

DOUBLE

DATA TYPE double

- A double-sized floating point number
- A decimal value "floating point" means the point can be anywhere in the number
- Eg: 10.567 or 105.67 (the points are in different places in the same digits)
- It's called "double" because it's usually 64 bits, hence the double size of our integers (or 8 bytes)

LET'S TRY SOME CODE DECLARE AND INITIALISE A VARIABLE

```
int main (void) {
    // Declaring a variable
    int answer;
    // Initialising the variable
    answer = 42;
    // Give the variable a different value
    answer = 7;
    // We can also declare and initialise together
    int answer_two = 88;
}
```

PRINTING OUT TO TERMINAL

```
printf()
```

```
// Printing a variable
int number = 13;
printf("My number is %d\n", number);
```

- Not just for specific messages we type in advance
- We can also print variables to our display!
- To print out a variable value, we use format specifiers
 - this is a % symbol followed by some characters to let the compiler know what data type you want to print..
 - %d where the output you'd like to put an int (decimal value, hence %d)
- After the comma, you put the name of the variable you want to write

PRINT OUT MANY VARIABLES

WHY NOT?

- The variables will match the symbols in the same order as they appear!
- You can have as many as you want and of different types also!

```
// Printing out two variables
int first = 3;
int second = 10;
printf("First is %d and second is %d\n", first, second);
```

LET'S TRY DIFFERENT TYPES OF NUMBERS

INTS AND DOUBLES
- OH MY!

- The %d and %lf are format specifiers that are used in printf statement to let the compiler know what data type we need to output.
 - o %d stands for "decimal integer"
 - %1f stands for "long floating point number" (a double)
- Remember that we have to be very prescriptive when we tell the computer what to do and that extends to even telling it what types we are printing in C

```
// print an int and a double
int diameter = 5;
double pi = 3.141;
printf("The diameter is %d, pi is %lf\n", diameter, pi);
```

WHAT ABOUT CHAR?

CAN'T FORGET THE LONELY CHAR

- The **%c** format specifier can also be used in printf statement to let the compiler know what data type we need to output (character).
- %c stands for "character"
- Don't forget that when you declare a char, you enclose it in single apostrophes to let the computer know that you are using a letter character

```
// print an int as a character
char letter = 'A';
printf("The letter %c has the ASCII value %d\n", letter, letter);
```

GREAT, WE CAN PRINT TO TERMINAL, CAN WE READ SOMETHING FROM TERMINAL?

scanf()

- Reads input from the user in the same format as printf
- Format specifiers (%d, %lf, %c) are used in the same way as for the printf statement
- The symbol tells scanf the address of the variable in memory (where the variable is located) that we want to place the value into (more details later in term)

```
// reading an integer
int input;
printf("Please type in a number: ");
scanf("%d", &input);

// reading a double
double decimal;
printf("Please type in a decimal number: ");
scanf("%lf", &decimal);
```

WHAT ABOUT OUR LONELY CHAR?

```
scanf()
```

- If you want scanf to read in a character, you will need to declare a character by using the keyword: char
- Even though you have declared a char to store your character into, it is still stored as an ASCII value... so you can move between **%d** and **%c** when you printf this variable

```
// reading a single character as a character
char character;
printf("Please type in a character: ");
scanf("%c", &character);
```

WHAT IF A VARIABLE NEVER CHANGES?

THEN IT IS MOST LIKELY A CONSTANT...

- Constants are like variables, only they never change!
- To define a constant, we use #define and follow it with the name of the constant and the value

```
5
6#include <stdio.h>
7
8 // Using constants - define them before your main
9
10 #define PI 3.1415
11 #define MEANING_OF_LIFE 42
12 #define MAX_NUMBER 13
13
14 int main (void) {
```

Style Guide: We name them in all caps so that we remember that they're not variable

LET'S TALK ABOUT MATHS

WE LOVE MATHS, RIGHT? C ALSO LOVES MATHS (SOMETIMES WITH QUIRKS).

- A lot of arithmetic operations will look very familiar in C
 - o adding +
 - subtracting -
 - multiplying *
 - o dividing /
- These will happen in their normal mathematical order
- We can also use brackets to force precedence

```
int x = 5;
int y = 10;
int result;
result = (x + y) * x;
printf("Result is %d\n", result);
```

SUPER FUN FACT, YOU CAN DO MATHS WITH CHAR BECAUSE THEY ARE JUST INTS!

- Because characters are represented as ints inside the variable, you are able to move around the ASCII values by adding or subtracting to them.
- For example, if you are at 'a' and you want to get to 'b', you can add 1

```
// some basic Maths
char letter = 'a';
char next_letter = letter + 1;
printf("My original letter %c with ASCII value %d\n", letter, letter);
printf("The next letter %c with ASCII value %d\n", next_letter,
next_letter);
```

THE QUIRKS OF INTEGERS...

INTEGER OVERFLOW/ INTEGER UNDERFLOW

- Check out Boeing 787 that had to be rebooted every 248 days (231 hundredths of a seconds) https://www.engadget.com/2015-05-01boeing-787-dreamliner-software-bug.html
- If we add two large ints together, we might go over the maximum value, which will actually roll around to the minimum value and possibly end up negative (Check out Ariane 5 explosion), a simple error like this caused a rather large problem:

https://www.bbc.com/future/article/20150505 -the-numbers-that-lead-to-disaster)

THE QUIRKS OF INTEGERS...

INTEGER OVERFLOW/ INTEGER UNDERFLOW

- In a less destructive example, the video
 Gangham Style on YouTube maxed out the views counter:
 https://www.bbc.com/news/world-asia-30288542
- ints might not always be 32 bits . . . dependent on Operating System

THE QUIRKS OF DOUBLES...

OFFENDING REPEATERS

- No such thing as infinite precision
- We can't precisely encode a simple number like
 1/3
- If we divide 1.0 by 3.0, we'll get an approximation of 1/3
- The effect of approximation can compound the more you use them

NOW A LITTLE BIT ABOUT DIVISION

IT IS INTERESTING IN C...

- Remember that C thinks in data types
 - If either numbers in the division are doubles, the result will be a double
 - If both numbers are ints, the result will be an int, for example, 3/2 will not return 1.5, because ints are only whole numbers
 - ints will always drop whatever fraction exists, they won't round nicely, so 5/3 will result in 1
- % is called Modulus. It will give us the remainder from a division between integers,
 eg. 5 % 3 = 2 (because 5/3 = 1 rem 2)



TIME TO STRETCH

There has just been a heavy fall of snow, Baudouim goes outside and finds that there is twice as much snow in his garden as in his neighbour Gael's garden. He does not, however, appear surprised. Why not?

DECISION TIME... **ASKING THE** COMPUTER TO MAKE A DECISION...

IF STATEMENTS

- Sometimes we want to make decisions based on what information we have at the time
- We can let our program branch between sets of instructions
- In C this is the **if** statement



WHAT KINDS OF **PROBLEMS** DO WE **SOLVE WITH** IF?

DECISION PROBLEMS (YES/NO)

- A decision problem is a question with a YES/NO answer
- This is the perfect time to use an IF statement to help make the decision
- Eg. Is a number even? Is a number larger than 10? Is a number prime? etc.

IF STATEMENT

IT IS LIKE A QUESTION AND AN ANSWER

- First we ask the question this is our condition
- If the answer to our question (condition) is YES, then we run the code in the curly brackets

```
// the code inside the curly brackets
// runs if the expression is true (not zero)
if (condition) {
   code statement;
   code statement;
}
```

WHAT IF THE ANSWER IS NO?

THERE ARE OPTIONS,
THERE ARE ALWAYS
OPTIONS

 If the answer to our question (condition) is NO, then we can add an else statement to let the computer know which other code may run

```
if (condition) {
    // code to run if the condition is true
    // or anything other than 0
} else {
    // run some other code instead
    // else is entered if the previous code
    // results in 0 (false)
}
```

WHAT IF THE ANSWER IS NO... AGAIN?

MORE OPTIONS

• If the answer to our question (condition) is NO, and the answer to our question (condition) in the else is also NO, then we can chain some if and else together to make an else if and create even more options in choosing which code to run...

HOW DO WE ASK GOOD QUESTIONS? RELATIONAL OPERATORS

NOTICE: IN C, WE HAVE == AND =

THESE ARE NOT THE SAME AND DO NOT MEAN WHAT YOU ARE USED TO IN MATHS!

USING = WHEN YOU ASSIGN VALUES
USING == WHEN YOU ARE
CHECKING FOR EQUIVALENCE

- Relational Operators work with pairs of numbers:
 - < less than</p>
 - > greater than
 - <= less than or equal to</p>
 - >= greater than or equal to
 - -= equals
 - != not equal to

 All of these will result in 0 if false and a 1 if true

SOME EXAMPLES

LET'S TRY THIS OUT...

• True (1) or False (0)?

```
if (12 <= 12) {
    //do something
}</pre>
```

```
if (8 != 8) {
    //do something
}
```

```
if (5 < 10) {
    //do something
}</pre>
```

I LIKE QUESTIONS, HOW DO I **ASK TWO** QUESTIONS AT THE SAME TIME?

LOGICAL OPERATORS

The first two are used between two questions (expressions):

- && AND: if both expressions are true then the condition is TRUE (equates to 1 if both sides equate to 1)
- II OR: if any of the two expressions are true then the condition is TRUE (is 1 if either side is 1)

This is used in front of an expression:

• ! NOT: reverse the expression (is the opposite of whatever the expression was)

SOME EXAMPLES

LET'S TRY THIS OUT...

• True (1) or False (0)?

```
if (7 < 15 && 8 >= 15) {
    //do something
}
```

```
if (7 < 15 || 8 >= 15) {
    //do something
}
```

```
if !(5 < 10 || 6 > 13) {
    //do something
}
```

LET'S PUT OUR SKILLS TO THE TEST

LET'S CODE! (SOLVE THE PROBLEM FIRST)

A user rolls two dice and tell us the number on each of the rolled die. Our program will add the die numbers together and check them against a target number that only the program knows. It will then report back whether the total of the dice was higher, equal or lower than the secret number.

BREAKING DOWN THE PROBLEM INTO A SUM OF SIMPLE PARTS

A user rolls two dice and tell us the number on each of the rolled die. Our program will add the die numbers together and check them against a target number that only the program knows. It will then report back whether the total of the dice was higher, equal or lower than the secret number.

- 1. A user will roll two dice done outside of our program
- 2. Take in the result of each die how do we read input?
- 3. Add the die numbers together
- 4. Check them against a target number based on steps 4 and 5, it looks like we need to make a decision therefore IF statement
- 5. Output if total of the dice was higher, equal or lower than the target number output based on the decision that we made

BREAKING DOWN THE PROBLEM INTO A SUM OF SIMPLE PARTS

A user rolls two dice and tell us the number on each of the rolled die. Our program will add the die numbers together and check them against a target number that only the program knows. It will then report back whether the total of the dice was higher, equal or lower than the secret number.

- 1. Take in the result of each die how do we read input?
 - a. Read input of die 1
 - b. Read input of die 2
- 2. Add the die numbers together
 - sum = die1+die2
- 3. Check them against a target number based on steps 3 and 4, it looks like we need to make a decision therefore IF statement
 - Define the target number
- 4. Output if total of the dice was higher, equal or lower than the target number. output based on the decision that we made
 - Is sum greater than target number?
 - Is sum less than target number?
 - Is sum equal to the target number?

NOW LET'S CODE!

- 1. Switch over to VLab
- 2. Open Terminal
- 3. Open a new file:

gedit dice_checker.c &

Feel free to follow along with lecture coding, or you can also find the code here:



Feedback please!

I value your feedback and use to pace the lectures and improve your overall learning experience. If you have any feedback from today's lecture, please follow the link below. Please remember to keep your feedback constructive, so I can action it and improve the learning experience.

https://forms.microsoft.com/r/dKssTn3AU4

WHAT DID WE LEARN TODAY?

RECAP

Hello World! our first program

VARIABLES

They come in different shapes and sizes - int, double and char Printing from variables (printf)

Reading user input into variables (scanf)

Using maths with variables


CONDITIONS

if /else /else if
Decision problems
Relational Operators
Logical Operators

DICE_CHECKER

Putting it all together in code

REACH OUT

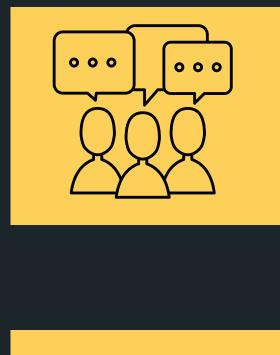

CONTENT RELATED QUESTIONS

Check out the forum



ADMIN QUESTIONS

cs1511@cse.unsw.edu.au