

Visoka škola strukovnih studija za informacione i komunikacione tehnologije




Dokumentacija

Velišić Nemanja 184/17

Sadržaj

1. UVOD	2
Korišćeni programski jezici	2

Izrada Template-a.....	2
Funkcionalnost	2
2.Organizacija sajta.....	4
Mapa sajta.....	4
Sema index stranice	
3.Korišćeni kodovi	13
CSS	13
HTML.....	22
Java Script.....	47
jQuery	55

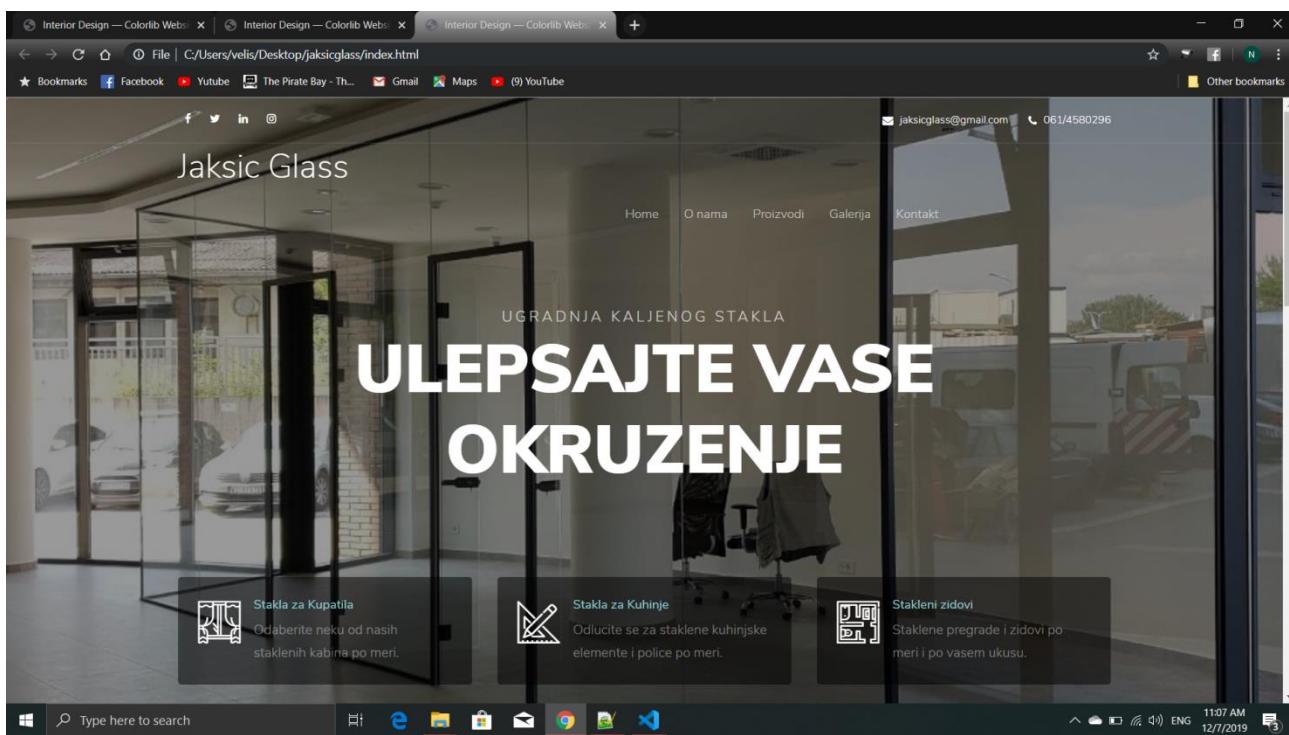





O NAMA

O nama

Kupatilo je jedna od najvažnijih prostorija u domu u kojoj ćete svakodnevno provoditi jedan deo svog vremena, pa stoga za renoviranje kupatila treba da se potrudite da dizajnirate i organizujete tako da odgovara svim vašim potrebama, kao i da se u njemu osećate dobro i spokojno. Promišljajte i planirajte prostor sve dok ne nađete način da uklopite sve ono što za vam je potrebno u njemu. Mi vam predlažemo da se igrate sa bojama staklenih zidova, stakla za tuš kabine i podnih pločica, sve dok nadete savršenu kombinaciju za vaš dom.. Ukoliko se odlučite za tuš kabinu, ona u svakom pogledu može povećati upotrebljivost i lepotu kupatila. Dobro isplanirajte paletu boja koju želite u ovom prostoru: neutralne boje donose osećaj smirenosti, dok bojeni akcenti doprinose razigranosti, kao i više šik i upečatljivijem stilu. Za šta god da se odlučte, boje će učiniti vaše kupatilo ambijentom baš po vašoj meri u kome ćete se osećati ispunjeno i zadovoljno onim što v.

Screenshot saved
The screenshot was added to your OneDrive.
OneDrive

Pogledajte neki od naših proizvoda.

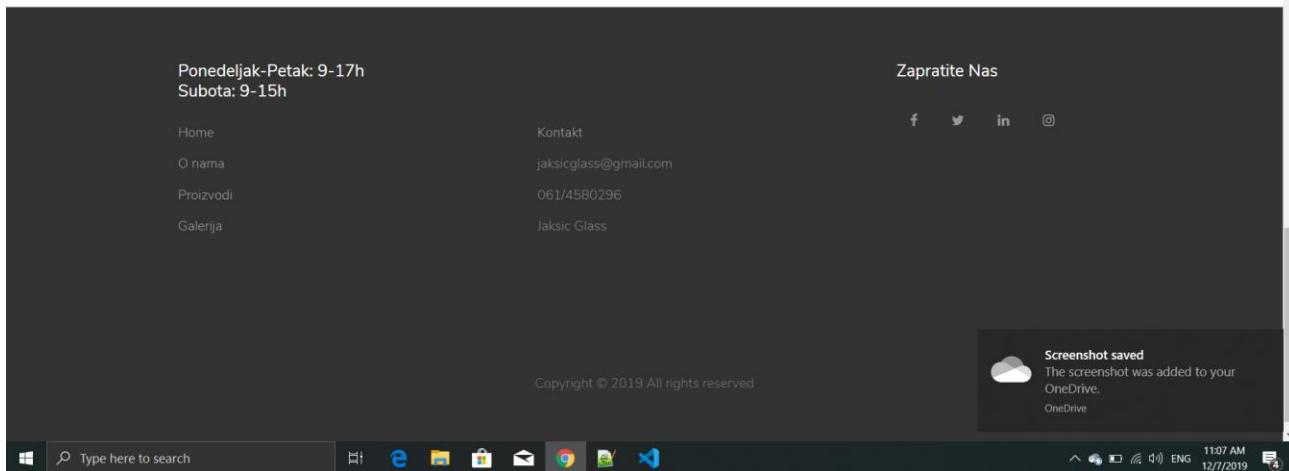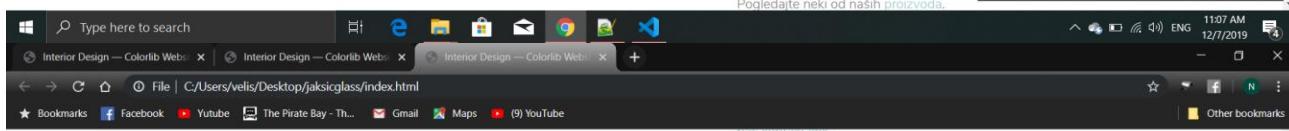

1.UVOD

'Jaksic Glass' je firma koja se bavi izradom stakla a pogotovo kupatilskim elementima . Unutar stranice sajta se nalazi forma koja nema nikakvu namenu i iskorišćena je samo zbog primene regularnih izraza i validacije forme.

Korišćeni programski jezici

Jezici koji su korišđeni u izradi ovoga sajta su:

HTML, CSS, JavaScript, jQuery.

Okruženje koje je korišćeno: Visual Studio Code

Izrada Tempalta

Ceo template je u potpunosti samostalno napisan od strane autora.

Funkcionalnost

Sajt sadrži dinamičkiispisanu navigaciju i iconice društvenih mreža, informacije o i puteve ka sortiranim izabranim kategorijama stakla.

Java script(O nama)- u delu gde se nalaze 3 bloka prelaskom mišem tj mouseover-om slike se menjaju.

Java Script(dinamičko ispisivanje)- unutar sajta dinamički su ispisane liste, blokovi i učitane slike.

Mapa sajta:

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer:** Shows files in the project structure:
 - OPEN EDITORS: index.html, contact.html, sitemap.xml, main.js
 - JAKSICGLASS folder:
 - js folder: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, sss, slick, about.html, contact.html, index.html, news.html, package-lock.json, projects.html, services.html, sitemap.xml- Editor:** The sitemap.xml file is open, displaying XML code for a sitemap. The code includes URLs for index.html, about.html, contact.html, and news.html, each with specific last-modified dates, change frequencies, and priorities.
- Status Bar:** Shows file path (sitemap.xml - jaksicglass - Visual Studio Code), line numbers (Ln 29, Col 22), and other status information (Spaces: 4, UTF-8, CRLF, XML, ENG, 10:41 AM, 12/7/2019).

CSS

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The title bar reads "style.css - ja...". The left sidebar has icons for file, search, and refresh. The "EXPLORER" tab is selected, showing the file structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane displays the CSS code for the selected file, style.css:

```
7964 .next-match .image {  
7965   width: 50px;  
7966   border-radius: 50%; }  
7967  
7968 .player {  
7969   position: relative; }  
7970 .player img {  
7971   max-width: 100px;  
7972   border-radius: 50%;  
7973   margin-bottom: 20px; }  
7974 .player .team-number {  
7975   position: absolute;  
7976   width: 30px;  
7977   height: 30px;  
7978   background: #98ccfd;  
7979   border-radius: 50%;  
7980   color: #fff; }  
7981 .player .team-number > span {  
7982   position: absolute;  
7983   -webkit-transform: translate(-50%, -50%);  
7984   -ms-transform: translate(-50%, -50%);  
7985   transform: translate(-50%, -50%);  
7986   left: 50%;  
7987   top: 50%; }  
7988 .player h2 {  
7989   font-size: 20px;  
7990   letter-spacing: .2em;  
7991   text-transform: uppercase; }  
7992 .player .position {  
7993   font-size: 14px;  
7994   color: #b3b3b3;  
7995   text-transform: uppercase; }  
7996 .site-block-27 ul, .site-block-27 ul li {  
7997   padding: 0;  
7998   margin: 0; }  
7999  
8000 .site-block-27 ul li {  
8001 }
```

At the bottom, there are status indicators: 1 warning, 1 error, a search bar, and pinned taskbar icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer View:** Shows the file structure. Open editors include index.html, contact.html, sitemap.xml, style.css (with 2 changes), and main.js. A folder named JAKSICGLASS contains sub-folders css and js, and files like bootstrap, aos.css, and various bootstrap and jQuery files.
- Editor View:** The style.css file is open, showing CSS code for a website. The code includes styles for .site-block-3, .site-block-half, and .bg-image, along with media queries for different screen widths.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
style.css - jaksicglass

css > # style.css > .list-group-item-info.list-group-item-action:ho
      transition: .3s all ease-in-out;
      height: 100%;
      top: 0px;
      position: relative; }

.site-block-3 .feature h3 {
  color: #000;
  font-size: 1.2rem; }

.site-block-3 .feature:hover, .site-block-3
  -webkit-box-shadow: 0 5px 20px -5px rgba(0, 0, 0, 0.1);
  box-shadow: 0 5px 20px -5px rgba(0, 0, 0, 0.1);

.site-block-3 .feature:hover {
  top: -10px; }

.site-block-half .image, .site-block-half .text {
  width: 100%; }

@media (min-width: 992px) {
  .site-block-half .image {
    margin-bottom: 50px; }

.site-block-half .text {
  padding-left: 15px;
  padding-right: 15px; }

@media (min-width: 992px) {
  .site-block-half .text {
    padding: 4rem; }

@media (min-width: 1200px) {
  .site-block-half .text {
    padding: 8rem; }

.site-block-half .bg-image {
  background-position: center center; }

@media (max-width: 991.98px) {
  .site-block-half .bg-image {
    height: 400px; } }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for styling elements like `.text-white-opacity-5`, `.text-black-opacity-5`, and `.site-block-feature`.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - # style.css** (selected)
 - main.js**

Under the "JAKSICGLASS" folder:
 - css**: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, style.css
 - data**
 - fonts**
 - images**
 - js**: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js

- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes CSS rules for various classes like `.site-mobile-menu`, `.site-nav-wrap`, and `.site-blocks-cover`, along with some JavaScript comments and imports.
- Explorer:** The left pane shows the project structure under "OPEN EDITORS".
 - `index.html`, `contact.html`, `sitemap.xml`
 - `# style.css` (selected, 2 changes)
 - `main.js`
 - JAKSICGLASS** folder
 - css** folder
 - `bootstrap`
 - `# aos.css`
 - `# bootstrap-datepicker.css`
 - `# bootstrap.min.css`
 - `# bootstrap.min.css.map`
 - `# jquery-ui.css`
 - `# lightbox.css`
 - `# lightbox.min.css`
 - `# magnific-popup.css`
 - `# owl.carousel.min.css`
 - `# owl.theme.default.min.css`
 - `# style.css` (selected, 2 changes)
 - `data`
 - `fonts`
 - `images`
 - js** folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - Outline**
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser with the developer tools open. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja".

The developer tools sidebar on the left lists "OPEN EDITORS" and "JAKSICGLASS" sections. Under "OPEN EDITORS", files like index.html, contact.html, sitemap.xml, style.css (selected), and main.js are listed. Under "JAKSICGLASS", there are sub-sections for "css" (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and "js" (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).

The main pane displays the CSS code for "style.css". The code includes rules for ".list-group-item-info.list-group-item-action:ho" (padding: 10px 20px; display: block; position: relative; color: #212529;), ".site-mobile-menu .site-nav-wrap a:hover" (color: #98cccd3;), ".site-mobile-menu .site-nav-wrap li" (position: relative; display: block;), ".site-mobile-menu .site-nav-wrap li.active" (color: #98cccd3;), ".site-mobile-menu .site-nav-wrap .arrow" (position: absolute; right: 0px; top: 10px; z-index: 20; width: 36px; height: 36px; text-align: center; cursor: pointer; border-radius: 50%;), ".site-mobile-menu .site-nav-wrap .arrow::before" (background: #f8f9fa;), ".site-mobile-menu .site-nav-wrap .arrow::after" (font-size: 12px; z-index: 20; font-family: "icomoon"; content: "\f078"; position: absolute; top: 50%; left: 50%; -webkit-transform: translate(-50%, -50%); -ms-transform: translate(-50%, -50%); transform: translate(-50%, -50%) rotate(45deg); -webkit-transition: .3s all ease; -o-transition: .3s all ease; transition: .3s all ease;}, and ".site-mobile-menu .site-nav-wrap .arrow::after" (content: "\f078").

```
css > # style.css > .list-group-item-info.list-group-item-action:ho
padding: 10px 20px;
display: block;
position: relative;
color: #212529; }

.site-mobile-menu .site-nav-wrap a:hover
color: #98cccd3; }

.site-mobile-menu .site-nav-wrap li {
position: relative;
display: block; }

.site-mobile-menu .site-nav-wrap li.active
color: #98cccd3; }

.site-mobile-menu .site-nav-wrap .arrow {
position: absolute;
right: 0px;
top: 10px;
z-index: 20;
width: 36px;
height: 36px;
text-align: center;
cursor: pointer;
border-radius: 50%; }

.site-mobile-menu .site-nav-wrap .arrow::before
background: #f8f9fa; }

.site-mobile-menu .site-nav-wrap .arrow::after
font-size: 12px;
z-index: 20;
font-family: "icomoon";
content: "\f078";
position: absolute;
top: 50%;
left: 50%;
-webkit-transform: translate(-50%, -50%);
-ms-transform: translate(-50%, -50%);
transform: translate(-50%, -50%) rotate(45deg);
-webkit-transition: .3s all ease;
-o-transition: .3s all ease;
transition: .3s all ease; }

.site-mobile-menu .site-nav-wrap .arrow::after
content: "\f078";
```

The screenshot shows the Microsoft Edge browser window with the developer tools open. The address bar at the top displays "style.css - ja...". The developer tools interface includes a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The left sidebar has icons for Explorer, Find, Tools, and Settings. The Explorer section shows the file structure with "OPEN EDITORS" containing index.html, contact.html, sitemap.xml, style.css (selected), and main.js. Below that is the "JAKSICGLASS" folder with sub-folders "css" and "js", and files like bootstrap, aos.css, and various jQuery and owl.carousel files. The main content area shows the CSS code for "style.css" with line numbers 7670 to 7707. The CSS code includes rules for ".list-group-item-info", ".list-group-item-action", ".site-mobile-menu .site-mobile-menu-head", ".site-mobile-menu .site-mobile-menu-body", ".site-mobile-menu .site-nav-wrap", ".site-mobile-menu .site-nav-wrap a", ".site-mobile-menu .site-nav-wrap li", and ".site-mobile-menu .site-nav-wrap .arrow". The bottom of the screen shows the Windows taskbar with icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
color: #25262a; }  
.site-mobile-menu .site-mobile-menu-head  
float: left;  
margin-top: 10px;  
margin-left: 0px; }  
.site-mobile-menu .site-mobile-menu-head  
display: inline-block;  
text-transform: uppercase; }  
.site-mobile-menu .site-mobile-menu-head  
max-width: 70px; }  
.site-mobile-menu .site-mobile-menu-head  
text-decoration: none; }  
.site-mobile-menu .site-mobile-menu-body {  
overflow-y: scroll;  
-webkit-overflow-scrolling: touch;  
position: relative;  
padding: 20px;  
height: calc(100vh - 52px);  
padding-bottom: 150px; }  
.site-mobile-menu .site-nav-wrap {  
padding: 0;  
margin: 0;  
list-style: none;  
position: relative; }  
.site-mobile-menu .site-nav-wrap a {  
padding: 10px 20px;  
display: block;  
position: relative;  
color: #212529; }  
.site-mobile-menu .site-nav-wrap a:hover  
color: #98cc03; }  
.site-mobile-menu .site-nav-wrap li {  
position: relative;  
display: block; }  
.site-mobile-menu .site-nav-wrap li.active  
color: #98cc03; }  
.site-mobile-menu .site-nav-wrap .arrow {  
position: absolute;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:**
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected).
 - data, fonts, images, js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE:**
- Editor Area:** Shows the content of style.css with line numbers 7609 to 7646. The code includes CSS for site-navbar, site-navigation, site-mobile-menu, and various jQuery UI components.
- Taskbar:** Shows 1 error and 1 warning. Includes icons for Windows, search, file explorer, browser, file manager, mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for navigation elements like .site-navbar, .site-navigation, and .site-menu, along with some JavaScript imports at the bottom.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Below "OPEN EDITORS" is the "JAKSICGLASS" folder, which contains:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css` (selected)
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
- `OUTLINE`

- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows errors: `⊗ 1`, `⚠ 1`.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser's address bar displays "style.css - ja...". The main content area of the browser shows the source code of a CSS file. The code includes various CSS rules for classes like ".site-navbar .site-navigation .site-menu" and ".site-navbar .site-navigation .site-menu-action". The code editor interface is visible on the left, showing a tree view of files under "OPEN EDITORS" and "JAKSICGLASS" categories, with "style.css" selected. The bottom of the screen features the Windows taskbar with icons for File Explorer, Edge, File Explorer, Mail, and Google Chrome.

```
File Edit Selection View Go Debug Terminal Help style.css - ja...
```

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css 2
- main.js js

JAKSICGLASS

- css
- bootstrap
- # aos.css
- # bootstrap-datepicker.css
- # bootstrap.min.css
- # bootstrap.min.css.map
- # jquery-ui.css
- # lightbox.css
- # lightbox.min.css
- # magnific-popup.css
- # owl.carousel.min.css
- # owl.theme.default.min.css
- # style.css 2
- > data
- > fonts
- > images
- js
- JS aos.js
- JS bootstrap-datepicker.min.js
- JS bootstrap.min.js
- JS jquery-3.3.1.min.js
- JS jquery-migrate-3.0.1.min.js
- JS jquery-ui.js
- JS jquery.countdown.min.js
- JS jquery.magnific-popup.min.js
- JS jquery.stellar.min.js

OUTLINE

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
text-decoration: none !important;  
font-size: 15px;  
display: inline-block; }  
.site-navbar .site-navigation .site-menu  
display: inline-block;  
padding: 10px 5px; }  
.site-navbar .site-navigation .site-menu  
padding: 10px 10px;  
color: rgba(255, 255, 255, 0.6);  
font-size: 15px;  
text-decoration: none !important; }  
.site-navbar .site-navigation .site-menu  
color: #fff; }  
.site-navbar .site-navigation .site-menu  
padding-right: 0; }  
.site-navbar .site-navigation .site-menu  
padding-right: 0; }  
.site-navbar .site-navigation .site-menu  
position: relative; }  
.site-navbar .site-navigation .site-menu  
position: relative;  
padding-right: 20px; }  
.site-navbar .site-navigation .site-menu  
position: absolute;  
content: "\e313";  
font-size: 16px;  
top: 50%;  
right: 0;  
-webkit-transform: translateY(-50%);  
-ms-transform: translateY(-50%);  
transform: translateY(-50%);  
font-family: 'icomoon'; }  
.site-navbar .site-navigation .site-menu  
visibility: hidden;  
opacity: 0;  
top: 100%;  
position: absolute;  
text-align: left;
```

⊗ 1 △ 1

Type here to search

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The top navigation bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar displays "style.css - ja". The left sidebar has icons for Explorer, Find, Open Editors, JAKSICGLASS, and Outline. The "OPEN EDITORS" section lists index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The "JAKSICGLASS" section lists various CSS and JS files. The main content area shows the CSS code for "style.css" with line numbers 7450 to 7487. The code includes styles for .site-footer, .list-group-item-info, .list-group-item-action, .bg-text-line, .bg-image, .bg-image.center, .bg-image.fixed, .bg-image.overlay, .bg-image.overlay-primary, .bg-image.overlay-before, and .bg-image.overlay-after.

```
css > # style.css > .list-group-item-info.list-group-item-action:has(.list-group-item-action) .site-footer h2, .site-footer h3, .site-footer h4, .site-footer p, .site-footer a { color: #fff; } .site-footer a { color: #999999; } .site-footer a:hover { color: white; } .site-footer ul li { margin-bottom: 10px; } .site-footer .footer-heading { font-size: 20px; color: #fff; }

.bg-text-line {
    display: inline;
    background: #000;
    -webkit-box-shadow: 20px 0 0 #000, -20px 0 0 #000;
    box-shadow: 20px 0 0 #000, -20px 0 0 #000;

.bg-image {
    background-size: cover;
    background-repeat: no-repeat;
    overflow: hidden; }
.bg-image.center {
    background-position: top center; }
.bg-image.fixed {
    background-position: fixed !important; }
.bg-image.overlay, .bg-image.overlay-primary {
    position: relative; }
.bg-image.overlay:before, .bg-image.overlay-after {
    content: "";
    position: absolute;
    top: 0;
    bottom: 0;
    right: 0;
    left: 0; }

.bg-image.overlay:before {
    background: rgba(0, 0, 0, 0.4); }
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The tabs at the top are File, Edit, Selection, View, Go, Debug, Terminal, and Help. The active tab is 'style.css - ja...'. The left sidebar has icons for Explorer, Search, Find, and Outline. The Explorer section shows 'OPEN EDITORS' with files index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder 'JAKSICGLASS' containing 'css' (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and 'style.css' (selected). The main pane displays the CSS code for 'style.css'.

```
index.html    contact.html    sitemap.xml    # style.css - ja...
css > # style.css > .list-group-item-info.list-group-item-action:ho...
height: 100%;  
width: 100%;  
z-index: 2;  
overflow: hidden; }  
.offcanvas-menu .site-wrap:before {  
    opacity: 1;  
    visibility: visible; }  
  
.btn {  
border-width: 2px; }  
.btn:active, .btn:focus {  
outline: none;  
-webkit-box-shadow: none !important;  
box-shadow: none !important; }  
.btn.btn-lg, .btn-group-lg > .btn {  
padding: 10px 20px;  
font-size: 16px; }  
.btn.btn-primary {  
color: #fff; }  

```

The screenshot shows the Microsoft Edge browser with the developer tools open. The tabs at the top are File, Edit, Selection, View, Go, Debug, Terminal, and Help. The active tab is 'style.css - ja...'. The left sidebar has icons for Explorer, Find, Open Editors, JAKSICGLASS, and Outline. The 'OPEN EDITORS' section lists index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The 'JAKSICGLASS' section lists various CSS and JS files. The main pane shows the CSS code for 'style.css' with line numbers 7266 to 7303. The code includes media queries for print, and various styling rules for elements like a, abbr, pre, blockquote, thead, tr, img, p, h2, h3, and body.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
visibility: hidden !important; }  
@media print {  
*,  
*:before,  
*:after {  
text-shadow: none !important;  
-webkit-box-shadow: none !important;  
box-shadow: none !important; }  
a:not(.btn) {  
text-decoration: underline; }  
abbr[title]::after {  
content: " (" attr(title) ")"; }  
pre {  
white-space: pre-wrap !important; }  
pre,  
blockquote {  
border: 1px solid #adb5bd;  
page-break-inside: avoid; }  
thead {  
display: table-header-group; }  
tr,  
img {  
page-break-inside: avoid; }  
p,  
h2,  
h3 {  
orphans: 3;  
widows: 3; }  
h2,  
h3 {  
page-break-after: avoid; }  
@page {  
size: a3; }  
body {  
min-width: 992px !important; }  
.container {  
min-width: 992px !important: }
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS rules and media queries. The line numbers on the left side of the editor pane range from 7254 to 7291.

```
index.html contact.html sitemap.xml # style.css
css > # style.css > .list-group-item-info.list-group-item-action:ho
7254 .text-hide {
7255   font: 0/0 a;
7256   color: transparent;
7257   text-shadow: none;
7258   background-color: transparent;
7259   border: 0; }

7261 .visible {
7262   visibility: visible !important; }

7264 .invisible {
7265   visibility: hidden !important; }

7267 @media print {
7268   *,
7269   *::before,
7270   *::after {
7271     text-shadow: none !important;
7272     -webkit-box-shadow: none !important;
7273     box-shadow: none !important; }
7274 a:not(.btn) {
7275   text-decoration: underline; }
7276 abbr[title]::after {
7277   content: " (" attr(title) ")"; }
7278 pre {
7279   white-space: pre-wrap !important; }
7280 pre,
7281 blockquote {
7282   border: 1px solid #adb5bd;
7283   page-break-inside: avoid; }
7284 thead {
7285   display: table-header-group; }
7286 tr,
7287 img {
7288   page-break-inside: avoid; }
7289 p,
7290 h1,
7291 h2,
```

Taskbar icons include Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows a portion of the "style.css" file:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
7094 .py-xl-5,  
7095 .py-xl-5 {  
7096 | padding-bottom: 3rem !important;  
7097 .pl-xl-5,  
7098 .px-xl-5 {  
7099 | padding-left: 3rem !important;  
7100 .m-xl-auto {  
7101 | margin: auto !important;  
7102 .mt-xl-auto,  
7103 .my-xl-auto {  
7104 | margin-top: auto !important;  
7105 .mr-xl-auto,  
7106 .mx-xl-auto {  
7107 | margin-right: auto !important;  
7108 .mb-xl-auto,  
7109 .my-xl-auto {  
7110 | margin-bottom: auto !important;  
7111 .ml-xl-auto,  
7112 .mx-xl-auto {  
7113 | margin-left: auto !important; } }  
7114 .text-monospace {  
7115 | font-family: SFMono-Regular, Menlo, Monaco,  
7116 .text-justify {  
7117 | text-align: justify !important;  
7118 .text nowrap {  
7119 | white-space: nowrap !important;  
7120 .text-truncate {  
7121 | overflow: hidden;  
7122 | -o-text-overflow: ellipsis;  
7123 | text-overflow: ellipsis;  
7124 | white-space: nowrap; }  
7125 .text-left {  
7126 | text-align: left !important;  
7127 }  
7128 }  
7129 }  
7130 }  
7131 }
```

The left sidebar of the developer tools shows the "EXPLORER" view with the following file structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

At the bottom, there are status icons: a gear icon with "1", a triangle icon with "1", a search bar with placeholder "Type here to search", and a taskbar with icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.


The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS: index.html, contact.html, sitemap.xml, # style.css (2), JS main.js js. JAKSICGLASS: css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), # style.css (2), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Terminal:** style.css - ja...
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho
7094 .py-xl-5,
7095 .py-xl-5 {
7096 | padding-bottom: 3rem !important;
7097 .pl-xl-5,
7098 .px-xl-5 {
7099 | padding-left: 3rem !important;
7100 .m-xl-auto {
7101 | margin: auto !important;
7102 .mt-xl-auto,
7103 .my-xl-auto {
7104 | margin-top: auto !important;
7105 .mr-xl-auto,
7106 .mx-xl-auto {
7107 | margin-right: auto !important;
7108 .mb-xl-auto,
7109 .my-xl-auto {
7110 | margin-bottom: auto !important;
7111 .ml-xl-auto,
7112 .mx-xl-auto {
7113 | margin-left: auto !important; } }

7115 .text-monospace {
7116 | font-family: SFMono-Regular, Menlo, Monaco
7117
7118 .text-justify {
7119 | text-align: justify !important;
7120
7121 .text-nowrap {
7122 | white-space: nowrap !important;
7123
7124 .text-truncate {
7125 | overflow: hidden;
7126 | -o-text-overflow: ellipsis;
7127 | text-overflow: ellipsis;
7128 | white-space: nowrap; }

7130 .text-left {
7131 | text-align: left !important;
```

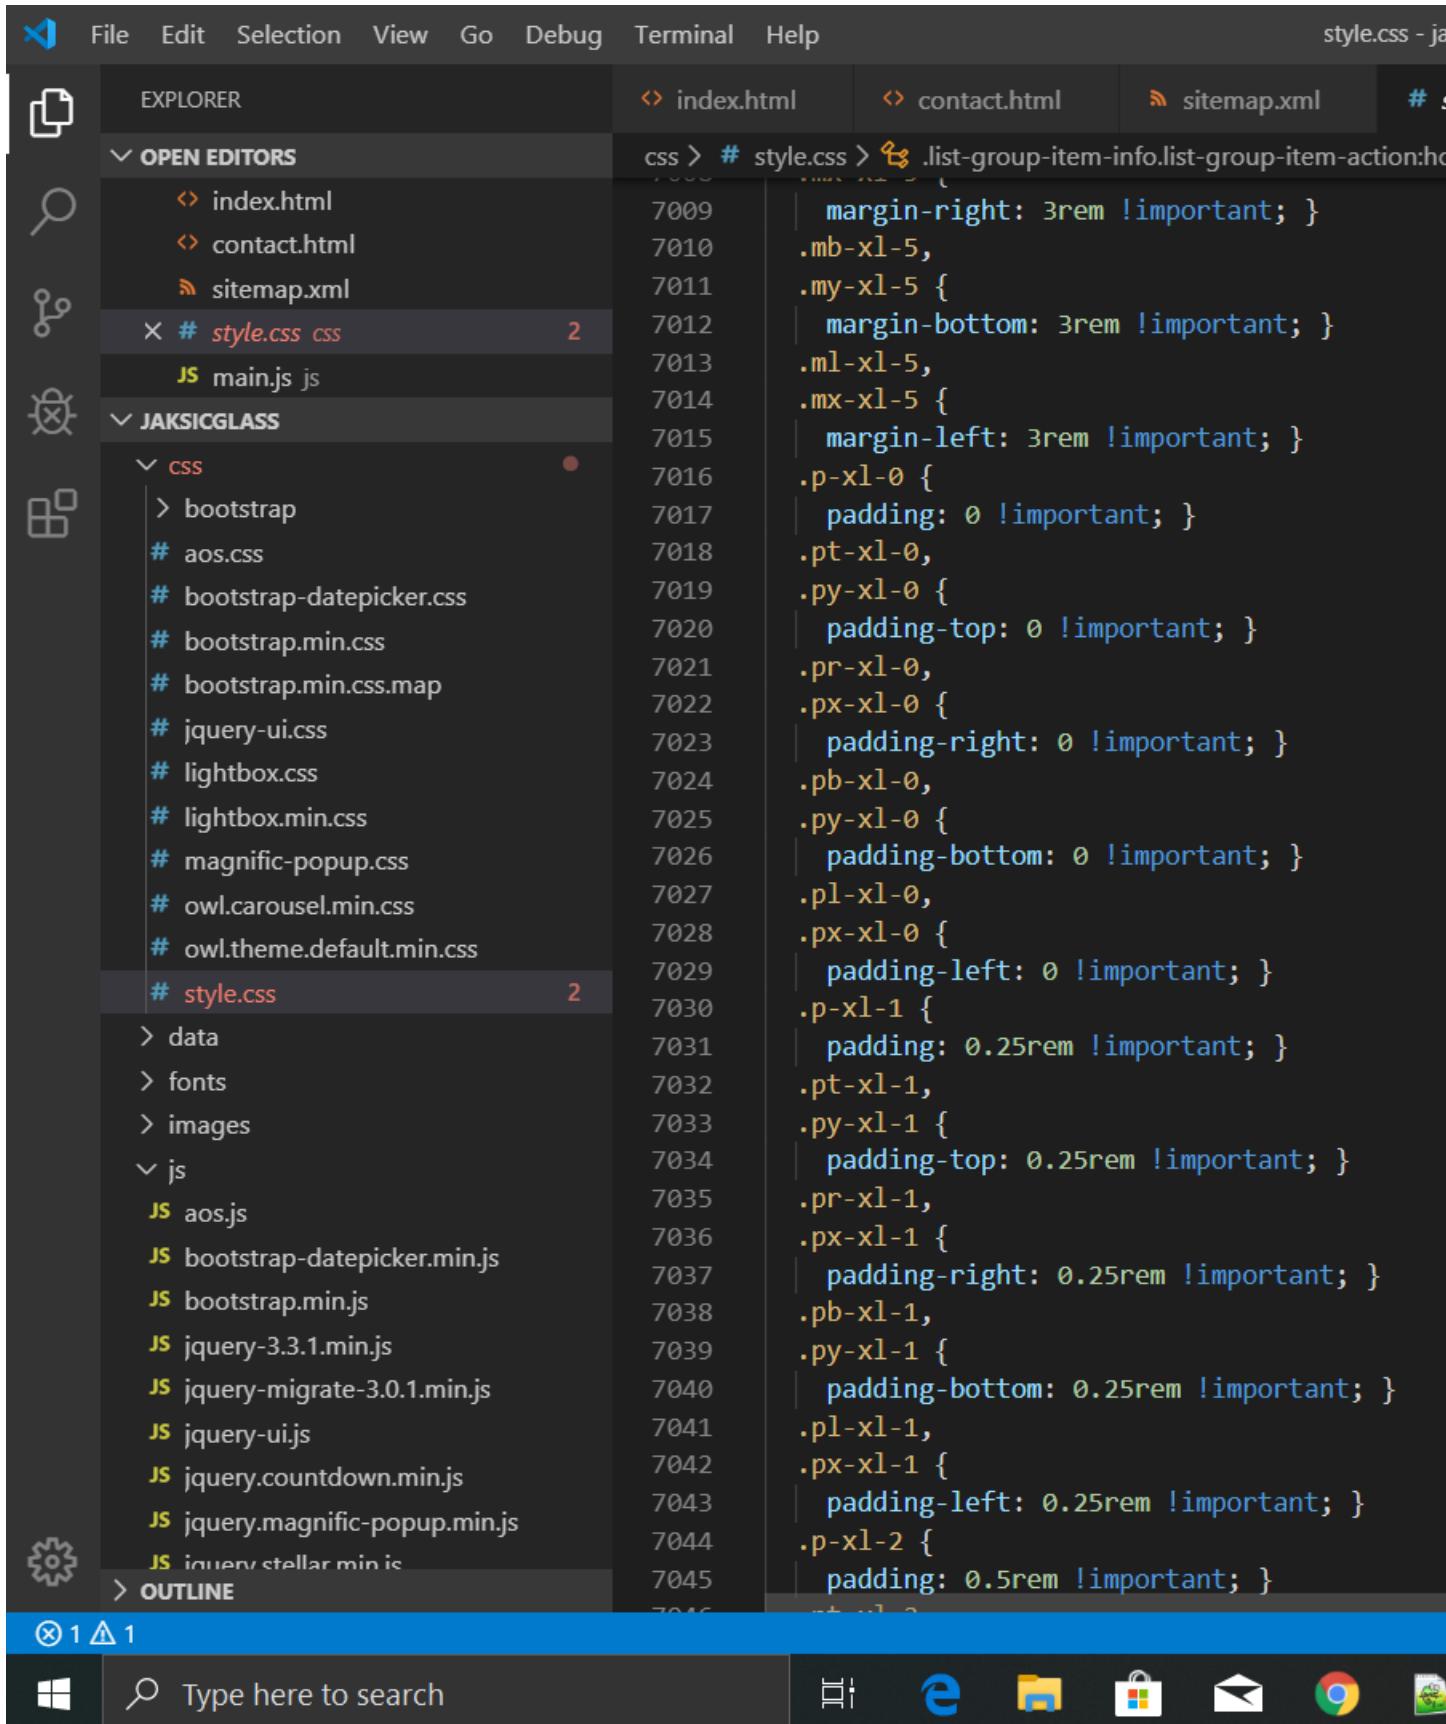

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code. The code includes Bootstrap utility classes like `.py-lg-5`, `.pl-lg-5`, `.px-lg-5`, etc., and media queries for `@media (min-width: 1200px)`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: A section showing the outline of the current file.
- Terminal:** Shows the command `style.css - j`.
- Bottom Bar:** Includes icons for Windows, search, taskbar, and browser links (e.g., Edge, Google Chrome).

The screenshot shows a Windows desktop environment with Visual Studio Code open. The title bar reads "style.css - ja...".

EXPLORER

- OPEN EDITORS
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (2)
 - main.js (js)
- JAKSICGLASS
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (2)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

Editor Content (style.css)

```
css > # style.css > .list-group-item-info.list-group-item-action:ho...  
6825 | margin-right: 3rem !important; }  
6826 | .mb-lg-5,  
6827 | .my-lg-5 {  
6828 | margin-bottom: 3rem !important; }  
6829 | .ml-lg-5,  
6830 | .mx-lg-5 {  
6831 | margin-left: 3rem !important; }  
6832 | .p-lg-0 {  
6833 | padding: 0 !important; }  
6834 | .pt-lg-0,  
6835 | .py-lg-0 {  
6836 | padding-top: 0 !important; }  
6837 | .pr-lg-0,  
6838 | .px-lg-0 {  
6839 | padding-right: 0 !important; }  
6840 | .pb-lg-0,  
6841 | .py-lg-0 {  
6842 | padding-bottom: 0 !important; }  
6843 | .pl-lg-0,  
6844 | .px-lg-0 {  
6845 | padding-left: 0 !important; }  
6846 | .p-lg-1 {  
6847 | padding: 0.25rem !important; }  
6848 | .pt-lg-1,  
6849 | .py-lg-1 {  
6850 | padding-top: 0.25rem !important; }  
6851 | .pr-lg-1,  
6852 | .px-lg-1 {  
6853 | padding-right: 0.25rem !important; }  
6854 | .pb-lg-1,  
6855 | .py-lg-1 {  
6856 | padding-bottom: 0.25rem !important; }  
6857 | .pl-lg-1,  
6858 | .px-lg-1 {  
6859 | padding-left: 0.25rem !important; }  
6860 | .p-lg-2 {  
6861 | padding: 0.5rem !important; }  
6862 | .pt-lg-2
```

Terminal

```
style.css - ja...  
① 1 △ 1  
Windows Type here to search e File e Google Drive Microsoft Edge Mail Chrome
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The tabs at the top are File, Edit, Selection, View, Go, Debug, Terminal, and Help. The active tab is 'style.css - ja...'. The left sidebar has icons for Explorer, Search, Find, and Outline. The 'EXPLORER' section shows 'OPEN EDITORS' with files index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder 'JAKSICGLASS' containing 'css' (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and 'js' (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js). The 'OUTLINE' section is collapsed. The main pane displays the following CSS code:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
6739 | margin-right: auto !important; }  
6740 | .mb-md-auto,  
6741 | .my-md-auto {  
6742 | margin-bottom: auto !important; }  
6743 | .ml-md-auto,  
6744 | .mx-md-auto {  
6745 | margin-left: auto !important; } }  
6746  
6747 @media (min-width: 992px) {  
6748 | .m-lg-0 {  
6749 | margin: 0 !important; }  
6750 | .mt-lg-0,  
6751 | .my-lg-0 {  
6752 | margin-top: 0 !important; }  
6753 | .mr-lg-0,  
6754 | .mx-lg-0 {  
6755 | margin-right: 0 !important; }  
6756 | .mb-lg-0,  
6757 | .my-lg-0 {  
6758 | margin-bottom: 0 !important; }  
6759 | .ml-lg-0,  
6760 | .mx-lg-0 {  
6761 | margin-left: 0 !important; }  
6762 | .m-lg-1 {  
6763 | margin: 0.25rem !important; }  
6764 | .mt-lg-1,  
6765 | .my-lg-1 {  
6766 | margin-top: 0.25rem !important; }  
6767 | .mr-lg-1,  
6768 | .mx-lg-1 {  
6769 | margin-right: 0.25rem !important; }  
6770 | .mb-lg-1,  
6771 | .my-lg-1 {  
6772 | margin-bottom: 0.25rem !important; }  
6773 | .ml-lg-1,  
6774 | .mx-lg-1 {  
6775 | margin-left: 0.25rem !important; }  
6776 | .m-lg-2 {
```

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css 2
- main.js js

JAKSICGLASS

- css
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css 2
- data
- fonts
- images
- js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

index.html contact.html sitemap.xml # style.css - j...

css > # style.css > .list-group-item-info.list-group-item-action:ho...


6641 margin-right: 3rem !important; }
6642 .mb-md-5,
6643 .my-md-5 {
6644 | margin-bottom: 3rem !important; }
6645 .ml-md-5,
6646 .mx-md-5 {
6647 | margin-left: 3rem !important; }
6648 .p-md-0 {
6649 | padding: 0 !important; }
6650 .pt-md-0,
6651 .py-md-0 {
6652 | padding-top: 0 !important; }
6653 .pr-md-0,
6654 .px-md-0 {
6655 | padding-right: 0 !important; }
6656 .pb-md-0,
6657 .py-md-0 {
6658 | padding-bottom: 0 !important; }
6659 .pl-md-0,
6660 .px-md-0 {
6661 | padding-left: 0 !important; }
6662 .p-md-1 {
6663 | padding: 0.25rem !important; }
6664 .pt-md-1,
6665 .py-md-1 {
6666 | padding-top: 0.25rem !important; }
6667 .pr-md-1,
6668 .px-md-1 {
6669 | padding-right: 0.25rem !important; }
6670 .pb-md-1,
6671 .py-md-1 {
6672 | padding-bottom: 0.25rem !important; }
6673 .pl-md-1,
6674 .px-md-1 {
6675 | padding-left: 0.25rem !important; }
6676 .p-md-2 {
6677 | padding: 0.5rem !important; }
6678 .pt-md-2,

⊗ 1 △ 1

Type here to search

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar at the bottom shows 'style.css - ja' and '⊗ 1 △ 1'. The Explorer sidebar on the left lists open editors (index.html, contact.html, sitemap.xml), a folder named 'JAKSICGLASS' containing CSS, JS, and image files, and an outline view. The main editor area displays a portion of the 'style.css' file with code related to Bootstrap's grid system. The code includes media queries for a minimum width of 768px, defining classes like .m-md-0 through .m-md-2 for margin values.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
6555 | margin-right: auto !important; }  
6556 | .mb-sm-auto,  
6557 | .my-sm-auto {  
6558 | margin-bottom: auto !important; }  
6559 | .ml-sm-auto,  
6560 | .mx-sm-auto {  
6561 | margin-left: auto !important; } }  
6562  
6563 @media (min-width: 768px) {  
6564 | .m-md-0 {  
6565 | margin: 0 !important; }  
6566 | .mt-md-0,  
6567 | .my-md-0 {  
6568 | margin-top: 0 !important; }  
6569 | .mr-md-0,  
6570 | .mx-md-0 {  
6571 | margin-right: 0 !important; }  
6572 | .mb-md-0,  
6573 | .my-md-0 {  
6574 | margin-bottom: 0 !important; }  
6575 | .ml-md-0,  
6576 | .mx-md-0 {  
6577 | margin-left: 0 !important; }  
6578 | .m-md-1 {  
6579 | margin: 0.25rem !important; }  
6580 | .mt-md-1,  
6581 | .my-md-1 {  
6582 | margin-top: 0.25rem !important; }  
6583 | .mr-md-1,  
6584 | .mx-md-1 {  
6585 | margin-right: 0.25rem !important; }  
6586 | .mb-md-1,  
6587 | .my-md-1 {  
6588 | margin-bottom: 0.25rem !important; }  
6589 | .ml-md-1,  
6590 | .mx-md-1 {  
6591 | margin-left: 0.25rem !important; }  
6592 | .m-md-2 {
```

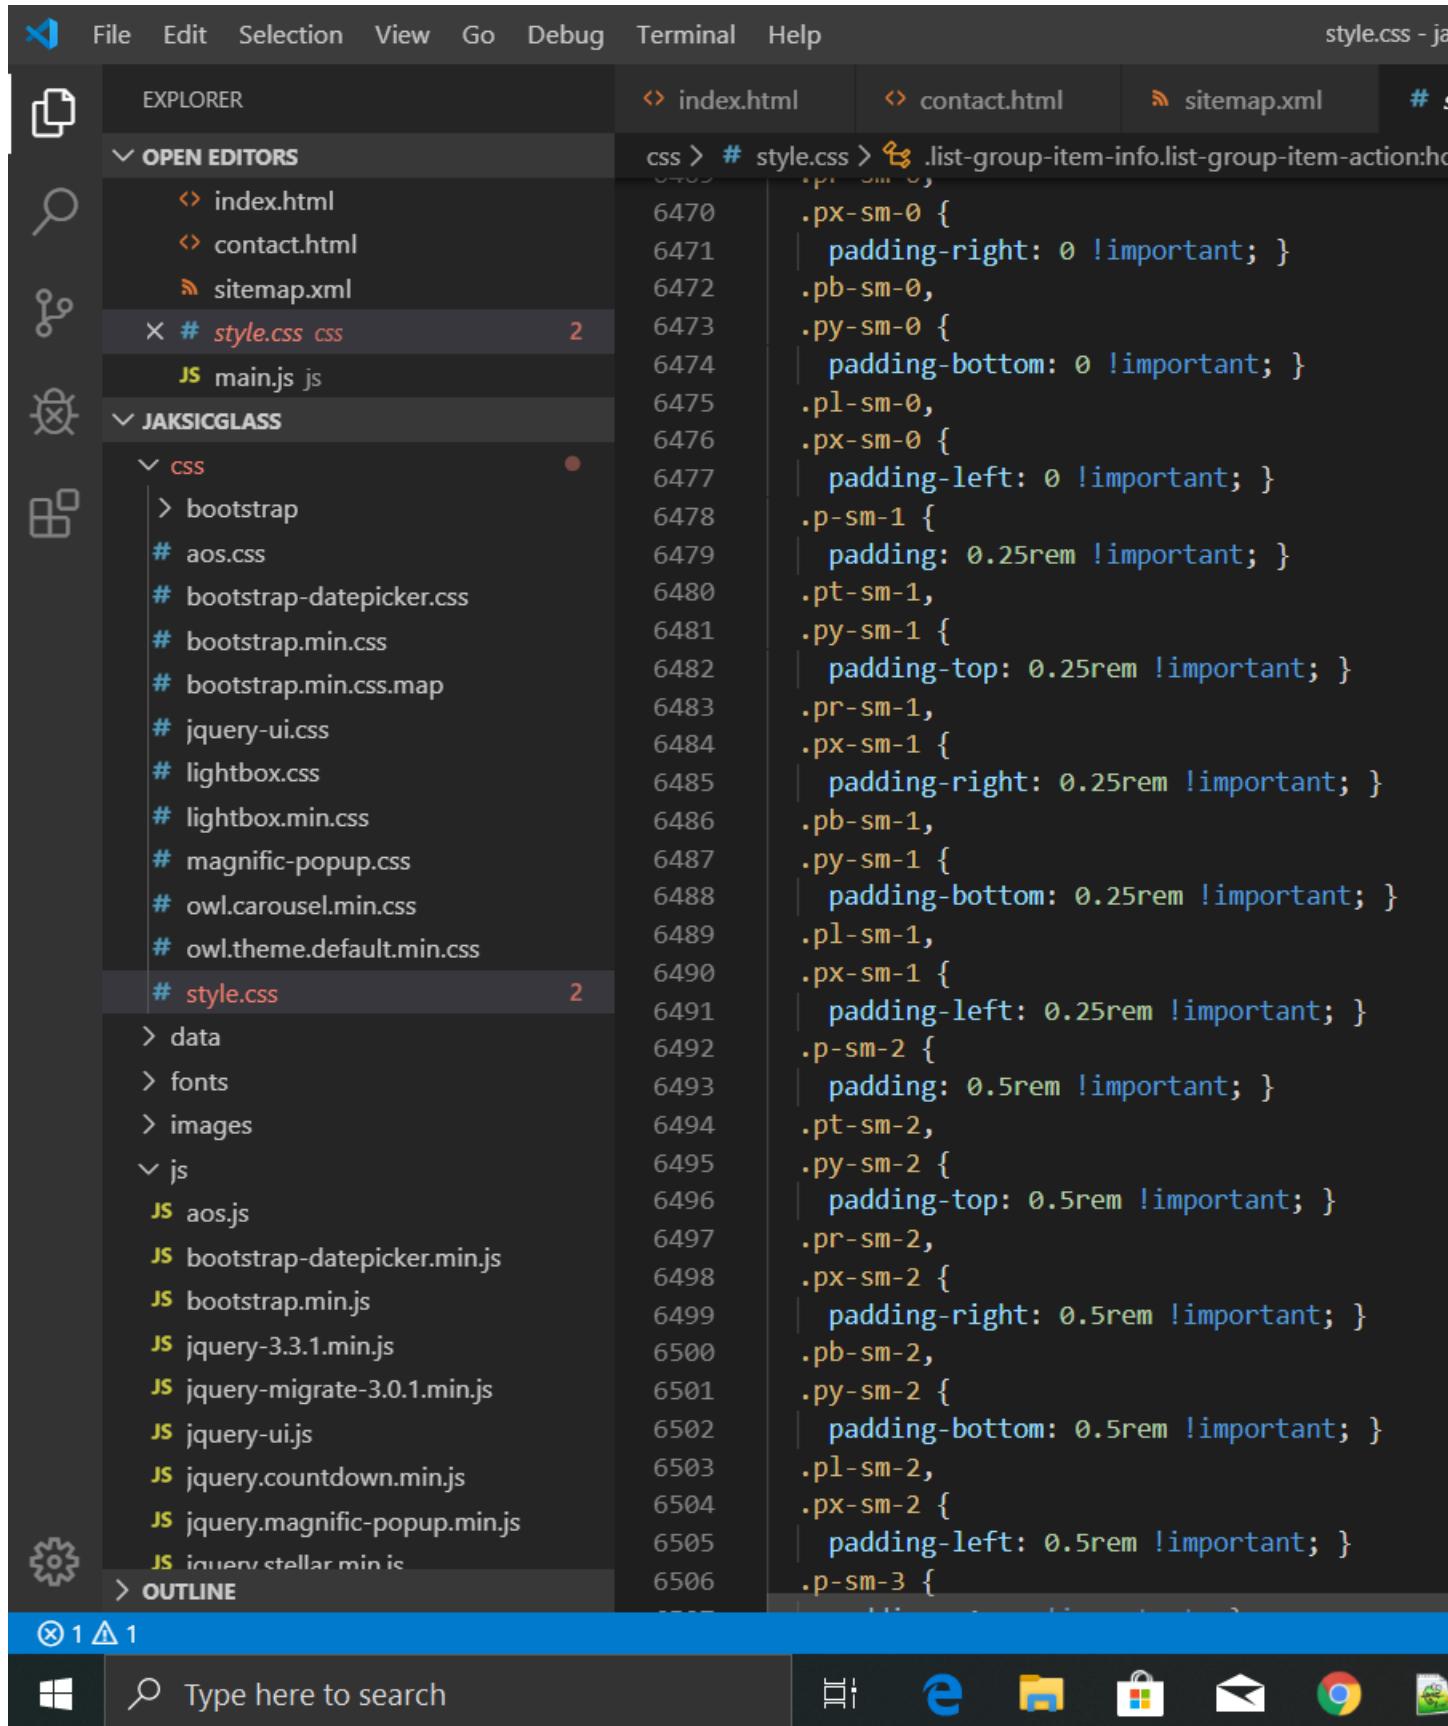

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for classes like `.my-auto`, `.ml-auto`, `.mx-auto`, and media queries for screens with a minimum width of 576px. Lines 6372 through 6408 are visible.
- Explorer Bar (Left):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css** (selected).
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Taskbar (Bottom):** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser with the developer tools open. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja".

The left sidebar, titled "EXPLORER", shows the "OPEN EDITORS" section with files: index.html, contact.html, sitemap.xml, style.css (selected), and main.js. Below this is the "JAKSICGLASS" folder, which contains a "css" folder with numerous CSS files and a "js" folder with various JavaScript files.

The main pane displays the CSS code for "style.css". The code is as follows:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
6323 | padding: 1.5rem !important; }  
6324 |  
6325 | .pt-4,  
6326 | .py-4 {  
6327 | padding-top: 1.5rem !important; }  
6328 |  
6329 | .pr-4,  
6330 | .px-4 {  
6331 | padding-right: 1.5rem !important; }  
6332 |  
6333 | .pb-4,  
6334 | .py-4 {  
6335 | padding-bottom: 1.5rem !important; }  
6336 |  
6337 | .pl-4,  
6338 | .px-4 {  
6339 | padding-left: 1.5rem !important; }  
6340 |  
6341 | .p-5 {  
6342 | padding: 3rem !important; }  
6343 |  
6344 | .pt-5,  
6345 | .py-5 {  
6346 | padding-top: 3rem !important; }  
6347 |  
6348 | .pr-5,  
6349 | .px-5 {  
6350 | padding-right: 3rem !important; }  
6351 |  
6352 | .pb-5,  
6353 | .py-5 {  
6354 | padding-bottom: 3rem !important; }  
6355 |  
6356 | .pl-5,  
6357 | .px-5 {  
6358 | padding-left: 3rem !important; }  
6359 |
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the code editor with the following CSS snippet:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
6225 | margin-left: 1.5rem !important; }  
6226 |  
6227 | .m-5 {  
6228 |   margin: 3rem !important; }  
6229 |  
6230 | .mt-5,  
6231 | .my-5 {  
6232 |   margin-top: 3rem !important; }  
6233 |  
6234 | .mr-5,  
6235 | .mx-5 {  
6236 |   margin-right: 3rem !important; }  
6237 |  
6238 | .mb-5,  
6239 | .my-5 {  
6240 |   margin-bottom: 3rem !important; }  
6241 |  
6242 | .ml-5,  
6243 | .mx-5 {  
6244 |   margin-left: 3rem !important; }  
6245 |  
6246 | .p-0 {  
6247 |   padding: 0 !important; }  
6248 |  
6249 | .pt-0,  
6250 | .py-0 {  
6251 |   padding-top: 0 !important; }  
6252 |  
6253 | .pr-0,  
6254 | .px-0 {  
6255 |   padding-right: 0 !important; }  
6256 |  
6257 | .pb-0,  
6258 | .py-0 {  
6259 |   padding-bottom: 0 !important; }  
6260 |  
6261 | .pl-0,
```

The status bar at the bottom shows 1 error and 1 warning, and includes a search bar and taskbar icons.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS classes and their definitions, such as .mr-2, .mx-2, .mb-2, .my-2, .ml-2, .mt-2, .mr-3, .mx-3, .mb-3, .my-3, .ml-3, .mt-3, .mr-4, .mx-4, .mb-4, and .my-4.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
6176  
6177 .mr-2,  
6178 .mx-2 {  
6179 margin-right: 0.5rem !important; }  
6180  
6181 .mb-2,  
6182 .my-2 {  
6183 margin-bottom: 0.5rem !important; }  
6184  
6185 .ml-2,  
6186 .mx-2 {  
6187 margin-left: 0.5rem !important; }  
6188  
6189 .m-3 {  
6190 margin: 1rem !important; }  
6191  
6192 .mt-3,  
6193 .my-3 {  
6194 margin-top: 1rem !important; }  
6195  
6196 .mr-3,  
6197 .mx-3 {  
6198 margin-right: 1rem !important; }  
6199  
6200 .mb-3,  
6201 .my-3 {  
6202 margin-bottom: 1rem !important; }  
6203  
6204 .ml-3,  
6205 .mx-3 {  
6206 margin-left: 1rem !important; }  
6207  
6208 .m-4 {  
6209 margin: 1.5rem !important; }  
6210  
6211 .mt-4,  
6212 .my-4 {
```

The bottom taskbar shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code. The code includes various classes like `.h-50`, `.h-75`, `.h-100`, `.h-auto`, `.mw-100`, `.mh-100`, `.m-0`, `.mt-0`, `.my-0`, `.mr-0`, `.mx-0`, `.mb-0`, `.ml-0`, and `.ml-1`. Lines 6114 to 6151 are visible.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** A folder containing several CSS files (aos.css, bootstrap-datepicker.css, bootstrap.min.css, etc.) and JS files (aos.js, bootstrap-datepicker.min.js, etc.).
 - OUTLINE:** A section showing the outline of the current file.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser is displaying a CSS file from a local file system. The address bar at the top of the browser shows the path: style.css - j...

The browser's status bar at the bottom indicates there are 1 error and 1 warning.

The main content area of the browser shows the following CSS code:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho...  
6053 z-index: 1030; }  
6054  
6055 @supports ((position: -webkit-sticky) or (po...  
6056 .sticky-top {  
6057 position: -webkit-sticky;  
6058 position: sticky;  
6059 top: 0;  
6060 z-index: 1020; } }  
  
.sr-only {  
6061 position: absolute;  
6062 width: 1px;  
6063 height: 1px;  
6064 padding: 0;  
6065 overflow: hidden;  
6066 clip: rect(0, 0, 0, 0);  
6067 white-space: nowrap;  
6068 border: 0; }  
  
.sr-only-focusable:active, .sr-only-focusable:  
6072 position: static;  
6073 width: auto;  
6074 height: auto;  
6075 overflow: visible;  
6076 clip: auto;  
6077 white-space: normal; }  
  
.shadow-sm {  
6079 -webkit-box-shadow: 0 0.125rem 0.25rem rgba(...  
6080 box-shadow: 0 0.125rem 0.25rem rgba(0, 0, 0, 0.1);  
  
.shadow {  
6083 -webkit-box-shadow: 0 0.5rem 1rem rgba(0, 0, 0, 0.5);  
6084 box-shadow: 0 0.5rem 1rem rgba(0, 0, 0, 0.5);  
  
.shadow-lg {  
6087 -webkit-box-shadow: 0 1rem 3rem rgba(0, 0, 0, 0.17);  
6088 box-shadow: 0 1rem 3rem rgba(0, 0, 0, 0.17);  
6089  
6090
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes media queries for different screen widths and various CSS rules for floating elements and position settings.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5992  
5993 @media (min-width: 576px) {  
5994   .float-sm-left {  
5995     float: left !important;  
5996   }  
5997   .float-sm-right {  
5998     float: right !important;  
5999   }  
6000   .float-sm-none {  
6001     float: none !important; } }  
6002 @media (min-width: 768px) {  
6003   .float-md-left {  
6004     float: left !important;  
6005   }  
6006   .float-md-right {  
6007     float: right !important;  
6008   }  
6009   .float-md-none {  
6010     float: none !important; } }  
6011 @media (min-width: 992px) {  
6012   .float-lg-left {  
6013     float: left !important;  
6014   }  
6015   .float-lg-right {  
6016     float: right !important;  
6017   }  
6018   .float-lg-none {  
6019     float: none !important; } }  
6020 @media (min-width: 1200px) {  
6021   .float-xl-left {  
6022     float: left !important;  
6023   }  
6024   .float-xl-right {  
6025     float: right !important;  
6026   }  
6027   .float-xl-none {  
6028     float: none !important; } }  
6029 .position-static {  
6030   position: static !important;  
6031 }  
6032 .position-relative {  
6033   position: relative !important;  
6034 }
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the source code of a CSS file, specifically "style.css", which includes various CSS properties and values. The left sidebar features the "EXPLORER" tab, which lists files and folders such as "index.html", "contact.html", "sitemap.xml", "# style.css", "main.js", and "bootstrap" under the "JAKSICGLASS" folder. The "style.css" file is currently selected in the Explorer. The bottom of the screen shows the Windows taskbar with icons for File Explorer, Edge, File Manager, Microsoft Store, Mail, and Google Chrome.

```
.align-items-xl-stretch {  
    -webkit-box-align: stretch !important;  
    -ms-flex-align: stretch !important;  
    align-items: stretch !important; }  
.align-content-xl-start {  
    -ms-flex-line-pack: start !important;  
    align-content: flex-start !important; }  
.align-content-xl-end {  
    -ms-flex-line-pack: end !important;  
    align-content: flex-end !important; }  
.align-content-xl-center {  
    -ms-flex-line-pack: center !important;  
    align-content: center !important; }  
.align-content-xl-between {  
    -ms-flex-line-pack: justify !important;  
    align-content: space-between !important; }  
.align-content-xl-around {  
    -ms-flex-line-pack: distribute !important;  
    align-content: space-around !important; }  
.align-content-xl-stretch {  
    -ms-flex-line-pack: stretch !important;  
    align-content: stretch !important; }  
.align-self-xl-auto {  
    -ms-flex-item-align: auto !important;  
    align-self: auto !important; }  
.align-self-xl-start {  
    -ms-flex-item-align: start !important;  
    align-self: flex-start !important; }  
.align-self-xl-end {  
    -ms-flex-item-align: end !important;  
    align-self: flex-end !important; }  
.align-self-xl-center {  
    -ms-flex-item-align: center !important;  
    align-self: center !important; }  
.align-self-xl-baseline {  
    -ms-flex-item-align: baseline !important;  
    align-self: baseline !important; }  
.align-self-xl-stretch {
```

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar at the bottom indicates "style.css - ja".

EXPLORER

- OPEN EDITORS**
 - index.html
 - contact.html
 - sitemap.xml
 - style.css** (css)
 - main.js (js)
- JAKSICGLASS**
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css** (css)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

Editor Area (style.css)

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5857 -ms-flex-item-align: stretch !important;  
5858 align-self: stretch !important; } }  
5859  
5860 @media (min-width: 1200px) {  
5861 .flex-xl-row {  
5862 -webkit-box-orient: horizontal !important;  
5863 -webkit-box-direction: normal !important;  
5864 -ms-flex-direction: row !important;  
5865 flex-direction: row !important; }  
5866 .flex-xl-column {  
5867 -webkit-box-orient: vertical !important;  
5868 -webkit-box-direction: normal !important;  
5869 -ms-flex-direction: column !important;  
5870 flex-direction: column !important; }  
5871 .flex-xl-row-reverse {  
5872 -webkit-box-orient: horizontal !important;  
5873 -webkit-box-direction: reverse !important;  
5874 -ms-flex-direction: row-reverse !important;  
5875 flex-direction: row-reverse !important; }  
5876 .flex-xl-column-reverse {  
5877 -webkit-box-orient: vertical !important;  
5878 -webkit-box-direction: reverse !important;  
5879 -ms-flex-direction: column-reverse !important;  
5880 flex-direction: column-reverse !important; }  
5881 .flex-xl-wrap {  
5882 -ms-flex-wrap: wrap !important;  
5883 flex-wrap: wrap !important; }  
5884 .flex-xl-nowrap {  
5885 -ms-flex-wrap: nowrap !important;  
5886 flex-wrap: nowrap !important; }  
5887 .flex-xl-wrap-reverse {  
5888 -ms-flex-wrap: wrap-reverse !important;  
5889 flex-wrap: wrap-reverse !important; }  
5890 .flex-xl-fill {  
5891 -webkit-box-flex: 1 !important;  
5892 -ms-flex: 1 1 auto !important;  
5893 flex: 1 1 auto !important; }  
5894 .flex-xl-grow-0 {
```

Taskbar

- ① 1 △ 1
- Windows icon
- Type here to search
- File Explorer icon
- Terminal icon
- File icon
- Folder icon
- Microsoft Store icon
- Email icon
- Google Chrome icon
- File icon

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code is a CSS file containing media queries and flexbox properties. The file has 5771 lines of code.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5735  
5736 @media (min-width: 992px) {  
5737   .flex-lg-row {  
5738     -webkit-box-orient: horizontal !important;  
5739     -webkit-box-direction: normal !important;  
5740     -ms-flex-direction: row !important;  
5741     flex-direction: row !important; }  
5742   .flex-lg-column {  
5743     -webkit-box-orient: vertical !important;  
5744     -webkit-box-direction: normal !important;  
5745     -ms-flex-direction: column !important;  
5746     flex-direction: column !important; }  
5747   .flex-lg-row-reverse {  
5748     -webkit-box-orient: horizontal !important;  
5749     -webkit-box-direction: reverse !important;  
5750     -ms-flex-direction: row-reverse !important;  
5751     flex-direction: row-reverse !important; }  
5752   .flex-lg-column-reverse {  
5753     -webkit-box-orient: vertical !important;  
5754     -webkit-box-direction: reverse !important;  
5755     -ms-flex-direction: column-reverse !important;  
5756     flex-direction: column-reverse !important; }  
5757   .flex-lg-wrap {  
5758     -ms-flex-wrap: wrap !important;  
5759     flex-wrap: wrap !important; }  
5760   .flex-lg-nowrap {  
5761     -ms-flex-wrap: nowrap !important;  
5762     flex-wrap: nowrap !important; }  
5763   .flex-lg-wrap-reverse {  
5764     -ms-flex-wrap: wrap-reverse !important;  
5765     flex-wrap: wrap-reverse !important; }  
5766   .flex-lg-fill {  
5767     -webkit-box-flex: 1 !important;  
5768     -ms-flex: 1 1 auto !important;  
5769     flex: 1 1 auto !important; }  
5770   .flex-lg-grow-0 {  
5771     -webkit-box-flex: 0 !important;
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes CSS rules for alignment and a media query for medium-width screens.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Under "JAKSICGLASS" folder:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css` (selected)
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
- `OUTLINE`

- Taskbar:** Shows icons for Task View, Search, Task List, and various system applications like File Explorer, Edge, File Manager, Mail, and Google Chrome.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser title bar reads "style.css - ja...". The main content area of the browser displays a portion of a CSS file. The CSS code includes various utility classes for alignment and spacing, such as ".justify-content-sm-end", ".justify-content-sm-center", ".justify-content-sm-between", ".justify-content-sm-around", ".align-items-sm-start", ".align-items-sm-end", ".align-items-sm-center", ".align-items-sm-baseline", ".align-items-sm-stretch", and ".align-content-sm-start". The code uses a mix of standard CSS properties and vendor-specific prefixes like "-webkit-", "-ms-", and "-ms-". The browser interface includes a navigation bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help options. On the left, there's an Explorer sidebar showing the project structure with files like index.html, contact.html, sitemap.xml, style.css, main.js, and several Bootstrap and jQuery files. At the bottom, there's a taskbar with icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5539 justify-content: flex-start !important;  
5540 .justify-content-sm-end {  
5541 -webkit-box-pack: end !important;  
5542 -ms-flex-pack: end !important;  
5543 justify-content: flex-end !important; }  
5544 .justify-content-sm-center {  
5545 -webkit-box-pack: center !important;  
5546 -ms-flex-pack: center !important;  
5547 justify-content: center !important; }  
5548 .justify-content-sm-between {  
5549 -webkit-box-pack: justify !important;  
5550 -ms-flex-pack: justify !important;  
5551 justify-content: space-between !important;  
5552 .justify-content-sm-around {  
5553 -ms-flex-pack: distribute !important;  
5554 justify-content: space-around !important;  
5555 .align-items-sm-start {  
5556 -webkit-box-align: start !important;  
5557 -ms-flex-align: start !important;  
5558 align-items: flex-start !important; }  
5559 .align-items-sm-end {  
5560 -webkit-box-align: end !important;  
5561 -ms-flex-align: end !important;  
5562 align-items: flex-end !important; }  
5563 .align-items-sm-center {  
5564 -webkit-box-align: center !important;  
5565 -ms-flex-align: center !important;  
5566 align-items: center !important; }  
5567 .align-items-sm-baseline {  
5568 -webkit-box-align: baseline !important;  
5569 -ms-flex-align: baseline !important;  
5570 align-items: baseline !important; }  
5571 .align-items-sm-stretch {  
5572 -webkit-box-align: stretch !important;  
5573 -ms-flex-align: stretch !important;  
5574 align-items: stretch !important; }  
5575 .align-content-sm-start {
```

The screenshot shows a Microsoft Edge browser window displaying a code editor interface. The top navigation bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja".

The left sidebar contains icons for Explorer, Search, Open Editors, JAKSICGLASS, Outline, and Taskbar.

The "OPEN EDITORS" section lists several files:

- index.html
- contact.html
- sitemap.xml
- # style.css (selected)
- main.js

The "JAKSICGLASS" section lists various CSS and JS files:

- css (directory)
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css (selected)
- data
- fonts
- images
- js (directory)
 - JS aos.js
 - JS bootstrap-datepicker.min.js
 - JS bootstrap.min.js
 - JS jquery-3.3.1.min.js
 - JS jquery-migrate-3.0.1.min.js
 - JS jquery-ui.js
 - JS jquery.countdown.min.js
 - JS jquery.magnific-popup.min.js
 - JS jquery.stellar.min.js

The main code editor area shows the content of the selected file, style.css, with line numbers 5453 to 5499. The code includes various CSS properties for alignment and media queries.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5453 -ms-flex-line-pack: justify !important;  
5454 align-content: space-between !important; }  
5455  
5456 .align-content-around {  
5457 -ms-flex-line-pack: distribute !important;  
5458 align-content: space-around !important; }  
5459  
5460 .align-content-stretch {  
5461 -ms-flex-line-pack: stretch !important;  
5462 align-content: stretch !important; }  
5463  
5464 .align-self-auto {  
5465 -ms-flex-item-align: auto !important;  
5466 align-self: auto !important; }  
5467  
5468 .align-self-start {  
5469 -ms-flex-item-align: start !important;  
5470 align-self: flex-start !important; }  
5471  
5472 .align-self-end {  
5473 -ms-flex-item-align: end !important;  
5474 align-self: flex-end !important; }  
5475  
5476 .align-self-center {  
5477 -ms-flex-item-align: center !important;  
5478 align-self: center !important; }  
5479  
5480 .align-self-baseline {  
5481 -ms-flex-item-align: baseline !important;  
5482 align-self: baseline !important; }  
5483  
5484 .align-self-stretch {  
5485 -ms-flex-item-align: stretch !important;  
5486 align-self: stretch !important; }  
5487  
5488 @media (min-width: 576px) {  
5489 .flex-sm-row {  
5490 webkit-box-orient: horizontal; importan
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Terminal:** style.css - j...
- Explorer:** Shows the file structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, style.css (selected)
 - data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js
- Editor:** The code editor displays the contents of style.css, specifically the CSS properties for align-items and align-content.
- Terminal:** The terminal window shows the command "style.css - j...".
- Bottom Bar:** Icons for Windows Start, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho
justify-content: center !important; }

.justify-content-between {
-webkit-box-pack: justify !important;
-ms-flex-pack: justify !important;
justify-content: space-between !important;

.justify-content-around {
-ms-flex-pack: distribute !important;
justify-content: space-around !important;

.align-items-start {
-webkit-box-align: start !important;
-ms-flex-align: start !important;
align-items: flex-start !important; }

.align-items-end {
-webkit-box-align: end !important;
-ms-flex-align: end !important;
align-items: flex-end !important; }

.align-items-center {
-webkit-box-align: center !important;
-ms-flex-align: center !important;
align-items: center !important; }

.align-items-baseline {
-webkit-box-align: baseline !important;
-ms-flex-align: baseline !important;
align-items: baseline !important; }

.align-items-stretch {
-webkit-box-align: stretch !important;
-ms-flex-align: stretch !important;
align-items: stretch !important; }

.align-content-start {
```

A screenshot of a Windows operating system desktop. In the foreground, a code editor window is open, showing an Explorer sidebar on the left and a large text editor pane on the right. The text editor contains CSS code related to flexbox properties like justify-content and align-items.

The code editor window title is "style.css - ja". The Explorer sidebar shows several files and folders:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js (JS)
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The main text editor pane displays the following CSS code:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5379 -webkit-box-flex: 1 !important;  
5380 -ms-flex-positive: 1 !important;  
5381 flex-grow: 1 !important; }  
5382  
5383 .flex-shrink-0 {  
5384 -ms-flex-negative: 0 !important;  
5385 flex-shrink: 0 !important; }  
5386  
5387 .flex-shrink-1 {  
5388 -ms-flex-negative: 1 !important;  
5389 flex-shrink: 1 !important; }  
5390  
5391 .justify-content-start {  
5392 -webkit-box-pack: start !important;  
5393 -ms-flex-pack: start !important;  
5394 justify-content: flex-start !important; }  
5395  
5396 .justify-content-end {  
5397 -webkit-box-pack: end !important;  
5398 -ms-flex-pack: end !important;  
5399 justify-content: flex-end !important; }  
5400  
5401 .justify-content-center {  
5402 -webkit-box-pack: center !important;  
5403 -ms-flex-pack: center !important;  
5404 justify-content: center !important; }  
5405  
5406 .justify-content-between {  
5407 -webkit-box-pack: justify !important;  
5408 -ms-flex-pack: justify !important;  
5409 justify-content: space-between !important; }  
5410  
5411 .justify-content-around {  
5412 -ms-flex-pack: distribute !important;  
5413 justify-content: space-around !important; }  
5414  
5415 .align-items-start {  
5416 -webkit-box-align: start !important;
```

The taskbar at the bottom of the screen shows several pinned icons, including File Explorer, Edge browser, File History, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code related to flexbox properties like `.flex-wrap`, `.flex-grow-0`, and `.justify-content-start`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: A section showing the outline of the current file.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser's developer tools open. The CSS tab is selected, displaying a snippet of CSS code. The code includes various flexbox-related properties like padding-top, flex-row, flex-column, flex-row-reverse, flex-column-reverse, flex-wrap, and flexnowrap. The code editor interface is visible on the left, showing the file structure and line numbers.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5330 | padding-top: 100%; }  
5331 |  
5332 | .flex-row {  
5333 |   -webkit-box-orient: horizontal !important;  
5334 |   -webkit-box-direction: normal !important;  
5335 |   -ms-flex-direction: row !important;  
5336 |   flex-direction: row !important; }  
5337 |  
5338 | .flex-column {  
5339 |   -webkit-box-orient: vertical !important;  
5340 |   -webkit-box-direction: normal !important;  
5341 |   -ms-flex-direction: column !important;  
5342 |   flex-direction: column !important; }  
5343 |  
5344 | .flex-row-reverse {  
5345 |   -webkit-box-orient: horizontal !important;  
5346 |   -webkit-box-direction: reverse !important;  
5347 |   -ms-flex-direction: row-reverse !important;  
5348 |   flex-direction: row-reverse !important; }  
5349 |  
5350 | .flex-column-reverse {  
5351 |   -webkit-box-orient: vertical !important;  
5352 |   -webkit-box-direction: reverse !important;  
5353 |   -ms-flex-direction: column-reverse !important;  
5354 |   flex-direction: column-reverse !important; }  
5355 |  
5356 | .flex-wrap {  
5357 |   -ms-flex-wrap: wrap !important;  
5358 |   flex-wrap: wrap !important; }  
5359 |  
5360 | .flexnowrap {  
5361 |   -ms-flex-wrap: nowrap !important;  
5362 |   flex-wrap: nowrap !important; }  
5363 |  
5364 | .flex-wrap-reverse {  
5365 |   -ms-flex-wrap: wrap-reverse !important;  
5366 |   flex-wrap: wrap-reverse !important; }  
5367 |
```

The screenshot shows the Microsoft Edge browser window with the developer tools open. The address bar at the top displays "style.css - ja...". The developer tools interface includes a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The left sidebar has icons for Explorer, Find, Tools, and Settings. The Explorer section shows the file structure with "OPEN EDITORS" containing index.html, contact.html, sitemap.xml, style.css (selected), and main.js. Below this is the "JAKSICGLASS" folder with sub-folders "css" and "js", and files like bootstrap, aos.css, and various JavaScript files. The main content area shows the CSS code for "style.css" with line numbers from 5281 to 5318. The code includes print-related styles and responsive embed styles.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5281 .d-print-block {  
5282 | display: block !important; }  
5283 .d-print-table {  
5284 | display: table !important; }  
5285 .d-print-table-row {  
5286 | display: table-row !important; }  
5287 .d-print-table-cell {  
5288 | display: table-cell !important; }  
5289 .d-print-flex {  
5290 | display: -webkit-box !important;  
5291 | display: -ms-flexbox !important;  
5292 | display: flex !important; }  
5293 .d-print-inline-flex {  
5294 | display: -webkit-inline-box !important;  
5295 | display: -ms-inline-flexbox !important;  
5296 | display: inline-flex !important; } }  
5297 .embed-responsive {  
5298 | position: relative;  
5299 | display: block;  
5300 | width: 100%;  
5301 | padding: 0;  
5302 | overflow: hidden; }  
5303 .embed-responsive::before {  
5304 | display: block;  
5305 | content: ""; }  
5306 .embed-responsive .embed-responsive-item,  
5307 .embed-responsive iframe,  
5308 .embed-responsive embed,  
5309 .embed-responsive object,  
5310 .embed-responsive video {  
5311 | position: absolute;  
5312 | top: 0;  
5313 | bottom: 0;  
5314 | left: 0;  
5315 | width: 100%;  
5316 | height: 100%;  
5317 | border: 0; }
```

The screenshot shows the Microsoft Edge browser window with the developer tools open. The address bar at the top displays "style.css - ja...". The developer tools interface includes a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The left sidebar has icons for Explorer, Find, Open Editors, JAKSICGLASS, and Outline. The "OPEN EDITORS" section lists index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The "JAKSICGLASS" section contains a "css" folder with bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, and style.css. The "js" folder contains aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, and jquery.stellar.min.js. The "OUTLINE" section is also visible. The main content area shows the source code for style.css, which includes various CSS rules for Bootstrap components like .d-lg-block, .d-lg-table, .d-lg-table-row, .d-lg-table-cell, .d-lg-flex, .d-lg-inline-flex, .d-xl-none, .d-xl-inline, .d-xl-inline-block, .d-xl-block, .d-xl-table, .d-xl-table-row, .d-xl-table-cell, .d-xl-flex, and .d-xl-inline-flex. The code uses LESS variables and mixins.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5232 | display: inline-block !important; }  
5233 | .d-lg-block {  
5234 |   display: block !important; }  
5235 | .d-lg-table {  
5236 |   display: table !important; }  
5237 | .d-lg-table-row {  
5238 |   display: table-row !important; }  
5239 | .d-lg-table-cell {  
5240 |   display: table-cell !important; }  
5241 | .d-lg-flex {  
5242 |   display: -webkit-box !important;  
5243 |   display: -ms-flexbox !important;  
5244 |   display: flex !important; }  
5245 | .d-lg-inline-flex {  
5246 |   display: -webkit-inline-box !important;  
5247 |   display: -ms-inline-flexbox !important;  
5248 |   display: inline-flex !important; } }  
5249 |  
5250 | @media (min-width: 1200px) {  
5251 |   .d-xl-none {  
5252 |     display: none !important; }  
5253 |   .d-xl-inline {  
5254 |     display: inline !important; }  
5255 |   .d-xl-inline-block {  
5256 |     display: inline-block !important; }  
5257 |   .d-xl-block {  
5258 |     display: block !important; }  
5259 |   .d-xl-table {  
5260 |     display: table !important; }  
5261 |   .d-xl-table-row {  
5262 |     display: table-row !important; }  
5263 |   .d-xl-table-cell {  
5264 |     display: table-cell !important; }  
5265 |   .d-xl-flex {  
5266 |     display: -webkit-box !important;  
5267 |     display: -ms-flexbox !important;  
5268 |     display: flex !important; }  
5269 |   .d-xl-inline-flex {
```

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the source code of a CSS file, with line numbers on the left. The code includes media queries for different screen widths, defining flex and inline-block displays for various classes like .d-md-inline-flex, .d-lg-none, and .d-lg-table-row.

```
style.css - ja...
css > # style.css > .list-group-item-info.list-group-item-action:ho...
display: flex !important; }
.d-md-inline-flex {
display: -webkit-inline-box !important;
display: -ms-inline-flexbox !important;
display: inline-flex !important; }

@media (min-width: 992px) {
.d-lg-none {
display: none !important; }
.d-lg-inline {
display: inline !important; }
.d-lg-inline-block {
display: inline-block !important; }
.d-lg-block {
display: block !important; }
.d-lg-table {
display: table !important; }
.d-lg-table-row {
display: table-row !important; }
.d-lg-table-cell {
display: table-cell !important; }
.d-lg-flex {
display: -webkit-box !important;
display: -ms-flexbox !important;
display: flex !important; }

.d-lg-inline-flex {
display: -webkit-inline-box !important;
display: -ms-inline-flexbox !important;
display: inline-flex !important; }

@media (min-width: 1200px) {
.d-xl-none {
display: none !important; }
.d-xl-inline {
display: inline !important; }
.d-xl-inline-block {
display: inline-block !important; }
.d-xl-block {
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file is "style.css - ja...".

The Explorer sidebar on the left lists open editors, JAKSICGLASS project files, and an outline. The main editor pane displays the content of "style.css".

```
css > # style.css > .list-group-item-info.list-group-item-action:ho...  
5196 | display: flex !important;  
5197 | .d-sm-inline-flex {  
5198 |   display: -webkit-inline-box !important;  
5199 |   display: -ms-inline-flexbox !important;  
5200 |   display: inline-flex !important; } }  
5201  
5202 @media (min-width: 768px) {  
5203   .d-md-none {  
5204     display: none !important; }  
5205   .d-md-inline {  
5206     display: inline !important; }  
5207   .d-md-inline-block {  
5208     display: inline-block !important; }  
5209   .d-md-block {  
5210     display: block !important; }  
5211   .d-md-table {  
5212     display: table !important; }  
5213   .d-md-table-row {  
5214     display: table-row !important; }  
5215   .d-md-table-cell {  
5216     display: table-cell !important; }  
5217   .d-md-flex {  
5218     display: -webkit-box !important;  
5219     display: -ms-flexbox !important;  
5220     display: flex !important; }  
5221   .d-md-inline-flex {  
5222     display: -webkit-inline-box !important;  
5223     display: -ms-inline-flexbox !important;  
5224     display: inline-flex !important; } }  
5225  
5226 @media (min-width: 992px) {  
5227   .d-lg-none {  
5228     display: none !important; }  
5229   .d-lg-inline {  
5230     display: inline !important; }  
5231   .d-lg-inline-block {  
5232     display: inline-block !important; }
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The title bar reads "style.css - ja...". The left sidebar has icons for file, search, and refresh. The main area has tabs for "index.html", "contact.html", "sitemap.xml", and "style.css". The "EXPLORER" tab is selected, showing the file structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The "style.css" file content is displayed on the right, with line numbers 5171 to 5208. The code includes media queries for different screen widths and various CSS properties like display, flex, and inline-block.

```
display: flex !important; }

.d-inline-flex {
display: -webkit-inline-box !important;
display: -ms-inline-flexbox !important;
display: inline-flex !important; }

@media (min-width: 576px) {
.d-sm-none {
display: none !important; }
.d-sm-inline {
display: inline !important; }
.d-sm-inline-block {
display: inline-block !important; }
.d-sm-block {
display: block !important; }
.d-sm-table {
display: table !important; }
.d-sm-table-row {
display: table-row !important; }
.d-sm-table-cell {
display: table-cell !important; }
.d-sm-flex {
display: -webkit-box !important;
display: -ms-flexbox !important;
display: flex !important; }

.d-sm-inline-flex {
display: -webkit-inline-box !important;
display: -ms-inline-flexbox !important;
display: inline-flex !important; }

@media (min-width: 768px) {
.d-md-none {
display: none !important; }
.d-md-inline {
display: inline !important; }
.d-md-inline-block {
display: inline-block !important; }
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The main editor area shows the content of the selected file, style.css:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5147 .d-none {  
5148 | display: none !important; }  
5149  
5150 .d-inline {  
5151 | display: inline !important; }  
5152  
5153 .d-inline-block {  
5154 | display: inline-block !important; }  
5155  
5156 .d-block {  
5157 | display: block !important; }  
5158  
5159 .d-table {  
5160 | display: table !important; }  
5161  
5162 .d-table-row {  
5163 | display: table-row !important; }  
5164  
5165 .d-table-cell {  
5166 | display: table-cell !important; }  
5167  
5168 .d-flex {  
5169 | display: -webkit-box !important;  
5170 | display: -ms-flexbox !important;  
5171 | display: flex !important; }  
5172  
5173 .d-inline-flex {  
5174 | display: -webkit-inline-box !important;  
5175 | display: -ms-inline-flexbox !important;  
5176 | display: inline-flex !important; }  
5177  
5178 @media (min-width: 576px) {  
5179 | .d-sm-none {  
5180 | | display: none !important; }  
5181 | .d-sm-inline {  
5182 | | display: inline !important; }  
5183 | .d-sm-inline-block {
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS classes and their properties, such as .rounded-right, .rounded-bottom, .rounded-left, .rounded-circle, .rounded-0, .clearfix::after, .d-none, .d-inline, .d-inline-block, .d-block, and .d-table.

```
index.html contact.html sitemap.xml # style.css
css > # style.css > .list-group-item-info.list-group-item-action:ho
5122 border-top-right-radius: 0.25rem !important;
5123
5124 .rounded-right {
5125 border-top-right-radius: 0.25rem !important;
5126 border-bottom-right-radius: 0.25rem !important;
5127
5128 .rounded-bottom {
5129 border-bottom-right-radius: 0.25rem !important;
5130 border-bottom-left-radius: 0.25rem !important;
5131
5132 .rounded-left {
5133 border-top-left-radius: 0.25rem !important;
5134 border-bottom-left-radius: 0.25rem !important;
5135
5136 .rounded-circle {
5137 border-radius: 50% !important; }
5138
5139 .rounded-0 {
5140 border-radius: 0 !important; }
5141
5142 .clearfix::after {
5143 display: block;
5144 clear: both;
5145 content: ""; }
5146
5147 .d-none {
5148 display: none !important; }
5149
5150 .d-inline {
5151 display: inline !important; }
5152
5153 .d-inline-block {
5154 display: inline-block !important; }
5155
5156 .d-block {
5157 display: block !important; }
5158
5159 .d-table {
```

Taskbar icons include Windows, Search, Task View, Edge, File Explorer, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js (js)
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, style.css:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5085 border-bottom: 0 !important; }  
5086 .border-left-0 {  
5087 border-left: 0 !important; }  
5088 .border-primary {  
5089 border-color: #98ccfd !important; }  
5090 .border-secondary {  
5091 border-color: #6c757d !important; }  
5092 .border-success {  
5093 border-color: #28a745 !important; }  
5094 .border-info {  
5095 border-color: #17a2b8 !important; }  
5096 .border-warning {  
5097 border-color: #eec60a !important; }  
5098 .border-danger {  
5099 border-color: #f23a2e !important; }  
5100 .border-light {  
5101 border-color: #f8f9fa !important; }  
5102 .border-dark {  
5103 border-color: #343a40 !important; }  
5104 .border-white {  
5105 border-color: #fff !important; }  
5106 .rounded {  
5107 border-radius: 0.25rem !important; }  
5108 .rounded-top {  
5109 border-top-left-radius: 0.25rem !important;  
5110 border-top-right-radius: 0.25rem !important;
```

The status bar at the bottom shows 1 warning and 1 error, and includes icons for Windows, search, taskbar, and browser links.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar at the bottom indicates there are 1 warning and 1 error (W 1 E 1).

The Explorer sidebar on the left lists open editors, JAKSICGLASS project files, and an outline. The outline section shows the structure of the current file.

The main editor area displays the content of style.css. The code is a CSS file with various classes and their styles. The file has 5085 lines of code, starting from line 5048.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
5048  
5049 a.bg-dark:hover, a.bg-dark:focus,  
5050 button.bg-dark:hover,  
5051 button.bg-dark:focus {  
5052 background-color: #1d2124 !important; }  
5053  
.bg-white {  
5054 background-color: #fff !important; }  
5055  
.bg-transparent {  
5056 background-color: transparent !important; }  
5057  
.border {  
5058 border: 1px solid #dee2e6 !important; }  
5059  
.border-top {  
5060 border-top: 1px solid #dee2e6 !important; }  
5061  
.border-right {  
5062 border-right: 1px solid #dee2e6 !important; }  
5063  
.border-bottom {  
5064 border-bottom: 1px solid #dee2e6 !important; }  
5065  
.border-left {  
5066 border-left: 1px solid #dee2e6 !important; }  
5067  
.border-0 {  
5068 border: 0 !important; }  
5069  
.border-top-0 {  
5070 border-top: 0 !important; }  
5071  
.border-right-0 {  
5072 border-right: 0 !important; }  
5073  
.border-bottom-0 {  
5074 border-bottom: 0 !important; }  
5075  
5076  
5077  
5078  
5079  
5080  
5081  
5082  
5083  
5084  
5085
```

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the source code of a CSS file, specifically "style.css". The code includes various CSS rules for classes like ".bg-info", ".bg-warning", ".bg-danger", ".bg-light", and ".bg-dark". The left sidebar features the "EXPLORER" tab, which lists files and folders such as "index.html", "contact.html", "sitemap.xml", "style.css", "main.js", and several Bootstrap and jQuery files. The "OUTLINE" tab is also visible at the bottom of the sidebar.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
background-color: #1e7e34 !important; }  
.bg-info {  
background-color: #17a2b8 !important; }  
a.bg-info:hover, a.bg-info:focus,  
button.bg-info:hover,  
button.bg-info:focus {  
background-color: #117a8b !important; }  
.bg-warning {  
background-color: #eec60a !important; }  
a.bg-warning:hover, a.bg-warning:focus,  
button.bg-warning:hover,  
button.bg-warning:focus {  
background-color: #bd9d08 !important; }  
.bg-danger {  
background-color: #f23a2e !important; }  
a.bg-danger:hover, a.bg-danger:focus,  
button.bg-danger:hover,  
button.bg-danger:focus {  
background-color: #df1b0e !important; }  
.bg-light {  
background-color: #f8f9fa !important; }  
a.bg-light:hover, a.bg-light:focus,  
button.bg-light:hover,  
button.bg-light:focus {  
background-color: #dae0e5 !important; }  
.bg-dark {  
background-color: #343a40 !important; }  
a.bg-dark:hover, a.bg-dark:focus
```

File Edit Selection View Go Debug Terminal Help style.css - ja

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- main.js js

JAKSICGLASS

- css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css 2
- data
- fonts
- images
- js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

index.html contact.html sitemap.xml # style.css

```
css > # style.css > .list-group-item-info.list-group-item-action: hover
right: 15%; bottom: 20px; left: 15%; z-index: 10; padding-top: 20px; padding-bottom: 20px; color: #fff; text-align: center; }

.align-baseline { vertical-align: baseline !important; }

.align-top { vertical-align: top !important; }

.align-middle { vertical-align: middle !important; }

.align-bottom { vertical-align: bottom !important; }

.align-text-bottom { vertical-align: text-bottom !important; }

.align-text-top { vertical-align: text-top !important; }

.bg-primary { background-color: #98cccd !important; }

a.bg-primary:hover, a.bg-primary:focus, button.bg-primary:hover, button.bg-primary:focus { background-color: #74bac4 !important; }

.bg-secondary { background-color: #6c757d !important; }
```

1 1 1

Type here to search

Windows Edge File Explorer Mail Microsoft Store Mail Google Chrome

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The right pane displays the content of `style.css`. The code includes CSS rules for `index.html`, `contact.html`, and `sitemap.xml`. It also contains a large block of CSS for the `.carousel-indicators` class, which defines styling for list items in a carousel.
- Explorer Area:** The left pane shows the file structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: A section showing the outline of the current file.
- Terminal:** The bottom right corner shows the Windows taskbar with icons for File Explorer, Edge, File History, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** At the bottom left, there are status icons for battery, signal, and notifications.

The screenshot shows the Microsoft Edge browser with the developer tools open. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja".

The developer tools sidebar on the left lists "OPEN EDITORS" containing index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder named "JAKSICGLASS" containing sub-folders "css" and "js", and files like bootstrap, aos.css, and various jQuery and Bootstrap files.

The main pane displays the CSS code for "style.css". The code includes:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4901 .carousel-control-next-icon {  
4902 display: inline-block;  
4903 width: 20px;  
4904 height: 20px;  
4905 background: transparent no-repeat center center;  
4906 background-size: 100% 100%; }  
  
.carousel-control-prev-icon {  
background-image: url("data:image/svg+xml;  
  
.carousel-control-next-icon {  
background-image: url("data:image/svg+xml;  
  
.carousel-indicators {  
position: absolute;  
right: 0;  
bottom: 10px;  
left: 0;  
z-index: 15;  
display: -webkit-box;  
display: -ms-flexbox;  
display: flex;  
-webkit-box-pack: center;  
-ms-flex-pack: center;  
justify-content: center;  
padding-left: 0;  
margin-right: 15%;  
margin-left: 15%;  
list-style: none; }  
.carousel-indicators li {  
position: relative;  
-webkit-box-flex: 0;  
-ms-flex: 0 1 auto;  
flex: 0 1 auto;  
width: 30px;  
height: 3px;  
margin-right: 3px;  
margin-left: 3px;
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja".

The developer tools sidebar on the left lists "OPEN EDITORS" containing index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder named "JAKSICGLASS" containing sub-folders "css" and "js", and files like bootstrap, aos.css, and various jQuery and Bootstrap files.

The main pane displays the CSS code for "style.css". The code includes:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4901 .carousel-control-next-icon {  
4902 display: inline-block;  
4903 width: 20px;  
4904 height: 20px;  
4905 background: transparent no-repeat center center;  
4906 background-size: 100% 100%; }  
  
.carousel-control-prev-icon {  
background-image: url("data:image/svg+xml;  
  
.carousel-control-next-icon {  
background-image: url("data:image/svg+xml;  
  
.carousel-indicators {  
position: absolute;  
right: 0;  
bottom: 10px;  
left: 0;  
z-index: 15;  
display: -webkit-box;  
display: -ms-flexbox;  
display: flex;  
-webkit-box-pack: center;  
-ms-flex-pack: center;  
justify-content: center;  
padding-left: 0;  
margin-right: 15%;  
margin-left: 15%;  
list-style: none; }  
.carousel-indicators li {  
position: relative;  
-webkit-box-flex: 0;  
-ms-flex: 0 1 auto;  
flex: 0 1 auto;  
width: 30px;  
height: 3px;  
margin-right: 3px;  
margin-left: 3px;
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The address bar at the top right displays "style.css - ja...". The developer tools interface includes a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The left sidebar has icons for Explorer, Find, Tools, and Grid. The Explorer section shows "OPEN EDITORS" with files index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also lists a folder JAKSICGLASS containing sub-folders css, data, fonts, images, and js, along with various CSS and JS files. The main content area shows the CSS code for a carousel, with line numbers 4877 to 4914 on the left and the corresponding CSS properties on the right.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4877 -ms-flex-align: center;  
4878 align-items: center;  
4879 -webkit-box-pack: center;  
4880 -ms-flex-pack: center;  
4881 justify-content: center;  
4882 width: 15%;  
4883 color: #fff;  
4884 text-align: center;  
4885 opacity: 0.5; }  
4886 .carousel-control-prev:hover, .carous  
4887 .carousel-control-next: hover,  
4888 .carousel-control-next: focus {  
4889 color: #fff;  
4890 text-decoration: none;  
4891 outline: 0;  
4892 opacity: .9; }  
4893 .carousel-control-prev {  
4894 left: 0; }  
4895 .carousel-control-next {  
4896 right: 0; }  
4897 .carousel-control-prev-icon,  
4898 .carousel-control-next-icon {  
4899 display: inline-block;  
4900 width: 20px;  
4901 height: 20px;  
4902 background: transparent no-repeat center  
4903 background-size: 100% 100%; }  
4904 .carousel-control-prev-icon {  
4905 background-image: url("data:image/svg+xml;  
4906 .carousel-control-next-icon {  
4907 background-image: url("data:image/svg+xml;  
4908 .carousel-indicators {  
4909 position: absolute;  
4910 bottom: -50px;  
4911 left: 50%;  
4912 transform: translateX(-50%);  
4913 z-index: 1000; }  
4914 .carousel-indicators li {
```

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows a portion of the "style.css" file with line numbers 4828 to 4865. The code is primarily CSS for a carousel, including rules for .carousel-item-prev, .active.carousel-item-left, .carousel-fade .carousel-item, .carousel-fade .carousel-item.active, .carousel-fade .carousel-item-next, .carousel-fade .carousel-item-prev, and various transition properties. The left sidebar is the Explorer panel, showing the project structure with "OPEN EDITORS" containing "index.html", "contact.html", "sitemap.xml", "# style.css", and "main.js". It also lists "JAKSICGLASS" and "aos.css" under "css". The bottom navigation bar includes icons for Windows, search, and other browser tabs.

```
4828 .carousel-item-prev,  
4829 .active.carousel-item-left {  
4830 -webkit-transform: translate3d(-100%, 0, 0);  
4831 transform: translate3d(-100%, 0, 0); }  
4832  
4833 .carousel-fade .carousel-item {  
4834 opacity: 0;  
4835 -webkit-transition-duration: .6s;  
4836 -o-transition-duration: .6s;  
4837 transition-duration: .6s;  
4838 -webkit-transition-property: opacity;  
4839 -o-transition-property: opacity;  
4840 transition-property: opacity; }  
4841  
4842 .carousel-fade .carousel-item.active,  
4843 .carousel-fade .carousel-item-next.carousel-  
4844 .carousel-fade .carousel-item-prev.carousel-  
4845 opacity: 1; }  
4846  
4847 .carousel-fade .active.carousel-item-left,  
4848 .carousel-fade .active.carousel-item-right {  
4849 opacity: 0; }  
4850  
4851 .carousel-fade .carousel-item-next,  
4852 .carousel-fade .carousel-item-prev,  
4853 .carousel-fade .carousel-item.active,  
4854 .carousel-fade .active.carousel-item-left,  
4855 .carousel-fade .active.carousel-item-prev {  
4856 -webkit-transform: translateX(0);  
4857 -ms-transform: translateX(0);  
4858 transform: translateX(0); }  
4859 @supports ((-webkit-transform-style: preser  
4860 .carousel-fade .carousel-item-next,  
4861 .carousel-fade .carousel-item-prev,  
4862 .carousel-fade .carousel-item.active,  
4863 .carousel-fade .active.carousel-item-left,  
4864 .carousel-fade .active.carousel-item-prev {  
4865 -webkit-transform: translate3d(0, 0, 0); }
```

The screenshot shows a Windows desktop environment. In the center is a Microsoft Edge browser window displaying a file from a local file system. The address bar at the top of the browser reads "style.css - j...". The browser's interface includes a back button, forward button, and a search/address bar.

The main content area of the browser displays the following CSS code:

```
index.html      contact.html      sitemap.xml      # style.css - j...
css > # style.css > .list-group-item-info.list-group-item-action:ho...
    .carousel-item-next,
    .carousel-item-prev {
        display: block;
        -webkit-transition: -webkit-transform 0.6s;
        transition: -webkit-transform 0.6s ease;
        -o-transition: transform 0.6s ease;
        transition: transform 0.6s ease, -webkit-t...
        @media screen and (prefers-reduced-motion:...
            .carousel-item.active,
            .carousel-item-next,
            .carousel-item-prev {
                -webkit-transition: none;
                -o-transition: none;
                transition: none; } }

.carousel-item-next,
.carousel-item-prev {
    position: absolute;
    top: 0; }

.carousel-item-next.carousel-item-left,
.carousel-item-prev.carousel-item-right {
    -webkit-transform: translateX(0);
    -ms-transform: translateX(0);
    transform: translateX(0); }
    @supports (-webkit-transform-style: pres...
        .carousel-item-next.carousel-item-left,
        .carousel-item-prev.carousel-item-right {
            -webkit-transform: translate3d(0, 0, 0);
            transform: translate3d(0, 0, 0); } }


.carousel-item-next,
.active.carousel-item-right {
    -webkit-transform: translateX(100%);
    -ms-transform: translateX(100%);
    transform: translateX(100%); }
    @supports (-webkit-transform-style: pres...
```

To the left of the browser window, the Windows taskbar is visible, showing icons for File Explorer, a search bar, and several pinned application icons including Microsoft Edge, File Explorer, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser's developer tools with the CSS tab selected. The left sidebar displays the file structure and open editors. The main pane shows a snippet of CSS for a popover component, specifically targeting the ".list-group-item-action: hover" selector.

```
css > # style.css > .list-group-item-info.list-group-item-action: hover  
left: 50%;  
display: block;  
width: 1rem;  
margin-left: -0.5rem;  
content: "";  
border-bottom: 1px solid #f7f7f7; }  
  
.bs-popover-left, .bs-popover-auto[x-placement=" left"] {  
margin-right: 0.5rem; }  
.bs-popover-left .arrow, .bs-popover-auto[x-placement=" left"] .arrow {  
right: calc((0.5rem + 1px) * -1);  
width: 0.5rem;  
height: 1rem;  
margin: 0.3rem 0; }  
.bs-popover-left .arrow::before, .bs-popover-left .arrow::after, .bs-popover-auto[x-placement=" left"] .arrow::before, .bs-popover-auto[x-placement=" left"] .arrow::after {  
border-width: 0.5rem 0 0.5rem 0.5rem; }  
.bs-popover-left .arrow::before, .bs-popover-left .arrow::after, .bs-popover-auto[x-placement=" left"] .arrow::before, .bs-popover-auto[x-placement=" left"] .arrow::after {  
right: 0;  
border-left-color: rgba(0, 0, 0, 0.25); }  
.bs-popover-left .arrow::after, .bs-popover-left .arrow::before, .bs-popover-auto[x-placement=" left"] .arrow::after, .bs-popover-auto[x-placement=" left"] .arrow::before {  
right: 1px;  
border-left-color: #fff; }  
  
.popover-header {  
padding: 0.5rem 0.75rem;  
margin-bottom: 0;  
font-size: 1rem;  
color: inherit;  

```

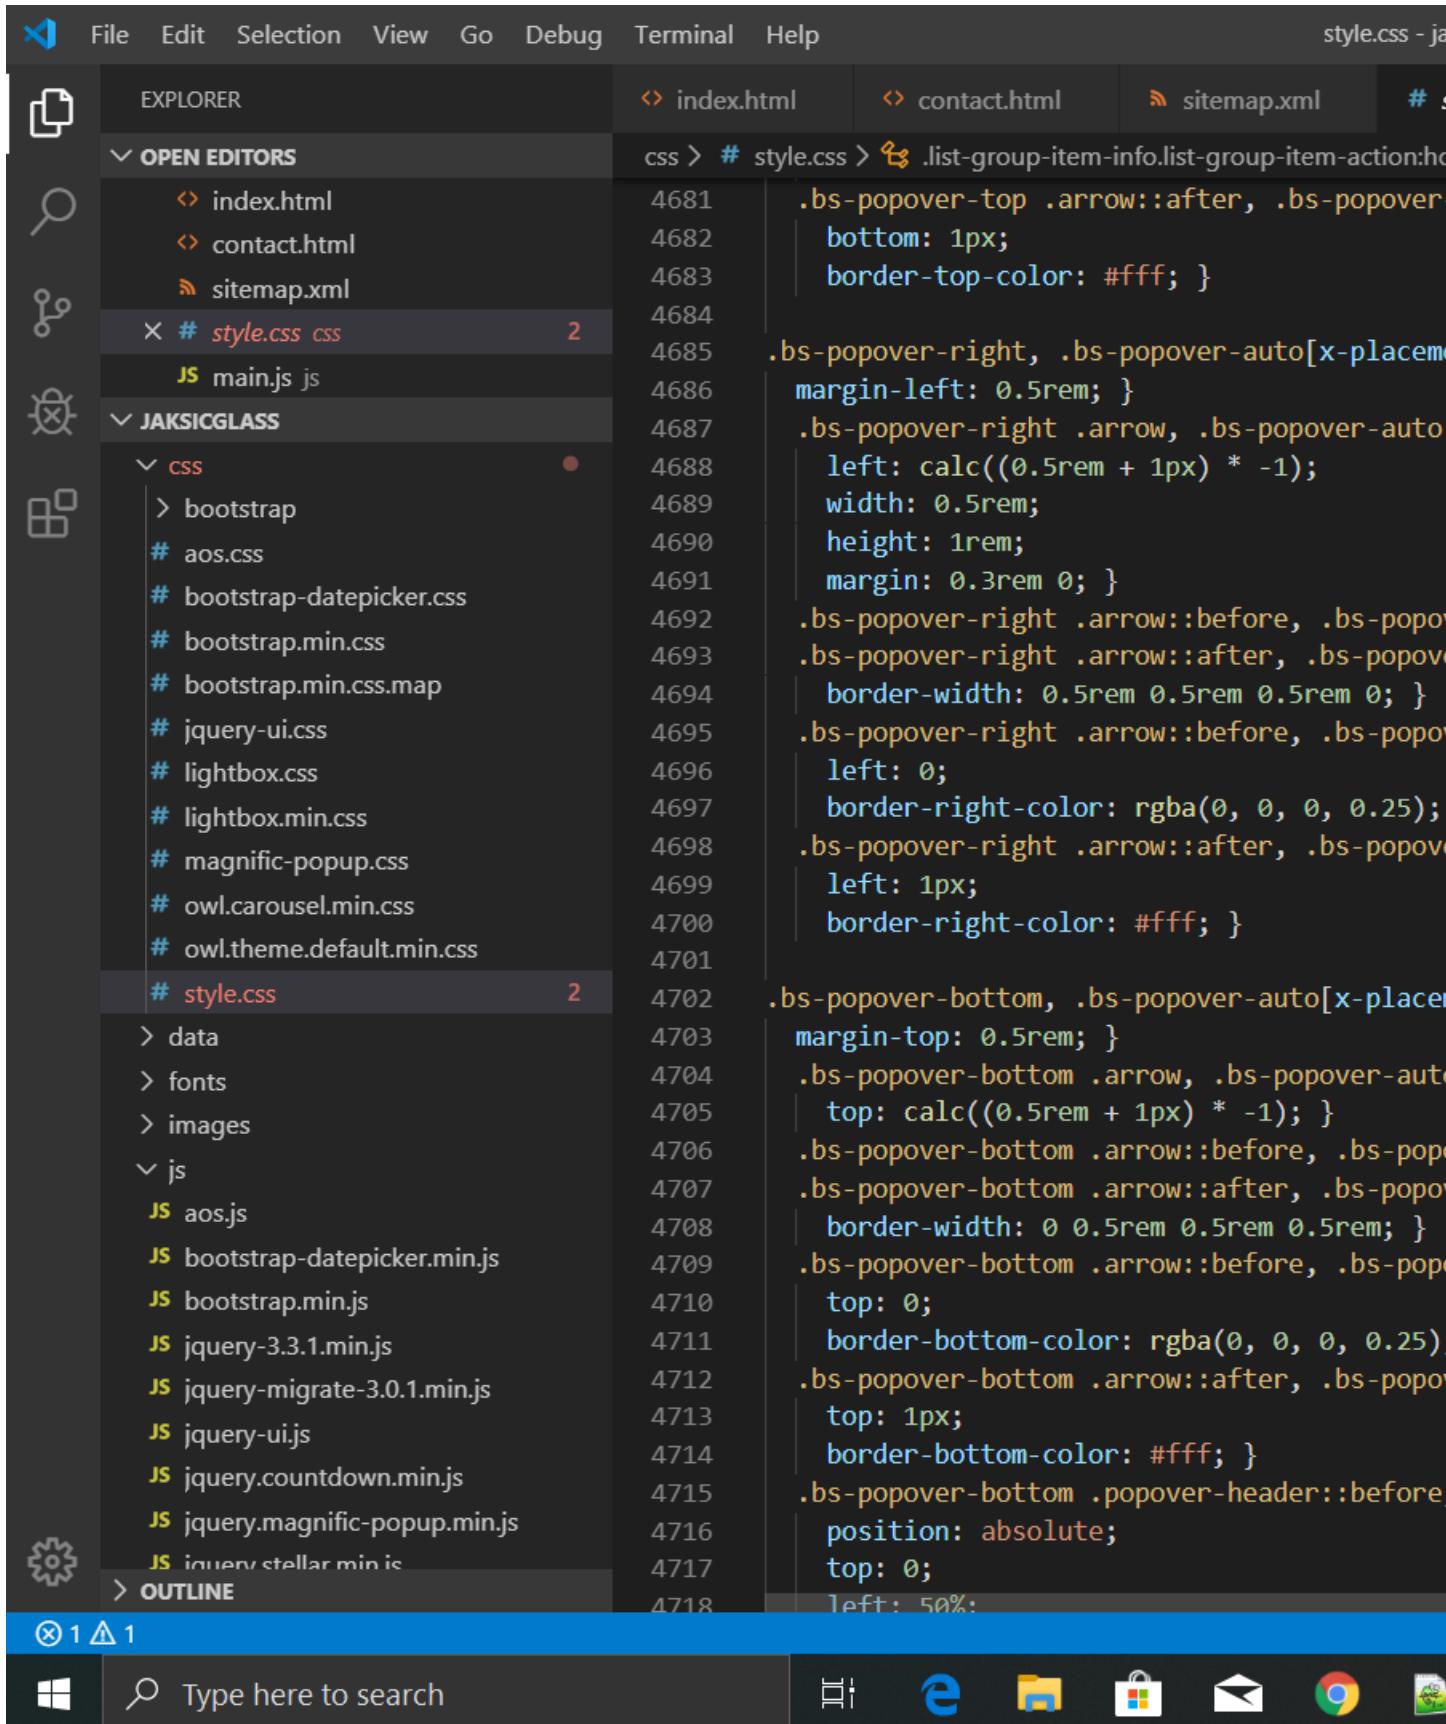

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes Bootstrap's popover styling for various placement types (top, right, bottom, left) and its arrow components.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`, `contact.html`, `sitemap.xml`
 - `# style.css` (selected, 2 changes)
 - `main.js`
 - JAKSICGLASS** folder
 - css** folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css` (selected, 2 changes)
 - `data`
 - `fonts`
 - `images`
 - js** folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser window with the developer tools open. The tabs at the top are File, Edit, Selection, View, Go, Debug, Terminal, and Help. The active tab is style.css - ja. The left sidebar has icons for file, search, refresh, and other developer tools. The Explorer tab shows the file structure with 'OPEN EDITORS' containing index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The JAKSICGLASS folder contains sub-folders like css, js, and images, along with files such as bootstrap, aos.css, and various jQuery and Bootstrap components. The right pane displays the CSS code for style.css, starting with a rule for .list-group-item-info.list-group-item-action:ho... and continuing with rules for .popover .arrow, .popover .arrow::before, and .popover .arrow::after.

```
position: absolute;
top: 0;
left: 0;
z-index: 1060;
display: block;
max-width: 276px;
font-family: "Nunito Sans", -apple-system,
font-style: normal;
font-weight: 400;
line-height: 1.5;
text-align: left;
text-align: start;
text-decoration: none;
text-shadow: none;
text-transform: none;
letter-spacing: normal;
word-break: normal;
word-spacing: normal;
white-space: normal;
line-break: auto;
font-size: 0.875rem;
word-wrap: break-word;
background-color: #fff;
background-clip: padding-box;
border: 1px solid rgba(0, 0, 0, 0.2);
border-radius: 0.3rem; }

.popover .arrow {
    position: absolute;
    display: block;
    width: 1rem;
    height: 0.5rem;
    margin: 0 0.3rem; }

.popover .arrow::before, .popover .arrow::after {
    position: absolute;
    display: block;
    content: "";
    border-color: transparent;
    border-style: solid;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code for Bootstrap's tooltip and popover components. The code includes rules for classes like `.bs-tooltip-right`, `.bs-tooltip-bottom`, `.bs-tooltip-left`, `.tooltip-inner`, and `.popover`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css** (selected).
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE**
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser window with the developer tools open. The tabs at the top are File, Edit, Selection, View, Go, Debug, Terminal, and Help. The active tab is style.css - ja. The left sidebar has icons for file, search, refresh, and other developer tools. The Explorer tab shows the project structure with files like index.html, contact.html, sitemap.xml, style.css (selected), main.js, and various Bootstrap and jQuery files under JAKSICGLASS/css and js. The CSS tab is selected, displaying the code for style.css. The code includes media queries for different screen widths and various CSS properties for modal-dialog, modal-dialog-centered, modal-sm, tooltip, and tooltip.show classes.

```
style.css - ja

File Edit Selection View Go Debug Terminal Help style.css - ja

EXPLORER
OPEN EDITORS
index.html
contact.html
sitemap.xml
# style.css css
main.js js
JAKSICGLASS
css
bootstrap
aos.css
bootstrap-datepicker.css
bootstrap.min.css
bootstrap.min.css.map
jquery-ui.css
lightbox.css
lightbox.min.css
magnific-popup.css
owl.carousel.min.css
owl.theme.default.min.css
style.css
data
fonts
images
js
aos.js
bootstrap-datepicker.min.js
bootstrap.min.js
jquery-3.3.1.min.js
jquery-migrate-3.0.1.min.js
jquery-ui.js
jquery.countdown.min.js
jquery.magnific-popup.min.js
jquery.stellar.min.js
OUTLINE

index.html
contact.html
sitemap.xml
style.css
.list-group-item-info.list-group-item-action:ho
.modal-dialog {
    max-width: 500px;
    margin: 1.75rem auto; }
.modal-dialog-centered {
    min-height: calc(100% - (1.75rem * 2));
    .modal-dialog-centered::before {
        height: calc(100vh - (1.75rem * 2)); }
.modal-sm {
    max-width: 300px; }

@media (min-width: 992px) {
    .modal-lg {
        max-width: 800px; }

.tooltip {
    position: absolute;
    z-index: 1070;
    display: block;
    margin: 0;
    font-family: "Nunito Sans", -apple-system,
    font-style: normal;
    font-weight: 400;
    line-height: 1.5;
    text-align: left;
    text-align: start;
    text-decoration: none;
    text-shadow: none;
    text-transform: none;
    letter-spacing: normal;
    word-break: normal;
    word-spacing: normal;
    white-space: normal;
    line-break: auto;
    font-size: 0.875rem;
    word-wrap: break-word;
    opacity: 0; }

.tooltip.show {
    opacity: 0.9; }
```

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser's address bar displays "style.css - ja...". The main content area of the browser shows the source code of a CSS file, specifically "style.css".

The browser's interface includes a top navigation bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help menus. Below the menu bar is an Explorer sidebar containing icons for file operations like Open, Save, Find, and Refresh. The Explorer sidebar also lists files and folders from the current project, such as index.html, contact.html, sitemap.xml, style.css, main.js, and various Bootstrap and jQuery files.

The central content area of the browser shows the following CSS code:

```
index.html    contact.html    sitemap.xml    style.css - ja...
EXPLORER
OPEN EDITORS
  index.html      4485
  contact.html   4486
  sitemap.xml    4487
  # style.css css 4488
  main.js js      4489
  2
JAKSICGLASS
  css
    bootstrap      4492
    aos.css        4493
    bootstrap-datepicker.css 4494
    bootstrap.min.css 4495
    bootstrap.min.css.map 4496
    jquery-ui.css 4497
    lightbox.css   4498
    lightbox.min.css 4499
    magnific-popup.css 4500
    owl.carousel.min.css 4501
    owl.theme.default.min.css 4502
    style.css       4503
    2
  data          4504
  fonts         4505
  images        4506
  js
    aos.js        4507
    bootstrap-datepicker.min.js 4508
    bootstrap.min.js 4509
    jquery-3.3.1.min.js 4510
    jquery-migrate-3.0.1.min.js 4511
    jquery-ui.js 4512
    jquery.countdown.min.js 4513
    jquery.magnific-popup.min.js 4514
    jquery.stellar.min.js 4515
  OUTLINE
  1 1

css > # style.css > .list-group-item-info.list-group-item-action:ho...
  .list-group-item-action:ho...
    -ms-flex-align: start;
    align-items: flex-start;
    -webkit-box-pack: justify;
    -ms-flex-pack: justify;
    justify-content: space-between;
    padding: 1rem;
    border-bottom: 1px solid #e9ecef;
    border-top-left-radius: 0.3rem;
    border-top-right-radius: 0.3rem; }
    .modal-header .close {
      padding: 1rem;
      margin: -1rem -1rem -1rem auto; }

    .modal-title {
      margin-bottom: 0;
      line-height: 1.5; }

    .modal-body {
      position: relative;
      -webkit-box-flex: 1;
      -ms-flex: 1 1 auto;
      flex: 1 1 auto;
      padding: 1rem; }

    .modal-footer {
      display: -webkit-box;
      display: -ms-flexbox;
      display: flex;
      -webkit-box-align: center;
      -ms-flex-align: center;
      align-items: center;
      -webkit-box-pack: end;
      -ms-flex-pack: end;
      justify-content: flex-end;
      padding: 1rem;
      border-top: 1px solid #e9ecef; }
      .modal-footer > :not(:first-child) {
        margin-left: .25rem; }
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja...".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes several CSS classes and their properties, such as .modal and .modal-dialog, with line numbers from 4399 to 4436.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4399    overflow-x: hidden;  
4400    overflow-y: auto; }  
4401  
4402 .modal {  
4403   position: fixed;  
4404   top: 0;  
4405   right: 0;  
4406   bottom: 0;  
4407   left: 0;  
4408   z-index: 1050;  
4409   display: none;  
4410   overflow: hidden;  
4411   outline: 0; }  
4412  
4413 .modal-dialog {  
4414   position: relative;  
4415   width: auto;  
4416   margin: 0.5rem;  
4417   pointer-events: none; }  
4418 .modal.fade .modal-dialog {  
4419   -webkit-transition: -webkit-transform 0.3s ease-in-out;  
4420   transition: -webkit-transform 0.3s ease-in-out;  
4421   -o-transition: transform 0.3s ease-out;  
4422   transition: transform 0.3s ease-out, -webkit-transform 0.3s ease-in-out;  
4423   -webkit-transform: translate(0, -25%);  
4424   -ms-transform: translate(0, -25%);  
4425   transform: translate(0, -25%); }  
4426 @media screen and (prefers-reduced-motion: no)  
4427   .modal.fade .modal-dialog {  
4428     -webkit-transition: none;  
4429     -o-transition: none;  
4430     transition: none; } }  
4431 .modal.show .modal-dialog {  
4432   -webkit-transform: translate(0, 0);  
4433   -ms-transform: translate(0, 0);  
4434   transform: translate(0, 0); }  
4435  
4436
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes several CSS classes and their properties, such as .modal and .modal-dialog, with line numbers from 4399 to 4436.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4399    overflow-x: hidden;  
4400    overflow-y: auto; }  
4401  
4402 .modal {  
4403   position: fixed;  
4404   top: 0;  
4405   right: 0;  
4406   bottom: 0;  
4407   left: 0;  
4408   z-index: 1050;  
4409   display: none;  
4410   overflow: hidden;  
4411   outline: 0; }  
4412  
4413 .modal-dialog {  
4414   position: relative;  
4415   width: auto;  
4416   margin: 0.5rem;  
4417   pointer-events: none; }  
4418 .modal.fade .modal-dialog {  
4419   -webkit-transition: -webkit-transform 0.3s ease-in-out;  
4420   transition: -webkit-transform 0.3s ease-in-out;  
4421   -o-transition: transform 0.3s ease-out;  
4422   transition: transform 0.3s ease-out, -webkit-transform 0.3s ease-in-out;  
4423   -webkit-transform: translate(0, -25%);  
4424   -ms-transform: translate(0, -25%);  
4425   transform: translate(0, -25%); }  
4426 @media screen and (prefers-reduced-motion: no)  
4427   .modal.fade .modal-dialog {  
4428     -webkit-transition: none;  
4429     -o-transition: none;  
4430     transition: none; } }  
4431 .modal.show .modal-dialog {  
4432   -webkit-transform: translate(0, 0);  
4433   -ms-transform: translate(0, 0);  
4434   transform: translate(0, 0); }  
4435  
4436
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes several CSS classes and their properties, such as .modal and .modal-dialog, with line numbers from 4399 to 4436.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4399    overflow-x: hidden;  
4400    overflow-y: auto; }  
4401  
4402 .modal {  
4403   position: fixed;  
4404   top: 0;  
4405   right: 0;  
4406   bottom: 0;  
4407   left: 0;  
4408   z-index: 1050;  
4409   display: none;  
4410   overflow: hidden;  
4411   outline: 0; }  
4412  
4413 .modal-dialog {  
4414   position: relative;  
4415   width: auto;  
4416   margin: 0.5rem;  
4417   pointer-events: none; }  
4418 .modal.fade .modal-dialog {  
4419   -webkit-transition: -webkit-transform 0.3s ease-in-out;  
4420   transition: -webkit-transform 0.3s ease-in-out;  
4421   -o-transition: transform 0.3s ease-out;  
4422   transition: transform 0.3s ease-out, -webkit-transform 0.3s ease-in-out;  
4423   -webkit-transform: translate(0, -25%);  
4424   -ms-transform: translate(0, -25%);  
4425   transform: translate(0, -25%); }  
4426 @media screen and (prefers-reduced-motion: no)  
4427   .modal.fade .modal-dialog {  
4428     -webkit-transition: none;  
4429     -o-transition: none;  
4430     transition: none; } }  
4431 .modal.show .modal-dialog {  
4432   -webkit-transform: translate(0, 0);  
4433   -ms-transform: translate(0, 0);  
4434   transform: translate(0, 0); }  
4435  
4436
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes several CSS classes and their properties, such as .modal and .modal-dialog, with line numbers from 4399 to 4436.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho  
4399    overflow-x: hidden;  
4400    overflow-y: auto; }  
4401  
4402 .modal {  
4403   position: fixed;  
4404   top: 0;  
4405   right: 0;  
4406   bottom: 0;  
4407   left: 0;  
4408   z-index: 1050;  
4409   display: none;  
4410   overflow: hidden;  
4411   outline: 0; }  
4412  
4413 .modal-dialog {  
4414   position: relative;  
4415   width: auto;  
4416   margin: 0.5rem;  
4417   pointer-events: none; }  
4418 .modal.fade .modal-dialog {  
4419   -webkit-transition: -webkit-transform 0.3s ease-in-out;  
4420   transition: -webkit-transform 0.3s ease-in-out;  
4421   -o-transition: transform 0.3s ease-out;  
4422   transition: transform 0.3s ease-out, -webkit-transform 0.3s ease-in-out;  
4423   -webkit-transform: translate(0, -25%);  
4424   -ms-transform: translate(0, -25%);  
4425   transform: translate(0, -25%); }  
4426 @media screen and (prefers-reduced-motion: no)  
4427   .modal.fade .modal-dialog {  
4428     -webkit-transition: none;  
4429     -o-transition: none;  
4430     transition: none; } }  
4431 .modal.show .modal-dialog {  
4432   -webkit-transform: translate(0, 0);  
4433   -ms-transform: translate(0, 0);  
4434   transform: translate(0, 0); }  
4435  
4436
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code defines several CSS classes for list items in a group:

```
4301 .list-group-item-secondary.list-group-item-action:active {  
4302   color: #383d41;  
4303   background-color: #c8cbcf; }  
4304 .list-group-item-secondary.list-group-item-action:disabled {  
4305   color: #fff;  
4306   background-color: #383d41;  
4307   border-color: #383d41; }  
4308  
4309 .list-group-item-success {  
4310   color: #155724;  
4311   background-color: #c3e6cb; }  
4312 .list-group-item-success.list-group-item-action:active {  
4313   color: #155724;  
4314   background-color: #b1dfbb; }  
4315 .list-group-item-success.list-group-item-action:disabled {  
4316   color: #fff;  
4317   background-color: #155724;  
4318   border-color: #155724; }  
4319  
4320 .list-group-item-info {  
4321   color: #0c5460;  
4322   background-color: #bee5eb; }  
4323 .list-group-item-info.list-group-item-action:active {  
4324   color: #0c5460;  
4325   background-color: #abdde5; }  
4326 .list-group-item-info.list-group-item-action:disabled {  
4327   color: #fff;  
4328   background-color: #0c5460;  
4329   border-color: #0c5460; }  
4330  
4331 .list-group-item-warning {  
4332   color: #7c6705;  
4333   background-color: #faefba; }  
4334 .list-group-item-warning.list-group-item-action:active {  
4335   color: #7c6705;  
4336   background-color: #f8e9a2; }  
4337 .list-group-item-warning.list-group-item-action:disabled {  
4338   color: #fff;
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Microsoft Edge browser window with a code editor interface. The title bar reads "style.css - ja...". The left sidebar has icons for File, Edit, Selection, View, Go, Debug, Terminal, Help, and a search bar. The main area has tabs for "index.html", "contact.html", "sitemap.xml", and "# style.css". The "OPEN EDITORS" section lists "index.html", "contact.html", "sitemap.xml", "# style.css" (selected), and "main.js". The "JAKSICGLASS" folder contains "css" and "js" subfolders. The "css" folder includes files like "bootstrap", "aos.css", "bootstrap-datepicker.css", etc. The "js" folder includes files like "aos.js", "bootstrap-datepicker.min.js", etc. The right pane displays the content of the selected "# style.css" file, showing CSS code for Bootstrap's list-group-item classes. The code includes rules for ".list-group-item-primary", ".list-group-item-secondary", ".list-group-item-success", and ".list-group-item-info". The code editor interface includes line numbers and a status bar at the bottom.

```
css > # style.css > .list-group-item-primary
4288 color: #4f6a6e;
4289 background-color: #e2f1f3; }
4290 .list-group-item-primary.list-group-item-a
4291 color: #4f6a6e;
4292 background-color: #d0e8ec; }
4293 .list-group-item-primary.list-group-item-a
4294 color: #fff;
4295 background-color: #4f6a6e;
4296 border-color: #4f6a6e; }

.list-group-item-secondary {
4298 color: #383d41;
4299 background-color: #d6d8db; }
4300 .list-group-item-secondary.list-group-item
4301 color: #383d41;
4302 background-color: #c8cbcf; }
4303 .list-group-item-secondary.list-group-item
4304 color: #fff;
4305 background-color: #383d41;
4306 border-color: #383d41; }

.list-group-item-success {
4309 color: #155724;
4310 background-color: #c3e6cb; }
4311 .list-group-item-success.list-group-item-a
4312 color: #155724;
4313 background-color: #b1dfbb; }
4314 .list-group-item-success.list-group-item-a
4315 color: #fff;
4316 background-color: #155724;
4317 border-color: #155724; }

.list-group-item-info {
4320 color: #0c5460;
4321 background-color: #bee5eb; }
4322 .list-group-item-info.list-group-item-a
4323 color: #0c5460;
4324 background-color: #abdde5; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right-hand pane displays the content of the file `style.css`. The code is a CSS file containing rules for a list group, including styles for the first child, last child, and hover states. It also includes rules for the `.list-group-flush` class and its children.
- Explorer:** The left-hand sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Below "OPEN EDITORS" is the "JAKSICGLASS" folder, which contains:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css`
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - `OUTLINE`
- Taskbar:** At the bottom, there are icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor pane displays the content of `style.css`. The code is a CSS file defining styles for a list group, including Bootstrap's list-group class and its item-action variants.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Below "OPEN EDITORS" is the "JAKSICGLASS" folder, which contains:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css` (selected)
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - `OUTLINE`
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - j...
- Explorer:** OPEN EDITORS section shows index.html, contact.html, sitemap.xml, # style.css (selected), main.js (js). JAKSICGLASS folder contains css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Status Bar:** Shows 1 warning, 1 error, and various system icons (Windows, Search, Taskbar).

```
css > # style.css > .progress-bar
4184 -webkit-box-orient: vertical;
4185 -webkit-box-direction: normal;
4186 -ms-flex-direction: column;
4187 flex-direction: column;
4188 -webkit-box-pack: center;
4189 -ms-flex-pack: center;
4190 justify-content: center;
4191 color: #fff;
4192 text-align: center;
4193 white-space: nowrap;
4194 background-color: #98cccd;
4195 -webkit-transition: width 0.6s ease;
4196 -o-transition: width 0.6s ease;
4197 transition: width 0.6s ease; }
4198 @media screen and (prefers-reduced-motion:
4199 .progress-bar {
4200 -webkit-transition: none;
4201 -o-transition: none;
4202 transition: none; } }

.progress-bar-striped {
4203 background-image: -webkit-linear-gradient(
4204 background-image: -o-linear-gradient(45deg,
4205 background-image: linear-gradient(45deg, r
4206 background-size: 1rem 1rem; }

.progress-bar-animated {
4207 -webkit-animation: progress-bar-stripes 1s
4208 animation: progress-bar-stripes 1s linear;
4209 }

.media {
4210 display: -webkit-box;
4211 display: -ms-flexbox;
4212 display: flex;
4213 -webkit-box-align: start;
4214 -ms-flex-align: start;
4215 align-items: flex-start; }
```

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The developer tools sidebar on the left lists "OPEN EDITORS" containing "index.html", "contact.html", "sitemap.xml", "# style.css", and "main.js". Below this is the "JAKSICGLASS" folder, which contains a "css" folder with numerous files like "bootstrap", "aos.css", "bootstrap-datepicker.css", etc., and a "# style.css" file. The main content area shows the following CSS code:

```
css > # style.css > @keyframes progress-bar-stripes
4155 .alert-dark .alert-link {
4156 |   color: #040505; }

4158 @-webkit-keyframes progress-bar-stripes {
4159   from {
4160     background-position: 1rem 0; }
4161   to {
4162     background-position: 0 0; } }

4164 @keyframes progress-bar-stripes {
4165   from {
4166     background-position: 1rem 0; }
4167   to {
4168     background-position: 0 0; } }

4170 .progress {
4171   display: -webkit-box;
4172   display: -ms-flexbox;
4173   display: flex;
4174   height: 1rem;
4175   overflow: hidden;
4176   font-size: 0.75rem;
4177   background-color: #e9ecef;
4178   border-radius: 0.25rem; }

4180 .progress-bar {
4181   display: -webkit-box;
4182   display: -ms-flexbox;
4183   display: flex;
4184   -webkit-box-orient: vertical;
4185   -webkit-box-direction: normal;
4186   -ms-flex-direction: column;
4187   flex-direction: column;
4188   -webkit-box-pack: center;
4189   -ms-flex-pack: center;
4190   justify-content: center;
4191   color: #fff;
4192   text-align: center;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for alert classes (danger, light, dark) and a progress bar stripes rule. Lines 4130 to 4167 are visible.
- Explorer:** The left sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css:** (selected)
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE:** (not expanded)
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, displaying CSS code for Bootstrap alerts. The code includes rules for `.alert-success`, `.alert-info`, `.alert-warning`, `.alert-danger`, and `.alert-light`.
- Explorer:** Shows the project structure with files like `index.html`, `contact.html`, `sitemap.xml`, `style.css`, `main.js`, and numerous Bootstrap-related CSS and JS files under the `JAKSICGLASS` folder.
- Taskbar:** Shows notifications for 1 error and 1 warning, along with search and quick access icons.
- Bottom Bar:** Includes the Windows Start button, a search bar, and pinned icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.

```
css > # style.css > .alert-success
4109 | border-top-color: #b1dabb; }
4110 | .alert-success .alert-link {
4111 |   color: #0b2e13; }

4113 .alert-info {
4114   color: #0c5460;
4115   background-color: #d1ecf1;
4116   border-color: #bee5eb; }
4117 .alert-info hr {
4118   border-top-color: #abdde5; }
4119 .alert-info .alert-link {
4120   color: #062c33; }

4122 .alert-warning {
4123   color: #7c6705;
4124   background-color: #fcf4ce;
4125   border-color: #faefba; }
4126 .alert-warning hr {
4127   border-top-color: #f8e9a2; }
4128 .alert-warning .alert-link {
4129   color: #4b3e03; }

4131 .alert-danger {
4132   color: #7e1e18;
4133   background-color: #fcd8d5;
4134   border-color: #fbc8c4; }
4135 .alert-danger hr {
4136   border-top-color: #f9b2ac; }
4137 .alert-danger .alert-link {
4138   color: #531410; }

4140 .alert-light {
4141   color: #818182;
4142   background-color: #fefefe;
4143   border-color: #fdfdfe; }
4144 .alert-light hr {
4145   border-top-color: #ecefef; }
4146 .alert-light .alert-link {
```

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser's address bar displays "style.css - ja...". The main content area of the browser shows a portion of a CSS file with line numbers from 4070 to 4107. The CSS code includes various alert styles like .alert-primary, .alert-secondary, and .alert-success. The browser's interface includes a back button, forward button, and a search bar at the bottom.

```
css > # style.css > .alert-dismissible .close  
4070  
4071 .alert-heading {  
4072   color: inherit; }  
4073  
4074 .alert-link {  
4075   font-weight: 700; }  
4076  
4077 .alert-dismissible {  
4078   padding-right: 4rem; }  
4079 .alert-dismissible .close {  
4080   position: absolute;  
4081   top: 0;  
4082   right: 0;  
4083   padding: 0.75rem 1.25rem;  
4084   color: inherit; }  
4085  
4086 .alert-primary {  
4087   color: #4f6a6e;  
4088   background-color: #eaf5f6;  
4089   border-color: #e2f1f3; }  
4090 .alert-primary hr {  
4091   border-top-color: #d0e8ec; }  
4092 .alert-primary .alert-link {  
4093   color: #3a4d50; }  
4094  
4095 .alert-secondary {  
4096   color: #383d41;  
4097   background-color: #e2e3e5;  
4098   border-color: #d6d8db; }  
4099 .alert-secondary hr {  
4100   border-top-color: #c8cbcf; }  
4101 .alert-secondary .alert-link {  
4102   color: #202326; }  
4103  
4104 .alert-success {  
4105   color: #155724;  
4106   background-color: #d4edda; }  
4107   border-color: #c3e6cb; }
```

The screenshot shows a Microsoft Edge browser window with a code editor interface. The title bar reads "style.css - ja...". The left sidebar has icons for File, Edit, Selection, View, Go, Debug, Terminal, Help, and a search bar. The main area has tabs for "index.html", "contact.html", "sitemap.xml", and "# style.css". The "OPEN EDITORS" section lists "index.html", "contact.html", "sitemap.xml", "# style.css" (selected), and "main.js". The "JAKSICGLASS" section contains a "css" folder with numerous files like "bootstrap", "aos.css", "bootstrap-datepicker.css", etc., and a "# style.css" file. The right pane displays the content of the selected "# style.css" file, showing CSS code with line numbers from 4041 to 4078.

```
css > # style.css > .badge-dark[href]:hover
4041
4042 .badge-dark {
4043   color: #fff;
4044   background-color: #343a40; }
4045 .badge-dark[href]:hover, .badge-dark[href]
4046   color: #fff;
4047   text-decoration: none;
4048   background-color: #1d2124; }

.jumbotron {
4049   padding: 2rem 1rem;
4050   margin-bottom: 2rem;
4051   background-color: #e9ecef;
4052   border-radius: 0.3rem; }
4053 @media (min-width: 576px) {
4054   .jumbotron {
4055     padding: 4rem 2rem; } }

.jumbotron-fluid {
4056   padding-right: 0;
4057   padding-left: 0;
4058   border-radius: 0; }

.alert {
4059   position: relative;
4060   padding: 0.75rem 1.25rem;
4061   margin-bottom: 1rem;
4062   border: 1px solid transparent;
4063   border-radius: 0.25rem; }

.alert-heading {
4064   color: inherit; }

.alert-link {
4065   font-weight: 700; }

.alert-dismissible {
4066   padding-right: 4rem; }
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja". The left sidebar has icons for Explorer, Find, Open, and Outline. The Explorer section shows "OPEN EDITORS" with files index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder "JAKSICGLASS" containing css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js). The "OUTLINE" section is also visible. The main pane displays the CSS code for "style.css".

```
css > # style.css > .badge-secondary[href]:hover
4011   color: #fff;
4012   background-color: #17a2b8; }
4013 .badge-info[href]:hover, .badge-info[href]
4014   color: #fff;
4015   text-decoration: none;
4016   background-color: #117a8b; }

4017
4018 .badge-warning {
4019   color: #212529;
4020   background-color: #eec60a; }
4021 .badge-warning[href]:hover, .badge-warning[
4022   color: #212529;
4023   text-decoration: none;
4024   background-color: #bd9d08; }

4025
4026 .badge-danger {
4027   color: #fff;
4028   background-color: #f23a2e; }
4029 .badge-danger[href]:hover, .badge-danger[
4030   color: #fff;
4031   text-decoration: none;
4032   background-color: #df1b0e; }

4033
4034 .badge-light {
4035   color: #212529;
4036   background-color: #f8f9fa; }
4037 .badge-light[href]:hover, .badge-light[
4038   color: #212529;
4039   text-decoration: none;
4040   background-color: #dae0e5; }

4041
4042 .badge-dark {
4043   color: #fff;
4044   background-color: #343a40; }
4045 .badge-dark[href]:hover, .badge-dark[href]
4046   color: #fff;
4047   text-decoration: none;
4048   background-color: #1d2124; }
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja...". The left sidebar has icons for Explorer, Find, Tools, and Grid. The Explorer section shows "OPEN EDITORS" with index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also lists files under "JAKSICGLASS" such as bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, and style.css. The main pane displays the CSS code for style.css, starting with a large block of rules for ".badge" and ".btn .badge", followed by ".badge-pill", ".badge-primary", ".badge-secondary", and ".badge-success". The code uses a mix of standard CSS properties and some custom classes like ".page-item:last-child .page-link" and ".pagination-sm". Line numbers 3963 to 4000 are visible on the left side of the code.

```
css > # style.css > .pagination-sm .page-item:last-child .page-link  
3963  
3964 .badge {  
3965 display: inline-block;  
3966 padding: 0.25em 0.4em;  
3967 font-size: 75%;  
3968 font-weight: 700;  
3969 line-height: 1;  
3970 text-align: center;  
3971 white-space: nowrap;  
3972 vertical-align: baseline;  
3973 border-radius: 0.25rem; }  
3974 .badge:empty {  
3975 display: none; }  
3976  
3977 .btn .badge {  
3978 position: relative;  
3979 top: -1px; }  
3980  
3981 .badge-pill {  
3982 padding-right: 0.6em;  
3983 padding-left: 0.6em;  
3984 border-radius: 10rem; }  
3985  
3986 .badge-primary {  
3987 color: #212529;  
3988 background-color: #98ccdb; }  
3989 .badge-primary[href]:hover, .badge-primary  
3990 color: #212529;  
3991 text-decoration: none;  
3992 background-color: #74bac4; }  
3993  
3994 .badge-secondary {  
3995 color: #fff;  
3996 background-color: #6c757d; }  
3997 .badge-secondary[href]:hover, .badge-second  
3998 color: #fff;  
3999 text-decoration: none;  
4000 background-color: #545b62; }
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - # style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS rules for navigation links and pagination elements, such as:

```
css > # style.css > .page-item.active .page-link
3925   .page-item.active .page-link {
3926     z-index: 1;
3927     color: #fff;
3928     background-color: #98cc00;
3929     border-color: #98cc00; }

.page-item.disabled .page-link {
3931   color: #6c757d;
3932   pointer-events: none;
3933   cursor: auto;
3934   background-color: #fff;
3935   border-color: #dee2e6; }

.pagination-lg .page-link {
3938   padding: 0.75rem 1.5rem;
3939   font-size: 1.25rem;
3940   line-height: 1.5; }

.pagination-lg .page-item:first-child .page-link {
3944   border-top-left-radius: 0.3rem;
3945   border-bottom-left-radius: 0.3rem; }

.pagination-lg .page-item:last-child .page-link {
3948   border-top-right-radius: 0.3rem;
3949   border-bottom-right-radius: 0.3rem; }

.pagination-sm .page-link {
3953   padding: 0.25rem 0.5rem;
3954   font-size: 0.875rem;
3955   line-height: 1.5; }

.pagination-sm .page-item:first-child .page-link {
3959   border-top-left-radius: 0.2rem;
3960   border-bottom-left-radius: 0.2rem; }

.pagination-sm .page-item:last-child .page-link {
3964   border-top-right-radius: 0.2rem;
3965   border-bottom-right-radius: 0.2rem; }
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser's developer tools open, specifically the 'Elements' tab. The left sidebar displays the 'EXPLORER' view with a tree of files and folders. The 'OPEN EDITORS' section lists several files: index.html, contact.html, sitemap.xml, style.css (which is currently selected), and main.js. Below this, there's a folder for 'JAKSICGLASS' containing numerous CSS and JS files. The right pane shows the source code for the selected 'style.css' file. The code is a CSS stylesheet with various rules for classes like .page-link, .page-link:hover, .page-link:focus, .page-item:first-child .page-link, .page-item:last-child .page-link, and .page-item.active .page-link. The code uses a mix of standard CSS properties and some vendor-specific properties like -webkit-box-shadow.

```
css > # style.css > .page-link:hover
3888 display: flex;
3889 padding-left: 0;
3890 list-style: none;
3891 border-radius: 0.25rem; }

3892 .page-link {
3893 position: relative;
3894 display: block;
3895 padding: 0.5rem 0.75rem;
3896 margin-left: -1px;
3897 line-height: 1.25;
3898 color: #98cccd;
3899 background-color: #fff;
3900 border: 1px solid #dee2e6; }

3901 .page-link:hover {
3902 z-index: 2;
3903 color: #62b1bc;
3904 text-decoration: none;
3905 background-color: #e9ecf;
3906 border-color: #dee2e6; }

3907 .page-link:focus {
3908 z-index: 2;
3909 outline: 0;
3910 -webkit-box-shadow: 0 0 0 0.2rem rgba(152, 204, 240, 0.2);
3911 box-shadow: 0 0 0 0.2rem rgba(152, 204, 240, 0.2); }

3912 .page-link:not(:disabled):not(.disabled) {
3913 cursor: pointer; }

3914 .page-item:first-child .page-link {
3915 margin-left: 0;
3916 border-top-left-radius: 0.25rem;
3917 border-bottom-left-radius: 0.25rem; }

3918 .page-item:last-child .page-link {
3919 border-top-right-radius: 0.25rem;
3920 border-bottom-right-radius: 0.25rem; }

3921 .page-item.active .page-link {
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes CSS rules for a breadcrumb navigation and a page-link class. Lines 3866 to 3903 are visible.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - # style.css** (selected, 2 changes)
 - main.js** (JS)
 - JAKSICGLASS** folder
 - css** folder
 - > bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css** (2 changes)
 - > data
 - > fonts
 - > images
 - js** folder
 - JS** aos.js
 - JS** bootstrap-datepicker.min.js
 - JS** bootstrap.min.js
 - JS** jquery-3.3.1.min.js
 - JS** jquery-migrate-3.0.1.min.js
 - JS** jquery-ui.js
 - JS** jquery.countdown.min.js
 - JS** jquery.magnific-popup.min.js
 - JS** jquery.stellar.min.js
- Taskbar:** Shows 1 error and 1 warning. Includes icons for Windows, search, task switching, and system notifications.
- Bottom Bar:** Icons for File Explorer, Terminal, Taskbar, and browser links (Edge, Google Chrome).

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser displays a CSS file from a local file system. The file path is shown in the address bar as "style.css - j...".

The browser's status bar indicates there are 1 error and 1 warning. The taskbar at the bottom shows icons for File Explorer, Edge, File Explorer again, Mail, and Google Chrome.

The main content area of the browser shows the following CSS code:

```
css > # style.css > {} @media (min-width: 576px) > .card-column {  
    -webkit-column-count: 3;  
    column-count: 3;  
    -webkit-column-gap: 1.25rem;  
    column-gap: 1.25rem;  
    orphans: 1;  
    widows: 1; }  
.card-columns .card {  
    display: inline-block;  
    width: 100%; } }  
  
.accordion .card:not(:first-of-type):not(:last-of-type) {  
    border-bottom: 0;  
    border-radius: 0; }  
  
.accordion .card:not(:first-of-type) .card-header {  
    border-radius: 0; }  
  
.accordion .card:first-of-type {  
    border-bottom: 0;  
    border-bottom-right-radius: 0;  
    border-bottom-left-radius: 0; }  
  
.accordion .card:last-of-type {  
    border-top-left-radius: 0;  
    border-top-right-radius: 0; }  
  
.breadcrumb {  
    display: -webkit-box;  
    display: -ms-flexbox;  
    display: flex;  
    -ms-flex-wrap: wrap;  
    flex-wrap: wrap;  
    padding: 0.75rem 1rem;  
    margin-bottom: 1rem;  
    list-style: none;  
    background-color: #e9ecef;  
    border-radius: 0.25rem; }
```

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser displays a CSS file, specifically 'style.css', in a code editor interface.

File **Edit** **Selection** **View** **Go** **Debug** **Terminal** **Help** style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css 2
- main.js js

JAKSICGLASS

- css
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css 2
- data
- fonts
- images
- js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

index.html contact.html sitemap.xml # style.css

```
css > # style.css > {} @media (min-width: 576px) { .card-group > .card:first-child .card-group > .card:last-child { border-bottom-right-radius: 0; } .card-group > .card:last-child { border-top-left-radius: 0; border-bottom-left-radius: 0; } .card-group > .card:last-child .card-group > .card:last-child .card > .card:last-child { border-top-left-radius: 0; } .card-group > .card:last-child .card-group > .card:last-child .card > .card:last-child { border-bottom-left-radius: 0; } .card-group > .card:only-child { border-radius: 0.25rem; } .card-group > .card:only-child .card > .card:only-child .card > .card:only-child { border-top-left-radius: 0.25rem; border-top-right-radius: 0.25rem; } .card-group > .card:only-child .card > .card:only-child .card > .card:only-child { border-bottom-right-radius: 0.25rem; border-bottom-left-radius: 0.25rem; } .card-group > .card:not(:first-child) { border-radius: 0; } .card-group > .card:not(:first-child) .card > .card:not(:first-child) .card > .card:not(:first-child) { border-radius: 0; } .card-columns .card { margin-bottom: 0.75rem; } @media (min-width: 576px) { .card-columns { -webkit-column-count: 3; column-count: 3; -webkit-column-gap: 1.25rem; column-gap: 1.25rem; }}
```

⊗ 1 △ 1

Windows Start Type here to search Edge File Explorer Mail Google Chrome

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The right pane displays the content of the file `style.css`. The code defines a `.card-group` class with various styling rules for cards, including flexbox and border-radius properties. Lines 3764 to 3801 are visible.
- Explorer Panel (Left):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: (empty)
- Taskbar (Bottom):** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar (Bottom):** Shows error counts: 1 error and 1 warning.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes media queries and CSS rules for ".card-deck" and ".card-group" classes.

```
css > # style.css > {} @media (min-width: 576px) > .card-deck
3735   display: flex;
3736   -webkit-box-orient: vertical;
3737   -webkit-box-direction: normal;
3738   -ms-flex-direction: column;
3739   flex-direction: column; }
3740   .card-deck .card {
3741     margin-bottom: 15px; }
3742   @media (min-width: 576px) {
3743     .card-deck {
3744       -webkit-box-orient: horizontal;
3745       -webkit-box-direction: normal;
3746       -ms-flex-flow: row wrap;
3747       flex-flow: row wrap;
3748       margin-right: -15px;
3749       margin-left: -15px; }
3750     .card-deck .card {
3751       display: -webkit-box;
3752       display: -ms-flexbox;
3753       display: flex;
3754       -webkit-box-flex: 1;
3755       -ms-flex: 1 0 0%;
3756       flex: 1 0 0%; }
3757       margin-right: 15px;
3758       margin-bottom: 0;
3759       margin-left: 15px; }
3760   .card-group {
3761     display: -webkit-box;
3762     display: -ms-flexbox;
3763     display: flex;
3764     -webkit-box-orient: vertical;
3765     -webkit-box-direction: normal;
3766     -ms-flex-direction: column;
3767     flex-direction: column;
3768     margin-right: 15px;
3769     margin-bottom: 0;
3770     margin-left: 15px; }
3771   .flex-direction: column; }
```

The bottom taskbar shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar on the right shows "style.css - ja".

The Explorer sidebar on the left lists the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The main editor area displays the content of the selected file, style.css:

```
css > # style.css > .card-img-top
3716 padding: 1.25rem; }

3717 .card-img {
3718 width: 100%;
3719 border-radius: calc(0.25rem - 1px); }

3722 .card-img-top {
3723 width: 100%;
3724 border-top-left-radius: calc(0.25rem - 1px);
3725 border-top-right-radius: calc(0.25rem - 1px);

3727 .card-img-bottom {
3728 width: 100%;
3729 border-bottom-right-radius: calc(0.25rem - 1px);
3730 border-bottom-left-radius: calc(0.25rem - 1px);

3732 .card-deck {
3733 display: -webkit-box;
3734 display: -ms-flexbox;
3735 display: flex;
3736 -webkit-box-orient: vertical;
3737 -webkit-box-direction: normal;
3738 -ms-flex-direction: column;
3739 flex-direction: column; }

3742 .card-deck .card {
3743 margin-bottom: 15px; }

3743 @media (min-width: 576px) {
3744 .card-deck {
3745 -webkit-box-orient: horizontal;
3746 -webkit-box-direction: normal;
3747 -ms-flex-flow: row wrap;
3748 flex-flow: row wrap;
3749 margin-right: -15px;
3750 margin-left: -15px; }

3751 .card-deck .card {
3752 display: -webkit-box;
3753 display: -ms-flexbox;
3754 display: flex;
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js
 - JAKSICGLASS:**
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, style.css (selected)
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js
 - outline**- Status Bar:** ⚡ 1 △ 1, Windows icon, Search bar (Type here to search), Taskbar icons (File Explorer, Edge, File Manager, Microsoft Store, Mail, Google Chrome).

```
css > # style.css > .card-footer:last-child
3686 background-color: #rgba(0, 0, 0, 0.03);
3687 border-bottom: 1px solid #rgba(0, 0, 0, 0.12);
3688 .card-header:first-child {
3689 border-radius: calc(0.25rem - 1px) calc(0.25rem - 1px) 0 0;
3690 .card-header + .list-group .list-group-item {
3691 border-top: 0; }

3692 .card-footer {
3693 padding: 0.75rem 1.25rem;
3694 background-color: #rgba(0, 0, 0, 0.03);
3695 border-top: 1px solid #rgba(0, 0, 0, 0.12);
3696 .card-footer:last-child {
3697 border-radius: 0 0 calc(0.25rem - 1px) calc(0.25rem - 1px);
3698 }
3699 .card-header-tabs {
3700 margin-right: -0.625rem;
3701 margin-bottom: -0.75rem;
3702 margin-left: -0.625rem;
3703 border-bottom: 0; }

3704 .card-header-pills {
3705 margin-right: -0.625rem;
3706 margin-left: -0.625rem; }

3707 .card-img-overlay {
3708 position: absolute;
3709 top: 0;
3710 right: 0;
3711 bottom: 0;
3712 left: 0;
3713 padding: 1.25rem; }

3714 .card-img {
3715 width: 100%;
3716 border-radius: calc(0.25rem - 1px); }

3717 .card-img-top {
3718 width: 100%; }
```

The screenshot shows a Windows desktop environment with Visual Studio Code open. The code editor displays a CSS file named 'style.css' with the following content:

```
css > # style.css > .card-subtitle
3659 | border-bottom-left-radius: 0.25rem; }
3660 |
3661 .card-body {
3662 | -webkit-box-flex: 1;
3663 | -ms-flex: 1 1 auto;
3664 | flex: 1 1 auto;
3665 | padding: 1.25rem; }

3666 .card-title {
3667 | margin-bottom: 0.75rem; }

3668 .card-subtitle {
3669 | margin-top: -0.375rem;
3670 | margin-bottom: 0; }

3671 .card-text:last-child {
3672 | margin-bottom: 0; }

3673 .card-link:hover {
3674 | text-decoration: none; }

3675 .card-link + .card-link {
3676 | margin-left: 1.25rem; }

3677 .card-header {
3678 | padding: 0.75rem 1.25rem;
3679 | margin-bottom: 0;
3680 | background-color: #rgba(0, 0, 0, 0.03);
3681 | border-bottom: 1px solid #rgba(0, 0, 0, 0.12);
3682 |
3683 .card-header:first-child {
3684 | border-radius: calc(0.25rem - 1px) calc(0.25rem - 1px) 0 0;
3685 | .card-header + .list-group .list-group-item {
3686 | border-top: 0; }

3687 .card-footer {
3688 | padding: 0.75rem 1.25rem;
3689 | background-color: #rgba(0, 0, 0, 0.03);
3690 | border-top: 1px solid #rgba(0, 0, 0, 0.12); }
```

The Explorer sidebar shows the project structure with files like index.html, contact.html, sitemap.xml, style.css, main.js, and various Bootstrap and jQuery files. The status bar at the bottom shows 1 warning and 1 error.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code is a CSS file containing styles for cards and card bodies. It includes imports for Bootstrap and other CSS files, and defines classes for cards, card bodies, titles, and subtitles.
- Explorer:** The left pane shows the file structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: A section showing the outline of the current file.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code is a CSS file targeting Bootstrap's dark navbar.

```
css > # style.css > .navbar-dark .navbar-nav .show > .nav-link
3603
3604 .navbar-dark .navbar-brand {
3605   color: #fff;
3606 }
3607 .navbar-dark .navbar-brand:hover, .navbar-
3608   color: #fff;
3609
3610 .navbar-dark .navbar-nav .nav-link {
3611   color: #fff;
3612 }
3613 .navbar-dark .navbar-nav .nav-link:hover,
3614   color: #fff;
3615 .navbar-dark .navbar-nav .nav-link.disabled,
3616   color: #fff;
3617
3618 .navbar-dark .navbar-nav .show > .nav-link,
3619 .navbar-dark .navbar-nav .active > .nav-link,
3620 .navbar-dark .navbar-nav .nav-link.show,
3621 .navbar-dark .navbar-nav .nav-link.active {
3622   color: #fff;
3623
3624 .navbar-dark .navbar-toggler {
3625   color: #fff;
3626   border-color: #fff;
3627
3628 .navbar-dark .navbar-toggler-icon {
3629   background-image: url("data:image/svg+xml;
3630
3631 .navbar-dark .navbar-text {
3632   color: #fff;
3633 }
3634 .navbar-dark .navbar-text a {
3635   color: #fff;
3636 }
3637 .card {
3638   position: relative;
3639   display: -webkit-box;
3640   display: -ms-flexbox;
3641   display: flex;
```
- Explorer:** The left sidebar shows the file structure. Open editors include `index.html`, `contact.html`, `sitemap.xml`, `# style.css` (selected), and `main.js`. A folder named `JAKSICGLASS` contains subfolders `css` and `js`, and files like `bootstrap`, `aos.css`, `bootstrap-datepicker.css`, etc.
- Taskbar:** At the bottom, there are icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor window displays the content of `style.css`. The code is a CSS file defining styles for a navbar, including rules for .navbar-light and .navbar-dark variants.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Under "JAKSICGLASS" folder:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css` (selected)
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
- `OUTLINE`

- Taskbar:** Shows icons for File Explorer, Search, Task Manager, GitHub, Terminal, Taskbar, and Start.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of `style.css`. The code is a CSS file containing various styles for a navbar, including classes like `.navbar-expand`, `.nav-link`, and `.navbar-toggler`.
- Explorer:** The sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Under "JAKSICGLASS" folder:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `style.css`
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
- `> OUTLINE`

- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right-hand panel displays the content of the file `style.css`. The code includes media queries for different screen widths, defining styles for Bootstrap components like `.btn`, `.navbar-expand-lg`, and `.dropdown`.
- Explorer:** The left-hand sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing a subfolder `css` which includes files like bootstrap, aos.css, bootstrap-datepicker.css, etc., and a file `# style.css`.
 - OUTLINE:** Shows the outline of the current file `style.css`.
- Taskbar:** The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows notifications: $\otimes 1 \Delta 1$.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor pane displays the content of `style.css`. The code includes CSS rules for Bootstrap's responsive navigation bar, media queries for different screen widths, and specific styles for the `style.css` file.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css:** (selected)
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js (JS).
 - JAKSICGLASS:** css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), style.css (selected), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Editor Area:** The code editor displays the content of style.css, showing CSS rules for various media queries and class definitions.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .btn
3456 -ms-flex-preferred-size: auto;
3457 flex-basis: auto; }
3458 .navbar-expand-md .navbar-toggler {
3459 display: none; } }

@media (max-width: 991.98px) {
3460 .navbar-expand-lg > .container,
3461 .navbar-expand-lg > .container-fluid {
3462 padding-right: 0;
3463 padding-left: 0; } }

@media (min-width: 992px) {
3464 .navbar-expand-lg {
3465 -webkit-box-orient: horizontal;
3466 -webkit-box-direction: normal;
3467 -ms-flex-flow: row nowrap;
3468 flex-flow: row nowrap;
3469 -webkit-box-pack: start;
3470 -ms-flex-pack: start;
3471 justify-content: flex-start; }

.navbar-expand-lg .navbar-nav {
3472 -webkit-box-orient: horizontal;
3473 -webkit-box-direction: normal;
3474 -ms-flex-direction: row;
3475 flex-direction: row; }
3476 .navbar-expand-lg .navbar-nav .dropdown {
3477 position: absolute; }
3478 .navbar-expand-lg .navbar-nav .nav-link {
3479 padding-right: 0.5rem;
3480 padding-left: 0.5rem; }

.navbar-expand-lg > .container,
3481 .navbar-expand-lg > .container-fluid {
3482 -ms-flex-wrap: nowrap;
3483 flex-wrap: nowrap; }

.navbar-expand-lg .navbar-collapse {
3484 display: -webkit-box !important;
3485 display: -ms-flexbox !important;
3486 display: flex !important;
```

The screenshot shows the Microsoft Edge DevTools interface. The top navigation bar includes File, Edit, Selection, View, Go, Debug, Terminal, Help, and a tab labeled "style.css - ja". The left sidebar has icons for Explorer, Find, Tools, and Settings. The "EXPLORER" section shows "OPEN EDITORS" with files index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also lists "JAKSICGLASS" resources like bootstrap, aos.css, and various CSS and JS files. The "OUTLINE" section is partially visible at the bottom. The main content area displays the "style.css" file's source code, which includes numerous media queries and CSS rules for a responsive navbar.

```
.navbar-expand-sm .navbar-nav .nav-link {  
    padding-right: 0.5rem;  
    padding-left: 0.5rem; }  
.navbar-expand-sm > .container,  
.navbar-expand-sm > .container-fluid {  
    -ms-flex-wrap: nowrap;  
    flex-wrap: nowrap; }  
.navbar-expand-sm .navbar-collapse {  
    display: -webkit-box !important;  
    display: -ms-flexbox !important;  
    display: flex !important;  
    -ms-flex-preferred-size: auto;  
    flex-basis: auto; }  
.navbar-expand-sm .navbar-toggler {  
    display: none; } }  
@media (max-width: 767.98px) {  
    .navbar-expand-md > .container,  
    .navbar-expand-md > .container-fluid {  
        padding-right: 0;  
        padding-left: 0; } }  
@media (min-width: 768px) {  
    .navbar-expand-md {  
        -webkit-box-orient: horizontal;  
        -webkit-box-direction: normal;  
        -ms-flex-flow: row nowrap;  
        flex-flow: row nowrap;  
        -webkit-box-pack: start;  
        -ms-flex-pack: start;  
        justify-content: flex-start; }  
.navbar-expand-md .navbar-nav {  
    -webkit-box-orient: horizontal;  
    -webkit-box-direction: normal;  
    -ms-flex-direction: row;  
    flex-direction: row; }  
.navbar-expand-md .navbar-nav .dropdown {  
    position: absolute; }  
3407  
3408  
3409  
3410  
3411  
3412  
3413  
3414  
3415  
3416  
3417  
3418  
3419  
3420  
3421  
3422  
3423  
3424  
3425  
3426  
3427  
3428  
3429  
3430  
3431  
3432  
3433  
3434  
3435  
3436  
3437  
3438  
3439  
3440  
3441  
3442  
3443  
3444
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code. The code includes media queries for different screen widths, targeting Bootstrap's responsive navbar. It uses classes like `.btn`, `.container`, and `.container-fluid`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: A section showing the outline of the current file.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css:** 2 data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Editor Area:** The code editor displays the content of the style.css file, showing various CSS rules and media queries. Some lines are numbered (e.g., 3370, 3371, 3372, 3373, 3374, 3375, 3376, 3377, 3378, 3379, 3380, 3381, 3382, 3383, 3384, 3385, 3386, 3387, 3388, 3389, 3390, 3391, 3392, 3393, 3394, 3395, 3396, 3397, 3398, 3399, 3400, 3401, 3402, 3403, 3404, 3405, 3406, 3407).
- Bottom Taskbar:** Icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser with the developer tools open. The 'CSS' tab is selected in the top right corner. The left sidebar, titled 'EXPLORER', shows the file structure with 'style.css' selected. The main pane displays the CSS code for the 'style.css' file.

```
css > # style.css > .btn
      position: static;
      float: none; }

.navbar-text {
  display: inline-block;
  padding-top: 0.5rem;
  padding-bottom: 0.5rem; }

.navbar-collapse {
  -ms-flex-preferred-size: 100%;
  flex-basis: 100%;
  -webkit-box-flex: 1;
  -ms-flex-positive: 1;
  flex-grow: 1;
  -webkit-box-align: center;
  -ms-flex-align: center;
  align-items: center; }

.navbar-toggler {
  padding: 0.25rem 0.75rem;
  font-size: 1.25rem;
  line-height: 1;
  background-color: transparent;
  border: 1px solid transparent;
  border-radius: 0.25rem; }

.navbar-toggler:hover, .navbar-toggler:focus {
  text-decoration: none; }

.navbar-toggler:not(:disabled):not(.disabled) {
  cursor: pointer; }

.navbar-toggler-icon {
  display: inline-block;
  width: 1.5em;
  height: 1.5em;
  vertical-align: middle;
  content: "";
  background: no-repeat center center;
  background-color: transparent; }
```

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the CSS code for "style.css". The left sidebar has a dark theme with various icons for file operations like copy, paste, cut, and search.

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css (2)
- JS main.js js

JAKSICGLASS

css

- bootstrap
- # aos.css
- # bootstrap-datepicker.css
- # bootstrap.min.css
- # bootstrap.min.css.map
- # jquery-ui.css
- # lightbox.css
- # lightbox.min.css
- # magnific-popup.css
- # owl.carousel.min.css
- # owl.theme.default.min.css
- # style.css (2)

data

fonts

images

js

- JS aos.js
- JS bootstrap-datepicker.min.js
- JS bootstrap.min.js
- JS jquery-3.3.1.min.js
- JS jquery-migrate-3.0.1.min.js
- JS jquery-ui.js
- JS jquery.countdown.min.js
- JS jquery.magnific-popup.min.js
- JS jquery.stellar.min.js

OUTLINE

index.html contact.html sitemap.xml

```
css > # style.css > .btn
3235 .nav-link:hover, .nav-link:focus {
3236   text-decoration: none;
3237 }
3238 .nav-link.disabled {
3239   color: #6c757d;
3240 }
3241 .nav-tabs {
3242   border-bottom: 1px solid #dee2e6;
3243   .nav-tabs .nav-item {
3244     margin-bottom: -1px;
3245   }
3246   .nav-tabs .nav-link {
3247     border: 1px solid transparent;
3248     border-top-left-radius: 0.25rem;
3249     border-top-right-radius: 0.25rem;
3250   }
3251   .nav-tabs .nav-link:hover, .nav-tabs .nav-link:focus {
3252     border-color: #e9ecef #e9ecef #dee2e6;
3253   }
3254   .nav-tabs .nav-link.disabled {
3255     color: #6c757d;
3256     background-color: transparent;
3257     border-color: transparent;
3258   }
3259   .nav-tabs .nav-link.active,
3260   .nav-tabs .nav-item.show .nav-link {
3261     color: #495057;
3262     background-color: #fff;
3263     border-color: #dee2e6 #dee2e6 #fff;
3264   }
3265   .nav-tabs .dropdown-menu {
3266     margin-top: -1px;
3267     border-top-left-radius: 0;
3268     border-top-right-radius: 0;
3269   }
3270   .nav-pills .nav-link {
3271     border-radius: 0.25rem;
3272   }
3273   .nav-pills .nav-link.active,
3274   .nav-pills .show > .nav-link {
3275     color: #fff;
3276     background-color: #98ccfd;
3277   }
3278   .nav-fill .nav-item {
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of `style.css`. The code includes CSS rules for a navigation bar and tabs, along with media queries for reduced motion support. Lines 3211-3248 are visible.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing several CSS and JS files, including bootstrap, aos.css, and various theme files.
 - style.css:** The file currently being edited, showing its structure and imports.
- Status Bar:** Shows 1 error and 1 warning, a search bar, and icons for Taskbar, Edge, File Explorer, Task View, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- JS main.js js

JAKSICGLASS

- css
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css 2
 - > data
 - > fonts
 - > images
 - js
 - JS aos.js
 - JS bootstrap-datepicker.min.js
 - JS bootstrap.min.js
 - JS jquery-3.3.1.min.js
 - JS jquery-migrate-3.0.1.min.js
 - JS jquery-ui.js
 - JS jquery.countdown.min.js
 - JS jquery.magnific-popup.min.js
 - JS jquery.stellar.min.js

OUTLINE

index.html contact.html sitemap.xml # style.css

css > # style.css > .btn

3248 .nav-tabs .nav-link:hover, .nav-tabs .nav-link.active { border-color: #e9ecef; }

3249 .nav-tabs .nav-link.disabled { border-color: #6c757d; }

3250 .nav-tabs .nav-link { background-color: transparent; border-color: transparent; }

3251 .nav-tabs .nav-link.active, .nav-tabs .nav-item.show .nav-link { color: #495057; background-color: #fff; border-color: #dee2e6 #dee2e6 #fff; }

3252 .nav-tabs .dropdown-menu { margin-top: -1px; border-top-left-radius: 0; border-top-right-radius: 0; }

3253 .nav-pills .nav-link { border-radius: 0.25rem; }

3254 .nav-pills .nav-link.active, .nav-pills .show > .nav-link { color: #fff; background-color: #98cccd; }

3255 .nav-fill .nav-item { -webkit-box-flex: 1; -ms-flex: 1 1 auto; flex: 1 1 auto; text-align: center; }

3256 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3257 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3258 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3259 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3260 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3261 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3262 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3263 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3264 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3265 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3266 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3267 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3268 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3269 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3270 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3271 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3272 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3273 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3274 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3275 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3276 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3277 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3278 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3279 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3280 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3281 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3282 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3283 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

3284 .nav-justified .nav-item { -ms-flex-preferred-size: 0; flex-basis: 0; -webkit-box-flex: 1; -ms-flex-positive: 1; flex-grow: 1; text-align: center; }

⊗ 1 △ 1

Type here to search

File Explorer Taskbar

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS section shows index.html, contact.html, sitemap.xml, # style.css (selected), and JS main.js. A JAKSICGLASS folder contains a css folder with bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, and owl.theme.default.min.css. It also contains a # style.css file (selected) and data, fonts, images, and js folders with various files like aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, and jquery.stellar.min.js.
- Editor Content:** The code editor displays the contents of style.css, specifically the .btn and .navbar-brand sections.
- Status Bar:** Shows 1 warning and 1 error icon, a search bar, and icons for Taskbar, Edge, File Explorer, Mail, and Google Chrome.

```
css > # style.css > .btn
display: -ms-flexbox;
display: flex;
-ms-flex-wrap: wrap;
flex-wrap: wrap;
-webkit-box-align: center;
-ms-flex-align: center;
align-items: center;
-webkit-box-pack: justify;
-ms-flex-pack: justify;
justify-content: space-between; }

.navbar-brand {
display: inline-block;
padding-top: 0.3125rem;
padding-bottom: 0.3125rem;
margin-right: 1rem;
font-size: 1.25rem;
line-height: inherit;
white-space: nowrap; }
.navbar-brand:hover, .navbar-brand:focus {
text-decoration: none; }

.navbar-nav {
display: -webkit-box;
display: -ms-flexbox;
display: flex;
-webkit-box-orient: vertical;
-webkit-box-direction: normal;
-ms-flex-direction: column;
flex-direction: column;
padding-left: 0;
margin-bottom: 0;
list-style: none; }
.navbar-nav .nav-link {
padding-right: 0;
padding-left: 0; }
.navbar-nav .dropdown-menu {
position: static; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS section shows index.html, contact.html, sitemap.xml, # style.css (selected), and JS main.js. A JAKSICGLASS folder contains a css folder with bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, and owl.theme.default.min.css. It also contains style.css (selected) and data, fonts, images, js, and outline sections.
- Editor Content:** The style.css file content is displayed, starting with .btn rules and continuing with .navbar-brand and .navbar-nav rules.
- Status Bar:** Shows 1 warning and 1 error icon, a search bar, and taskbar icons for File Explorer, Terminal, Taskbar, and others.

```
css > # style.css > .btn
display: -ms-flexbox;
display: flex;
-ms-flex-wrap: wrap;
flex-wrap: wrap;
-webkit-box-align: center;
-ms-flex-align: center;
align-items: center;
-webkit-box-pack: justify;
-ms-flex-pack: justify;
justify-content: space-between; }

.navbar-brand {
display: inline-block;
padding-top: 0.3125rem;
padding-bottom: 0.3125rem;
margin-right: 1rem;
font-size: 1.25rem;
line-height: inherit;
white-space: nowrap; }
.navbar-brand:hover, .navbar-brand:focus {
text-decoration: none; }

.navbar-nav {
display: -webkit-box;
display: -ms-flexbox;
display: flex;
-webkit-box-orient: vertical;
-webkit-box-direction: normal;
-ms-flex-direction: column;
flex-direction: column;
padding-left: 0;
margin-bottom: 0;
list-style: none; }
.navbar-nav .nav-link {
padding-right: 0;
padding-left: 0; }
.navbar-nav .dropdown-menu {
position: static; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS section shows index.html, contact.html, sitemap.xml, # style.css (selected), and JS main.js. A JAKSICGLASS folder contains a css folder with bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, and owl.theme.default.min.css. It also contains style.css (selected) and data, fonts, images, js, and outline sections.
- Editor Content:** The style.css file content is displayed, starting with .btn rules and continuing with .navbar-brand and .navbar-nav rules.
- Status Bar:** Shows 1 warning and 1 error icon, a search bar, and taskbar icons for File Explorer, Terminal, Taskbar, and others.

```
css > # style.css > .btn
display: -ms-flexbox;
display: flex;
-ms-flex-wrap: wrap;
flex-wrap: wrap;
-webkit-box-align: center;
-ms-flex-align: center;
align-items: center;
-webkit-box-pack: justify;
-ms-flex-pack: justify;
justify-content: space-between; }

.navbar-brand {
display: inline-block;
padding-top: 0.3125rem;
padding-bottom: 0.3125rem;
margin-right: 1rem;
font-size: 1.25rem;
line-height: inherit;
white-space: nowrap; }
.navbar-brand:hover, .navbar-brand:focus {
text-decoration: none; }

.navbar-nav {
display: -webkit-box;
display: -ms-flexbox;
display: flex;
-webkit-box-orient: vertical;
-webkit-box-direction: normal;
-ms-flex-direction: column;
flex-direction: column;
padding-left: 0;
margin-bottom: 0;
list-style: none; }
.navbar-nav .nav-link {
padding-right: 0;
padding-left: 0; }
.navbar-nav .dropdown-menu {
position: static; }
```

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- JS main.js js

JAKSICGLASS

css

- bootstrap
- # aos.css
- # bootstrap-datepicker.css
- # bootstrap.min.css
- # bootstrap.min.css.map
- # jquery-ui.css
- # lightbox.css
- # lightbox.min.css
- # magnific-popup.css
- # owl.carousel.min.css
- # owl.theme.default.min.css
- # style.css 2
- > data
- > fonts
- > images
- js
- JS aos.js
- JS bootstrap-datepicker.min.js
- JS bootstrap.min.js
- JS jquery-3.3.1.min.js
- JS jquery-migrate-3.0.1.min.js
- JS jquery-ui.js
- JS jquery.countdown.min.js
- JS jquery.magnific-popup.min.js
- JS jquery.stellar.min.js

OUTLINE

index.html contact.html sitemap.xml # style.css

```
css > # style.css > .btn
3248 .nav-tabs .nav-link:hover, .nav-tabs .nav-link.active {
3249 border-color: #e9ecef #e9ecef #e9ecef;
3250 .nav-tabs .nav-link.disabled {
3251 color: #6c757d;
3252 background-color: transparent;
3253 border-color: transparent; }
3254 .nav-tabs .nav-link.active,
3255 .nav-tabs .nav-item.show .nav-link {
3256 color: #495057;
3257 background-color: #fff;
3258 border-color: #dee2e6 #dee2e6 #fff;
3259 .nav-tabs .dropdown-menu {
3260 margin-top: -1px;
3261 border-top-left-radius: 0;
3262 border-top-right-radius: 0; }

3263 .nav-pills .nav-link {
3264 border-radius: 0.25rem; }

3265 .nav-pills .nav-link.active,
3266 .nav-pills .show > .nav-link {
3267 color: #fff;
3268 background-color: #98cccd; }

3269 .nav-fill .nav-item {
3270 -webkit-box-flex: 1;
3271 -ms-flex: 1 1 auto;
3272 flex: 1 1 auto;
3273 text-align: center; }

3274 .nav-justified .nav-item {
3275 -ms-flex-preferred-size: 0;
3276 flex-basis: 0;
3277 -webkit-box-flex: 1;
3278 -ms-flex-positive: 1;
3279 flex-grow: 1;
3280 text-align: center; }
```

⊗ 1 △ 1

Type here to search

File Explorer Home Recent Taskbar

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected, 2 changes)
 - JS main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css (selected, 2 changes)
 - data
 - fonts
 - images
 - js
 - JS aos.js
 - JS bootstrap-datepicker.min.js
 - JS bootstrap.min.js
 - JS jquery-3.3.1.min.js
 - JS jquery-migrate-3.0.1.min.js
 - JS jquery-ui.js
 - JS jquery.countdown.min.js
 - JS jquery.magnific-popup.min.js
 - JS jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, style.css:

```
height: 1rem;
margin-top: -0.25rem;
background-color: #98cccd3;
border: 0;
border-radius: 1rem;
-webkit-transition: background-color 0.15s ease-in-out;
transition: background-color 0.15s ease-in-out;
-o-transition: background-color 0.15s ease-in-out;
transition: background-color 0.15s ease-in-out;
-webkit-appearance: none;
appearance: none; }

@media screen and (prefers-reduced-motion: no-prefer-reduced-motion) {
    .custom-range::-webkit-slider-thumb {
        -webkit-transition: none;
        -o-transition: none;
        transition: none; } }

.custom-range::-webkit-slider-thumb:active {
    background-color: white; }

.custom-range::-webkit-slider-runnable-track {
    width: 100%;
    height: 0.5rem;
    color: transparent;
    cursor: pointer;
    background-color: #dee2e6;
    border-color: transparent;
    border-radius: 1rem; }

.custom-range::-moz-range-thumb {
    width: 1rem;
    height: 1rem;
    background-color: #98cccd3;
    border: 0;
    border-radius: 1rem;
    -webkit-transition: background-color 0.15s ease-in-out;
    transition: background-color 0.15s ease-in-out;
    -o-transition: background-color 0.15s ease-in-out;
    transition: background-color 0.15s ease-in-out;
    background-color: #98cccd3; }
```

The status bar at the bottom shows 1 error and 1 warning, and includes icons for Windows, search, taskbar, and browser links.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of `style.css`. The code includes various CSS rules for buttons, form inputs, and media queries for screen and touch devices. It also includes custom range styles for webkit and moz ranges.
- Explorer:** The sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`, `contact.html`, `sitemap.xml`
 - `# style.css` (selected, 2 changes)
 - `main.js`
 - JAKSICGLASS** folder
 - css** folder (marked with a red dot)
 - `bootstrap`
 - `# aos.css`
 - `# bootstrap-datepicker.css`
 - `# bootstrap.min.css`
 - `# bootstrap.min.css.map`
 - `# jquery-ui.css`
 - `# lightbox.css`
 - `# lightbox.min.css`
 - `# magnific-popup.css`
 - `# owl.carousel.min.css`
 - `# owl.theme.default.min.css`
 - `# style.css` (selected, 2 changes)
 - `> data`
 - `> fonts`
 - `> images`
 - js** folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
- Taskbar:** Shows icons for File Explorer, Search, Task List, and various application links (OneDrive, Edge, Microsoft Store, Mail, Google Chrome).

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER index.html contact.html sitemap.xml # ...

OPEN EDITORS index.html contact.html sitemap.xml # style.css 2 JS main.js js

JAKSICGLASS

css bootstrap aos.css bootstrap-datepicker.css bootstrap.min.css bootstrap.min.css.map jquery-ui.css lightbox.css lightbox.min.css magnific-popup.css owl.carousel.min.css owl.theme.default.min.css style.css 2

data fonts images js aos.js bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js

OUTLINE

3015 color: #495057; 3016 background-color: #fff; } 3017 .custom-select[multiple], .custom-select[s... 3018 height: auto; 3019 padding-right: 0.75rem; 3020 background-image: none; } 3021 .custom-select:disabled { 3022 color: #6c757d; 3023 background-color: #e9ecef; } 3024 .custom-select::-ms-expand { 3025 opacity: 0; }

3026 .custom-select-sm { 3027 height: calc(1.8125rem + 2px); 3028 padding-top: 0.375rem; 3029 padding-bottom: 0.375rem; 3030 font-size: 75%; }

3031 .custom-select-lg { 3032 height: calc(2.875rem + 2px); 3033 padding-top: 0.375rem; 3034 padding-bottom: 0.375rem; 3035 font-size: 125%; }

3036 .custom-file { 3037 position: relative; 3038 display: inline-block; 3039 width: 100%; 3040 height: calc(2.25rem + 2px); 3041 margin-bottom: 0; }

3042 .custom-file-input { 3043 position: relative; 3044 z-index: 2; 3045 width: 100%; 3046 height: calc(2.25rem + 2px); 3047 margin: 0; 3048 opacity: 0; }

3049 3050 3051 3052

⊗ 1 △ 1

Type here to search

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER index.html contact.html sitemap.xml # ...

OPEN EDITORS index.html contact.html sitemap.xml # style.css 2 JS main.js js

JAKSICGLASS

css bootstrap aos.css bootstrap-datepicker.css bootstrap.min.css bootstrap.min.css.map jquery-ui.css lightbox.css lightbox.min.css magnific-popup.css owl.carousel.min.css owl.theme.default.min.css style.css 2

data fonts images js aos.js bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js

OUTLINE

3015 color: #495057; 3016 background-color: #fff; } 3017 .custom-select[multiple], .custom-select[s... 3018 height: auto; 3019 padding-right: 0.75rem; 3020 background-image: none; } 3021 .custom-select:disabled { 3022 color: #6c757d; 3023 background-color: #e9ecef; } 3024 .custom-select::-ms-expand { 3025 opacity: 0; }

3026 .custom-select-sm { 3027 height: calc(1.8125rem + 2px); 3028 padding-top: 0.375rem; 3029 padding-bottom: 0.375rem; 3030 font-size: 75%; }

3031 .custom-select-lg { 3032 height: calc(2.875rem + 2px); 3033 padding-top: 0.375rem; 3034 padding-bottom: 0.375rem; 3035 font-size: 125%; }

3036 .custom-file { 3037 position: relative; 3038 display: inline-block; 3039 width: 100%; 3040 height: calc(2.25rem + 2px); 3041 margin-bottom: 0; }

3042 .custom-file-input { 3043 position: relative; 3044 z-index: 2; 3045 width: 100%; 3046 height: calc(2.25rem + 2px); 3047 margin: 0; 3048 opacity: 0; }

3049 3050 3051 3052

⊗ 1 △ 1

Type here to search

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- main.js js

JAKSICGLASS

- css
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css 2
- data
- fonts
- images
- js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

index.html contact.html sitemap.xml # style.css .btn

background-size: 8px 10px;
border: 1px solid #ced4da;
border-radius: 0.25rem;
-webkit-appearance: none;
-moz-appearance: none;
appearance: none; }

.custom-select:focus {
border-color: #f1f8f9;
outline: 0;
-webkit-box-shadow: 0 0 0 0.2rem rgba(241, 248, 255, 0.2);
box-shadow: 0 0 0 0.2rem rgba(241, 248, 255, 0.2);}

.custom-select:focus::-ms-value {
color: #495057;
background-color: #fff; }

.custom-select[multiple], .custom-select[size] {
height: auto;
padding-right: 0.75rem;
background-image: none; }

.custom-select:disabled {
color: #6c757d;
background-color: #e9ecef; }

.custom-select::-ms-expand {
opacity: 0; }

.custom-select-sm {
height: calc(1.8125rem + 2px);
padding-top: 0.375rem;
padding-bottom: 0.375rem;
font-size: 75%; }

.custom-select-lg {
height: calc(2.875rem + 2px);
padding-top: 0.375rem;
padding-bottom: 0.375rem;
font-size: 125%; }

.custom-file {

1 1

Type here to search

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- main.js js

JAKSICGLASS

- css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css 2
- data
- fonts
- images
- js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

index.html contact.html sitemap.xml # style.css .btn

2966 .custom-checkbox .custom-control-input:checkbox

2967 background-image: url("data:image/svg+xml;");

2968 .custom-checkbox .custom-control-input:indeterminate

2969 background-color: #98ccfd; }

2970 .custom-checkbox .custom-control-input:indeterminate

2971 background-image: url("data:image/svg+xml;");

2972 .custom-checkbox .custom-control-input:indeterminate

2973 background-color: #98ccfd; }

2974 .custom-checkbox .custom-control-input:disabled

2975 background-color: #rgba(152, 204, 211, 0.5);

2976 .custom-checkbox .custom-control-input:disabled

2977 background-color: #rgba(152, 204, 211, 0.5);

2978 .custom-checkbox .custom-control-input:disabled

2979 background-color: #rgba(152, 204, 211, 0.5);

2980 .custom-radio .custom-control-label::before

2981 border-radius: 50%; }

2982 .custom-radio .custom-control-input:checked

2983 background-color: #98ccfd; }

2984 .custom-radio .custom-control-input:checked

2985 background-image: url("data:image/svg+xml;");

2986 .custom-radio .custom-control-input:disabled

2987 background-color: #rgba(152, 204, 211, 0.5);

2988 .custom-select {

2989 display: inline-block;

2990 width: 100%;

2991 height: calc(2.25rem + 2px);

2992 padding: 0.375rem 1.75rem 0.375rem 0.75rem;

2993 line-height: 1.5;

2994 color: #495057;

2995 vertical-align: middle;

2996 background: #fff url("data:image/svg+xml;");

2997 background-size: 8px 10px;

2998

2999

3000

3001

3002

3003

⊗ 1 △ 1

Type here to search

File Explorer Home Taskbar

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor pane displays the content of `style.css`. The code includes various CSS rules for buttons, checkboxes, and radio buttons, utilizing Bootstrap and custom classes like `.custom-control`.
- Explorer:** The sidebar shows the file structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing a subfolder `css` which includes bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css:** 2 changes.
 - data:**
 - fonts:**
 - images:**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE:**
- Taskbar:** Shows icons for Task View, Command Palette, Find, Replace, Save, Undo, Redo, and browser links for Edge, Google Chrome, Microsoft Edge, and File Explorer.
- Status Bar:** Shows 1 error and 1 warning, and a search bar at the bottom.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser title bar reads "style.css - ja...". The main content area of the browser displays a portion of a CSS file. The CSS code includes rules for ".custom-control-input:disabled ~ .custom-control-label" and ".custom-control-label::before" (and its corresponding after rule). The browser's address bar shows the URL "style.css". The taskbar at the bottom features icons for File Explorer, Edge, File Explorer again, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help style.css - ja...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- JS main.js js

JAKSICGLASS

css

- bootstrap
- # aos.css
- # bootstrap-datepicker.css
- # bootstrap.min.css
- # bootstrap.min.css.map
- # jquery-ui.css
- # lightbox.css
- # lightbox.min.css
- # magnific-popup.css
- # owl.carousel.min.css
- # owl.theme.default.min.css
- # style.css 2

data

fonts

images

js

- JS aos.js
- JS bootstrap-datepicker.min.js
- JS bootstrap.min.js
- JS jquery-3.3.1.min.js
- JS jquery-migrate-3.0.1.min.js
- JS jquery-ui.js
- JS jquery.countdown.min.js
- JS jquery.magnific-popup.min.js
- JS jquery.stellar.min.js

OUTLINE

index.html contact.html sitemap.xml

```
.custom-control-input:disabled ~ .custom-control-label { background-color: #e9ecef; }

.custom-control-label { position: relative; margin-bottom: 0; }

.custom-control-label::before { position: absolute; top: 0.25rem; left: -1.5rem; display: block; width: 1rem; height: 1rem; pointer-events: none; content: ""; -webkit-user-select: none; -moz-user-select: none; -ms-user-select: none; user-select: none; background-color: #dee2e6; }

.custom-control-label::after { position: absolute; top: 0.25rem; left: -1.5rem; display: block; width: 1rem; height: 1rem; content: ""; background-repeat: no-repeat; background-position: center center; background-size: 50% 50%; }

.custom-checkbox .custom-control-label::before { border-radius: 0.25rem; }

.custom-checkbox .custom-control-input:checked + .custom-control-label::before { background-color: #98ccd3; }
```

⊗ 1 △ 1

Type here to search

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected), data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Editor Area:** The current file is style.css, showing CSS code for a custom control input. The code includes rules for .custom-control-input: checked, :focus, :active, and :disabled states, along with .custom-control-label and .custom-control-label::before and ::after pseudo-elements.
- Bottom Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 1 error and 1 warning.

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the CSS code for "style.css". The left sidebar has a "File" tab selected. The "EXPLORER" tab is active, showing a tree view of files. The "OPEN EDITORS" section lists "index.html", "contact.html", "sitemap.xml", "# style.css", and "main.js". The "# style.css" item is highlighted with a blue selection bar. Below it, under "JAKSICGLASS", there are sections for "css" and "js". The "css" section contains numerous CSS files like "bootstrap", "aos.css", "bootstrap-datepicker.css", etc. The "js" section contains numerous JS files like "aos.js", "bootstrap-datepicker.min.js", etc. The right side of the screen shows the actual CSS code, which includes styles for ".custom-control-*" classes, such as ".custom-control-btn" and ".custom-control-input". The code uses a mix of standard CSS properties and some custom ones like "-webkit-inline-box" and "-ms-inline-flexbox". The code editor has a dark theme with syntax highlighting.

```
css > # style.css > .custom-control-btn
2905 display: block;
2906 min-height: 1.5rem;
2907 padding-left: 1.5rem; }

2908 .custom-control-inline {
2909 display: -webkit-inline-box;
2910 display: -ms-inline-flexbox;
2911 display: inline-flex;
2912 margin-right: 1rem; }

2913 .custom-control-input {
2914 position: absolute;
2915 z-index: -1;
2916 opacity: 0; }
2917 .custom-control-input:checked ~ .custom-control-label {
2918 color: #fff;
2919 background-color: #98ccdb; }
2920 .custom-control-input:focus ~ .custom-control-label {
2921 -webkit-box-shadow: 0 0 0 1px #fff, 0 0 0 1px #fff, 0 0 0 0.2rem #98ccdb; }
2922 .custom-control-input:active ~ .custom-control-label {
2923 color: #fff;
2924 background-color: white; }
2925 .custom-control-input:disabled ~ .custom-control-label {
2926 color: #6c757d; }
2927 .custom-control-input:disabled ~ .custom-control-label {
2928 background-color: #e9ecef; }

2929 .custom-control-label {
2930 position: relative;
2931 margin-bottom: 0; }
2932 .custom-control-label::before {
2933 position: absolute;
2934 top: 0.25rem;
2935 left: -1.5rem;
2936 display: block;
2937 width: 1rem;
2938 height: 1rem;
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja...".

The Explorer sidebar on the left lists open editors, including index.html, contact.html, sitemap.xml, style.css (selected), main.js, and several CSS and JS files under the JAKSICGLASS folder.

The main editor area displays the content of style.css:

```
css > # style.css > .btn
padding: 0.5rem 1rem;
font-size: 1.25rem;
line-height: 1.5;
border-radius: 0.3rem; }

.input-group-sm > .form-control,
.input-group-sm > .input-group-prepend > .input...
.input-group-sm > .input-group-append > .input...
.input-group-sm > .input-group-prepend > .bt...
.input-group-sm > .input-group-append > .bt...
height: calc(1.8125rem + 2px);
padding: 0.25rem 0.5rem;
font-size: 0.875rem;
line-height: 1.5;
border-radius: 0.2rem; }

.input-group > .input-group-prepend > .bt...
.input-group > .input-group-prepend > .input...
.input-group > .input-group-append:not(:last-...
.input-group > .input-group-append:not(:last-...
.input-group > .input-group-append:last-child...
.input-group > .input-group-append:last-child...
border-top-right-radius: 0;
border-bottom-right-radius: 0; }

.input-group > .input-group-append > .bt...
.input-group > .input-group-append > .input...
.input-group > .input-group-prepend:not(:fir...
.input-group > .input-group-prepend:not(:fir...
.input-group > .input-group-prepend:first-ch...
.input-group > .input-group-prepend:first-ch...
border-top-left-radius: 0;
border-bottom-left-radius: 0; }

.custom-control {
position: relative;
display: block;
min-height: 1.5rem;
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for Bootstrap components like input groups and dropdowns. Lines 2856-2892 are visible, showing rules for `.input-group-lg`, `.input-group-sm`, and `.input-group`.
- Explorer:** The left sidebar shows the project structure. It includes files like `index.html`, `contact.html`, `sitemap.xml`, `style.css`, `main.js`, and several Bootstrap and AOS CSS files. The `style.css` file is currently selected.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor pane displays the content of `style.css`. The code includes various CSS rules for input groups and other components, such as Bootstrap and AOS.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** A folder containing several CSS files (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and JS files (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
 - OUTLINE:** Shows the outline of the current file, style.css.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser displays a CSS file from a local file system. The file path is shown in the address bar as "style.css - j...".

The browser's status bar indicates there are 1 error and 1 warning. The taskbar at the bottom includes icons for File Explorer, Edge, File Explorer, Mail, and Google Chrome.

The main content area of the browser shows the following code:

```
css > # style.css > .btn
2794 border-top-right-radius: 0;
2795 border-bottom-right-radius: 0; }
2796 .input-group > .form-control:not(:first-child)
2797 .input-group > .custom-select:not(:first-child)
2798 border-top-left-radius: 0;
2799 border-bottom-left-radius: 0; }
2800 .input-group > .custom-file {
2801 display: -webkit-box;
2802 display: -ms-flexbox;
2803 display: flex;
2804 -webkit-box-align: center;
2805 -ms-flex-align: center;
2806 align-items: center; }
2807 .input-group > .custom-file:not(:last-child)
2808 .input-group > .custom-file:not(:last-child)
2809 border-top-right-radius: 0;
2810 border-bottom-right-radius: 0; }
2811 .input-group > .custom-file:not(:first-child)
2812 border-top-left-radius: 0;
2813 border-bottom-left-radius: 0; }

2814 .input-group-prepend,
2815 .input-group-append {
2816 display: -webkit-box;
2817 display: -ms-flexbox;
2818 display: flex; }
2819 .input-group-prepend .btn,
2820 .input-group-append .btn {
2821 position: relative;
2822 z-index: 2; }
2823 .input-group-prepend .btn + .btn,
2824 .input-group-prepend .btn + .input-group-text
2825 .input-group-prepend .input-group-text + .input-group-text
2826 .input-group-prepend .input-group-text + .input-group-text
2827 .input-group-append .btn + .btn,
2828 .input-group-append .btn + .input-group-text
2829 .input-group-append .input-group-text + .input-group-text
2830 .input-group-append .input-group-text + .input-group-text
2831 .input-group-append .input-group-text + .input-group-text
```

The screenshot shows the Microsoft Edge DevTools interface. The top bar includes File, Edit, Selection, View, Go, Debug, Terminal, Help, and a tab for "style.css - ja...". The left sidebar has icons for file, search, refresh, and other developer tools. The main area is divided into sections: EXPLORER, CSS, JS, and OUTLINE. The EXPLORER section shows "OPEN EDITORS" with files like index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also lists "JAKSICGLASS" components such as bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, and style.css. The CSS section displays the contents of style.css, starting with ".btn" and continuing with various CSS rules for input groups and custom file inputs. The JS section shows the source code for files like aos.js, bootstrap-datepicker.min.js, and jquery.magnific-popup.min.js. The OUTLINE section is partially visible at the bottom.

```
css > # style.css > .btn
position: relative;
-webkit-box-flex: 1;
-ms-flex: 1 1 auto;
flex: 1 1 auto;
width: 1%;
margin-bottom: 0; }

.input-group > .form-control + .form-control {
.input-group > .form-control + .custom-select {
.input-group > .form-control + .custom-file {
.input-group > .custom-select + .form-control {
.input-group > .custom-select + .custom-select {
.input-group > .custom-select + .custom-file {
.input-group > .custom-file + .form-control {
.input-group > .custom-file + .custom-select {
.input-group > .custom-file + .custom-file {
    margin-left: -1px; }

.input-group > .form-control:focus,
.input-group > .custom-select:focus,
.input-group > .custom-file .custom-file-input {
    z-index: 3; }
.input-group > .custom-file .custom-file-input {
    z-index: 4; }

.input-group > .form-control:not(:last-child),
.input-group > .custom-select:not(:last-child),
    border-top-right-radius: 0;
    border-bottom-right-radius: 0; }

.input-group > .form-control:not(:first-child),
.input-group > .custom-select:not(:first-child),
    border-top-left-radius: 0;
    border-bottom-left-radius: 0; }

.input-group > .custom-file {
    display: -webkit-box;
    display: -ms-flexbox;
    display: flex;
    -webkit-box-align: center;
    -ms-flex-align: center;
    align-items: center; }

input-group > .custom-file:not(:last-child),
    border-top-right-radius: 0;
    border-bottom-right-radius: 0; }

input-group > .custom-select {
    border: none;
    border-bottom: 1px solid #ccc;
    padding: 0 0 0 10px; }

input-group > .custom-select::placeholder {
    position: absolute;
    top: 0;
    left: 0;
    width: 100%; }
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The top bar includes File, Edit, Selection, View, Go, Debug, Terminal, Help, and a tab for style.css - ja. The left sidebar has icons for Explorer, Search, Find, and Outline. The Explorer section shows 'OPEN EDITORS' with index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder for JAKSICGLASS containing CSS files like bootstrap, aos.css, bootstrap-datepicker.css, etc., and JS files like aos.js, bootstrap-datepicker.min.js, etc. The main pane displays the CSS code for style.css, starting with .btn-group-vertical > .btn-group + .btn-group { margin-top: -1px; margin-left: 0; } and continuing with various button styles and input-group definitions.

```
css > # style.css > .btn-group-vertical > .btn-group + .btn-group { margin-top: -1px; margin-left: 0; } .btn-group-vertical > .btn:not(:last-child) { border-bottom-right-radius: 0; border-bottom-left-radius: 0; } .btn-group-vertical > .btn:not(:first-child) { border-top-left-radius: 0; border-top-right-radius: 0; } .btn-group-toggle > .btn, .btn-group-toggle > .btn-group > .btn { margin-bottom: 0; } .btn-group-toggle > .btn input[type="radio"], .btn-group-toggle > .btn input[type="checkbox"], .btn-group-toggle > .btn-group > .btn input, .btn-group-toggle > .btn-group > .btn input { position: absolute; clip: rect(0, 0, 0, 0); pointer-events: none; } .input-group { position: relative; display: -webkit-box; display: -ms-flexbox; display: flex; -ms-flex-wrap: wrap; flex-wrap: wrap; -webkit-box-align: stretch; -ms-flex-align: stretch; align-items: stretch; width: 100%; } .input-group > .form-control, .input-group > .custom-select, .input-group > .custom-file { position: relative;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for buttons and button groups, such as `.btn`, `.btn-lg`, and `.btn-group`.
- Explorer:** The left sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css** (selected).
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE**
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 1 error and 1 warning (indicated by icons with numbers 1 and 1).

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the current file is "style.css - ja...".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected, 2 changes)
 - main.js (JS)
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - # style.css (selected, 2 changes)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS rules for buttons and dropdowns, such as:

```
.btn-toolbar {  
    display: -webkit-box;  
    display: -ms-flexbox;  
    display: flex;  
    -ms-flex-wrap: wrap;  
    flex-wrap: wrap;  
    -webkit-box-pack: start;  
    -ms-flex-pack: start;  
    justify-content: flex-start; }  
.btn-toolbar .input-group {  
    width: auto; }  
  
.btn-group > .btn:first-child {  
    margin-left: 0; }  
  
.btn-group > .btn:not(:last-child):not(.dropdown-toggle-split) {  
    border-top-right-radius: 0;  
    border-bottom-right-radius: 0; }  
  
.btn-group > .btn:not(:first-child),  
.btn-group > .btn-group:not(:first-child) > .dropdown-toggle-split {  
    border-top-left-radius: 0;  
    border-bottom-left-radius: 0; }  
  
.dropdown-toggle-split {  
    padding-right: 0.5625rem;  
    padding-left: 0.5625rem; }  
.dropdown-toggle-split::after, .dropdown-toggle-split::before {  
    margin-left: 0; }  
.dropleft .dropdown-toggle-split::before {  
    margin-right: 0; }  
  
.btn-sm + .dropdown-toggle-split, .btn-group > .dropdown-toggle-split {  
    padding-right: 0.275rem; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected).
 - data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE.
- Editor Area:** The code editor displays the content of style.css, showing various CSS rules and their line numbers. Some lines are highlighted in yellow.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser window with the developer tools open. The address bar at the top right displays "style.css - ja...". The main content area shows a portion of the "style.css" file with code related to dropdown menus. The left sidebar has several icons: a clipboard, magnifying glass, link, refresh, and a gear. The "EXPLORER" section lists files and folders under "OPEN EDITORS" and "JAKSICGLASS". The "style.css" file is currently selected. The bottom status bar shows "⊗ 1 △ 1" and a search bar with "Type here to search".

```
css > # style.css > .btn
display: none; }

.dropleft .dropdown-toggle::before {
display: inline-block;
width: 0;
height: 0;
margin-right: 0.255em;
vertical-align: 0.255em;
content: "";
border-top: 0.3em solid transparent;
border-right: 0.3em solid transparent;
border-bottom: 0.3em solid transparent; }

.dropleft .dropdown-toggle::empty::after {
margin-left: 0; }

.dropleft .dropdown-toggle::before {
vertical-align: 0; }

.dropdown-menu[x-placement^="top"], .dropdown-
right: auto;
bottom: auto; }

.dropdown-divider {
height: 0;
margin: 0.5rem 0;
overflow: hidden;
border-top: 1px solid #e9ecef; }

.dropdown-item {
display: block;
width: 100%;
padding: 0.25rem 1.5rem;
clear: both;
font-weight: 400;
color: #212529;
text-align: inherit;
white-space: nowrap; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of `style.css`. The code includes various CSS rules for dropdown menus and other UI components, such as Bootstrap and AOS integrations.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: A section showing the outline of the current file.
- Terminal:** The bottom right corner shows the Windows taskbar with icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.
- Status Bar:** Shows notifications: 1 error, 1 warning, and a search bar: Type here to search.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS section shows index.html, contact.html, sitemap.xml, style.css (selected), and main.js. A JAKSICGLASS folder contains css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css) and js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Editor Content:** The style.css file is open, showing CSS code for dropdown menus and other styles.
- Status Bar:** Shows 1 error, 1 warning, and a search bar.

```
.dropdown-menu {
    position: absolute;
    top: 100%;
    left: 0;
    z-index: 1000;
    display: none;
    float: left;
    min-width: 10rem;
    padding: 0.5rem 0;
    margin: 0.125rem 0 0;
    font-size: 1rem;
    color: #212529;
    text-align: left;
    list-style: none;
    background-color: #fff;
    background-clip: padding-box;
    border: 1px solid #rgba(0, 0, 0, 0.15);
    border-radius: 0.25rem; }

.dropdown-menu-right {
    right: 0;
    left: auto; }

.dropdown .dropdown-menu {
    top: auto;
    bottom: 100%;
    margin-top: 0;
    margin-bottom: 0.125rem; }

.dropdown .dropdown-toggle::after {
    display: inline-block;
    width: 0;
    height: 0;
    margin-left: 0.255em;
    vertical-align: 0.255em;
    content: "";
    border-top: 0;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code for a button class. The code includes transitions for webkit, opera, and standard properties.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: Shows the outline of the current file.
- Status Bar:** Shows 1 warning and 1 error icon, a search bar, and taskbar icons for File Explorer, Terminal, Taskbar, Microsoft Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the current file is "style.css - ja...".

The Explorer sidebar on the left lists the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - # style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The Editor pane displays the content of "style.css" with line numbers 2378 to 2415. The code defines CSS rules for buttons and links.

```
css > # style.css > .btn
border-color: #343a40; }
.btn-outline-dark:hover {
color: #fff;
background-color: #343a40;
border-color: #343a40; }
.btn-outline-dark:focus, .btn-outline-dark:-webkit-box-shadow: 0 0 0 0.2rem rgba(52, 58, 64, 0.2);
box-shadow: 0 0 0 0.2rem rgba(52, 58, 64, 0.2);
.btn-outline-dark.disabled, .btn-outline-dark:disabled {
color: #343a40;
background-color: transparent; }
.btn-outline-dark:not(:disabled):not(.disabled).show > .btn-outline-dark.dropdown-toggle {
color: #fff;
background-color: #343a40;
border-color: #343a40; }
.btn-outline-dark:not(:disabled):not(.disabled).show > .btn-outline-dark.dropdown-toggle:-webkit-box-shadow: 0 0 0 0.2rem rgba(52, 58, 64, 0.2);
box-shadow: 0 0 0 0.2rem rgba(52, 58, 64, 0.2);
.btn-link {
font-weight: 400;
color: #98cc00;
background-color: transparent; }
.btn-link:hover {
color: #62b1bc;
text-decoration: underline;
background-color: transparent;
border-color: transparent; }
.btn-link:focus, .btn-link.focus {
text-decoration: underline;
border-color: transparent;
-webkit-box-shadow: none;
box-shadow: none; }
.btn-link:disabled, .btn-link.disabled {
color: #6c757d;
pointer-events: none; }
```

The Terminal pane at the bottom shows a command history with entries like "git add .", "git commit -m 'Initial commit'", and "git push -u origin main".

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code for button styles. The code includes rules for `.btn`, `.btn-outline-danger`, and `.btn-outline-light`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css** (selected).
 - data**
 - fonts**
 - images**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (2), main.js (js).
 - JAKSICGLASS:**
 - css
 - bootstrap
 - # aos.css
 - # bootstrap-datepicker.css
 - # bootstrap.min.css
 - # bootstrap.min.css.map
 - # jquery-ui.css
 - # lightbox.css
 - # lightbox.min.css
 - # magnific-popup.css
 - # owl.carousel.min.css
 - # owl.theme.default.min.css
 - # style.css (2)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - OUTLINE
- Status Bar:** ⚡ 1 △ 1, Windows icon, Search bar (Type here to search), Taskbar icons (File Explorer, Edge, File Manager, Microsoft Store, Mail, Google Chrome).

```
css > # style.css > .btn
background-color: #17a2b8;
border-color: #17a2b8; }
.btn-outline-info:not(:disabled):not(.disabled).show > .btn-outline-info.dropdown-toggle
-webkit-box-shadow: 0 0 0 0.2rem #rgb(23, 162, 184);
box-shadow: 0 0 0 0.2rem #rgba(23, 162, 184);


.btn-outline-warning {
color: #eec60a;
background-color: transparent;
background-image: none;
border-color: #eec60a; }
.btn-outline-warning:hover {
color: #212529;
background-color: #eec60a;
border-color: #eec60a; }
.btn-outline-warning:focus, .btn-outline-warning:active
-webkit-box-shadow: 0 0 0 0.2rem #rgb(238, 198, 102);
box-shadow: 0 0 0 0.2rem #rgba(238, 198, 102);
.btn-outline-warning.disabled, .btn-outline-warning:disabled
color: #eec60a;
background-color: transparent; }
.btn-outline-warning:not(:disabled):not(.disabled).show > .btn-outline-warning.dropdown-toggle
color: #212529;
background-color: #eec60a;
border-color: #eec60a; }
.btn-outline-warning:not(:disabled):not(.disabled).show > .btn-outline-warning.dropdown-toggle
-webkit-box-shadow: 0 0 0 0.2rem #rgb(238, 198, 102);
box-shadow: 0 0 0 0.2rem #rgba(238, 198, 102);

.btn-outline-danger {
color: #f23a2e;
background-color: transparent;
background-image: none;
border-color: #f23a2e; }
.btn-outline-danger:hover {
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Explorer View:** Shows the project structure with files like index.html, contact.html, sitemap.xml, style.css (selected), main.js, and various Bootstrap and jQuery files under JAKSICGLASS/css and JAKSICGLASS/js.
- Editor View:** Displays the content of style.css, showing CSS rules for buttons and other UI components.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.


```
css > # style.css > .btn
background-color: #6c757d;
border-color: #6c757d; }
.btn-outline-secondary:focus, .btn-outline-secondary:active {
    -webkit-box-shadow: 0 0 0 0.2rem rgba(108, 117, 125, 0.2);
    box-shadow: 0 0 0 0.2rem rgba(108, 117, 125, 0.2);
}
.btn-outline-secondary.disabled, .btn-outline-secondary:disabled {
    color: #6c757d;
    background-color: transparent; }
.btn-outline-secondary:not(:disabled):not(.disabled).show > .btn-outline-secondary.dropdown-toggle {
    color: #fff;
    background-color: #6c757d;
    border-color: #6c757d; }
.btn-outline-secondary:not(:disabled):not(.disabled).show > .btn-outline-secondary.dropdown-toggle::after {
    -webkit-box-shadow: 0 0 0 0.2rem rgba(108, 117, 125, 0.2);
    box-shadow: 0 0 0 0.2rem rgba(108, 117, 125, 0.2);
}
.btn-outline-success {
    color: #28a745;
    background-color: transparent;
    background-image: none;
    border-color: #28a745; }
.btn-outline-success:hover {
    color: #fff;
    background-color: #28a745;
    border-color: #28a745; }
.btn-outline-success:focus, .btn-outline-success:active {
    -webkit-box-shadow: 0 0 0 0.2rem rgba(40, 167, 89, 0.2);
    box-shadow: 0 0 0 0.2rem rgba(40, 167, 89, 0.2);
}
.btn-outline-success.disabled, .btn-outline-success:disabled {
    color: #28a745;
    background-color: transparent; }
.btn-outline-success:not(:disabled):not(.disabled).show > .btn-outline-success.dropdown-toggle {
    color: #fff;
    background-color: #28a745;
    border-color: #28a745; }
```

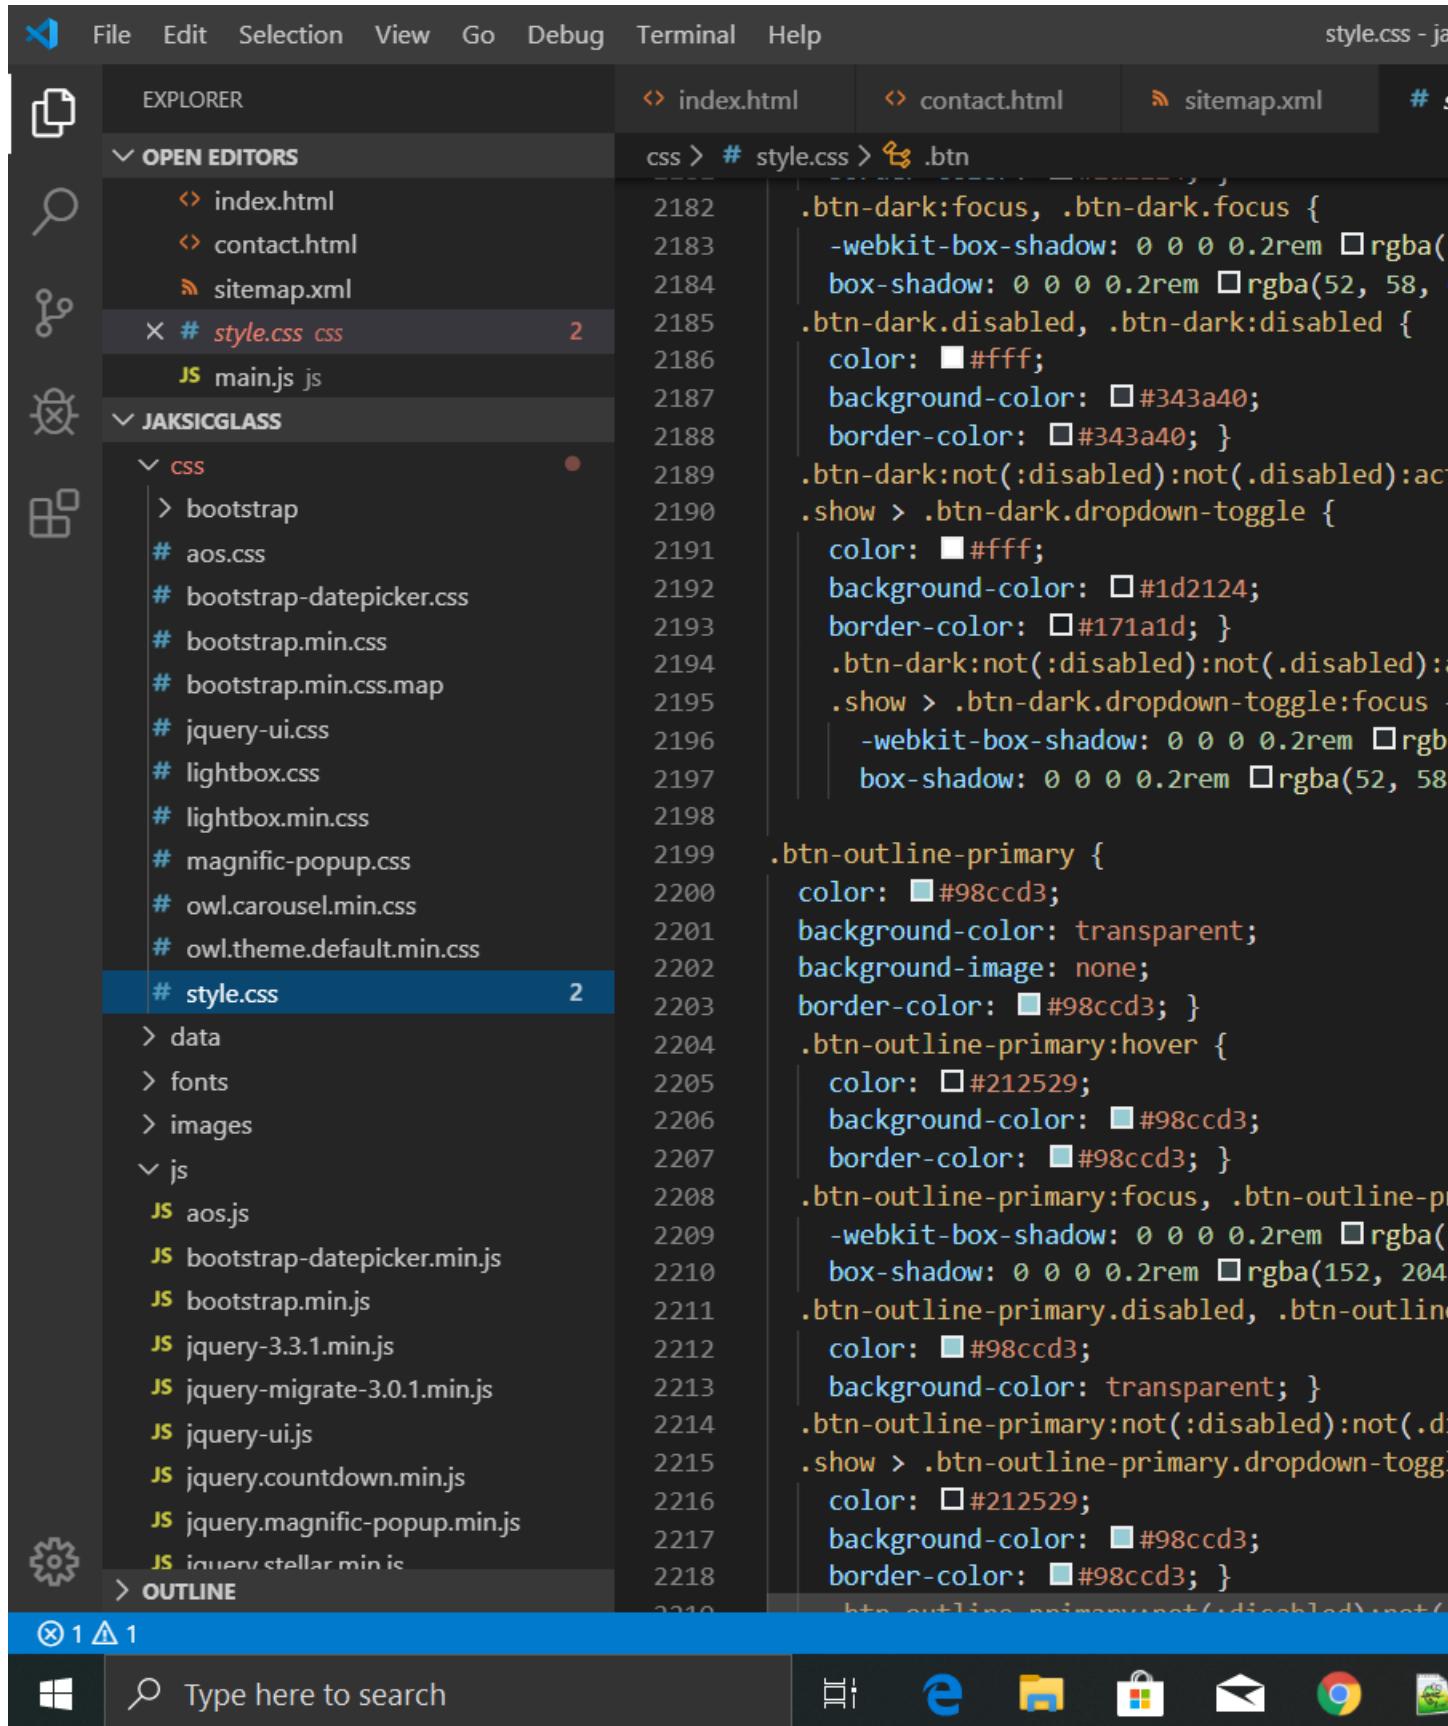

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Explorer View:** Shows the project structure with files like index.html, contact.html, sitemap.xml, style.css (selected), main.js, and various Bootstrap and jQuery files under JAKSICGLASS/css and JAKSICGLASS/js.
- Editor View:** Displays the content of style.css, showing CSS rules for buttons and other UI components.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .btn
2120 .SHOW > .btn-warning.dropdown-toggle:FOCUS
2121 -webkit-box-shadow: 0 0 0 0.2rem #rgb
2122 box-shadow: 0 0 0 0.2rem #rgba(238, 1
2123
2124 .btn-danger {
2125 color: #fff;
2126 background-color: #f23a2e;
2127 border-color: #f23a2e; }
2128 .btn-danger:hover {
2129 color: #fff;
2130 background-color: #eb1c0f;
2131 border-color: #df1b0e; }
2132 .btn-danger:focus, .btn-danger.focus {
2133 -webkit-box-shadow: 0 0 0 0.2rem #rgba(
2134 box-shadow: 0 0 0 0.2rem #rgba(242, 58,
2135 .btn-danger.disabled, .btn-danger:disabled
2136 color: #fff;
2137 background-color: #f23a2e;
2138 border-color: #f23a2e; }
2139 .btn-danger:not(:disabled):not(.disabled):FOCUS
2140 .show > .btn-danger.dropdown-toggle {
2141 color: #fff;
2142 background-color: #df1b0e;
2143 border-color: #d3190d; }
2144 .btn-danger:not(:disabled):not(.disabled):HOVER
2145 .show > .btn-danger.dropdown-toggle:HOVER
2146 -webkit-box-shadow: 0 0 0 0.2rem #rgb
2147 box-shadow: 0 0 0 0.2rem #rgba(242, 58,
2148 .btn-light {
2149 color: #212529;
2150 background-color: #f8f9fa;
2151 border-color: #f8f9fa; }
2152 .btn-light:hover {
2153 color: #212529;
2154 background-color: #e2e6ea;
2155 border-color: #dae0e5; }
2156 .btn-light:focus, .btn-light.focus {
```

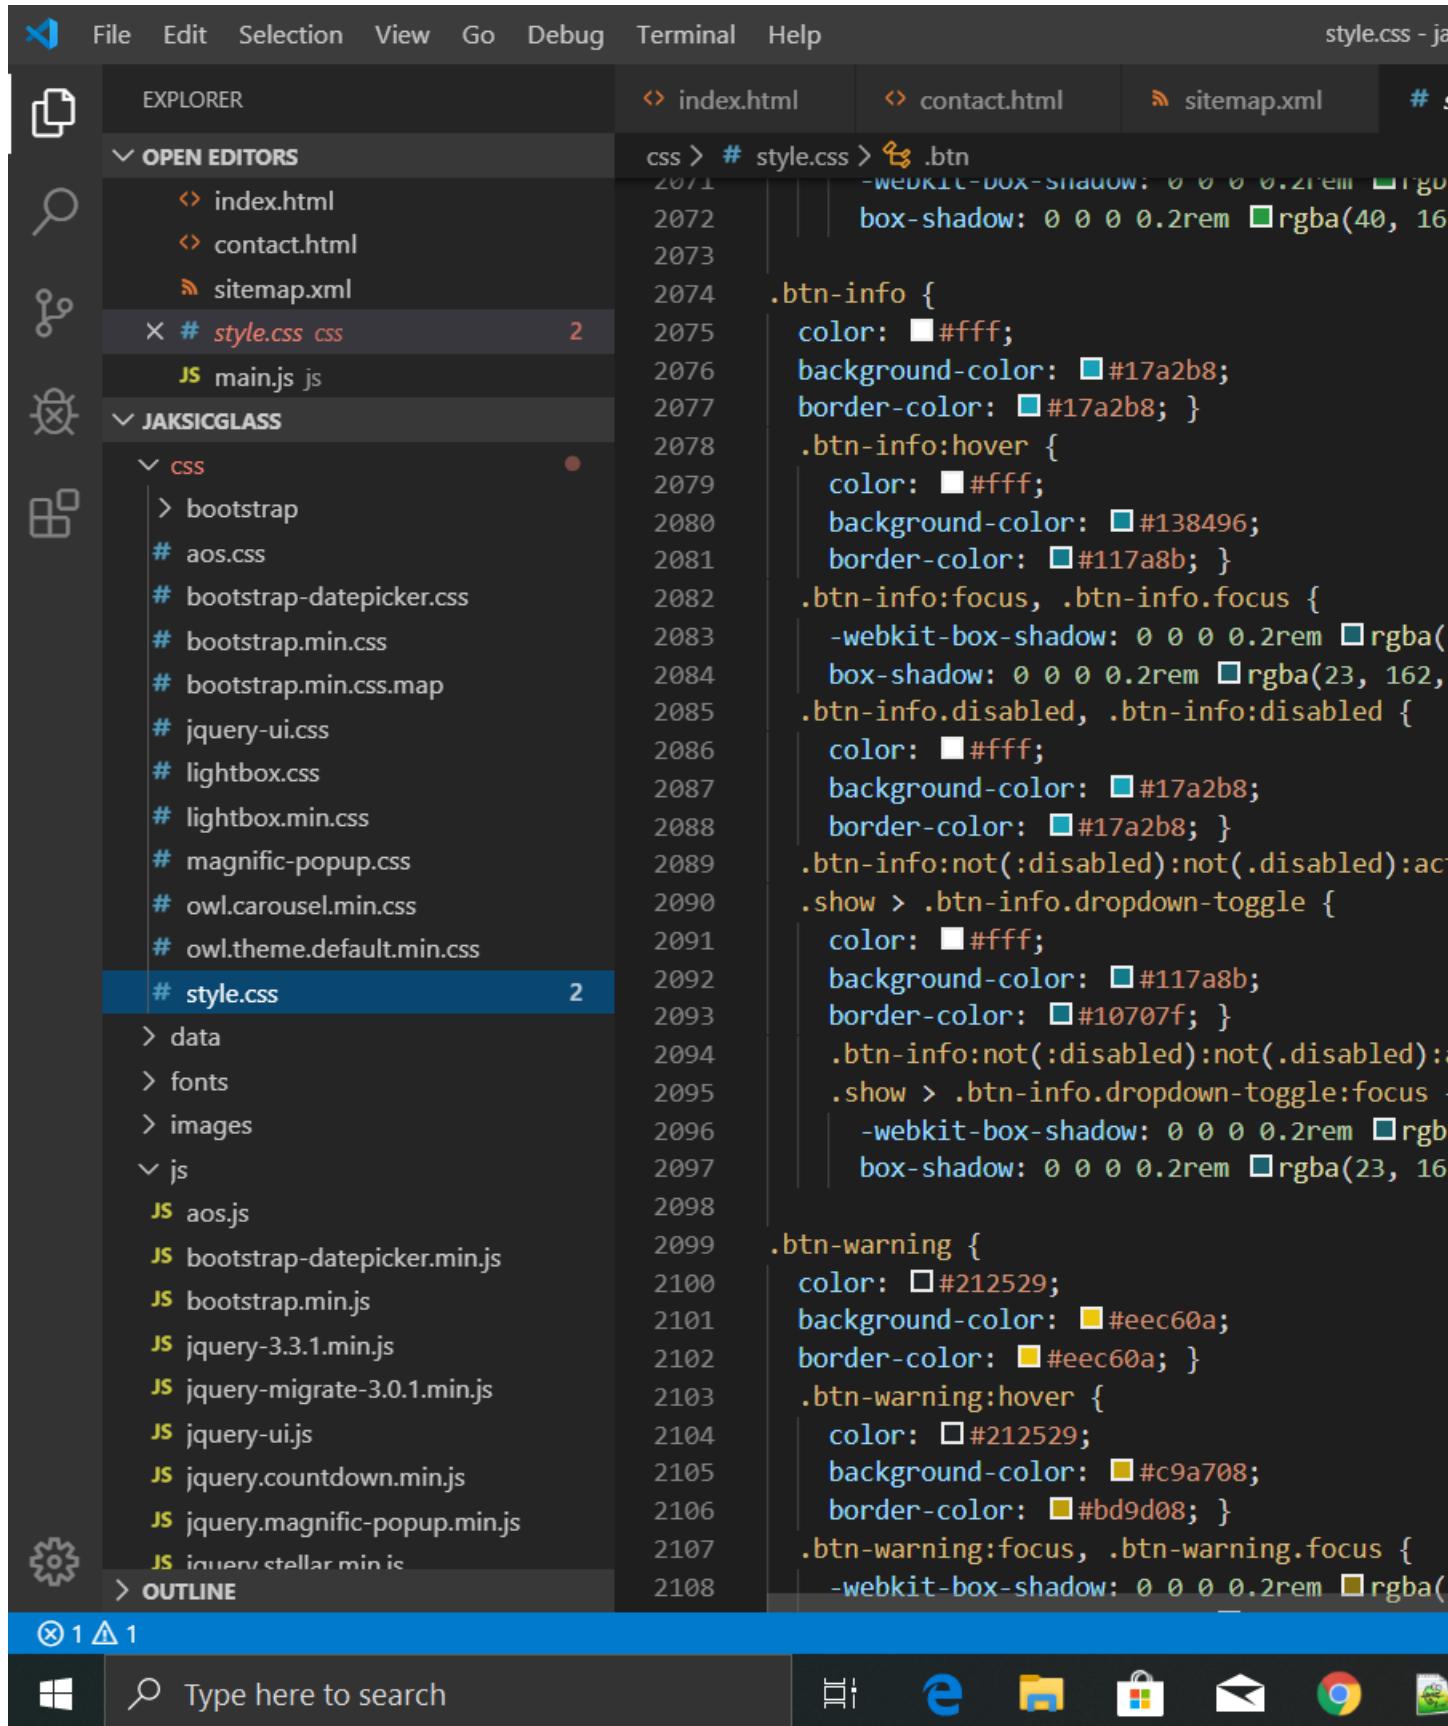

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes CSS rules for buttons and success buttons, such as `.btn-secondary` and `.btn-success`, with properties like color, background-color, border-color, and box-shadows.
- Explorer:** The left pane shows the project structure with the following files and folders:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (js).
 - JAKSICGLASS:** css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), style.css (selected), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 1 error and 1 warning (indicated by icons with numbers 1 and 1).

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of `style.css`. The code includes CSS rules for `.btn` and other elements, along with media queries and JavaScript imports.
- Explorer:** The sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected, 2 changes)
 - `main.js`

Under "JAKSICGLASS" (expanded), there are several CSS files:
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`

Under "style.css" (selected, 2 changes), there are imports for data, fonts, images, and JS files:
 - `> data`
 - `> fonts`
 - `> images`
 - `> js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js`
 - `> OUTLINE`
- Taskbar:** Shows 1 error and 1 warning. Includes icons for Windows, search, file operations, and browser integration (Edge, Google Chrome).

The screenshot shows a Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code for a button class (`.btn`). The code includes vendor prefixes for flexbox and webkit properties.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing a subfolder `css` which includes bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css:** 2 changes.
 - data, fonts, images:** Folders.
 - js:** Aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Taskbar:** Shows 1 error and 1 warning. Includes icons for Windows, search, task view, edge, file explorer, start, mail, and chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code. The code includes rules for `.btn`, `.form-control`, `.input-group`, `.custom-select`, `.form-check`, `.form-check-input`, `.custom-control`, `.custom-control-label`, and `.btn` again.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:** css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), style.css (selected), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS

 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js

- JAKSICGLASS:**
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- Status Bar:** ⚡ 1 △ 1
- Bottom Bar:** Windows Start button, Search bar (Type here to search), Taskbar icons (File Explorer, Edge, File Manager, Microsoft Store, Mail, Google Chrome).

```
css > # style.css > .btn
1888 -webkit-box-direction: normal;
1889 -ms-flex-flow: row wrap;
1890 flex-flow: row wrap;
1891 -webkit-box-align: center;
1892 -ms-flex-align: center;
1893 align-items: center; }

.form-inline .form-check {
1894 width: 100%; }

@media (min-width: 576px) {
1895 .form-inline label {
1896 display: -webkit-box;
1897 display: -ms-flexbox;
1898 display: flex;
1899 -webkit-box-align: center;
1900 -ms-flex-align: center;
1901 align-items: center;
1902 -webkit-box-pack: center;
1903 -ms-flex-pack: center;
1904 justify-content: center;
1905 margin-bottom: 0; }

.form-inline .form-group {
1906 display: -webkit-box;
1907 display: -ms-flexbox;
1908 display: flex;
1909 -webkit-box-flex: 0;
1910 -ms-flex: 0 0 auto;
1911 flex: 0 0 auto;
1912 -webkit-box-orient: horizontal;
1913 -webkit-box-direction: normal;
1914 -ms-flex-flow: row wrap;
1915 flex-flow: row wrap;
1916 -webkit-box-align: center;
1917 -ms-flex-align: center;
1918 align-items: center;
1919 margin-bottom: 0; }

.form-inline .form-control {
1920 display: inline-block;
1921 width: auto;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor pane displays the content of `style.css`. The code includes various CSS rules for form validation and custom controls, such as `.was-validated` and `.custom-control-input` classes.
- Explorer:** The left sidebar shows the file structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: Shows 1 warning and 1 error.
- Taskbar:** Includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css:** 2 (selected), data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Right Editor Area:** CSS code editor showing style.css content. The code includes various CSS rules for form validation and custom controls, such as .was-validated, .form-control-file:invalid, .form-control-file.is-invalid, .invalid-tool, .display: block;, .color: #f23a2e;, .background-color: #f9aba6;, .border-color: #f5675e;, .border-radius: 0.2rem, .border: 1px solid #f23a2e;, .border: 1px solid #fff;, .border: 1px solid #f23a2e;, .border: inherit;, .outline: 1px solid #f23a2e;, and .outline: 1px solid #fff;.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the source code of the "style.css" file, which includes various CSS rules for styling buttons, form controls, and other elements. The left sidebar is the "EXPLORER" view, showing the project structure with files like "index.html", "contact.html", "sitemap.xml", "style.css", "main.js", and several Bootstrap and jQuery files under the "JAKSICGLASS" folder. The status bar at the bottom indicates there are 1 warning and 1 error.

```
File Edit Selection View Go Debug Terminal Help style.css - ja...
EXPLORER
OPEN EDITORS
  index.html
  contact.html
  sitemap.xml
  # style.css css 2
    JS main.js js
  JAKSICGLASS
    css
      bootstrap
      aos.css
      bootstrap-datepicker.css
      bootstrap.min.css
      bootstrap.min.css.map
      jquery-ui.css
      lightbox.css
      lightbox.min.css
      magnific-popup.css
      owl.carousel.min.css
      owl.theme.default.min.css
    # style.css 2
      data
      fonts
      images
      js
        aos.js
        bootstrap-datepicker.min.js
        bootstrap.min.js
        jquery-3.3.1.min.js
        jquery-migrate-3.0.1.min.js
        jquery-ui.js
        jquery.countdown.min.js
        jquery.magnific-popup.min.js
        jquery.stellar.min.js
    OUTLINE
css > # style.css > .btn
1814   line-height: 1.5;
1815   color: #fff;
1816   background-color: rgba(242, 58, 46, 0.9);
1817   border-radius: 0.25rem; }

1818
1819 .was-validated .form-control:invalid, .form-
1820 .custom-select:invalid,
1821 .custom-select.is-invalid {
1822   border-color: #f23a2e; }
1823 .was-validated .form-control:invalid:focus,
1824 .custom-select:invalid:focus,
1825 .custom-select.is-invalid:focus {
1826   border-color: #f23a2e;
1827   -webkit-box-shadow: 0 0 0 0.2rem rgba(242, 58,
1828   box-shadow: 0 0 0 0.2rem rgba(242, 58,
1829   .was-validated .form-control:invalid ~ .in-
1830   .was-validated .form-control:invalid ~ .in-
1831   .form-control.is-invalid ~ .invalid-tooltip,
1832   .custom-select:invalid ~ .invalid-feedback,
1833   .was-validated
1834   .custom-select:invalid ~ .invalid-tooltip,
1835   .custom-select.is-invalid ~ .invalid-feedback,
1836   .custom-select.is-invalid ~ .invalid-tooltip
1837   | display: block; }

1838
1839 .was-validated .form-control-file:invalid ~ .
1840 .was-validated .form-control-file:invalid ~ .
1841 .form-control-file.is-invalid ~ .invalid-tooltip
1842   display: block; }

1843
1844 .was-validated .form-check-input:invalid ~ .
1845   color: #f23a2e; }

1846
1847 .was-validated .form-check-input:invalid ~ .
1848 .was-validated .form-check-input:invalid ~ .
1849 .form-check-input.is-invalid ~ .invalid-tooltip
1850   display: block; }

1851
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), # style.css (selected), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Editor Area:** The # style.css file is open, showing CSS code for various Bootstrap components like buttons, form controls, and checkboxes. The code includes color definitions (#28a745) and shadows.
- Bottom Taskbar:** Icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 1 error and 1 warning.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes CSS rules for various elements like `.btn`, `.was-validated`, and `.form-control`.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - # style.css** (selected)
 - JS main.js**

Under the "JAKSICGLASS" folder, there are several CSS files:
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`

Under the "# style.css" entry, there are additional files:
 - `data`
 - `fonts`
 - `images`
 - `js`
 - JS aos.js**
 - JS bootstrap-datepicker.min.js**
 - JS bootstrap.min.js**
 - JS jquery-3.3.1.min.js**
 - JS jquery-migrate-3.0.1.min.js**
 - JS jquery-ui.js**
 - JS jquery.countdown.min.js**
 - JS jquery.magnific-popup.min.js**
 - JS jquery.stellar.min.js**

- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser is displaying a CSS file from a local file system. The address bar in the browser shows the path: style.css - j...

The left side of the image shows the Visual Studio Code interface, which includes:

- File** | **Edit** | **Selection** | **View** | **Go** | **Debug** | **Terminal** | **Help**
- EXPLORER** sidebar with the following tree structure:
 - OPEN EDITORS**: index.html, contact.html, sitemap.xml, # style.css (selected), main.js
 - JAKSICGLASS**:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css
 - # style.css (selected)
 - data, fonts, images
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js
 - OUTLINE**
- STATUS BAR**: ⊗ 1 △ 1
- SEARCH BAR**: Type here to search
- Taskbar**: Icons for File Explorer, Edge, File History, Mail, and Google Chrome.

The right side of the image shows the content of the selected CSS file, style.css:

```
css > # style.css > .btn
1679 .form-row > [class*="col-"] {
1680   padding-right: 5px;
1681   padding-left: 5px; }

1683 .form-check {
1684   position: relative;
1685   display: block;
1686   padding-left: 1.25rem; }

1688 .form-check-input {
1689   position: absolute;
1690   margin-top: 0.3rem;
1691   margin-left: -1.25rem; }
1692 .form-check-input:disabled ~ .form-check-label {
1693   color: #adb5bd; }

1695 .form-check-label {
1696   margin-bottom: 0; }

1698 .form-check-inline {
1699   display: -webkit-inline-box;
1700   display: -ms-inline-flexbox;
1701   display: inline-flex;
1702   -webkit-box-align: center;
1703   -ms-flex-align: center;
1704   align-items: center;
1705   padding-left: 0;
1706   margin-right: 0.75rem; }

1707 .form-check-inline .form-check-input {
1708   position: static;
1709   margin-top: 0;
1710   margin-right: 0.3125rem;
1711   margin-left: 0; }

1713 .valid-feedback {
1714   display: none;
1715   width: 100%;
1716   margin-top: 0.25rem; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main pane displays the content of the file `style.css`. The code includes various CSS rules for buttons, form controls, and labels, along with imports for Bootstrap and other assets.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing a subfolder `css` which includes bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css:** 2 changes.
 - data:**
 - fonts:**
 - images:**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE:**
- Terminal:** The bottom right corner shows the Windows taskbar with icons for File Explorer, Edge, File Manager, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS: index.html, contact.html, sitemap.xml, # style.css (2), JS main.js js. JAKSICGLASS: css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), # style.css (2), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Terminal:** style.css - ja...
- Taskbar:** Shows icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .btn
1532
1533 @media (max-width: 1199.98px) {
1534   .table-responsive-xl {
1535     display: block;
1536     width: 100%;
1537     overflow-x: auto;
1538     -webkit-overflow-scrolling: touch;
1539     -ms-overflow-style: -ms-autohiding-scrollbar;
1540   }
1541   .table-responsive-xl > .table-bordered {
1542     border: 0; } }

.table-responsive {
1543   display: block;
1544   width: 100%;
1545   overflow-x: auto;
1546   -webkit-overflow-scrolling: touch;
1547   -ms-overflow-style: -ms-autohiding-scrollbar;
1548 }
1549 .table-responsive > .table-bordered {
1550   border: 0; }

.form-control {
1551   display: block;
1552   width: 100%;
1553   height: calc(2.25rem + 2px);
1554   padding: 0.375rem 0.75rem;
1555   font-size: 1rem;
1556   line-height: 1.5;
1557   color: #495057;
1558   background-color: #fff;
1559   background-clip: padding-box;
1560   border: 1px solid #ced4da;
1561   border-radius: 0.25rem;
1562   -webkit-transition: border-color 0.15s ease-in-out;
1563   transition: border-color 0.15s ease-in-out;
1564   -o-transition: border-color 0.15s ease-in-out;
1565   transition: border-color 0.15s ease-in-out;
1566   transition: border-color 0.15s ease-in-out;
1567   transition: border-color 0.15s ease-in-out;
1568   @media screen and (prefers-reduced-motion: no-preference) {
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of the file `style.css`. The code is a CSS file containing various styles for tables and other elements. Lines 1373 to 1410 are visible, showing styles for table rows, th, td, and tr:nth-of-type(odd) elements.
- Explorer:** The sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`

Under "JAKSICGLASS" folder:
 - `css` folder
 - `bootstrap`
 - `aos.css`
 - `bootstrap-datepicker.css`
 - `bootstrap.min.css`
 - `bootstrap.min.css.map`
 - `jquery-ui.css`
 - `lightbox.css`
 - `lightbox.min.css`
 - `magnific-popup.css`
 - `owl.carousel.min.css`
 - `owl.theme.default.min.css`
 - `# style.css`
 - `data`
 - `fonts`
 - `images`
 - `js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - `> OUTLINE`

- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of the file `style.css`. The code is a CSS file containing various styles for tables and other elements. Lines 1373 to 1410 are visible, showing styles for table rows, th, td, and various table classes like `table-striped`, `table-primary`, `table-secondary`, `table-success`, etc.
- Explorer:** The sidebar shows the project structure. It includes files like `index.html`, `contact.html`, `sitemap.xml`, and multiple versions of `style.css` and `main.js`. A folder named `JAKSICGLASS` contains numerous CSS and JS files, likely for a theme or plugin.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, search, and various system applications like File Explorer, Edge, and Mail.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The editor pane displays the content of the file `style.css`. The code is a CSS file containing various styles for tables and other elements. Lines 1373 to 1410 are visible, showing styles for table rows, th, td, and various table classes like `table-striped`, `table-primary`, `table-secondary`, `table-success`, etc.
- Explorer:** The sidebar shows the project structure. It includes files like `index.html`, `contact.html`, `sitemap.xml`, and multiple versions of `style.css` and `main.js`. A folder named `JAKSICGLASS` contains numerous CSS and JS files, likely for a theme or plugin.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, search, and various system applications like File Explorer, Edge, and Mail.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code for tables. The code includes rules for `.table-bordered`, `.table-borderless`, `.table-striped`, `.table-hover`, `.table-primary`, `.table-secondary`, and `.table-hover .table-primary: hover`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing several CSS files (aos.css, bootstrap-datepicker.css, bootstrap.min.css, etc.) and JS files (aos.js, bootstrap-datepicker.min.js, etc.).
 - style.css:** 2 changes.
 - data, fonts, images, js:** Directories and files under style.css.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Explorer View:** Shows the project structure under "OPEN EDITORS" and "JAKSICGLASS".
- Editor View:** Displays the content of "style.css" with line numbers 1349 to 1386.
- Taskbar:** Includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .btn
1349 border-bottom: 2px solid #dee2e6; }
1350 .table tbody + tbody {
1351 border-top: 2px solid #dee2e6; }
1352 .table .table {
1353 background-color: #fff; }
1354
1355 .table-sm th,
1356 .table-sm td {
1357 padding: 0.3rem; }

1358 .table-bordered {
1359 border: 1px solid #dee2e6; }
1360 .table-bordered th,
1361 .table-bordered td {
1362 border: 1px solid #dee2e6; }
1363 .table-bordered thead th,
1364 .table-bordered thead td {
1365 border-bottom-width: 2px; }

1366 .table-borderless th,
1367 .table-borderless td,
1368 .table-borderless thead th,
1369 .table-borderless tbody + tbody {
1370 border: 0; }

1371 .table-striped tbody tr:nth-of-type(odd) {
1372 background-color: #rgba(0, 0, 0, 0.05); }
1373
1374 .table-hover tbody tr:hover {
1375 background-color: #rgba(0, 0, 0, 0.075); }
1376
1377 .table-primary,
1378 .table-primary > th,
1379 .table-primary > td {
1380 background-color: #e2f1f3; }

1381 .table-hover .table-primary:hover {
1382 background-color: #d9eaf7; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for layout and styling, such as margin-left percentages and table-related styles.
- Explorer:** The left sidebar shows the project structure under "OPEN EDITORS".
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - # style.css** (selected, 2 changes)
 - JS main.js**
 - JAKSICGLASS** folder
 - css** folder (marked with a red dot)
 - `bootstrap`
 - `# aos.css`
 - `# bootstrap-datepicker.css`
 - `# bootstrap.min.css`
 - `# bootstrap.min.css.map`
 - `# jquery-ui.css`
 - `# lightbox.css`
 - `# lightbox.min.css`
 - `# magnific-popup.css`
 - `# owl.carousel.min.css`
 - `# owl.theme.default.min.css`
 - # style.css** (2 changes)
 - `> data`
 - `> fonts`
 - `> images`
 - js** folder
 - JS aos.js**
 - JS bootstrap-datepicker.min.js**
 - JS bootstrap.min.js**
 - JS jquery-3.3.1.min.js**
 - JS jquery-migrate-3.0.1.min.js**
 - JS jquery-ui.js**
 - JS jquery.countdown.min.js**
 - JS jquery.magnific-popup.min.js**
 - JS jquery.stellar.min.js**
 - `> OUTLINE`
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing code related to the `.btn` class. The code includes various CSS properties like `-ms-flex-order`, `order`, and `webkit-box-ordinal-group`.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing several CSS files (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css).
 - style.css:** The current file being edited, with line numbers 1275 to 1312 visible.
 - data, fonts, images:** Folders under style.css.
 - js:** A folder containing numerous JavaScript files (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
 - OUTLINE:** A section at the bottom of the sidebar.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Microsoft Edge browser window displaying a code editor interface. The top navigation bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates "style.css - ja".

The left sidebar contains icons for Explorer, Search, Open Editors, JAKSICGLASS, and Outline. The "OPEN EDITORS" section lists index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The "JAKSICGLASS" section lists various CSS and JS files.

The main area displays the content of style.css, showing a series of CSS rules with line numbers from 1251 to 1288. The code includes media queries for "index.html" and "contact.html" and a "sitemap.xml" file.

```
css > # style.css > .btn
flex: 0 0 100%; max-width: 100%; }
.order-xl-first {
-webkit-box-ordinal-group: 0;
-ms-flex-order: -1;
order: -1; }
.order-xl-last {
-webkit-box-ordinal-group: 14;
-ms-flex-order: 13;
order: 13; }
.order-xl-0 {
-webkit-box-ordinal-group: 1;
-ms-flex-order: 0;
order: 0; }
.order-xl-1 {
-webkit-box-ordinal-group: 2;
-ms-flex-order: 1;
order: 1; }
.order-xl-2 {
-webkit-box-ordinal-group: 3;
-ms-flex-order: 2;
order: 2; }
.order-xl-3 {
-webkit-box-ordinal-group: 4;
-ms-flex-order: 3;
order: 3; }
.order-xl-4 {
-webkit-box-ordinal-group: 5;
-ms-flex-order: 4;
order: 4; }
.order-xl-5 {
-webkit-box-ordinal-group: 6;
-ms-flex-order: 5;
order: 5; }
.order-xl-6 {
-webkit-box-ordinal-group: 7;
-ms-flex-order: 6;
order: 6; }

@rule 1251
flex: 0 0 100%; max-width: 100%; }
@rule 1252
.order-xl-first {
-webkit-box-ordinal-group: 0;
-ms-flex-order: -1;
order: -1; }
@rule 1253
.order-xl-last {
-webkit-box-ordinal-group: 14;
-ms-flex-order: 13;
order: 13; }
@rule 1254
.order-xl-0 {
-webkit-box-ordinal-group: 1;
-ms-flex-order: 0;
order: 0; }
@rule 1255
.order-xl-1 {
-webkit-box-ordinal-group: 2;
-ms-flex-order: 1;
order: 1; }
@rule 1256
.order-xl-2 {
-webkit-box-ordinal-group: 3;
-ms-flex-order: 2;
order: 2; }
@rule 1257
.order-xl-3 {
-webkit-box-ordinal-group: 4;
-ms-flex-order: 3;
order: 3; }
@rule 1258
.order-xl-4 {
-webkit-box-ordinal-group: 5;
-ms-flex-order: 4;
order: 4; }
@rule 1259
.order-xl-5 {
-webkit-box-ordinal-group: 6;
-ms-flex-order: 5;
order: 5; }
@rule 1260
.order-xl-6 {
-webkit-box-ordinal-group: 7;
-ms-flex-order: 6;
order: 6; }


@rule 1261
flex: 0 0 100%; max-width: 100%; }
@rule 1262
.order-xl-first {
-webkit-box-ordinal-group: 0;
-ms-flex-order: -1;
order: -1; }
@rule 1263
.order-xl-last {
-webkit-box-ordinal-group: 14;
-ms-flex-order: 13;
order: 13; }
@rule 1264
.order-xl-0 {
-webkit-box-ordinal-group: 1;
-ms-flex-order: 0;
order: 0; }
@rule 1265
.order-xl-1 {
-webkit-box-ordinal-group: 2;
-ms-flex-order: 1;
order: 1; }
@rule 1266
.order-xl-2 {
-webkit-box-ordinal-group: 3;
-ms-flex-order: 2;
order: 2; }
@rule 1267
.order-xl-3 {
-webkit-box-ordinal-group: 4;
-ms-flex-order: 3;
order: 3; }
@rule 1268
.order-xl-4 {
-webkit-box-ordinal-group: 5;
-ms-flex-order: 4;
order: 4; }
@rule 1269
.order-xl-5 {
-webkit-box-ordinal-group: 6;
-ms-flex-order: 5;
order: 5; }
@rule 1270
.order-xl-6 {
-webkit-box-ordinal-group: 7;
-ms-flex-order: 6;
order: 6; }

@rule 1271
flex: 0 0 100%; max-width: 100%; }
@rule 1272
.order-xl-first {
-webkit-box-ordinal-group: 0;
-ms-flex-order: -1;
order: -1; }
@rule 1273
.order-xl-last {
-webkit-box-ordinal-group: 14;
-ms-flex-order: 13;
order: 13; }
@rule 1274
.order-xl-0 {
-webkit-box-ordinal-group: 1;
-ms-flex-order: 0;
order: 0; }
@rule 1275
.order-xl-1 {
-webkit-box-ordinal-group: 2;
-ms-flex-order: 1;
order: 1; }
@rule 1276
.order-xl-2 {
-webkit-box-ordinal-group: 3;
-ms-flex-order: 2;
order: 2; }
@rule 1277
.order-xl-3 {
-webkit-box-ordinal-group: 4;
-ms-flex-order: 3;
order: 3; }
@rule 1278
.order-xl-4 {
-webkit-box-ordinal-group: 5;
-ms-flex-order: 4;
order: 4; }
@rule 1279
.order-xl-5 {
-webkit-box-ordinal-group: 6;
-ms-flex-order: 5;
order: 5; }
@rule 1280
.order-xl-6 {
-webkit-box-ordinal-group: 7;
-ms-flex-order: 6;
order: 6; }

@rule 1281
flex: 0 0 100%; max-width: 100%; }
@rule 1282
.order-xl-first {
-webkit-box-ordinal-group: 0;
-ms-flex-order: -1;
order: -1; }
@rule 1283
.order-xl-last {
-webkit-box-ordinal-group: 14;
-ms-flex-order: 13;
order: 13; }
@rule 1284
.order-xl-0 {
-webkit-box-ordinal-group: 1;
-ms-flex-order: 0;
order: 0; }
@rule 1285
.order-xl-1 {
-webkit-box-ordinal-group: 2;
-ms-flex-order: 1;
order: 1; }
@rule 1286
.order-xl-2 {
-webkit-box-ordinal-group: 3;
-ms-flex-order: 2;
order: 2; }
@rule 1287
.order-xl-3 {
-webkit-box-ordinal-group: 4;
-ms-flex-order: 3;
order: 3; }
@rule 1288
.order-xl-4 {
-webkit-box-ordinal-group: 5;
-ms-flex-order: 4;
order: 4; }
```

The screenshot shows the Microsoft Edge browser with the developer tools open. The address bar at the top right displays "style.css - ja...". The developer tools interface includes a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The left sidebar has icons for file, search, and refresh, followed by sections for EXPLORER, OPEN EDITORS, and JAKSICGLASS. The OPEN EDITORS section lists index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The JAKSICGLASS section lists various CSS and JS files. The main pane shows the CSS code for style.css, specifically targeting the .btn class with flexbox properties. The code editor shows lines 1214 through 1251.

```
css > # style.css > .btn
1214 -webkit-box-flex: 0;
1215 -ms-flex: 0 0 41.66667%;
1216 flex: 0 0 41.66667%;
1217 max-width: 41.66667%; }
1218 .col-xl-6 {
1219 -webkit-box-flex: 0;
1220 -ms-flex: 0 0 50%;
1221 flex: 0 0 50%;
1222 max-width: 50%; }
1223 .col-xl-7 {
1224 -webkit-box-flex: 0;
1225 -ms-flex: 0 0 58.33333%;
1226 flex: 0 0 58.33333%;
1227 max-width: 58.33333%; }
1228 .col-xl-8 {
1229 -webkit-box-flex: 0;
1230 -ms-flex: 0 0 66.66667%;
1231 flex: 0 0 66.66667%;
1232 max-width: 66.66667%; }
1233 .col-xl-9 {
1234 -webkit-box-flex: 0;
1235 -ms-flex: 0 0 75%;
1236 flex: 0 0 75%;
1237 max-width: 75%; }
1238 .col-xl-10 {
1239 -webkit-box-flex: 0;
1240 -ms-flex: 0 0 83.33333%;
1241 flex: 0 0 83.33333%;
1242 max-width: 83.33333%; }
1243 .col-xl-11 {
1244 -webkit-box-flex: 0;
1245 -ms-flex: 0 0 91.66667%;
1246 flex: 0 0 91.66667%;
1247 max-width: 91.66667%; }
1248 .col-xl-12 {
1249 -webkit-box-flex: 0;
1250 -ms-flex: 0 0 100%;
1251 flex: 0 0 100%;
```

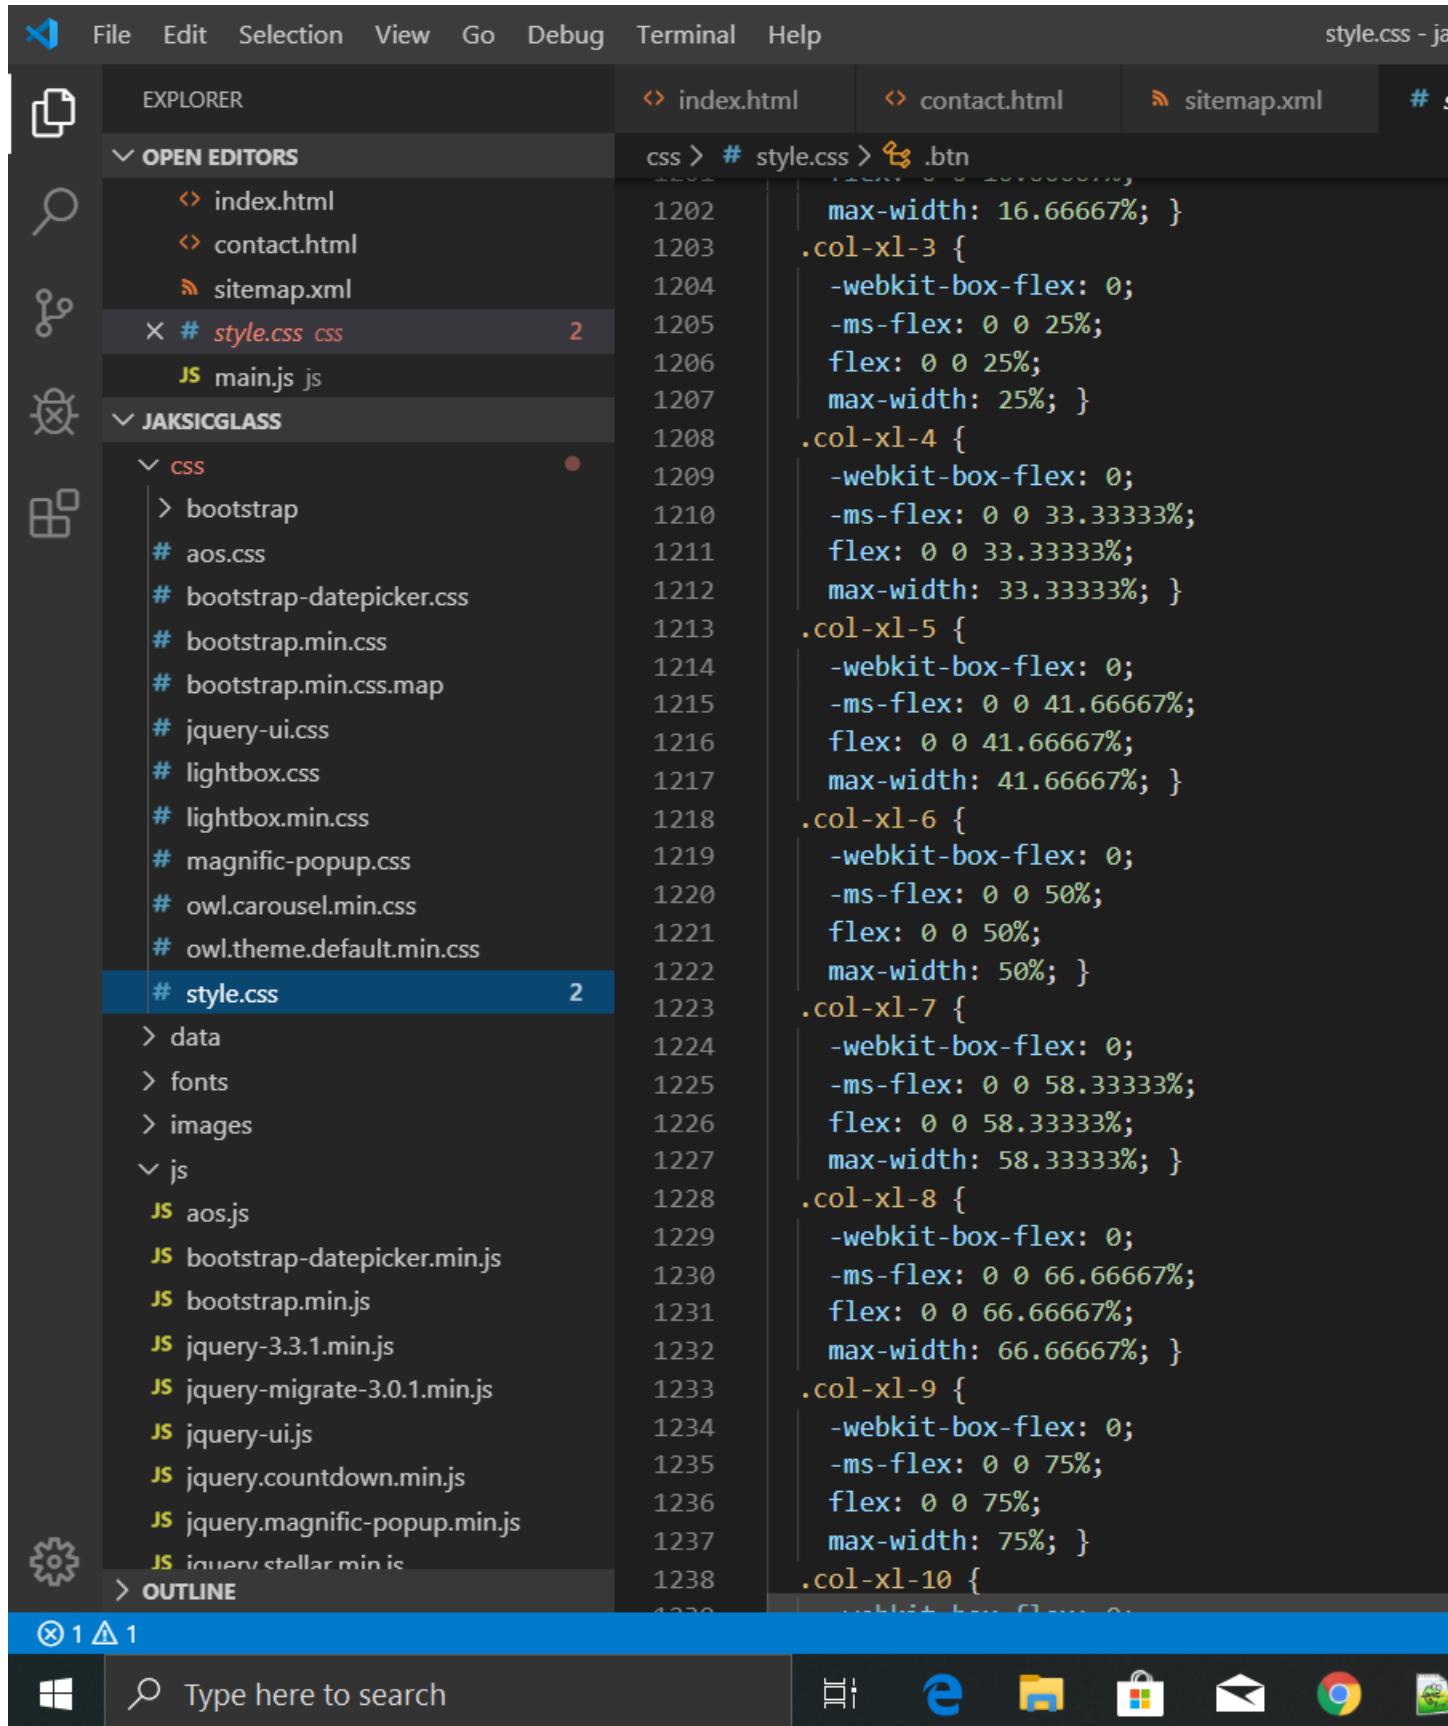

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - jaksicglass
- Left Sidebar:** Explorer, Search, Find, Open Editors, JAKSICGLASS, Outline.
- Open Editors:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
- Project Structure:** JAKSICGLASS folder containing css, js, and images.
- Code Editor:** The style.css file is open, showing CSS code for a responsive grid system.

```
css > # style.css > .btn
margin-left: 91.66667%; } }

@media (min-width: 1200px) {
.col-xl {
-ms-flex-preferred-size: 0;
flex-basis: 0;
-webkit-box-flex: 1;
-ms-flex-positive: 1;
flex-grow: 1;
max-width: 100%; }

.col-xl-auto {
-webkit-box-flex: 0;
-ms-flex: 0 0 auto;
flex: 0 0 auto;
width: auto;
max-width: none; }

.col-xl-1 {
-webkit-box-flex: 0;
-ms-flex: 0 0 8.33333%;
flex: 0 0 8.33333%;
max-width: 8.33333%; }

.col-xl-2 {
-webkit-box-flex: 0;
-ms-flex: 0 0 16.66667%;
flex: 0 0 16.66667%;
max-width: 16.66667%; }

.col-xl-3 {
-webkit-box-flex: 0;
-ms-flex: 0 0 25%;
flex: 0 0 25%;
max-width: 25%; }

.col-xl-4 {
-webkit-box-flex: 0;
-ms-flex: 0 0 33.33333%;
flex: 0 0 33.33333%;
max-width: 33.33333%; }

.col-xl-5 {
-webkit-box-flex: 0;
```
- Bottom Bar:** Notifications (1 error, 1 warning), Taskbar with icons for File Explorer, Edge, File Manager, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Microsoft Edge browser window with a dark theme. The address bar at the top right displays "style.css - ja...". The main content area is divided into two panes. The left pane, titled "EXPLORER", contains a "OPEN EDITORS" section with files: index.html, contact.html, sitemap.xml, style.css (selected), and main.js. Below this is a "JAKSICGLASS" folder containing sub-folders "css" and "js", and files like bootstrap, aos.css, and various CSS and JS files. The right pane shows the content of the selected "style.css" file, which includes media queries for widths up to 1200px. The bottom of the screen features the Windows taskbar with icons for File Explorer, Edge, File Hub, Mail, and Google Chrome.

```
css > # style.css > .btn
1153 |   order: 12; }
1154 |   .offset-lg-0 {
1155 |     margin-left: 0; }
1156 |   .offset-lg-1 {
1157 |     margin-left: 8.3333%; }
1158 |   .offset-lg-2 {
1159 |     margin-left: 16.6667%; }
1160 |   .offset-lg-3 {
1161 |     margin-left: 25%; }
1162 |   .offset-lg-4 {
1163 |     margin-left: 33.3333%; }
1164 |   .offset-lg-5 {
1165 |     margin-left: 41.6667%; }
1166 |   .offset-lg-6 {
1167 |     margin-left: 50%; }
1168 |   .offset-lg-7 {
1169 |     margin-left: 58.3333%; }
1170 |   .offset-lg-8 {
1171 |     margin-left: 66.6667%; }
1172 |   .offset-lg-9 {
1173 |     margin-left: 75%; }
1174 |   .offset-lg-10 {
1175 |     margin-left: 83.3333%; }
1176 |   .offset-lg-11 {
1177 |     margin-left: 91.6667%; } }

@media (min-width: 1200px) {
  .col-xl {
    -ms-flex-preferred-size: 0;
    flex-basis: 0;
    -webkit-box-flex: 1;
    -ms-flex-positive: 1;
    flex-grow: 1;
    max-width: 100%; }
  .col-xl-auto {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 auto;
    flex: 0 0 auto; }
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The Explorer sidebar on the left lists open editors and project files:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js (JS)
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The main editor area displays the content of "style.css". The code uses the Bootstrap grid system with classes like .offset-lg-0 through .offset-lg-11. The code is numbered from 1140 to 1177.

```
css > # style.css > .btn
1140    -ms-flex-order: 9;
1141    order: 9; }
1142    .order-lg-10 {
1143        -webkit-box-ordinal-group: 11;
1144        -ms-flex-order: 10;
1145        order: 10; }
1146    .order-lg-11 {
1147        -webkit-box-ordinal-group: 12;
1148        -ms-flex-order: 11;
1149        order: 11; }
1150    .order-lg-12 {
1151        -webkit-box-ordinal-group: 13;
1152        -ms-flex-order: 12;
1153        order: 12; }
1154    .offset-lg-0 {
1155        margin-left: 0; }
1156    .offset-lg-1 {
1157        margin-left: 8.3333%; }
1158    .offset-lg-2 {
1159        margin-left: 16.6667%; }
1160    .offset-lg-3 {
1161        margin-left: 25%; }
1162    .offset-lg-4 {
1163        margin-left: 33.3333%; }
1164    .offset-lg-5 {
1165        margin-left: 41.6667%; }
1166    .offset-lg-6 {
1167        margin-left: 50%; }
1168    .offset-lg-7 {
1169        margin-left: 58.3333%; }
1170    .offset-lg-8 {
1171        margin-left: 66.6667%; }
1172    .offset-lg-9 {
1173        margin-left: 75%; }
1174    .offset-lg-10 {
1175        margin-left: 83.3333%; }
1176    .offset-lg-11 {
1177        margin-left: 91.6667%; } }
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge DevTools interface with the 'style.css' file open. The left sidebar displays the 'EXPLORER' view, which includes sections for 'OPEN EDITORS' (index.html, contact.html, sitemap.xml) and 'JAKSICGLASS' (css, js). The 'css' section under 'JAKSICGLASS' contains numerous CSS files, with 'style.css' currently selected. The main pane shows the code for 'style.css' with line numbers from 1116 to 1153. The code includes various CSS properties like '-ms-flex-order', 'order', and class definitions for '.order-lg-4' through '.order-lg-12'. The status bar at the bottom indicates 1 warning and 1 error.

```
css > # style.css > .btn
1116 -ms-flex-order: 3;
1117 order: 3; }
1118 .order-lg-4 {
1119 -webkit-box-ordinal-group: 5;
1120 -ms-flex-order: 4;
1121 order: 4; }
1122 .order-lg-5 {
1123 -webkit-box-ordinal-group: 6;
1124 -ms-flex-order: 5;
1125 order: 5; }
1126 .order-lg-6 {
1127 -webkit-box-ordinal-group: 7;
1128 -ms-flex-order: 6;
1129 order: 6; }
1130 .order-lg-7 {
1131 -webkit-box-ordinal-group: 8;
1132 -ms-flex-order: 7;
1133 order: 7; }
1134 .order-lg-8 {
1135 -webkit-box-ordinal-group: 9;
1136 -ms-flex-order: 8;
1137 order: 8; }
1138 .order-lg-9 {
1139 -webkit-box-ordinal-group: 10;
1140 -ms-flex-order: 9;
1141 order: 9; }
1142 .order-lg-10 {
1143 -webkit-box-ordinal-group: 11;
1144 -ms-flex-order: 10;
1145 order: 10; }
1146 .order-lg-11 {
1147 -webkit-box-ordinal-group: 12;
1148 -ms-flex-order: 11;
1149 order: 11; }
1150 .order-lg-12 {
1151 -webkit-box-ordinal-group: 13;
1152 -ms-flex-order: 12;
1153 order: 12; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Explorer:** Shows the file structure:
 - OPEN EDITORS: index.html, contact.html, sitemap.xml, # style.css (selected), main.js
 - JAKSICGLASS: css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), # style.css (selected), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Editor:** The # style.css file is open, showing CSS code with line numbers 1091 to 1128. The code includes rules for .btn, .order-lg-first, .order-lg-last, .order-lg-0, .order-lg-1, .order-lg-2, .order-lg-3, .order-lg-4, .order-lg-5, and .order-lg-6.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".


The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected, 2 changes)
 - main.js (JS)
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - # style.css (selected, 2 changes)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The main editor area shows the content of "style.css". The code uses flexbox and Bootstrap's grid system:

```
flex: 0 0 58.33333%;  
max-width: 58.33333%; }  
.col-lg-8 {  
-webkit-box-flex: 0;  
-ms-flex: 0 0 66.66667%;  
flex: 0 0 66.66667%;  
max-width: 66.66667%; }  
.col-lg-9 {  
-webkit-box-flex: 0;  
-ms-flex: 0 0 75%;  
flex: 0 0 75%;  
max-width: 75%; }  
.col-lg-10 {  
-webkit-box-flex: 0;  
-ms-flex: 0 0 83.33333%;  
flex: 0 0 83.33333%;  
max-width: 83.33333%; }  
.col-lg-11 {  
-webkit-box-flex: 0;  
-ms-flex: 0 0 91.66667%;  
flex: 0 0 91.66667%;  
max-width: 91.66667%; }  
.col-lg-12 {  
-webkit-box-flex: 0;  
-ms-flex: 0 0 100%;  
flex: 0 0 100%;  
max-width: 100%; }  
.order-lg-first {  
-webkit-box-ordinal-group: 0;  
-ms-flex-order: -1;  
order: -1; }  
.order-lg-last {  
-webkit-box-ordinal-group: 14;  
-ms-flex-order: 13;  
order: 13; }  
.order-lg-0 {  
-webkit-box-ordinal-group: 1;  
-ms-flex-order: 0; }
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

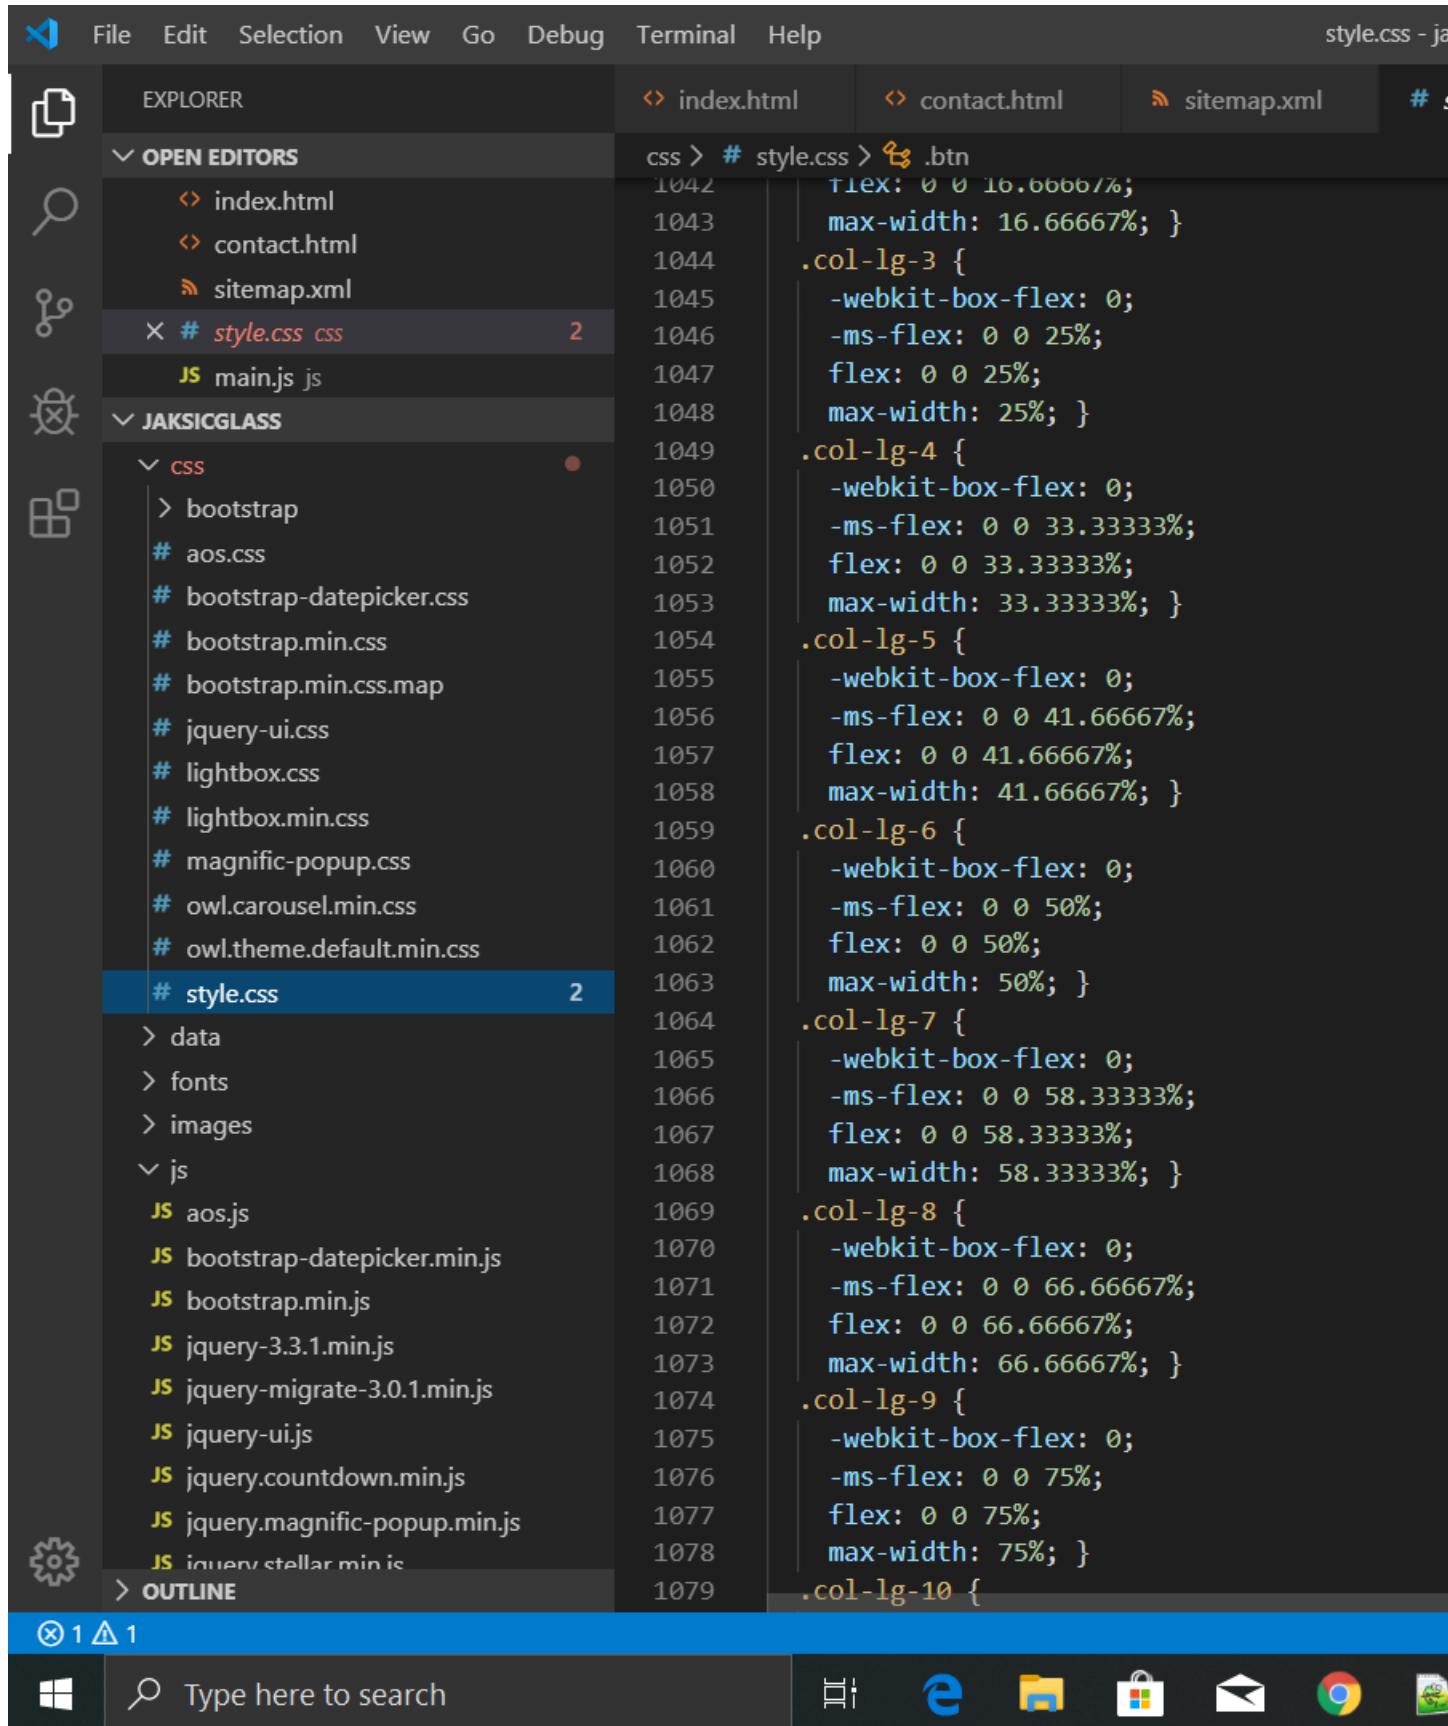

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code for a responsive grid system. The code includes media queries for a minimum width of 992px, defining classes like `.col-lg`, `.col-lg-auto`, `.col-lg-1`, `.col-lg-2`, `.col-lg-3`, `.col-lg-4`, and `.col-lg-5` with various flex properties.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), data, fonts, images, js (selected). Sub-folders under js include aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, and jquery.stellar.min.js.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge DevTools interface with the CSS panel open. The left sidebar lists files in the 'OPEN EDITORS' section, including index.html, contact.html, sitemap.xml, style.css (which is selected), and main.js. Below this is the 'JAKSICGLASS' folder, which contains a 'css' folder with numerous CSS files and a 'js' folder with various JavaScript files.

The right pane displays the content of the selected file, style.css. The code includes a series of margin-left rules for .btn elements from line 993 to 1030, followed by a media query for @media (min-width: 992px) defining .col-lg and .col-lg-auto styles.

```
css > # style.css > .btn
      -ms-flex-order: 12;
      order: 12; }
.offset-md-0 {
  margin-left: 0; }
.offset-md-1 {
  margin-left: 8.3333%; }
.offset-md-2 {
  margin-left: 16.6667%; }
.offset-md-3 {
  margin-left: 25%; }
.offset-md-4 {
  margin-left: 33.3333%; }
.offset-md-5 {
  margin-left: 41.6667%; }
.offset-md-6 {
  margin-left: 50%; }
.offset-md-7 {
  margin-left: 58.3333%; }
.offset-md-8 {
  margin-left: 66.6667%; }
.offset-md-9 {
  margin-left: 75%; }
.offset-md-10 {
  margin-left: 83.3333%; }
.offset-md-11 {
  margin-left: 91.6667%; }

@media (min-width: 992px) {
  .col-lg {
    -ms-flex-preferred-size: 0;
    flex-basis: 0;
    -webkit-box-flex: 1;
    -ms-flex-positive: 1;
    flex-grow: 1;
    max-width: 100%; }
  .col-lg-auto {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 auto; }
```

The screenshot shows the Microsoft Edge DevTools interface. The top navigation bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar displays "style.css - ja".

The left sidebar contains icons for file operations, search, and other developer tools. The "EXPLORER" section lists open editors: index.html, contact.html, sitemap.xml, style.css (selected), and main.js. It also shows a folder structure under "JAKSICGLASS" containing various CSS and JS files.

The main content area is the "Source Editor" for "style.css". The code is as follows:

```
css > # style.css > .btn
993 -ms-flex-order: 12;
994 order: 12; }
995 .offset-md-0 {
996 | margin-left: 0; }
997 .offset-md-1 {
998 | margin-left: 8.3333%; }
999 .offset-md-2 {
1000 | margin-left: 16.6667%; }
1001 .offset-md-3 {
1002 | margin-left: 25%; }
1003 .offset-md-4 {
1004 | margin-left: 33.3333%; }
1005 .offset-md-5 {
1006 | margin-left: 41.6667%; }
1007 .offset-md-6 {
1008 | margin-left: 50%; }
1009 .offset-md-7 {
1010 | margin-left: 58.3333%; }
1011 .offset-md-8 {
1012 | margin-left: 66.6667%; }
1013 .offset-md-9 {
1014 | margin-left: 75%; }
1015 .offset-md-10 {
1016 | margin-left: 83.3333%; }
1017 .offset-md-11 {
1018 | margin-left: 91.6667%; } }

@media (min-width: 992px) {
1020 .col-lg {
1021 | -ms-flex-preferred-size: 0;
1022 | flex-basis: 0;
1023 | -webkit-box-flex: 1;
1024 | -ms-flex-positive: 1;
1025 | flex-grow: 1;
1026 | max-width: 100%; }
1027 .col-lg-auto {
1028 | -webkit-box-flex: 0;
1029 | -ms-flex: 0 0 auto;
1030 }
```

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser title bar reads "style.css - ja...". The main content area of the browser displays a portion of a CSS file, specifically the ".order-md-7" through ".order-md-12" rules. The CSS code includes vendor-specific prefixes like "-webkit-box-ordinal-group" and "-ms-flex-order".

The browser's address bar shows the URL "style.css". The status bar at the bottom of the browser window indicates "⊗ 1 △ 1".

The desktop taskbar at the bottom features several pinned icons: File Explorer, Edge, File History, Mail, and Google Chrome.

The left side of the image shows the Windows Start menu with various pinned apps like Mail, Photos, and Settings.

The central part of the image is dominated by the Microsoft Edge browser window, which contains the following CSS code:

```
css > # style.css > .btn
      -ms-flex-order: 6;
      order: 6; }
.order-md-7 {
  -webkit-box-ordinal-group: 8;
  -ms-flex-order: 7;
  order: 7; }
.order-md-8 {
  -webkit-box-ordinal-group: 9;
  -ms-flex-order: 8;
  order: 8; }
.order-md-9 {
  -webkit-box-ordinal-group: 10;
  -ms-flex-order: 9;
  order: 9; }
.order-md-10 {
  -webkit-box-ordinal-group: 11;
  -ms-flex-order: 10;
  order: 10; }
.order-md-11 {
  -webkit-box-ordinal-group: 12;
  -ms-flex-order: 11;
  order: 11; }
.order-md-12 {
  -webkit-box-ordinal-group: 13;
  -ms-flex-order: 12;
  order: 12; }
.offset-md-0 {
  margin-left: 0; }
.offset-md-1 {
  margin-left: 8.3333%; }
.offset-md-2 {
  margin-left: 16.6667%; }
.offset-md-3 {
  margin-left: 25%; }
.offset-md-4 {
  margin-left: 33.3333%; }
.offset-md-5 {
  margin-left: 41.6667%; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected), data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Right Panel (Editor):** CSS code editor showing the structure of style.css, including rules for .btn, .order-md-4, .order-md-5, .order-md-6, .order-md-7, .order-md-8, .order-md-9, .order-md-10, .order-md-11, .order-md-12, and .order-md-13.
- Bottom Taskbar:** Taskbar icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 1 error and 1 warning.

The screenshot shows a Microsoft Edge browser window with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Explorer Sidebar:** Shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css
 - # style.css (selected)
 - data, fonts, images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - OUTLINE
- Code Editor Area:** Displays the content of style.css, specifically the .btn class and its associated flexbox properties.
- Bottom Bar:** Shows icons for Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja
- Explorer View:** Shows the project structure with the following files:
 - OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
 - JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- Editor View:** Displays the content of style.css, specifically the .btn class and the .col-md-8 through .col-md-12 classes.
- Taskbar:** Shows icons for Taskbar, Start, Task View, Edge, File Explorer, Task Manager, Mail, and Google Chrome.
- Status Bar:** Shows notifications (@ 1, △ 1) and a search bar.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The file `style.css` is open, showing CSS code for a responsive grid layout using flexbox. The code includes rules for classes like `.col-md-1` through `.col-md-7`, which define widths of 8.33333%, 16.66667%, 25%, 33.33333%, 41.66667%, 50%, and 58.33333% respectively.
- Explorer Pane:** Shows the project structure with the following files:
 - `index.html`
 - `contact.html`
 - `sitemap.xml`
 - `# style.css` (selected)
 - `main.js`
 - JAKSICGLASS** folder
 - `css` folder
 - `bootstrap`
 - `# aos.css`
 - `# bootstrap-datepicker.css`
 - `# bootstrap.min.css`
 - `# bootstrap.min.css.map`
 - `# jquery-ui.css`
 - `# lightbox.css`
 - `# lightbox.min.css`
 - `# magnific-popup.css`
 - `# owl.carousel.min.css`
 - `# owl.theme.default.min.css`
 - `# style.css`
 - `> data`
 - `> fonts`
 - `> images`
 - `> js` folder
 - `aos.js`
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - `> OUTLINE`
- Taskbar:** Shows icons for File Explorer, Task View, Edge browser, File Explorer, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge DevTools interface with the CSS panel open. The left sidebar displays the 'OPEN EDITORS' section, which includes files like index.html, contact.html, sitemap.xml, style.css (selected), and main.js. Below this is the 'JAKSICGLASS' folder, containing sub-folders for css and js, and individual files such as bootstrap, aos.css, and various jQuery and Bootstrap components. The right panel shows the code for style.css, specifically the .btn class and a media query for min-width: 768px.

```
css > # style.css > .btn
834 -ms-flex-order: 12;
835 order: 12; }
836 .offset-sm-0 {
837 | margin-left: 0; }
838 .offset-sm-1 {
839 | margin-left: 8.3333%; }
840 .offset-sm-2 {
841 | margin-left: 16.66667%; }
842 .offset-sm-3 {
843 | margin-left: 25%; }
844 .offset-sm-4 {
845 | margin-left: 33.3333%; }
846 .offset-sm-5 {
847 | margin-left: 41.66667%; }
848 .offset-sm-6 {
849 | margin-left: 50%; }
850 .offset-sm-7 {
851 | margin-left: 58.3333%; }
852 .offset-sm-8 {
853 | margin-left: 66.66667%; }
854 .offset-sm-9 {
855 | margin-left: 75%; }
856 .offset-sm-10 {
857 | margin-left: 83.3333%; }
858 .offset-sm-11 {
859 | margin-left: 91.66667%; } }

@media (min-width: 768px) {
860 .col-md {
861 | -ms-flex-preferred-size: 0;
862 | flex-basis: 0;
863 | -webkit-box-flex: 1;
864 | -ms-flex-positive: 1;
865 | flex-grow: 1;
866 | max-width: 100%; }
867 .col-md-auto {
868 | -webkit-box-flex: 0;
869 | -ms-flex: 0 0 auto;
870 |
871 }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer View:** Shows the project structure with the following files and folders:
 - OPEN EDITORS: index.html, contact.html, sitemap.xml, style.css (selected), main.js
 - JAKSICGLASS folder:
 - css folder: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css
 - style.css (selected)
 - data, fonts, images, js folder: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js
 - OUTLINE
- Editor View:** The right pane displays the content of the selected file, style.css. The code includes CSS rules for .btn, .order-sm-7, .order-sm-8, .order-sm-9, .order-sm-10, .order-sm-11, .order-sm-12, .offset-sm-0, .offset-sm-1, .offset-sm-2, .offset-sm-3, .offset-sm-4, and .offset-sm-5. Lines 810 through 846 are visible.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface. The Explorer sidebar on the left lists files and folders: index.html, contact.html, sitemap.xml, style.css (selected), main.js, bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, data, fonts, images, js, aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, and outline. The Editor tab on the right displays the content of style.css, specifically the .order-sm-1 through .order-sm-10 classes which define flex order properties for responsive design.

```
css > # style.css > .btn
      -webkit-box-ordinal-group: 1;
      -ms-flex-order: 0;
      order: 0; }

.order-sm-1 {
      -webkit-box-ordinal-group: 2;
      -ms-flex-order: 1;
      order: 1; }

.order-sm-2 {
      -webkit-box-ordinal-group: 3;
      -ms-flex-order: 2;
      order: 2; }

.order-sm-3 {
      -webkit-box-ordinal-group: 4;
      -ms-flex-order: 3;
      order: 3; }

.order-sm-4 {
      -webkit-box-ordinal-group: 5;
      -ms-flex-order: 4;
      order: 4; }

.order-sm-5 {
      -webkit-box-ordinal-group: 6;
      -ms-flex-order: 5;
      order: 5; }

.order-sm-6 {
      -webkit-box-ordinal-group: 7;
      -ms-flex-order: 6;
      order: 6; }

.order-sm-7 {
      -webkit-box-ordinal-group: 8;
      -ms-flex-order: 7;
      order: 7; }

.order-sm-8 {
      -webkit-box-ordinal-group: 9;
      -ms-flex-order: 8;
      order: 8; }

.order-sm-9 {
      -webkit-box-ordinal-group: 10;
      -ms-flex-order: 9; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor window displays the content of `style.css`. The code defines a series of CSS classes for grid columns (col-sm-5 through col-sm-12) using flexbox properties.
- Explorer:** The left sidebar shows the project structure. It includes files like `index.html`, `contact.html`, `sitemap.xml`, `style.css` (which is currently selected), and `main.js`. A folder named `JAKSICGLASS` contains numerous CSS and JS files related to Bootstrap and other UI components.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, search, file explorer, command palette, and browser links (Edge, Google Drive, Microsoft Store, Mail, and Chrome).

```
css > # style.css > .btn
.col-sm-5 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 41.66667%;
    flex: 0 0 41.66667%;
    max-width: 41.66667%; }

.col-sm-6 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 50%;
    flex: 0 0 50%;
    max-width: 50%; }

.col-sm-7 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 58.33333%;
    flex: 0 0 58.33333%;
    max-width: 58.33333%; }

.col-sm-8 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 66.66667%;
    flex: 0 0 66.66667%;
    max-width: 66.66667%; }

.col-sm-9 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 75%;
    flex: 0 0 75%;
    max-width: 75%; }

.col-sm-10 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 83.33333%;
    flex: 0 0 83.33333%;
    max-width: 83.33333%; }

.col-sm-11 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 91.66667%;
    flex: 0 0 91.66667%;
    max-width: 91.66667%; }

.col-sm-12 {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 100%; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** style.css - ja...
- Explorer:** OPEN EDITORS: index.html, contact.html, sitemap.xml, # style.css (selected), main.js (js). JAKSICGLASS: css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), style.css (2), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Status Bar:** ⚡ 1 ▲ 1, Type here to search, Taskbar icons (File Explorer, Recent Files, Taskbar, Taskbar, Taskbar, Taskbar, Taskbar, Taskbar, Taskbar).

```
css > # style.css > .btn
699 .offset-11 {
700   margin-left: 91.66667%; }

@media (min-width: 576px) {
703   .col-sm {
704     -ms-flex-preferred-size: 0;
705     flex-basis: 0;
706     -webkit-box-flex: 1;
707     -ms-flex-positive: 1;
708     flex-grow: 1;
709     max-width: 100%; }

.col-sm-auto {
710     -webkit-box-flex: 0;
711     -ms-flex: 0 0 auto;
712     flex: 0 0 auto;
713     width: auto;
714     max-width: none; }

.col-sm-1 {
715     -webkit-box-flex: 0;
716     -ms-flex: 0 0 8.33333%;
717     flex: 0 0 8.33333%;
718     max-width: 8.33333%; }

.col-sm-2 {
719     -webkit-box-flex: 0;
720     -ms-flex: 0 0 16.66667%;
721     flex: 0 0 16.66667%;
722     max-width: 16.66667%; }

.col-sm-3 {
723     -webkit-box-flex: 0;
724     -ms-flex: 0 0 25%;
725     flex: 0 0 25%;
726     max-width: 25%; }

.col-sm-4 {
727     -webkit-box-flex: 0;
728     -ms-flex: 0 0 33.33333%;
729     flex: 0 0 33.33333%;
730     max-width: 33.33333%; }

.col-sm-5 {
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected), data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
- Editor Area:** The right pane displays the content of the selected file, style.css. The code includes CSS rules for .btn, .order-10, .order-11, .order-12, .offset-1 through .offset-7, and various margin-left values. Lines 650-687 are visible.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code uses CSS3 flexbox properties to define the layout of a navigation bar. It includes rules for ".btn", ".order-first", ".order-last", ".order-0", ".order-1", ".order-2", ".order-3", and ".order-4" classes.

```
css > # style.css > .btn
589 -webkit-box-flex: 0;
590 -ms-flex: 0 0 100%;
591 flex: 0 0 100%;
592 max-width: 100%; }

593 .order-first {
594 -webkit-box-ordinal-group: 0;
595 -ms-flex-order: -1;
596 order: -1; }

597 .order-last {
598 -webkit-box-ordinal-group: 14;
599 -ms-flex-order: 13;
600 order: 13; }

601 .order-0 {
602 -webkit-box-ordinal-group: 1;
603 -ms-flex-order: 0;
604 order: 0; }

605 .order-1 {
606 -webkit-box-ordinal-group: 2;
607 -ms-flex-order: 1;
608 order: 1; }

609 .order-2 {
610 -webkit-box-ordinal-group: 3;
611 -ms-flex-order: 2;
612 order: 2; }

613 .order-3 {
614 -webkit-box-ordinal-group: 4;
615 -ms-flex-order: 3;
616 order: 3; }

617 .order-4 {
618 -webkit-box-ordinal-group: 5;
619 -ms-flex-order: 4;
```

The bottom taskbar shows the Windows Start button, a search bar with placeholder "Type here to search", and icons for File Explorer, Edge browser, File History, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser interface with the developer tools open. The address bar at the top displays "style.css - ja...". The main content area shows the source code of the "style.css" file, which contains CSS rules for a grid layout with 12 columns. The code includes vendor prefixes for webkit and ms flexbox. The left sidebar is the Explorer panel, showing the project structure with files like "index.html", "contact.html", "sitemap.xml", "main.js", and various CSS and JS files under the "JAKSICGLASS" folder. The "style.css" file is selected in the Explorer. The bottom navigation bar includes icons for Windows, search, and various Microsoft services like File Explorer, Edge, Mail, and OneDrive.

```
css > # style.css > .btn
552 .col-6 {
553   -webkit-box-flex: 0;
554   -ms-flex: 0 0 50%;
555   flex: 0 0 50%;
556   max-width: 50%; }

557 .col-7 {
558   -webkit-box-flex: 0;
559   -ms-flex: 0 0 58.33333%;
560   flex: 0 0 58.33333%;
561   max-width: 58.33333%; }

562 .col-8 {
563   -webkit-box-flex: 0;
564   -ms-flex: 0 0 66.66667%;
565   flex: 0 0 66.66667%;
566   max-width: 66.66667%; }

567 .col-9 {
568   -webkit-box-flex: 0;
569   -ms-flex: 0 0 75%;
570   flex: 0 0 75%;
571   max-width: 75%; }

572 .col-10 {
573   -webkit-box-flex: 0;
574   -ms-flex: 0 0 83.33333%;
575   flex: 0 0 83.33333%;
576   max-width: 83.33333%; }

577 .col-11 {
578   -webkit-box-flex: 0;
579   -ms-flex: 0 0 91.66667%;
580   flex: 0 0 91.66667%;
581   max-width: 91.66667%; }

582 .col-12 {
583   -webkit-box-flex: 0;
584   -ms-flex: 0 0 100%;
585   flex: 0 0 100%;
586   max-width: 100%; }

587 .col-13 {
588   -webkit-box-flex: 0;
589   -ms-flex: 0 0 100%; }
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - j...
- Explorer:** Shows the file structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css, style.css (selected)
 - data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js
- Editor:** The right pane displays the content of the selected file, style.css:

```
528 .col-2 {  
529 | -webkit-box-flex: 0;  
530 | -ms-flex: 0 0 16.66667%;  
531 | flex: 0 0 16.66667%;  
532 | max-width: 16.66667%; }  
533  
534 .col-3 {  
535 | -webkit-box-flex: 0;  
536 | -ms-flex: 0 0 25%;  
537 | flex: 0 0 25%;  
538 | max-width: 25%; }  
539  
540 .col-4 {  
541 | -webkit-box-flex: 0;  
542 | -ms-flex: 0 0 33.33333%;  
543 | flex: 0 0 33.33333%;  
544 | max-width: 33.33333%; }  
545  
546 .col-5 {  
547 | -webkit-box-flex: 0;  
548 | -ms-flex: 0 0 41.66667%;  
549 | flex: 0 0 41.66667%;  
550 | max-width: 41.66667%; }  
551  
552 .col-6 {  
553 | -webkit-box-flex: 0;  
554 | -ms-flex: 0 0 50%;  
555 | flex: 0 0 50%;  
556 | max-width: 50%; }  
557  
558 .col-7 {  
559 | -webkit-box-flex: 0;  
560 | -ms-flex: 0 0 58.33333%;  
561 | flex: 0 0 58.33333%;  
562 | max-width: 58.33333%; }  
563  
564 .col-8 {  
565 | -webkit-box-flex: 0;
```
- Taskbar:** Shows icons for Task View, Search, Taskbar, File Explorer, Command Palette, and others.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The right pane displays the content of the file `style.css`. The code is a CSS file containing Bootstrap's grid system rules. Lines 491 to 528 are shown, defining classes like `.no-gutters`, `.col`, `.col-auto`, `.col-1`, and `.col-2`.
- Explorer:** The left pane shows the project structure. It includes files like `index.html`, `contact.html`, `sitemap.xml`, `style.css` (which is currently selected), `main.js`, and several Bootstrap and jQuery files under the `JAKSICGLASS/css` folder.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser displays a CSS file from a local file system. The file path is shown in the address bar as "style.css - j...".

The browser's status bar indicates there are 1 error and 1 warning. The taskbar at the bottom shows icons for File Explorer, Edge, File Explorer again, Mail, and Google Chrome.

The main content area of the browser shows the following CSS code:

```
css > # style.css > .btn
442 color: #212529; }
443 pre code {
444 font-size: inherit;
445 color: inherit;
446 word-break: normal; }

448 .pre-scrollable {
449 max-height: 340px;
450 overflow-y: scroll; }

500 .container {
501 width: 100%;
502 padding-right: 15px;
503 padding-left: 15px;
504 margin-right: auto;
505 margin-left: auto; }
506 @media (min-width: 576px) {
507   .container {
508     max-width: 540px; } }
509 @media (min-width: 768px) {
510   .container {
511     max-width: 720px; } }
512 @media (min-width: 992px) {
513   .container {
514     max-width: 960px; } }
515 @media (min-width: 1200px) {
516   .container {
517     max-width: 1140px; } }

520 .container-fluid {
521 width: 100%;
522 padding-right: 15px;
523 padding-left: 15px;
524 margin-right: auto;
525 margin-left: auto; }

528 .row {
529 display: -webkit-box;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `style.css` is open, showing CSS code. The code includes styles for `.btn`, `code`, `kbd`, and `pre` elements, along with a scrollable pre-element and a container class.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing a `css` folder with numerous CSS files (bootstrap, aos.css, bootstrap-datepicker.css, etc.) and JS files (aos.js, bootstrap-datepicker.min.js, etc.).
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- # style.css css 2
- JS main.js js

JAKSICGLASS

css

- bootstrap
- # aos.css
- # bootstrap-datepicker.css
- # bootstrap.min.css
- # bootstrap.min.css.map
- # jquery-ui.css
- # lightbox.css
- # lightbox.min.css
- # magnific-popup.css
- # owl.carousel.min.css
- # owl.theme.default.min.css
- # style.css 2
- > data
- > fonts
- > images
- js
- JS aos.js
- JS bootstrap-datepicker.min.js
- JS bootstrap.min.js
- JS jquery-3.3.1.min.js
- JS jquery-migrate-3.0.1.min.js
- JS jquery-ui.js
- JS jquery.countdown.min.js
- JS jquery.magnific-popup.min.js
- JS jquery.stellar.min.js

OUTLINE

index.html contact.html sitemap.xml # style.css .btn

```
font-size: 80%;  
color: #6c757d; }  
.blockquote-footer::before {  
content: "\2014 \00A0"; }  
  
.img-fluid {  
max-width: 100%;  
height: auto; }  
  
.img-thumbnail {  
padding: 0.25rem;  
background-color: #fff;  
border: 1px solid #dee2e6;  
border-radius: 0.25rem;  
max-width: 100%;  
height: auto; }  
  
.figure {  
display: inline-block; }  
  
.figure-img {  
margin-bottom: 0.5rem;  
line-height: 1; }  
  
.figure-caption {  
font-size: 90%;  
color: #6c757d; }  
  
code {  
font-size: 87.5%;  
color: #e8e8e8;  
word-break: break-word; }  
a > code {  
color: inherit; }  
  
kbd {  
padding: 0.2rem 0.4rem;  
font-size: 87.5%;}
```

⊗ 1 △ 1

Type here to search

Windows File Explorer Edge Microsoft Store Mail Google Chrome

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js (JS).
 - JAKSICGLASS:** css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), # style.css (selected), data, fonts, images, js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Editor Area:** The code editor displays the content of style.css, showing various CSS rules and their line numbers (e.g., 344 to 381). The code includes styles for buttons, headings, HRs, small text, marks, and list items.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer View:** Shows the file structure. Open editors include index.html, contact.html, sitemap.xml, style.css (selected), and main.js. A folder named JAKSICGLASS contains a subfolder css with numerous CSS files like bootstrap, aos.css, and magnific-popup.css.
- Editor View:** Displays the content of style.css. The code includes various CSS rules for elements like progress, input[type="search"], and h1-h6.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .btn
271
272 progress {
273   vertical-align: baseline; }
274
275 [type="number"]::-webkit-inner-spin-button,
276 [type="number"]::-webkit-outer-spin-button {
277   height: auto; }
278
279 [type="search"] {
280   outline-offset: -2px;
281   -webkit-appearance: none; }
282
283 [type="search"]::-webkit-search-cancel-button,
284 [type="search"]::-webkit-search-decoration {
285   -webkit-appearance: none; }
286
287 ::-webkit-file-upload-button {
288   font: inherit;
289   -webkit-appearance: button; }
290
291 output {
292   display: inline-block; }
293
294 summary {
295   display: list-item;
296   cursor: pointer; }
297
298 template {
299   display: none; }
300
301 [hidden] {
302   display: none !important; }
303
304 h1, h2, h3, h4, h5, h6,
305 .h1, .h2, .h3, .h4, .h5, .h6 {
306   margin-bottom: 0.5rem;
307   font-family: inherit;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected).
 - data, fonts, images.
 - js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE.
- Editor Area:** Displays the content of the selected file, style.css. The code includes various CSS rules for input, textarea, fieldset, legend, progress, and search elements, along with some comments and line numbers.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- Top Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css:** 2 (selected).
 - data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE.
- Right Panel (Editor):** CSS code editor showing style.css content from line 148 to 185. The code includes various CSS rules for links, pre, code, kbd, samp, figure, img, svg, and table elements.
- Bottom Bar:** Taskbar with icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - # style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS rules for styling elements like .btn, small, sub, sup, and a. The code is numbered from 124 to 160.

```
css > # style.css > .btn
124 | font-weight: bolder; }

125 |
126 small {
127   font-size: 80%; }

128 |
129 sub,
130 sup {
131   position: relative;
132   font-size: 75%;
133   line-height: 0;
134   vertical-align: baseline; }

135 |
136 sub {
137   bottom: -.25em; }

138 |
139 sup {
140   top: -.5em; }

141 |
142 a {
143   color: #98ccfd;
144   text-decoration: none;
145   background-color: transparent;
146   -webkit-text-decoration-skip: objects; }
147 a:hover {
148   color: #62b1bc;
149   text-decoration: underline; }

150 |
151 a:not([href]):not([tabindex]) {
152   color: inherit;
153   text-decoration: none; }
154 a:not([href]):not([tabindex]):hover, a:not(
155   color: inherit;
156   text-decoration: none; }
157 a:not([href]):not([tabindex]):focus {
158   outline: 0; }

159 |
160 pre,
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - # style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS rules for global styling, including font families, line heights, and color schemes. It also includes specific rules for form elements and a horizontal rule.

```
*::before,  
*::after {  
    -webkit-box-sizing: border-box;  
    box-sizing: border-box; }  
  
html {  
    font-family: sans-serif;  
    line-height: 1.15;  
    -webkit-text-size-adjust: 100%;  
    -ms-text-size-adjust: 100%;  
    -ms-overflow-style: scrollbar;  
    -webkit-tap-highlight-color: transparent;  
  
    @-ms-viewport {  
        width: device-width; }  
  
    article, aside, figcaption, figure, footer,   
    display: block; }  
  
body {  
    margin: 0;  
    font-family: "Nunito Sans", -apple-system,  
    font-size: 1rem;  
    font-weight: 400;  
    line-height: 1.5;  
    color: #212529;  
    text-align: left;  
    background-color: #fff; }  
  
[tabindex="-1"]:focus {  
    outline: 0 !important; }  
  
hr {  
    -webkit-box-sizing: content-box;  
    box-sizing: content-box;  
    height: 0;  
    overflow: visible; }
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** style.css - ja...
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, # style.css (selected), main.js.
 - JAKSICGLASS:** css (selected), bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - # style.css (selected).
 - data, fonts, images, js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE.
- Editor Area:** The right pane displays the content of the selected file, style.css. The code includes Bootstrap v4.1.3 variables and mixins. Lines 1 through 38 are shown, ending with a comment block for ::before.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER OPEN EDITORS index.html contact.html services.html ...

index.html contact.html services.html sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.min.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

services.html

```
<div class="mb-5">
  <h3 class="footer-heading mb-4">
    <div class="block-25">
      <ul class="list-unstyled">
        <li class="mb-3">
          <a href="#" class="d-flex align-items-center">
            <figure class="image mr-2">
              
            </figure>
            <div class="text">
              <span class="small text">Small Text</span>
              <h3 class="heading font-weight-normal">Heading for Service 1</h3>
            </div>
          </a>
        </li>
        <li class="mb-3">
          <a href="#" class="d-flex align-items-center">
            <figure class="image mr-2">
              
            </figure>
            <div class="text">
              <span class="small text">Small Text</span>
              <h3 class="heading font-weight-normal">Heading for Service 2</h3>
            </div>
          </a>
        </li>
        <li class="mb-3">
          <a href="#" class="d-flex align-items-center">
            <figure class="image mr-2">
              
            </figure>
            <div class="text">
              <span class="small text">Small Text</span>
              <h3 class="heading font-weight-normal">Heading for Service 3</h3>
            </div>
          </a>
        </li>
      </ul>
    </div>
  </h3>
</div>
```

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- services.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html contact.html services.html

services.html

```
<li><a href="#">Services</a>
<li><a href="#">News</a></li>
<li><a href="#">Team</a></li>
</ul>
</div>
<div class="col-md-6 col-lg-6">
  <ul class="list-unstyled">
    <li><a href="#">About Us</a>
    <li><a href="#">Privacy Policy</a>
    <li><a href="#">Contact Us</a>
    <li><a href="#">Membership</a>
  </ul>
</div>
<div class="col-lg-4">
  <div class="mb-5">
    <h3 class="footer-heading mb-4">
      <div class="block-25">
        <ul class="list-unstyled">
          <li class="mb-3">
            <a href="#" class="d-flex align-items-center">
              <figure class="image mr-3">
                
              </figure>
              <div class="text">
                <span class="small text-gray">John Doe</span>
                <h3 class="heading font-weight-normal">John Doe</h3>
              </div>
            </a>
          </li>
          <li class="mb-3">
            <a href="#" class="d-flex align-items-center">
              <figure class="image mr-3">
                
              </figure>
              <div class="text">
                <span class="small text-gray">Jane Doe</span>
                <h3 class="heading font-weight-normal">Jane Doe</h3>
              </div>
            </a>
          </li>
        </ul>
      </div>
    </div>
  </div>
</div>
```

0 0

Type here to search

File Explorer Home Taskbar

The screenshot shows a Microsoft Edge browser window with a dark theme. The top navigation bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar displays "services.html".

The left sidebar contains icons for Explorer, Open Editors, JAKSICGLASS, and Outline. The "OPEN EDITORS" section lists index.html, contact.html, services.html (selected), sitemap.xml, and main.js. The "JAKSICGLASS" section lists bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html, package-lock.json, projects.html, robots.txt, services.html (selected again), and sitemap.xml.

The main content area shows the code for services.html, starting with:

```
<a href="#" class="d-flex text-decoration-none align-self-center d-block mb-3" style="font-size: 1.2em; color: #007bff; transition: all 0.3s ease;">

### Decorations


```

The code continues with footer and navigation sections, ending with a contact us link.

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER OPEN EDITORS index.html contact.html services.html

index.html contact.html services.html

services.html

sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js

bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

services.html

177 </div>

178

179 <div class="site-section site-block-3 bg-1">

180 <div class="container">

181 <div class="row">

182 <div class="col-lg-6 mb-5 mb-lg-0">

183 <div class="img-border">

184

185 </div>

186 </div>

187 <div class="col-lg-6">

188 <div class="row row-items">

189 <div class="col-6">

190

191

192

193 <h3>Pool Decor</h3>

194

195

196 </div>

197 <div class="col-6">

198

199

200

201 <h3>Seat Decor</h3>

202

203

204 </div>

205 <div class="row row-items last">

206 <div class="col-6">

207

208

209

210 <h3>Services</h3>

211

212

213 </div>

214 </div>

0 0

Type here to search

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER OPEN EDITORS index.html contact.html services.html ...

index.html
contact.html
services.html
sitemap.xml
main.js js

JAKSICGLASS bootstrap-datepicker.min.js
bootstrap.min.js
jquery-3.3.1.min.js
jquery-migrate-3.0.1.min.js
jquery-ui.js
jquery.countdown.min.js
jquery.magnific-popup.min.js
jquery.stellar.min.js
lightbox-plus-jquery.min.js
lightbox-plus-jquery.map
main.js
owl.carousel.min.js
popper.min.js
slick.min.js
scss
slick
about.html
contact.html
index.html
news.html
package-lock.json
projects.html
robots.txt
services.html
sitemap.xml

153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189

```
<div class="col-lg-4 col-md-6 mb-5">
  <div class="media custom-media">
    <div class="mr-3 icon"><span class="icon icon-1"></span></div>
    <div class="media-body">
      <h5 class="mt-0">Design Inter&nbsp;face</h5>
      <p>Cras sit amet nibh libero, in feugiat nisl pellentesque id, ultricies euismod.</p>
    </div>
  </div>
</div>

<div class="col-lg-4 col-md-6 mb-5">
  <div class="media custom-media">
    <div class="mr-3 icon"><span class="icon icon-2"></span></div>
    <div class="media-body">
      <h5 class="mt-0">Intuitive Design</h5>
      <p>Cras sit amet nibh libero, in feugiat nisl pellentesque id, ultricies euismod.</p>
    </div>
  </div>
</div>

<div class="site-section site-block-3 bg-light">
  <div class="container">
    <div class="row">
      <div class="col-lg-6 mb-5 mb-lg-0">
        <div class="img-border">
          
        </div>
      </div>
      <div class="col-lg-6">
        <div class="row row-items">
          <div class="col-6">
            <a href="#" class="d-flex justify-content-between align-items-center">
              
              <div>
                <h4>Service A</h4>
                <p>Nulla facilisi. Nullam id dolor id nibh ultricies feugiat. Nunc sed.
```

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** services.html
- Explorer Bar (Left):**
 - OPEN EDITORS:** index.html, contact.html, services.html (highlighted), sitemap.xml, main.js js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html, package-lock.json, projects.html, robots.txt, services.html (highlighted again), sitemap.xml.
- Code Editor (Right):** The code for services.html is displayed, showing multiple sections of HTML with media elements and placeholder text.
- Bottom Taskbar:** Icons for Windows, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a dark-themed code editor interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The current file is 'services.html'. The left sidebar has an 'EXPLORER' tab with a tree view. Under 'OPEN EDITORS', files index.html, contact.html, and services.html are listed. Under 'JAKSICGLASS', there's a long list of CSS and JS files. The main editor pane displays the content of 'services.html', which includes HTML, CSS, and JavaScript code. The status bar at the bottom shows system icons for Windows, search, and task switching.

```
<span class="sub-text">Our Awesome Services</span>
<h1>Our Services</h1>
</div>
</div>
</div>
</div>
<div class="site-section">
<div class="container">
<div class="row">
<div class="col-lg-4 col-md-6 mb-5">
<div class="media custom-media">
<div class="mr-3 icon"><span class="fas fa-image"></span></div>
<div class="media-body">
<h5 class="mt-0">Creative Solutions</h5>
<p>Cras sit amet nibh libero, in feugiat purus ultrices non, euismod id nisi.</p>
</div>
</div>
</div>
<div class="col-lg-4 col-md-6 mb-5">
<div class="media custom-media">
<div class="mr-3 icon"><span class="fas fa-globe"></span></div>
<div class="media-body">
<h5 class="mt-0">Design Interactions</h5>
<p>Cras sit amet nibh libero, in feugiat purus ultrices non, euismod id nisi.</p>
</div>
</div>
<div class="col-lg-4 col-md-6 mb-5">
<div class="media custom-media">
<div class="mr-3 icon"><span class="fas fa-laptop"></span></div>
<div class="media-body">
<h5 class="mt-0">Intuitive Design</h5>
<p>Cras sit amet nibh libero, in feugiat purus ultrices non, euismod id nisi.</p>
</div>
</div>

```

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER OPEN EDITORS index.html contact.html services.html

OPEN EDITORS index.html contact.html services.html sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

services.html

```
<ul class="site-menu js-clone" data-aos="fade">
- Home
- About
- Projects
- News
- Contact

</ul>
</div>
</div>
</div>
</div>
</div>
</div>
<div class="site-blocks-cover overlay inner" data-aos="fade" data-stellar-background-ratio="0.5">
<div class="container">
<div class="row align-items-center">
<div class="col-md-10">
Our Awesome Services

# Our Services


</div>
</div>
</div>
</div>
<div class="site-section">
<div class="container">
<div class="row">
<div class="col-lg-4 col-md-6 mb-5">
<div class="media custom-media">
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Bar:** services.html
- Explorer:** Shows the project structure with files like index.html, contact.html, services.html, sitemap.xml, and main.js. The services.html file is currently selected.
- Editor:** Displays the content of the services.html file, which includes:

```
<div class="d-flex justify-content-between">
  <a href="#" class="d-flex align-items-center">
    <span class="icon-phone mr-2" style="font-size: 1.5em; color: #007bff; font-weight: bold; margin-right: 10px;">
```

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- services.html**
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html**
- sitemap.xml

OUTLINE

Type here to search

```
<head>
  <link rel="stylesheet" href="css/style.css">
</head>
<body>
  <div class="site-wrap">
    <div class="site-mobile-menu">
      <div class="site-mobile-menu-header">
        <div class="site-mobile-menu-close mt-3" data-menu-toggle="mobile-menu">
          <span class="icon-close2 js-menu-toggle"></span>
        </div>
      </div>
      <div class="site-mobile-menu-body"></div>
    </div> <!-- .site-mobile-menu -->
    <div class="site-navbar-wrap">
      <div class="site-navbar-top">
        <div class="container py-3">
          <div class="row align-items-center">
            <div class="col-6">
              <a href="#" class="p-2 pl-0"><span class="icon-phone mr-2"></span> Call</a>
              <a href="#" class="p-2 pl-0"><span class="icon-mail mr-2"></span> Email</a>
            </div>
            <div class="col-6">
              <div class="d-flex ml-auto">
                <a href="#" class="d-flex align-items-center">
                  <span class="icon-phone mr-2"></span> Call
                </a>
                <a href="#" class="d-flex align-items-center">
                  <span class="icon-envelope mr-2"></span> Email
                </a>
              </div>
            </div>
          </div>
        </div>
      </div>
      <div class="site-navbar" data-animate="slide-down">
        <div class="container py-3">
          <div class="row align-items-center justify-content-between">
            <div class="col-6">
              <div class="site-navbar-brand">
                
              </div>
              <div class="site-navbar-text">
                <p>JAKSIC GLASS<br/>Your Local Glass Company<br/>We're here to help you with all your glass needs!</p>
              </div>
            </div>
            <div class="col-6 text-right">
              <div class="site-navbar-menu">
                <ul class="list-unstyled mb-0">
                  <li><a href="#">Home</a></li>
                  <li><a href="#">About</a></li>
                  <li><a href="#">Services</a></li>
                  <li><a href="#">Contact</a></li>
                </ul>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</body>
```

File Edit Selection View Go Debug Terminal Help services.html

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- services.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html

{ package-lock.json

} projects.html

robots.txt

services.html

sitemap.xml

OUTLINE

index.html contact.html services.html

```
<!DOCTYPE html>
<html lang="en">
<head>
    <title>Interior Design – Colorlib Website Template</title>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <link rel="stylesheet" href="https://fonts.googleapis.com/css2?family=Inter:wght@400;500;600;700;800;900&display=swap">
    <link rel="stylesheet" href="fonts/icomoon/style.css">
    <link rel="stylesheet" href="css/magnific-popup.css">
    <link rel="stylesheet" href="css/jquery-ui.css">
    <link rel="stylesheet" href="css/owl.carousel.css">
    <link rel="stylesheet" href="css/owl.theme.default.css">
    <link rel="stylesheet" href="css/bootstrap.css">
    <link rel="stylesheet" href="fonts/flaticon.css">
    <link rel="stylesheet" href="css/aos.css">
    <link rel="stylesheet" href="css/style.css">
</head>
<body>
    <div class="site-wrap">
        <div class="site-mobile-menu">
            <div class="site-mobile-menu-header">
                <div class="site-mobile-menu-close mt-3" style="float: right; margin-right: 10px;">
                    <span class="icon-close2 js-menu-toggle" style="font-size: 1.5em; color: #000; position: absolute; left: -10px; top: 0; z-index: 1000; font-weight: bold; border-radius: 50%; padding: 5px; background-color: white; border: 1px solid #000; transition: all 0.3s ease; transform: rotate(45deg);></span>
                </div>
            </div>
            <div class="site-mobile-menu-body" style="background-color: #fff; padding: 10px; border: 1px solid #f0f0f0; border-top: none; border-radius: 0 0 10px 10px; position: absolute; left: -10px; top: 0; width: 300px; height: 100%; z-index: 999; transition: all 0.3s ease; transform: rotate(-45deg);>
            </div>
        </div>
        <!-- .site-mobile-menu -->
    </div>
```

The screenshot shows a dark-themed code editor interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar displays "projects.html".

The left sidebar contains the Explorer view, which lists the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - projects.html**
 - sitemap.xml
 - main.js
- JAKSICGLASS:
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
 - scss
 - slick
 - about.html
 - contact.html
 - index.html
 - news.html
- package-lock.json
- robots.txt
- services.html
- sitemap.xml

The Editor view on the right shows the content of the "projects.html" file:

```
<!-- index.html -->
<!-- contact.html -->
<!-- projects.html -->
<!-- sitemap.xml -->
<!-- main.js -->

<div class="site-wrap">
  <div class="col-lg-3 mb-5 mb-lg-0">
    <div class="row">
      <div class="col-md-12">
        <h3 class="footer-heading mb-4">
          <div id="iconList2">
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>

<div class="row pt-5 mt-5 text-center">
  <div class="col-md-12">
    <p>
      Copyright &copy;
      <script>document.write(new Date().getFullYear())</script>
    </p>
    <div style="text-align: center;">
      <script src="js/jquery-3.3.1.min.js"></script>
      <script src="js/aos.js"></script>
      <script src="js/main.js"></script>
    </div>
  </div>
</div>


</body>
</html>
```

The status bar at the bottom shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Right Panel (Code View):** Displays the content of the `projects.html` file. The code is an HTML footer section with the following structure:

```
<footer class="site-footer border-top">
  <div class="container">
    <div class="row">
      <div class="col-lg-9 mb-5 mb-lg-0">
        <div class="row mb-5">
          <div class="col-md-12">
            <h3 class="footer-heading mb-3">Subota: 9-15h</h3>
          </div>
        <div class="col-md-6 col-lg-6">
          <ul class="list-unstyled">
            <li><a href="index.html">Home</a>
            <li><a href="about.html">O nama</a>
            <li><a href="projects.html">Projekti</a>
            <li><a href="news.html">Galerija</a>
          </ul>
        </div>
        <div class="col-md-6 col-lg-6">
          <ul class="list-unstyled">
            <li><a href="contact.html">Kontakt</a>
            <li>jaksicglass@gmail.com</a>
            <li>061/4580296</li>
            <li>Jaksic Glass</li>
          </ul>
        </div>
      </div>
    </div>
  </div>
</footer>
```
- Left Panel (Explorer View):** Shows the following file structure:
 - `OPEN EDITORS`: index.html, contact.html, projects.html (selected), sitemap.xml, main.js, js.
 - `JAKSICGLASS`: bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js.
 - `SCSS`: scss.
 - `SLICK`: slick.
 - `HTML`: about.html, contact.html, index.html, news.html.
 - `JSON`: package-lock.json.
 - `OTHER`: robots.txt, services.html, sitemap.xml.
- Bottom Status Bar:** Shows icons for file operations (New, Open, Save, etc.) and system status (0 errors, 0 warnings).
- Taskbar:** Shows icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

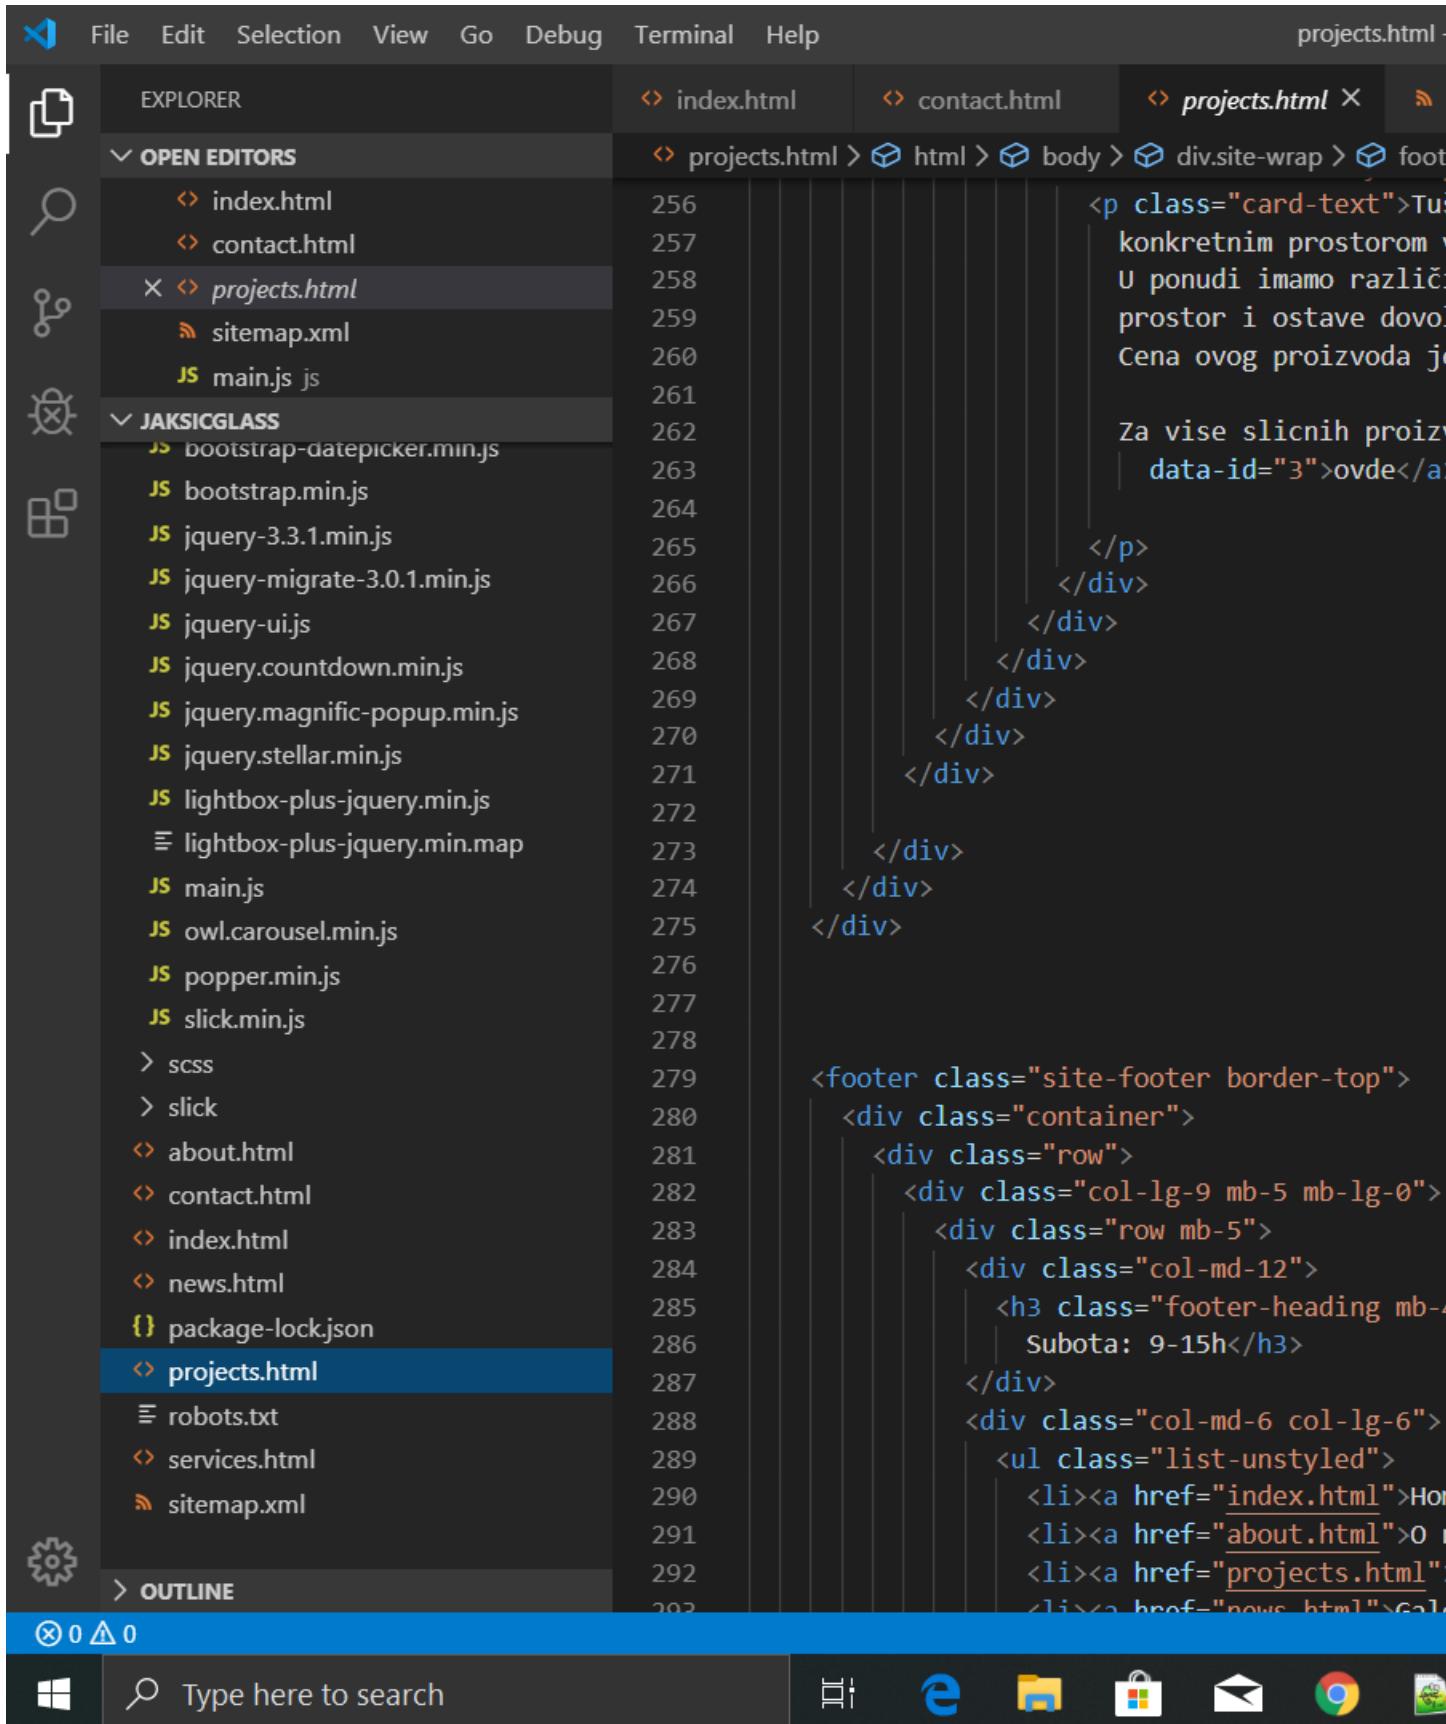

File Edit Selection View Go Debug Terminal Help projects.html

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- projects.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html

contact.html

projects.html

236 </div>

237 </div>

238 </div>

239 </div>

240 </div>

241 </div>

242 <div class="col-lg-12 jedanProizvod">

243 <div class="row ">

244 <div class="col-lg-12 mb-5">

245 <h2 class="h2 text-center">sta

246 </div>

247 </div>

248 </div>

249 </div>

250 </div>

251 </div>

252 </div>

253 </div>

254 </div>

255 </div>

256 </div>

257 </div>

258 </div>

259 </div>

260 </div>

261 </div>

262 </div>

263 </div>

264 </div>

265 </div>

266 </div>

267 </div>

268 </div>

269 </div>

270 </div>

271 </div>

272 </div>

273 </div>

konkretnim prostorom

U ponudi imamo razlic

prostor i ostave dovo

Cena ovog proizvoda je

Za vise sličnih proizv

data-id="3">ovde

File Edit Selection View Go Debug Terminal Help projects.html

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- projects.html**
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html**
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html contact.html projects.html

209 </div>

210 </div>

211 </div>

212 <div class="col-lg-12 jedanProizvod">

213 <div class="row">

214 <div class="col-lg-12 mb-5">

215 | <h2 class="h2 text-center">Sta

216 </div>

217 <div class="row d-flex justify-content-around">

218 <div class="col-lg-12 d-flex justify-content-around">

219 <div class="row d-flex justify-content-around">

220 <div class="col-lg-6 proizvod">

221 |

222 </div>

223 <div class="col-lg-6 card p-3">

224 <div class="card-body no-padding">

225 | <p class="card-text">Taj je jedan

226 | konkrenim prostorom

227 | U ponudi imamo razlicite

228 | prostor i ostave dovo

229 | Cena ovog proizvoda je

230 | Za vise sličnih proizvoda

231 | [ovde](#)

232 </div>

233 </div>

234 </div>

235 </p>

236 </div>

237 </div>

238 </div>

239 </div>

240 </div>

241 </div>


242 <div class="col-lg-12 jedanProizvod">

243 <div class="row">

244 <div class="col-lg-12 mb-5">

245 | <h2 class="h2 text-center">Sta

246 </div>

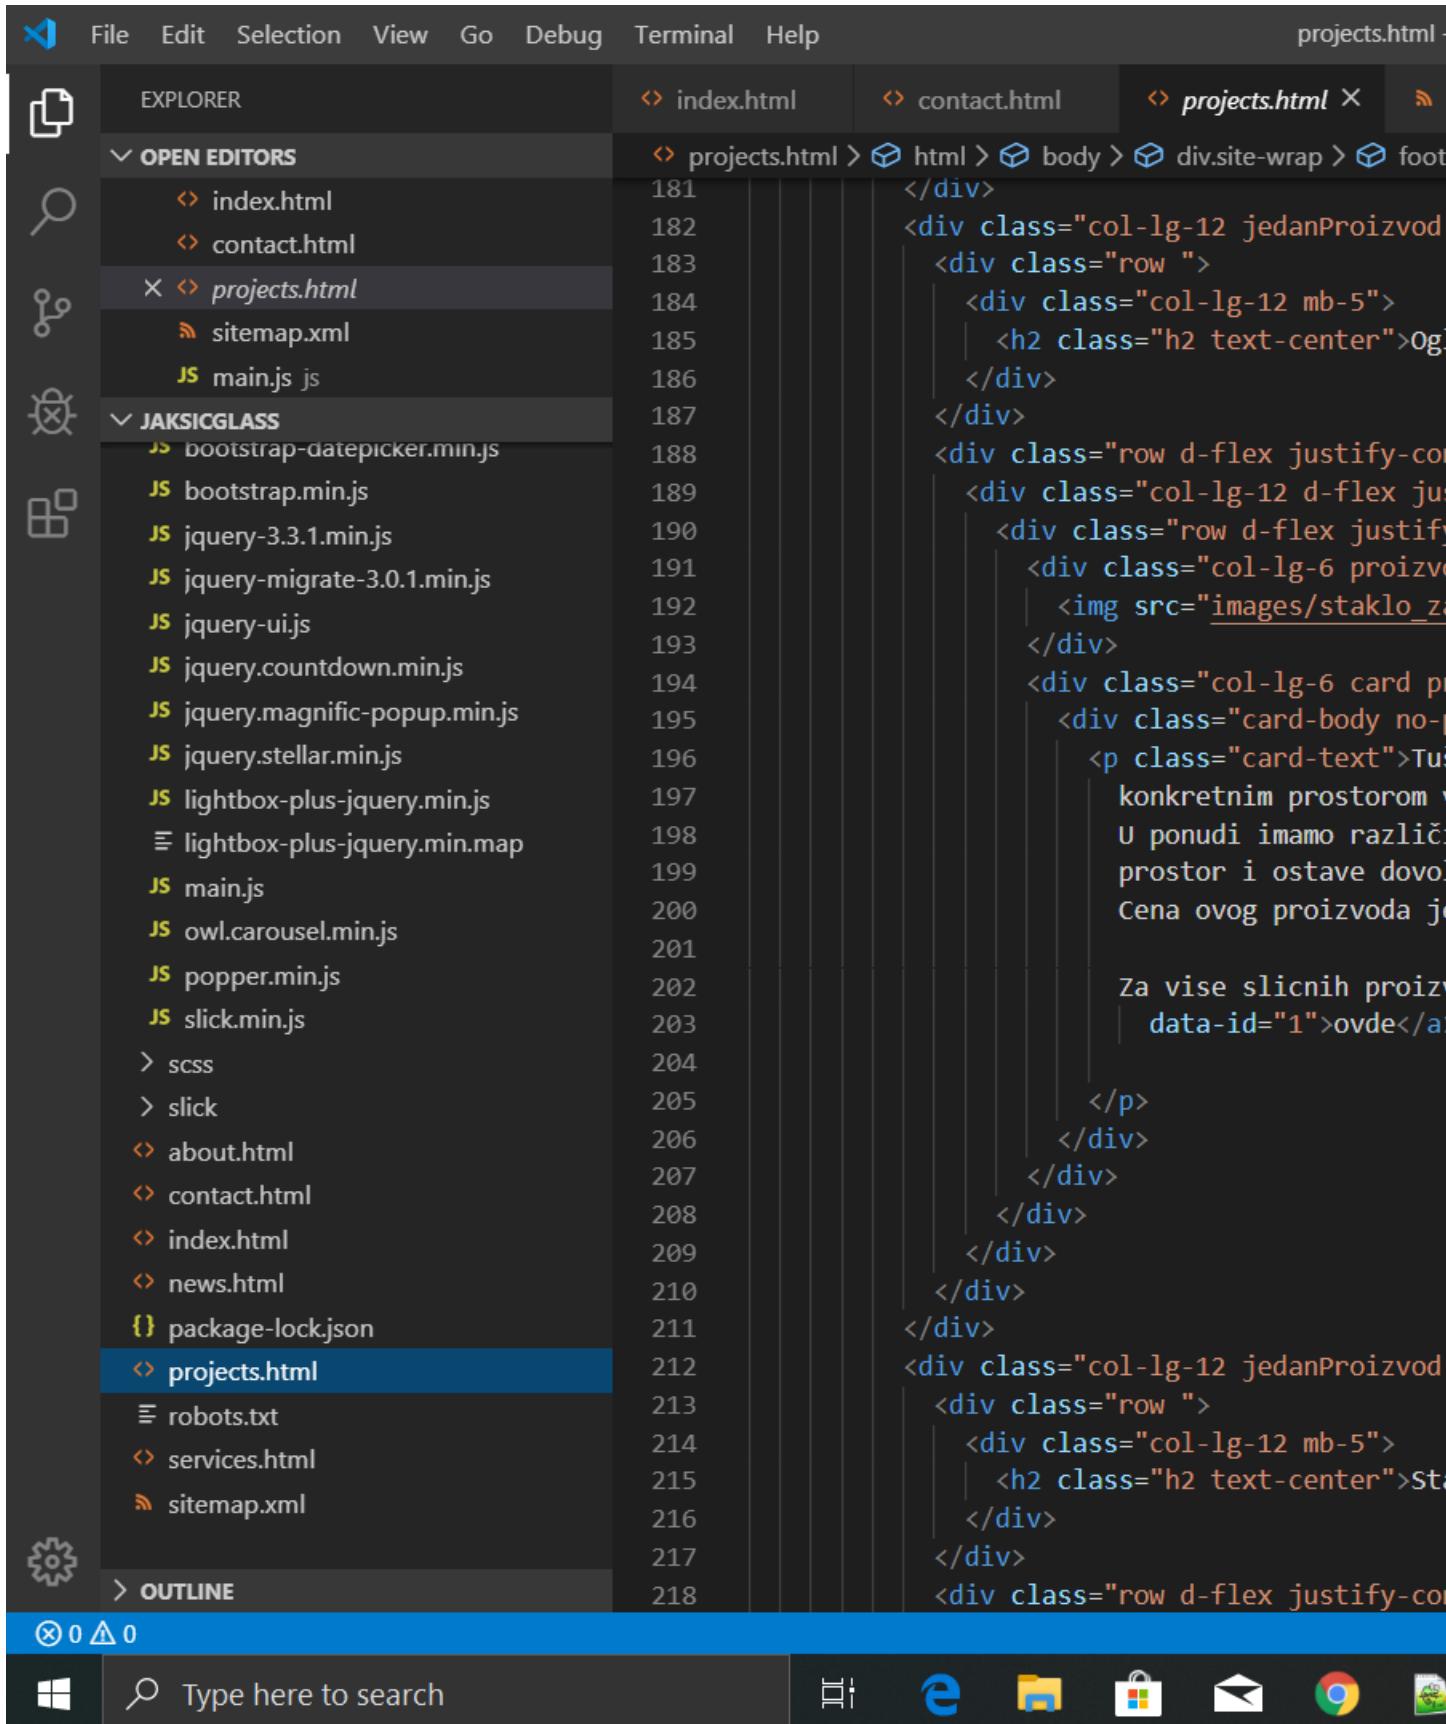

File Edit Selection View Go Debug Terminal Help projects.html

EXPLORER OPEN EDITORS index.html contact.html projects.html

index.html contact.html projects.html sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.min.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

149 </div>

150 </div>

151 </div>

152 <div class="col-lg-12 jedanProizvod">

153 <div class="row ">

154 <div class="col-lg-12 mb-5">

155 <h2 class="h2 text-center">Staklo za

156 </div>

157 </div>

158 <div class="row d-flex justify-content-around">

159 <div class="col-lg-12 d-flex justify-content-around">

160 <div class="row d-flex justify-content-around">

161 <div class="col-lg-6 proizvod">

162

163 </div>

164 <div class="col-lg-6 card proizvod">

165 <div class="card-body no-padding">

166 <p class="card-text">Tu je

167
konkretnim prostorom

168
U ponudi imamo različite

169
prostori i ostave dovođene

170
Cena ovog proizvoda je

171
za vise sličnih proizvoda

172
ovde

173 </div>

174 </div>

175 </div>

176 </div>

177 </div>

178 </div>

179 </div>

180 </div>

181 </div>

182 <div class="col-lg-12 jedanProizvod">

183 <div class="row ">

184 <div class="col-lg-12 mb-5">

185 <h2 class="h2 text-center">Ogledno

186 </div>

⊗ 0 △ 0

Type here to search

File Edit Selection View Go Debug Terminal Help projects.html

EXPLORER OPEN EDITORS index.html contact.html projects.html

index.html contact.html projects.html sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145

```
<div class="row mb-5 d-flex justify-content-center">
<div class="col-md-12 d-inline-flex flex-wrap">
<button class="btn btn-light filter-item" data-filter="kupatila"></button>
<button class="btn btn-light filter-item" data-filter="kuhinja"></button>
<button class="btn btn-light filter-item" data-filter="zidove"></button>
</div>
</div>

<div class="row mb-5 d-flex justify-content-center">
<div class="col-lg-12 jedanProizvod">
<div class="row">
<div class="col-lg-12 mb-5">
<h2 class="h2 text-center text-decoration-none">JAKSICGLASS</h2>
</div>
</div>
<div class="row d-flex justify-content-between">
<div class="col-lg-12 d-flex justify-content-between">
<div class="row d-flex justify-content-between">
<div class="col-lg-6 proizvod">

<div class="card-body no-padding">
<p class="card-text">Tus je staklo zidove. Proizvedeno je u konkretnim prostorom i ostavlja je bez ostaza. U ponudi imamo razlicite velicine i prostore i ostave dovođene. Cena ovog proizvoda je 1000 dinara. Za vise sličnih proizvoda i usluga posetite nas na ovde</p>
</div>
</div>
<div class="col-lg-6 card proizvod">

<div class="card-body no-padding">
<p class="card-text">Tus je staklo zidove. Proizvedeno je u konkretnim prostorom i ostavlja je bez ostaza. U ponudi imamo razlicite velicine i prostore i ostave dovođene. Cena ovog proizvoda je 1000 dinara. Za vise sličnih proizvoda i usluga posetite nas na ovde</p>
</div>
</div>
</div>
</div>
</div>
</div>
```

File Edit Selection View Go Debug Terminal Help projects.html

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- X projects.html
- sitemap.xml
- JS main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- JS bootstrap.min.js
- JS jquery-3.3.1.min.js
- JS jquery-migrate-3.0.1.min.js
- JS jquery-ui.js
- JS jquery.countdown.min.js
- JS jquery.magnific-popup.min.js
- JS jquery.stellar.min.js
- JS lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- JS main.js
- JS owl.carousel.min.js
- JS popper.min.js
- JS slick.min.js
- > scss
- > slick
- about.html
- contact.html
- index.html
- news.html
- { package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html contact.html projects.html

projects.html > html > body > div.site-wrap > footer

92 </div>

93

94 <div class="site-blocks-cover overlay inner" data-stellar-background-ratio="0.5">

95 <div class="container pt-5">

96 <div class="row align-items-center text-center">

97 <div class="col-md-10 pt-5">

98 Nasi

99 <h1>Proizvodi</h1>

100 </div>

101 </div>

102 </div>

103 </div>

104 </div>

105 <div class="site-section">

106 <div class="container">

107 <div class="row mb-5 d-flex justify-content-between align-items-center" style="background-color: #f0f0f0; padding: 10px; border-radius: 10px; margin-bottom: 20px">

108 <div class="col-md-12 d-inline-flex align-items-center" style="text-align: center">

109 <button class="btn btn-light filter-item" type="button">kupatila</button>

110 <button class="btn btn-light filter-item" type="button">kuhinje</button>

111 <button class="btn btn-light filter-item" type="button">zidove</button>

112 </div>

113 </div>

114 </div>

115 </div>

116 </div>

117 </div>

118 </div>

119 </div>

120 <div class="row mb-5 d-flex justify-content-between align-items-center" style="background-color: #f0f0f0; padding: 10px; border-radius: 10px; margin-bottom: 20px">

121 <div class="col-lg-12 jedanProizvod" style="text-align: center">

122 <div class="row">

123 <div class="col-lg-12 mb-5" style="text-align: center">

124 <h2 class="h2 text-center text-decoration-none" style="font-size: 1.5em; color: #007bff; margin: 0; font-weight: bold">

125 </h2>

126 </div>

127 </div>

128 </div>

129 </div>

0 0

Type here to search

File Edit Selection View Go Debug Terminal Help

File Explorer Search Taskbar

File Edit Selection View Go Debug Terminal Help projects.html

EXPLORER OPEN EDITORS index.html contact.html projects.html

index.html contact.html projects.html sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.min.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

projects.html

63 <div class="site-navbar">
64 <div class="container py-1">
65 <div class="row align-items-center">
66 <div class="col-4">
67 | <h1 class="mb-0 site-logo">
68 </div>
69 <div class="col-10">
70 <nav class="site-navigation text-right">
71 <div class="container">
72 <div class="d-inline-block w-100" style="text-align: right;">
73 |
74 <ul id="hederLista" class="list-style-type none" style="list-style-type: none; padding-left: 0;">
75 | <!--<li class="active">
76 | | Home
77 |
78 | About
79 |
80 | <li class="">
81 | | Projects
82 |
83 | News
84 |
85 | Contact
86
87 </div>
88 </div>
89 </div>
90 </div>
91 </div>
92 </div>
93 <div class="site-blocks-cover overlay inner" style="background-color: #f0f0f0; position: relative; height: 400px; background-position: center top; background-size: cover; background-repeat: no-repeat; background-attachment: fixed; data-stellar-background-ratio="0.5">
94 <div class="container pt-5">
95 <div class="row align-items-center text-center" style="height: 100%;>
96 <div class="col-md-10 pt-5" style="margin: auto; height: 100%;>
97 | Nasi
98 | <h1>Proizvodi</h1>
99 </div>
100 </div>

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar displays "projects.html".

The Explorer sidebar on the left lists the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - projects.html**
 - sitemap.xml
 - main.js
- JAKSICGLASS:
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
 - scss
 - slick
 - about.html
 - contact.html
 - index.html
 - news.html
- package-lock.json
- robots.txt
- services.html
- sitemap.xml

The Editor pane on the right displays the code for "projects.html". The code is a template for a mobile menu and a navigation bar. It includes CSS classes like "site-mobile-menu", "site-navbar-wrap", and "site-navbar". The code uses Bootstrap and other libraries for styling and functionality.

```
<div class="site-mobile-menu">
  <div class="site-mobile-menu-header">
    <div class="site-mobile-menu-close mt-1" href="#">
      <span class="icon-close2 js-menu-toggle" href="#"></span>
    </div>
  </div>
  <div class="site-mobile-menu-body"></div>
</div> <!-- .site-mobile-menu -->

<div class="site-navbar-wrap">
  <div class="site-navbar-top">
    <div class="container py-3">
      <div class="row align-items-center">
        <div id="iconLista" class="col-6">
          </div>
        <div class="col-6">
          <div class="d-flex ml-auto">
            <a href="#" class="d-flex align-items-center">
              <span class="icon-envelope mr-2" href="#"></span>
              <span class="d-none d-md-inline" href="#">Contact</span>
            </a>
            <a href="#" class="d-flex align-items-center">
              <span class="icon-phone mr-2" href="#"></span>
              <span class="d-none d-md-inline" href="#">Call</span>
            </a>
          </div>
        </div>
      </div>
    </div>
  </div>
  <div class="site-navbar">
    <div class="container py-1">
      <div class="row align-items-center">
        <div class="col-4">
          <h1 class="mb-0 site-logo"><a href="#">JAKSICGLASS</a></h1>
        </div>
```

The bottom status bar shows icons for file operations, search, and system notifications (0 errors, 0 warnings).


The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar displays "projects.html".

The left sidebar (Explorer) shows the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - projects.html (selected)
 - sitemap.xml
 - main.js
- JAKSICGLASS:
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
 - scss
 - slick
 - about.html
 - contact.html
 - index.html
 - news.html
- {} package-lock.json
- <> projects.html (selected)
- robots.txt
- <> services.html
- & sitemap.xml

The right pane displays the code for "projects.html":

```
1  <!DOCTYPE html>
2  <html lang="en">
3
4  <head>
5      <title>Interior Design &mdash; Colorlib Website Template</title>
6      <meta charset="utf-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
8
9      <link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Open+Sans:300,400,600,700&display=block">
10     <link rel="stylesheet" href="fonts/icomoon/style.css" type="text/css">
11
12     <link rel="stylesheet" href="css/magnific-popup.css" type="text/css">
13     <link rel="stylesheet" href="css/jquery-ui.css" type="text/css">
14     <link rel="stylesheet" href="css/owl.carousel.css" type="text/css">
15     <link rel="stylesheet" href="css/owl.theme.default.css" type="text/css">
16     <link rel="stylesheet" href="css/bootstrap-datepicker.css" type="text/css">
17
18     <link rel="stylesheet" href="fonts/flaticon.css" type="text/css">
19
20     <link rel="stylesheet" href="css/aos.css" type="text/css">
21
22     <link rel="stylesheet" href="css/style.css" type="text/css">
23
24
25  </head>
26
27  <body>
28
29      <div class="site-wrap">
30
31          <div class="site-mobile-menu">
32              <div class="site-mobile-menu-header">
33                  <div class="site-mobile-menu-close mt-3" style="float: right;">
34                      <span class="icon-close2 js-menu-toggle" style="font-size: 1.5em; color: #000; position: absolute; right: -10px; top: -10px; z-index: 1000; font-weight: bold; font-style: normal; border-radius: 50%; background-color: white; padding: 5px; text-align: center; width: 20px; height: 20px; line-height: 20px; border: 1px solid #000; transition: all 0.3s ease; transform: rotate(45deg);></span>
35                  </div>
36
37          <div class="site-mobile-menu-body" style="background-color: #fff; padding: 10px; border-radius: 5px; margin-top: 10px; position: relative; z-index: 1000; width: 100%; height: 100%;>
38              <!-- .site-mobile-menu -->
```

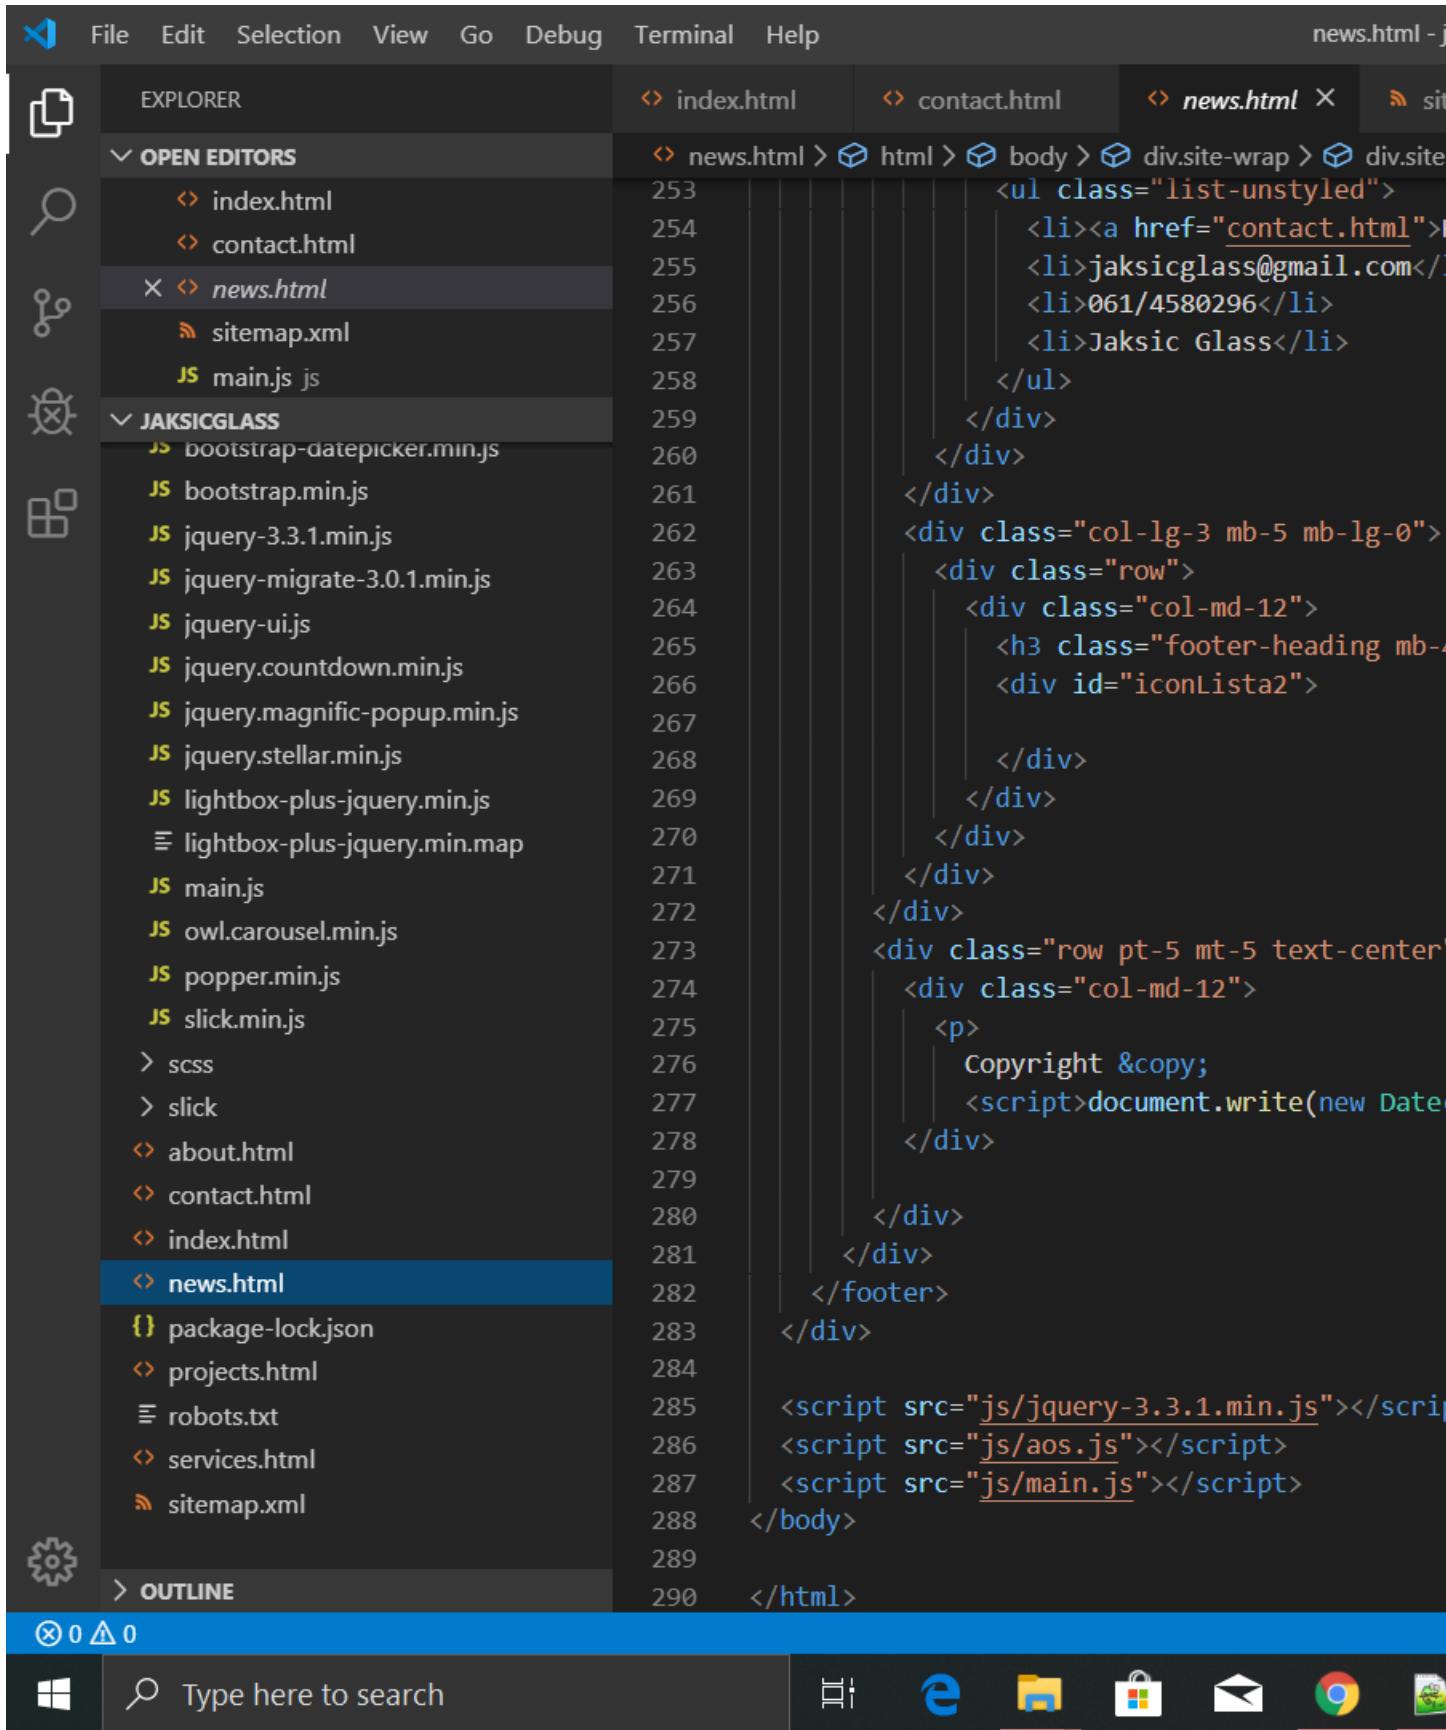

The screenshot shows the Microsoft Edge browser window displaying the file "news.html". The browser's address bar at the top shows "news.html - jaksicglass.com". The main content area displays the HTML code for the "news.html" page, which includes a navigation menu, contact information, and a footer with copyright and date details. The browser's status bar at the bottom indicates 0 errors and 0 warnings.

File Edit Selection View Go Debug Terminal Help news.html - jaksicglass.com

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- news.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html

contact.html

news.html

news.html > html > body > div.site-wrap > div.site

253 <ul class="list-unstyled">
254
255 jaksicglass@gmail.com
256 061/4580296
257 Jaksic Glass
258
259 </div>
260 </div>
261 </div>
262 <div class="col-lg-3 mb-5 mb-lg-0">
263 <div class="row">
264 <div class="col-md-12">
265 <h3 class="footer-heading mb-2">
266 <div id="iconLista2">
267 </div>
268 </div>
269 </div>
270 </div>
271 </div>
272 </div>
273 <div class="row pt-5 mt-5 text-center">
274 <div class="col-md-12">
275 <p>Copyright ©;
276 <script>document.write(new Date().getFullYear())</script>
277 </p>
278 </div>
279 </div>
280 </div>
281 </div>
282 </div>
283 </div>
284 <script src="js/jquery-3.3.1.min.js"></script>
285 <script src="js/aos.js"></script>
286 <script src="js/main.js"></script>
287 </body>
288 </html>

0 0

Type here to search

File Edit Selection View Go Debug Terminal Help news.html - j

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- news.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html

contact.html

news.html

news.html > html > body > div.site-wrap > div.site

src="images/stakleni_zidovi_5

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

<a href="images/stakleni_zidovi_6

src="images/stakleni_zidovi_6

<a href="images/stakleni_zidovi_7

src="images/stakleni_zidovi_7

</div>

</div>

</div>

</div>

<footer class="site-footer border-top">

<div class="container">

<div class="row">

<div class="col-lg-9 mb-5 mb-lg-0">

<div class="row mb-5">

<div class="col-md-12">

<h3 class="footer-heading mb-4">Subota: 9-15h</h3>

</div>

<div class="col-md-6 col-lg-6">

<ul class="list-unstyled">

Home

O nama

Projekti

Galerija

</div>

<div class="col-md-6 col-lg-6">

<ul class="list-unstyled">

Kontakt

jaksicglass@gmail.com

×

0 △ 0

Type here to search

File Explorer Taskbar

File Edit Selection View Go Debug Terminal Help news.html - j

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- news.html**
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html**

{} package-lock.json

<> projects.html

robots.txt

<> services.html

<> sitemap.xml

OUTLINE

index.html

contact.html

news.html

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

```
<a href="images/staklo_za_kupatilo_1.jpg" src="images/staklo_za_kupatilo_1.jpg">
<a href="images/staklo_za_kuhinju_1.jpg" src="images/staklo_za_kuhinju_1.jpg">
<a href="images/staklo_za_kuhinju_2.jpg" src="images/staklo_za_kuhinju_2.jpg">
<a href="images/staklo_za_kuhinju_3.jpg" src="images/staklo_za_kuhinju_3.jpg">
<a href="images/stakleni_zidovi_1.jpg" src="images/stakleni_zidovi_1.jpg">
<a href="images/stakleni_zidovi_2.jpg" src="images/stakleni_zidovi_2.jpg">
<a href="images/stakleni_zidovi_3.jpg" src="images/stakleni_zidovi_3.jpg">
<a href="images/stakleni_zidovi_4.jpg" src="images/stakleni_zidovi_4.jpg">
<a href="images/stakleni_zidovi_5.jpg" src="images/stakleni_zidovi_5.jpg">
<a href="images/stakleni_zidovi_6.jpg" src="images/stakleni_zidovi_6.jpg">
<a href="images/stakleni_zidovi_7.jpg" src="images/stakleni_zidovi_7.jpg">
</div>
</div>
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `news.html` is open and selected in the list of editors.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, contact.html, news.html (selected), sitemap.xml, main.js, js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html (selected).
 - package-lock.json, projects.html, robots.txt, services.html, sitemap.xml.
- Status Bar:** Shows 0 errors, 0 warnings, and 0 info. Includes a search bar and taskbar icons for File Explorer, Home, Recent Files, Taskbar, Taskbar Search, Taskbar Icons, Taskbar Buttons, Taskbar Buttons (Windows), Taskbar Buttons (Mac), Taskbar Buttons (Linux), Taskbar Buttons (Darwin), Taskbar Buttons (X11), Taskbar Buttons (Wayland), Taskbar Buttons (Wm), Taskbar Buttons (Kwin), Taskbar Buttons (Kwin4), Taskbar Buttons (Kwin5), Taskbar Buttons (Kwin6), Taskbar Buttons (Kwin7), Taskbar Buttons (Kwin8), Taskbar Buttons (Kwin9), Taskbar Buttons (Kwin10), Taskbar Buttons (Kwin11), Taskbar Buttons (Kwin12), Taskbar Buttons (Kwin13), Taskbar Buttons (Kwin14), Taskbar Buttons (Kwin15), Taskbar Buttons (Kwin16), Taskbar Buttons (Kwin17), Taskbar Buttons (Kwin18), Taskbar Buttons (Kwin19), Taskbar Buttons (Kwin20), Taskbar Buttons (Kwin21), Taskbar Buttons (Kwin22), Taskbar Buttons (Kwin23), Taskbar Buttons (Kwin24), Taskbar Buttons (Kwin25), Taskbar Buttons (Kwin26), Taskbar Buttons (Kwin27), Taskbar Buttons (Kwin28), Taskbar Buttons (Kwin29), Taskbar Buttons (Kwin30), Taskbar Buttons (Kwin31), Taskbar Buttons (Kwin32), Taskbar Buttons (Kwin33), Taskbar Buttons (Kwin34), Taskbar Buttons (Kwin35), Taskbar Buttons (Kwin36), Taskbar Buttons (Kwin37), Taskbar Buttons (Kwin38), Taskbar Buttons (Kwin39), Taskbar Buttons (Kwin40), Taskbar Buttons (Kwin41), Taskbar Buttons (Kwin42), Taskbar Buttons (Kwin43), Taskbar Buttons (Kwin44), Taskbar Buttons (Kwin45), Taskbar Buttons (Kwin46), Taskbar Buttons (Kwin47), Taskbar Buttons (Kwin48), Taskbar Buttons (Kwin49), Taskbar Buttons (Kwin50), Taskbar Buttons (Kwin51), Taskbar Buttons (Kwin52), Taskbar Buttons (Kwin53), Taskbar Buttons (Kwin54), Taskbar Buttons (Kwin55), Taskbar Buttons (Kwin56), Taskbar Buttons (Kwin57), Taskbar Buttons (Kwin58), Taskbar Buttons (Kwin59), Taskbar Buttons (Kwin60), Taskbar Buttons (Kwin61), Taskbar Buttons (Kwin62), Taskbar Buttons (Kwin63), Taskbar Buttons (Kwin64), Taskbar Buttons (Kwin65), Taskbar Buttons (Kwin66), Taskbar Buttons (Kwin67), Taskbar Buttons (Kwin68), Taskbar Buttons (Kwin69), Taskbar Buttons (Kwin70), Taskbar Buttons (Kwin71), Taskbar Buttons (Kwin72), Taskbar Buttons (Kwin73), Taskbar Buttons (Kwin74), Taskbar Buttons (Kwin75), Taskbar Buttons (Kwin76), Taskbar Buttons (Kwin77), Taskbar Buttons (Kwin78), Taskbar Buttons (Kwin79), Taskbar Buttons (Kwin80), Taskbar Buttons (Kwin81), Taskbar Buttons (Kwin82), Taskbar Buttons (Kwin83), Taskbar Buttons (Kwin84), Taskbar Buttons (Kwin85), Taskbar Buttons (Kwin86), Taskbar Buttons (Kwin87), Taskbar Buttons (Kwin88), Taskbar Buttons (Kwin89), Taskbar Buttons (Kwin90), Taskbar Buttons (Kwin91), Taskbar Buttons (Kwin92), Taskbar Buttons (Kwin93), Taskbar Buttons (Kwin94), Taskbar Buttons (Kwin95), Taskbar Buttons (Kwin96), Taskbar Buttons (Kwin97), Taskbar Buttons (Kwin98), Taskbar Buttons (Kwin99), Taskbar Buttons (Kwin100), Taskbar Buttons (Kwin101), Taskbar Buttons (Kwin102), Taskbar Buttons (Kwin103), Taskbar Buttons (Kwin104), Taskbar Buttons (Kwin105), Taskbar Buttons (Kwin106), Taskbar Buttons (Kwin107), Taskbar Buttons (Kwin108), Taskbar Buttons (Kwin109), Taskbar Buttons (Kwin110), Taskbar Buttons (Kwin111), Taskbar Buttons (Kwin112), Taskbar Buttons (Kwin113), Taskbar Buttons (Kwin114), Taskbar Buttons (Kwin115), Taskbar Buttons (Kwin116), Taskbar Buttons (Kwin117), Taskbar Buttons (Kwin118), Taskbar Buttons (Kwin119), Taskbar Buttons (Kwin120), Taskbar Buttons (Kwin121), Taskbar Buttons (Kwin122), Taskbar Buttons (Kwin123), Taskbar Buttons (Kwin124), Taskbar Buttons (Kwin125), Taskbar Buttons (Kwin126), Taskbar Buttons (Kwin127), Taskbar Buttons (Kwin128), Taskbar Buttons (Kwin129), Taskbar Buttons (Kwin130), Taskbar Buttons (Kwin131), Taskbar Buttons (Kwin132), Taskbar Buttons (Kwin133), Taskbar Buttons (Kwin134), Taskbar Buttons (Kwin135), Taskbar Buttons (Kwin136), Taskbar Buttons (Kwin137), Taskbar Buttons (Kwin138), Taskbar Buttons (Kwin139), Taskbar Buttons (Kwin140), Taskbar Buttons (Kwin141), Taskbar Buttons (Kwin142), Taskbar Buttons (Kwin143), Taskbar Buttons (Kwin144), Taskbar Buttons (Kwin145), Taskbar Buttons (Kwin146), Taskbar Buttons (Kwin147), Taskbar Buttons (Kwin148), Taskbar Buttons (Kwin149), Taskbar Buttons (Kwin150), Taskbar Buttons (Kwin151), Taskbar Buttons (Kwin152), Taskbar Buttons (Kwin153), Taskbar Buttons (Kwin154), Taskbar Buttons (Kwin155), Taskbar Buttons (Kwin156), Taskbar Buttons (Kwin157), Taskbar Buttons (Kwin158), Taskbar Buttons (Kwin159), Taskbar Buttons (Kwin160), Taskbar Buttons (Kwin161), Taskbar Buttons (Kwin162), Taskbar Buttons (Kwin163), Taskbar Buttons (Kwin164), Taskbar Buttons (Kwin165), Taskbar Buttons (Kwin166), Taskbar Buttons (Kwin167), Taskbar Buttons (Kwin168), Taskbar Buttons (Kwin169), Taskbar Buttons (Kwin170), Taskbar Buttons (Kwin171), Taskbar Buttons (Kwin172), Taskbar Buttons (Kwin173), Taskbar Buttons (Kwin174), Taskbar Buttons (Kwin175), Taskbar Buttons (Kwin176), Taskbar Buttons (Kwin177), Taskbar Buttons (Kwin178), Taskbar Buttons (Kwin179), Taskbar Buttons (Kwin180), Taskbar Buttons (Kwin181), Taskbar Buttons (Kwin182), Taskbar Buttons (Kwin183), Taskbar Buttons (Kwin184), Taskbar Buttons (Kwin185), Taskbar Buttons (Kwin186), Taskbar Buttons (Kwin187), Taskbar Buttons (Kwin188).

The screenshot shows a dark-themed code editor interface. At the top is a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file is "news.html - j".

The left side features a sidebar with several icons: a file icon, a search icon, a link icon, a magnifying glass icon, a gear icon, and a grid icon. Below these are sections for "OPEN EDITORS" and "JAKSICGLASS".

The "OPEN EDITORS" section lists index.html, contact.html, news.html (which is currently selected), sitemap.xml, and main.js js.

The "JAKSICGLASS" section lists numerous CSS and JavaScript files, including bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, and news.html (which is also listed under JAKSICGLASS).

The main area displays the content of the "news.html" file. The code includes HTML structure like <div> elements and tags, along with line numbers from 122 to 159.

At the bottom, there is a status bar with icons for file operations, a search bar with the placeholder "Type here to search", and a taskbar with icons for File Explorer, Edge browser, File History, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help news.html - j

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- news.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html

contact.html

news.html

news.html > html > body > div.site-wrap > div.site-section > div.container pt-5 > div.row align-items-center text-align center > div.col-md-10 pt-5 > span.sub-text Galerija > h1 POGLEDAJTE NAS RAD </h1> </div> </div> </div>

101 <div class="container pt-5">

102 <div class="row align-items-center text-align center">

103 <div class="col-md-10 pt-5">

104 Galerija

105 <h1>POGLEDAJTE NAS RAD</h1>

106 </div>

107 </div>

108 </div>

109 <div class="site-section">

110 <div class="container">

111 <div class="row mb-5 d-flex justify-content-between align-items-center" style="background-color: #f0f0f0; padding: 10px; border-radius: 10px; margin-bottom: 20px">

112 <div class="col-md-12 d-inline-flex align-items-center" style="text-align: center">

113 <button class="btn btn-light filter-item" style="margin-right: 10px; font-size: 14px; border: 1px solid #ccc; padding: 5px 15px; border-radius: 10px; transition: all 0.3s ease"> kupatila </button>

114 <button class="btn btn-light filter-item" style="font-size: 14px; border: 1px solid #ccc; padding: 5px 15px; border-radius: 10px; transition: all 0.3s ease"> kuhinje </button>

115 <button class="btn btn-light filter-item" style="font-size: 14px; border: 1px solid #ccc; padding: 5px 15px; border-radius: 10px; transition: all 0.3s ease"> zidove </button>

116 </div>

117 </div>

118 </div>

119 </div>

120 </div>

121 </div>

122 </div>

123 </div>

124 <div class="row mb-5 d-flex justify-content-between align-items-center" style="background-color: #f0f0f0; padding: 10px; border-radius: 10px; margin-bottom: 20px">

125 <div class="gallerypictureBlock ml-10" style="text-align: center; width: 300px; height: 150px; position: relative; overflow: hidden; border-radius: 10px; background-color: #f0f0f0; border: 1px solid #ccc; transition: all 0.3s ease">

126

127

128

129 <div class="text-block" style="text-align: center; margin-top: 10px; font-size: 12px; color: #666; opacity: 0.8; transition: all 0.3s ease">

130

131

132

133 <div class="text-block" style="text-align: center; margin-top: 10px; font-size: 12px; color: #666; opacity: 0.8; transition: all 0.3s ease">

134

135

0 0

Type here to search

Windows Start File Explorer Mail Edge Microsoft Store Mail Google Chrome

File Edit Selection View Go Debug Terminal Help news.html - j

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- news.html**
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html**

package-lock.json

projects.html

robots.txt

services.html

sitemap.xml

OUTLINE

index.html

contact.html

news.html

68 <div class="site-wrap">

69 <div class="site-nav">

70 <div class="container py-1">

71 <div class="row align-items-center" style="height: 100px;">

72 <div class="col-4">

73 <h1 class="mb-0 site-logo">JAKSICGLASS</h1>

74 </div>

75 <div class="col-10">

76 <nav class="site-navigation text-right">

77 <div class="container">

78 <div class="d-inline-block" style="text-align: right; margin-right: 10px;">

79 <div class="site-menu-toggle" style="font-size: 1.5em; font-weight: bold; color: #333; border: 1px solid #333; padding: 0 5px; border-radius: 50%; height: 30px; width: 30px; display: flex; align-items: center; justify-content: center; transition: all 0.3s ease; position: relative; z-index: 1000; ">

80 <ul id="hederLista" class="list-group list-group-flush" style="list-style-type: none; padding-left: 0; margin: 0; position: absolute; top: 0; left: 0; background-color: white; border: 1px solid #333; border-top: none; border-radius: 5px; width: 200px; min-height: 200px; position: absolute; z-index: 1000; ">

81 <!--<li class="active">

82 Home

83

84 About

85

86 Projects

87

88 News

89

90

91 </div>

92 </div>

93 </div>

94 </div>

95 </div>

96 </div>

97 <div class="site-blocks-cover overlay inner" style="background-color: black; opacity: 0.5; position: absolute; top: 0; left: 0; width: 100%; height: 100%; z-index: 1000; ">

98 <div class="container pt-5">

99 <div class="row align-items-center text-white" style="height: 100%; position: relative; z-index: 1000; ">

100 <div class="col-md-10 pt-5" style="text-align: center; position: relative; z-index: 1000; ">

101

102 <h1 style="margin: 0; color: white; font-size: 2em; font-weight: bold; position: relative; z-index: 1000; ">POGLEDAJTE NAS RAD</h1>

103 </div>

104 </div>

0 0

Type here to search

Windows Start File Explorer Mail Microsoft Edge Mail Microsoft Edge

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer:** Shows the project structure:
 - OPEN EDITORS: index.html, contact.html, news.html (highlighted), sitemap.xml, main.js
 - JAKSICGLASS theme files: bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick.
 - HTML files: about.html, contact.html, index.html, news.html (highlighted).
 - Other files: package-lock.json, projects.html, robots.txt, services.html, sitemap.xml.
- Editor:** The 'news.html' file is open, displaying the following code:

```
<div class="site-mobile-menu-header">
<div class="site-mobile-menu-close mt-3" href="#">
<span class="icon-close2 js-menu-toggle"></span>
</div>
<div class="site-mobile-menu-body"></div>

<div class="site-navbar-wrap">
<div class="site-navbar-top">
<div class="container py-3">
<div class="row align-items-center">
<div id="iconLista" class="col-6">
</div>
<div class="col-6">
<div class="d-flex ml-auto">
<a href="#" class="d-flex align-items-center">
<span class="icon-envelope mr-2" style="font-size: 1.5em; color: #007bff; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
<span class="d-none d-md-in">
</span>
</a>
<a href="#" class="d-flex align-items-center">
<span class="icon-phone mr-2" style="font-size: 1.5em; color: #007bff; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
<span class="d-none d-md-in">
</span>
</a>
</div>
</div>
</div>
</div>
<div class="site-navbar">
<div class="container py-1">
<div class="row align-items-center">
<div class="col-4">
<h1 class="mb-0 site-logo"><a href="#">JAKSICGLASS</a></h1>
</div>
<div class="col-8 text-right">
<ul class="list-item" style="list-style-type: none; padding-left: 0; margin-bottom: 0; margin-top: 0; font-size: 1.2em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';">
- <span class="icon-search" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-user" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-mail" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-link" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-phone" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-envelope" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-link" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>
- <span class="icon-search" style="color: #007bff; font-size: 1.5em; font-weight: bold; font-style: italic; font-family: 'Font Awesome 5 Free';"></span>


Bottom Bar: Taskbar with icons for File Explorer, Search, Task List, and various application icons (Windows, Edge, File Explorer, Microsoft Store, Mail, File Explorer).


```

The screenshot shows a Microsoft Edge browser window with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** news.html - j...
- Explorer Sidebar:**
 - OPEN EDITORS:** index.html, contact.html, news.html (highlighted), sitemap.xml, main.js, js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html (highlighted).
 - Others:** package-lock.json, projects.html, robots.txt, services.html, sitemap.xml.
- Main Area:** A code editor showing the HTML code for news.html. The code includes head and body sections with various CSS classes and JavaScript files included via href attributes.
- Bottom Bar:** Icons for Windows Start, Search (Type here to search), Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 0 errors and 0 warnings.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer View:** Shows the project structure with files like index.html, contact.html, news.html, sitemap.xml, and main.js. A folder named JAKSICGLASS contains numerous CSS and JS files related to Bootstrap and other frameworks.
- Editor View:** Displays the content of news.html. The code includes DOCTYPE html, head (with title and meta tags), and body (with site-wrap div). The body contains a site-mobile-menu section with a header and close button.
- Taskbar:** Shows icons for Windows, search, task manager, file explorer, edge browser, file manager, mail, and chrome.

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>Interior Design &mdash; Colorlib Website Template</title>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
<link rel="stylesheet" href="https://fonts.googleapis.com/css2?family=Inter:wght@400;600&display=swap">
<link rel="stylesheet" href="fonts/icomoon/style.css">
<link rel="stylesheet" href="css/magnific-popup.css">
<link rel="stylesheet" href="css/jquery-ui.css">
<link rel="stylesheet" href="css/owl.carousel.min.css">
<link rel="stylesheet" href="css/owl.theme.default.min.css">
<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="fonts/flaticon.css">
<link rel="stylesheet" href="css/aos.css">
<link rel="stylesheet" href="css/style.css">
<link href="css/lightbox.css" rel="stylesheet">
<script type="text/javascript" src="js/lightbox.min.js">

```

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** contact.html -
- Explorer:** Shows the project structure with files like index.html, about.html, contact.html, sitemap.xml, and main.js.
- Open Editors:** contact.html is the active editor, displaying its HTML code structure.
- Code Editor:** The contact.html file content is shown with line numbers (204-233) and syntax highlighting for HTML tags and JS code.
- Sidebar:** Includes icons for file operations, search, and other development tools.
- Bottom Bar:** Shows system icons for taskbar, search bar, and pinned applications (File Explorer, Edge, Mail, Google Chrome).

```
</div>
<div class="col-lg-3 mb-5 mb-lg-0">
<div class="row">
<div class="col-md-12">
<h3 class="footer-heading mb-4">Zap
<div id="iconLista2">
</div>
</div>
</div>
</div>
<div class="row pt-5 mt-5 text-center">
<div class="col-md-12">
<p>
Copyright &copy;
<script>document.write(new Date().get
</div>
</div>
</div>
<script src="js/jquery-3.3.1.min.js"></script>
<script src="js/aos.js"></script>
<script src="js/main.js"></script>
</>
</div>
</div>
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `contact.html` is open, showing its code structure. The code includes HTML, CSS, and JavaScript. It features a footer with links to Home, About, Projects, News, Contact, and an email address (`jaksicglass@gmail.com`). It also includes a contact form with fields for Name, Email, and Message, along with a reCAPTCHA field.
- Explorer:** The sidebar shows the project structure:
 - OPEN EDITORS:** index.html, about.html, contact.html (highlighted), sitemap.xml, main.js, js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js.
 - SCSS:** scss.
 - Solid:** slick.
 - HTML:** about.html, contact.html (highlighted), index.html, news.html.
 - JSON:** package-lock.json, projects.html, robots.txt, services.html, sitemap.xml.
- Terminal:** Shows the command `npm run build`.
- Bottom Bar:** Includes icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help contact.html

EXPLORER

OPEN EDITORS

- index.html
- about.html
- contact.html
- sitemap.xml
- main.js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js

scss

slick

about.html

contact.html

index.html

news.html

package-lock.json

projects.html

robots.txt

services.html

sitemap.xml

OUTLINE

0 0

Type here to search

```
<div class="site-wrap">
  <div class="site-content">
    <div class="content">
      <div class="row">
        <div class="col-md-6 mb-3">
          <div class="text-black contactCard bg-white border rounded">
            <!-- <div class="card-header">Header</div -->
            <div class="card-body contactCard bg-white border rounded">
              <h5 class="card-title text-black">Kontakt</h5>
              <p class="card-text"><span class="fa fa-envelope"></span> Izaberite najbolji način za kontakt</p>
              <p class="card-text"><span class="fa fa-phone"></span> <a href="mailto:jaksicglass@gmail.com">jaksicglass@gmail.com</a></p>
              <p class="card-text"><span class="fa fa-map-marker"></span> Izaberite najbolji način za kontakt</p>
            </div>
          </div>
        </div>
        <div class="col-md-6">
          <div class="site-footer border-top">
            <div class="container">
              <div class="row">
                <div class="col-lg-9 mb-5 mb-lg-0">
                  <div class="row mb-5">
                    <div class="col-md-12">
                      <h3 class="footer-heading mb-4">Ponude</h3>
                      <ul class="list-style-type-none p-0 m-0">
                        <li><a href="#">Web dizajn i razvoj</a></li>
                        <li><a href="#">Dizajn i izrada logo</a></li>
                        <li><a href="#">Dizajn i izrada logotipa</a></li>
                        <li><a href="#">Dizajn i izrada logotipa</a></li>
                      </ul>
                    </div>
                  </div>
                </div>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```

File Edit Selection View Go Debug Terminal Help contact.html

EXPLORER OPEN EDITORS index.html about.html contact.html contact.html > html body div.site-wrap div.sit

OPEN EDITORS index.html about.html contact.html sitemap.xml main.js js

JAKSICGLASS bootstrap-datepicker.min.js bootstrap.min.js jquery-3.3.1.min.js jquery-migrate-3.0.1.min.js jquery-ui.js jquery.countdown.min.js jquery.magnific-popup.min.js jquery.stellar.min.js lightbox-plus-jquery.min.js lightbox-plus-jquery.map main.js owl.carousel.min.js popper.min.js slick.min.js scss slick about.html contact.html contact.html index.html news.html package-lock.json projects.html robots.txt services.html sitemap.xml

contact.html > html body div.site-wrap div.sit

120 </div>

121 <div class="form-group">

122 <label for="exampleInputPassword">

123 <input type="password" class="form-control" id="exampleInputPassword" placeholder="Password" />

124 </div>

125 <div class="form-group form-check">

126 <input type="checkbox" class="form-check-input" id="exampleCheck1" checked="" />

127 <label class="form-check-label" for="exampleCheck1">

128 </div>

129 <button type="submit" class="btn btn-primary" href="#">Submit

130 </form>

131 <!--

132 -->

133 </div>

134 <div id="ispisNekogTeksta">

135 </div>

136 <style>

137 .mapouter {

138 position: relative;

139 text-align: right;

140 height: 500px;

141 width: 600px;

142 }

143 .gmap_canvas {

144 overflow: hidden;

145 background: none !important;

146 height: 500px;

147 width: 600px;

148 }

149 </style>

150 </div>

151 </div>

152 <div class="col-md-6 mb-3">

153 <div class="text-black contactCard bg-white p-3 border rounded">

154 <!-- <div class="card-header">Header -->

155 <div class="card-body">

156 <div class="card-text">

157 <!-- <div class="card-footer">Footer -->

File Edit Selection View Go Debug Terminal Help contact.html

EXPLORER

OPEN EDITORS

- index.html
- about.html
- contact.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick

about.html

contact.html

index.html

news.html

package-lock.json

projects.html

robots.txt

services.html

sitemap.xml

OUTLINE

0 0

Type here to search

```
<div class="site-blocks-cover overlay inner-page" data-stellar-background-ratio="0.5">
<div class="container pt-5">
    <div class="row align-items-center text-center">
        <div class="col-md-10 pt-5">
            <span class="sub-text">Kontakt</span>
            <h1>KONTAKTIRAJTE NAS</h1>
        </div>
    </div>
</div>
<div class="site-section bg-light">
<div class="container">
    <div class="row d-flex justify-content-around">
        <div class="col-md-6 mb-3">
            <div class="mapouter bg-white text-black">
                <div class="gmap_canvas d-flex justify-content-center align-items-center" style="height: 100%; width: 100%; position: relative; background-color: #f0f0f0; border: 1px solid #ccc; border-radius: 10px; padding: 10px; margin-bottom: 10px;>
                    <div style="position: absolute; top: 0; left: 0; width: 100%; height: 100%; z-index: 1; background-color: white; border: 1px solid #ccc; border-radius: 10px; padding: 10px; margin-bottom: 10px;>
                        <form>
                            <div class="form-group">
                                <label for="exampleInputEmail1">Your email</label>
                                <input type="email" class="form-control" id="exampleInputEmail1" placeholder="Enter email" style="width: 100%; height: 40px; border: 1px solid #ccc; border-radius: 5px; padding: 5px; margin-bottom: 10px; font-size: 14px; font-weight: bold; color: #333; transition: border-color 0.3s ease-in-out;*>
                                <small id="emailHelp" class="form-text text-muted">We'll never share your email with anyone else.</small>
                            </div>
                            <button type="submit" class="btn btn-primary" style="width: 100%; height: 40px; border: 1px solid #ccc; border-radius: 5px; padding: 5px; margin-top: 10px; font-size: 14px; font-weight: bold; color: white; background-color: #333; transition: background-color 0.3s ease-in-out;*>Send message</button>
                        </form>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>
```

The screenshot shows a Windows desktop environment with a Microsoft Edge browser window open. The browser title bar reads "contact.html". The main content area of the browser displays the source code of a contact page. The code is a mix of HTML, CSS, and JavaScript. The browser's address bar shows the URL "http://127.0.0.1:5500/contact.html".

The browser's status bar at the bottom indicates "0 0 0 0". Below the browser, the taskbar is visible with icons for File Explorer, Edge, File Explorer again, Mail, and Google Chrome.

The left side of the image shows the Windows Start menu with various pinned apps like Mail, Photos, and File Explorer.

The central part of the image is dominated by the Microsoft Edge browser window, which contains the following code:

```
<div class="site-blocks-cover overlay inner-page">
  <div class="site-wrap">
    <div class="site-navbar py-1">
      <div class="container py-1">
        <div class="row align-items-center">
          <div class="col-4">
            <h1 class="mb-0 site-logo"><a href="#">JAKSICGLASS</a></h1>
          </div>
          <div class="col-10">
            <nav class="site-navigation text-right">
              <div class="container">
                <div class="d-inline-block d-lg-none site-menu-toggle js-menu-toggle" id="site-menu-toggle"><span>☰</span></div>
                <ul id="hederLista" class="site-menu">
                  <!--<li class="active">
                    <a href="index.html">Home</a>
                  </li>
                  <li><a href="about.html">O nama</a>
                  </li>
                  <li><a href="projects.html">Proizvodi</a>
                  </li>
                  <li><a href="news.html">Galerija</a>
                  </li>
                  <li><a href="contact.html">Kontakt</a>
                  </li>
                </ul>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The file `contact.html` is open, showing its code structure. The code includes HTML, CSS, and JavaScript files, with some parts collapsed.
- Explorer:** The sidebar shows the project structure with the following files:
 - `index.html`
 - `about.html`
 - `contact.html` (selected)
 - `sitemap.xml`
 - `main.js`
 - JAKSICGLASS** folder
 - `bootstrap-datepicker.min.js`
 - `bootstrap.min.js`
 - `jquery-3.3.1.min.js`
 - `jquery-migrate-3.0.1.min.js`
 - `jquery-ui.js`
 - `jquery.countdown.min.js`
 - `jquery.magnific-popup.min.js`
 - `jquery.stellar.min.js`
 - `lightbox-plus-jquery.min.js`
 - `lightbox-plus-jquery.min.map`
 - `main.js`
 - `owl.carousel.min.js`
 - `popper.min.js`
 - `slick.min.js`
 - `scss`
 - `slick`
 - `about.html`
 - `contact.html`
 - `index.html`
 - `news.html`
 - `package-lock.json`
 - `projects.html`
 - `robots.txt`
 - `services.html`
 - `sitemap.xml`
- Status Bar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Taskbar, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer:** Shows the file structure:
 - OPEN EDITORS: index.html, about.html, contact.html (highlighted), sitemap.xml, main.js
 - JAKSICGLASS folder:
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
 - SCSS, slick, about.html, contact.html (highlighted), index.html, news.html, package-lock.json, projects.html, robots.txt, services.html, sitemap.xml
 - OUTLINE- Editor:** Displays the content of contact.html. The code includes meta tags for title, description, and charset, followed by various CSS links to Google fonts and local files like magnific-popup.css, jquery-ui.css, owl.carousel.min.css, owl.theme.default.css, and bootstrap-datepicker.css. It also includes SCSS imports for flaticon and aos, and a link to cdnjs.cloudflare.com for style.css. The body of the page starts with a site-wrap class and a mobile menu section.
- Taskbar:** Shows icons for Windows, search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.
- Status Bar:** Shows 0 errors and 0 warnings.

The screenshot shows a Microsoft Edge browser window with a dark theme. The address bar at the top displays "about.html". The main content area is a code editor showing the HTML and CSS for the "about.html" page. The code includes a footer section with a list of links and some JavaScript at the bottom.

EXPLORER

- OPEN EDITORS
 - index.html
 - about.html**
 - contact.html
 - sitemap.xml
 - main.js js
- JAKSICGLASS
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
- > scss
- > slick
- about.html
- contact.html
- index.html
- news.html
- { package-lock.json
- > projects.html
- robots.txt
- > services.html
- sitemap.xml

OUTLINE

```
<ul class="list-unstyled">
  <li><a href="contact.html">jaksicglass@gmail.com</a></li>
  <li>061/4580296</li>
  <li>Jaksic Glass</li>
</ul>
</div>
</div>
<div class="col-lg-3 mb-5 mb-lg-0">
  <div class="row">
    <div class="col-md-12">
      <h3 class="footer-heading mb-3">
        <div id="iconLista2">
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
<div class="row pt-5 mt-5 text-center">
  <div class="col-md-12">
    <p>
      Copyright &copy;
      <script>document.write(new Date().getFullYear())</script>
    </p>
    <script src="js/jquery-3.3.1.min.js"></script>
    <script src="js/aos.js"></script>
    <script src="js/main.js"></script>
  </div>
</div>
```



EXPLORER

- ✓ OPEN EDITORS
 - ↳ index.htm
 - ✗ ↳ about.htm
 - ↳ contact.htm
 - RSS sitemap.xml
 - JS main.js



✓ JAKSICGLASS

- ↳ bootstrap-datepicker.min.js
JS bootstrap.min.js
JS jquery-3.3.1.min.js
JS jquery-migrate-3.0.1.min.js
JS jquery-ui.js
JS jquery.countdown.min.js
JS jquery.magnific-popup.min.js
JS jquery.stellar.min.js
JS lightbox-plus-jquery.min.js
≡ lightbox-plus-jquery.min.map
JS main.js
JS owl.carousel.min.js
JS popper.min.js
JS slick.min.js
➤ scss
➤ slick
↳ about.html
↳ contact.html
↳ index.html
↳ news.html
{} package-lock.json
↳ projects.html
≡ robots.txt
↳ services.html
RSS sitemap.xml



> OUTLINE

⊗ 0 □ 0



 Type here to search



The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer View:** Shows the project structure with files like index.html, about.html, contact.html, sitemap.xml, and main.js. A folder named "JAKSICGLASS" contains several JavaScript files including bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, and slick.
- Editor View:** Displays the content of the "about.html" file. The code includes HTML structure with a footer section containing a h3 tag with the text "Stakleni zidovi". The footer also contains a link with the href attribute set to "#".
- Taskbar:** Shows icons for Windows, search, task switching, file explorer, command palette, terminal, and browser links for Microsoft Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
<div class="site-half">
<div class="img-bg-1" id="onamaslika"></div>
<div class="container">
<div class="row no-gutters align-items-center justify-content-between">
<div class="col-md-12 col-lg-7 ml-lg-0">
<span class="sub-title">Arhitektura</span>
<h2 class="font-weight-bold text-align-center">Kada dođe vreme za renoviranje</h2>
<p>Kada dođe vreme za renoviranje izbor treba načinuti na osnovu klizna vrata od kaljenog stakla koji donosi i glamur u vaš dom strane i dopuštaju prirodnjoj svjetlosti. Sličan efekat stvara i npr. inkorporirati u uređenje elemente veće i šik, zbog količine i potrošnja struje..</p>
<p class="mb-4">Oblik sobe je ključan za manje prostorije u kojima bi se moglo dobiti više prostora, koja se otvaraju na unutrašnjost. Klizna vrata su sjajni izbor, ali i oblik i veličina.</p>
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Code Editor:** The current file is `about.html`. The code displays a responsive layout with sections for "Staklo za kupatila" and "Staklo za kuhinje". It uses Bootstrap classes like `col-lg-6`, `row`, and `stKupatilo`.
- Explorer:** Shows the project structure:
 - OPEN EDITORS:** index.html, about.html (selected), contact.html, sitemap.xml, main.js, js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js.
 - SCSS:** scss.
 - Slick:** slick.
 - HTML:** about.html, contact.html, index.html, news.html.
 - JSON:** package-lock.json.
 - HTML:** projects.html, robots.txt, services.html.
 - XML:** sitemap.xml.
- Bottom Bar:** Shows icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help about.html -

EXPLORER

OPEN EDITORS

- index.html
- about.html
- contact.html
- sitemap.xml
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js

> scss

> slick

about.html

contact.html

index.html

news.html

{ package-lock.json

projects.html

robots.txt

services.html

sitemap.xml

OUTLINE

0 0

Type here to search

index.html

about.html X

contact.html

sitemap.xml

about.html > html > body > div.site-wrap > footer

78

79

80 <li class="">

81 |

82

83 G

84 <a href="contact.html"

85

86 </div>

87 </nav>

88 </div>

89 </div>

90 </div>

91 </div>

92 </div>

93 </div>

94 <div class="site-blocks-cover overlay inn

95 data-stellar-background-ratio="0.5">

96 <div class="container pt-5">

97 <div class="row align-items-center te

98 | <div class="col-md-10 pt-5">

99 | 0 nama</sp

100 <h1>UPOZNAJTE NAS RAD</h1>

101 </div>

102 </div>

103 </div>

104 </div>

105 <div class="site-section site-block-3 bg-

106 <div class="container mt-5 mb-5 ">

107 <div class="row changingPictures">

108 | <div class="col-lg-6 mb-5 mb-lg-0">

109 | <div class="img-border">

110 |

113 <div class="row row-items blokDrz

114 | <div class="col-6 stKupatilo">

115 </div>

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Code Editor:** The current file is `about.html`. The code is a responsive website template with sections for mobile menu, navigation bar, and site content.
- Explorer:** Shows the project structure:
 - OPEN EDITORS:** index.html, about.html (selected), contact.html, sitemap.xml, main.js, js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js.
 - SCSS:** scss.
 - Slick:** slick.
- Bottom Status Bar:** Shows 0 errors and 0 warnings. Includes a search bar: "Type here to search" and icons for Windows, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The file `about.html` is open and displayed. The code includes meta tags for title, charset, and viewport, followed by several `<link rel="stylesheet"` tags pointing to external CSS files like `fonts.css`, `magnific-popup.css`, and `owl.carousel.css`. The `<body>` section contains a `<div class="site-wrap">` element and a `<div class="site-mobile-menu">` element.
- Explorer Sidebar:** Shows the project structure with the following files and folders:
 - OPEN EDITORS:** index.html, about.html (selected), contact.html, sitemap.xml, main.js, js.
 - JAKSICGLASS:** bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js.
 - SCSS:** scss.
 - Slick:** slick.
- Outline Sidebar:** Shows the outline of the current file `about.html`.
- Status Bar:** Shows 0 errors and 0 warnings.
- Bottom Taskbar:** Includes icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "index.html -".

The left sidebar contains the Explorer view, which lists the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - robots.txt
 - main.js
- JAKSICGLASS:
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
 - scss
 - slick
 - about.html
 - contact.html
 - index.html
 - news.html
 - package-lock.json
 - projects.html
 - robots.txt
 - services.html
 - sitemap.xml

The "index.html" file is currently selected in the Explorer.

The main editor area displays the code for "index.html":

```
219 </div>
220 </div>
221 </div>
222 </div>
223 </div>
224 <div class="row pt-5 mt-5 text-center">
225 <div class="col-md-12">
226 <p>
227 Copyright &copy;
228 <script>document.write(new Date().getFullYear())
229 </div>
230 </div>
231 </div>
232 </div>
233 </footer>
234 </div>
235 <script src="js/jquery-3.3.1.min.js"></script>
236 <script src="js/aos.js"></script>
237 <script src="js/main.js"></script>
238
239 </body>
240
241 </html>
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Mail, and Google Chrome.

The screenshot shows a dark-themed code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Title Bar:** index.html -
- Explorer Panel:** Shows the project structure with the following files:
 - OPEN EDITORS: index.html, contact.html, sitemap.xml
 - JAKSICGLASS: bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html (selected), news.html, package-lock.json, projects.html, robots.txt, services.html, sitemap.xml
- Code Editor:** Displays the content of index.html with line numbers 185 to 222. The code includes footer styling, container rows, and a list-unstyled ul for links.
- Bottom Status Bar:** Shows icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

File Edit Selection View Go Debug Terminal Help index.html -

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- robots.txt
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.min.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml

OUTLINE

index.html X contact.html sitemap.xml

index.html > html > head > link

```
156 <div class="site-section mb-5">
157   <div class="container">
158     <div class="row">
159       <div class="col-lg-6 mb-5 mb-lg-0">
160         <div class="img-border">
161           
162         </div>
163       </div>
164     </div>
165   <div class="col-lg-5 ml-auto">
166     <span class="sub-title">O nama</span>
167     <h2 class="font-weight-bold text-left">Kupatilo je jedna od najvažnijih komponenti u kući. Ukoliko se ne dobro održava, može dovesti do neugodnosti i zdravstvenih problemata. Da stoga za renoviranje kupatila potrebama, kao i da se u njemu ukloniti neophodne delove, morate da uklopite sve ono što za vreme radova neće biti u upotrebi. Stakla za tuš kabine i podni paneli su takođe važne komponente u kući. Ukoliko se odlučite za tuš kabine, morate da odaberete dobar proizvođač i kvalitetne materijale. Osim toga, morate da odaberete dobar montažni tim koji će učiniti radove bezbedno i u skladu sa vremenom i budžetom. Kupatilo je jedna od najvažnijih komponenti u kući. Ukoliko se ne dobro održava, može dovesti do neugodnosti i zdravstvenih problemata. Da stoga za renoviranje kupatila potrebama, kao i da se u njemu ukloniti neophodne delove, morate da uklopite sve ono što za vreme radova neće biti u upotrebi. Stakla za tuš kabine i podni paneli su takođe važne komponente u kući. Ukoliko se odlučite za tuš kabine, morate da odaberete dobar proizvođač i kvalitetne materijale. Osim toga, morate da odaberete dobar montažni tim koji će učiniti radove bezbedno i u skladu sa vremenom i budžetom. Kontaktirajte nas i već ste na početku procesa renovacije kupatila.
```

174 </p>
175 <p>Kontaktirajte nas i već ste na početku procesa renovacije kupatila.</p>
176 <p>Pogledajte neki od naših projekata i pogledajte kako su izgledali.
177 </div>
178 </div>
179 </div>
180 </div>
181 </div>
182 </div>
183 </div>
184 </div>
185 </div>
186 <footer class="site-footer border-top">
187 <div class="container">
188 <div class="row">
189 <div class="col-lg-9 mb-5 mb-lg-0">
190 <div class="row mb-5">
191 <div class="col-md-12">
192 <h3 class="footer-heading mb-3">Subota: 9-15h</h3>

0 0

Type here to search

File Explorer Taskbar

File Edit Selection View Go Debug Terminal Help index.html -

EXPLORER

OPEN EDITORS

- index.html
- contact.html
- sitemap.xml
- robots.txt
- main.js js

JAKSICGLASS

- bootstrap-datepicker.min.js
- bootstrap.min.js
- jquery-3.3.1.min.js
- jquery-migrate-3.0.1.min.js
- jquery-ui.js
- jquery.countdown.min.js
- jquery.magnific-popup.min.js
- jquery.stellar.min.js
- lightbox-plus-jquery.min.js
- lightbox-plus-jquery.map
- main.js
- owl.carousel.min.js
- popper.min.js
- slick.min.js
- scss
- slick
- about.html
- contact.html
- index.html
- news.html
- package-lock.json
- projects.html
- robots.txt
- services.html
- sitemap.xml


OUTLINE

index.html > html > head > link

```
</div>
<div class="col-lg-4 filterBlokKuhinja">
<a href="projects.html">
<div href="#" class="site-block">
<div class="mr-3">
| <span class="icon flaticon->
</div>
<div class="text">
| <h3>Stakla za Kuhinje</h3>
| <p>Odlucite se za staklene l...
</div>
</div>
</a>
</div>
<div class="col-lg-4 filterBlokZidovi">
<a href="projects.html">
<div href="#" class="site-block">
<div class="mr-3">
| <span class="icon flaticon->
</div>
<div class="text">
| <h3>Stakleni zidovi</h3>
| <p>Staklene pregrade i zidovi...
</div>
</div>
</a>
</div>
</div>
</div>
</div>
```

0 0

Type here to search

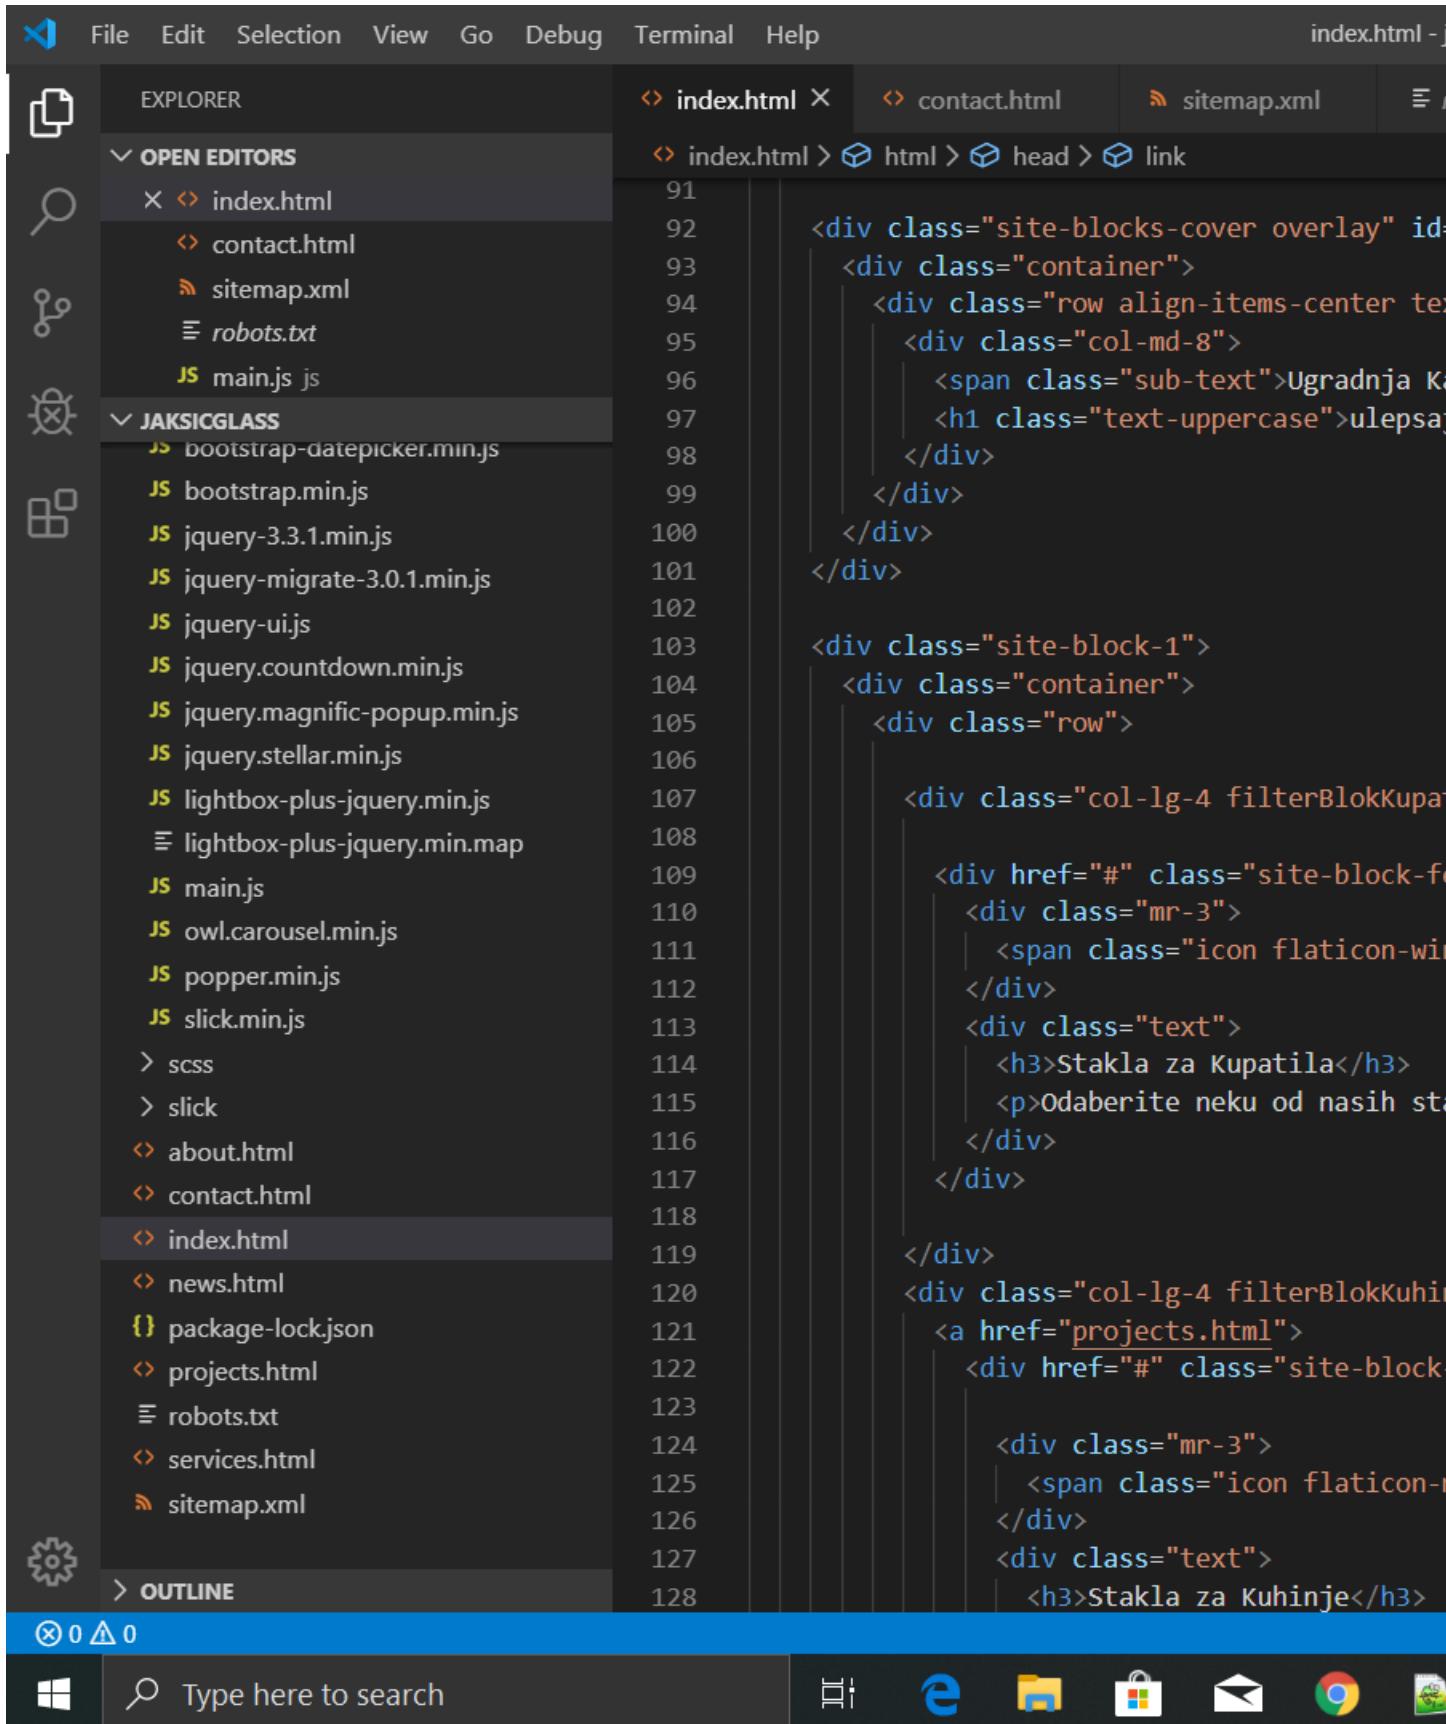

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the current file is index.html. The left sidebar (Explorer) lists open editors, including index.html, contact.html, sitemap.xml, robots.txt, main.js, and several CSS and JS files under the JAKSICGLASS folder. The main editor area displays the HTML code for index.html, with line numbers from 62 to 99. The code includes a site-navbar with a logo and navigation links, and a site-blocks-cover overlay with a sub-text message. The bottom taskbar features icons for Windows, search, task switching, and various system applications like File Explorer, Edge, and Mail.

```
<div class="site-navbar">
  <div class="container py-1">
    <div class="row align-items-center">
      <div class="col-4">
        <h1 class="mb-0 site-logo"><a href="#">H</a></h1>
      </div>
      <div class="col-10">
        <nav class="site-navigation text-right">
          <div class="container">
            <div class="d-inline-block" style="text-align: right; margin-right: 10px;">
              <span class="site-menu-toggle"><i class="fa fa-bars"></i></span>
            </div>
            <ul id="hederLista" class="list-style-type-none">
              <!-- <li class="active">
                <a href="#">Home</a>
              </li>
              <li><a href="#">About</a></li>
              <li><a href="#">Projects</a></li>
              <li><a href="#">News</a></li>
              <li><a href="#">Contact</a></li>
            </ul>
          </div>
        </nav>
      </div>
    </div>
  </div>
</div>
<div class="site-blocks-cover overlay" id="site-blocks-cover">
  <div class="container">
    <div class="row align-items-center text-center">
      <div class="col-md-8">
        <span class="sub-text">Ugradnja Komponenta</span>
        <h1 class="text-uppercase">ulepsavaš</h1>
      </div>
    </div>
  </div>
</div>
```


The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the current file is index.html. The left sidebar (Explorer) lists open editors, including index.html, contact.html, sitemap.xml, robots.txt, main.js, and several CSS and JS files under the JAKSICGLASS folder. The main editor area displays the HTML code for index.html, with line numbers from 62 to 99. The code includes a site-navbar with a logo and navigation links, and a site-blocks-cover overlay with a sub-text message. The bottom taskbar features icons for Windows, search, task switching, and various system applications like File Explorer, Edge, and Mail.

```
<div class="site-navbar">
  <div class="container py-1">
    <div class="row align-items-center">
      <div class="col-4">
        <h1 class="mb-0 site-logo"><a href="#">H</a></h1>
      </div>
      <div class="col-10">
        <nav class="site-navigation text-right">
          <div class="container">
            <div class="d-inline-block" style="text-align: right; margin-right: 10px;">
              <span class="site-menu-toggle"><i class="fa fa-bars"></i></span>
            </div>
            <ul id="hederLista" class="list-style-type-none">
              <!-- <li class="active">
                <a href="#">Home</a>
              </li>
              <li><a href="#">About</a></li>
              <li><a href="#">Projects</a></li>
              <li><a href="#">News</a></li>
              <li><a href="#">Contact</a></li>
            </ul>
          </div>
        </nav>
      </div>
    </div>
  </div>
</div>
<div class="site-blocks-cover overlay" id="site-blocks-cover">
  <div class="container">
    <div class="row align-items-center text-center">
      <div class="col-md-8">
        <span class="sub-text">Ugradnja Komponenta</span>
        <h1 class="text-uppercase">ulepsavaš</h1>
      </div>
    </div>
  </div>
</div>
```

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the current file is index.html. The left sidebar features icons for Explorer, Search, Open Editors, JAKSICGLASS, and Outline. The Explorer view lists files and folders under 'OPEN EDITORS' and 'JAKSICGLASS'. The main editor area displays the HTML code for 'index.html', with line numbers from 30 to 67. The code includes CSS classes like 'site-mobile-menu', 'site-navbar-wrap', and 'site-navbar', and various JavaScript files listed in the 'JAKSICGLASS' folder.

```
<div class="site-mobile-menu">
<div class="site-mobile-menu-header">
| <div class="site-mobile-menu-close mt-1" href=""><span class="icon-close2 js-menu-top" href=""></div>
| </div>
<div class="site-mobile-menu-body"></div>
</div> <!-- .site-mobile-menu -->

<div class="site-navbar-wrap">
<div class="site-navbar-top">
| <div class="container py-3">
| | <div class="row align-items-center">
| | | <div id="iconLista" class="col-6">
| | | </div>
| | <div class="col-6">
| | | <div class="d-flex ml-auto">
| | | | <a href="contact.html" class="d-block d-md-none" href=""><span class="icon-envelope mr-2" href=""><span class="d-none d-md-inline" href=""></a>
| | | | <a href="#" class="d-flex align-items-center" href=""><span class="icon-phone mr-2" href=""><span class="d-none d-md-inline" href=""></a>
| | | </div>
| | </div>
| | | <div class="d-flex align-items-center" href=""></div>
| | </div>
| </div>
<div class="site-navbar">
| <div class="container py-1">
| | <div class="row align-items-center">
| | | <div class="col-4">
| | | | <h1 class="mb-0 site-logo"><a href="#">
```

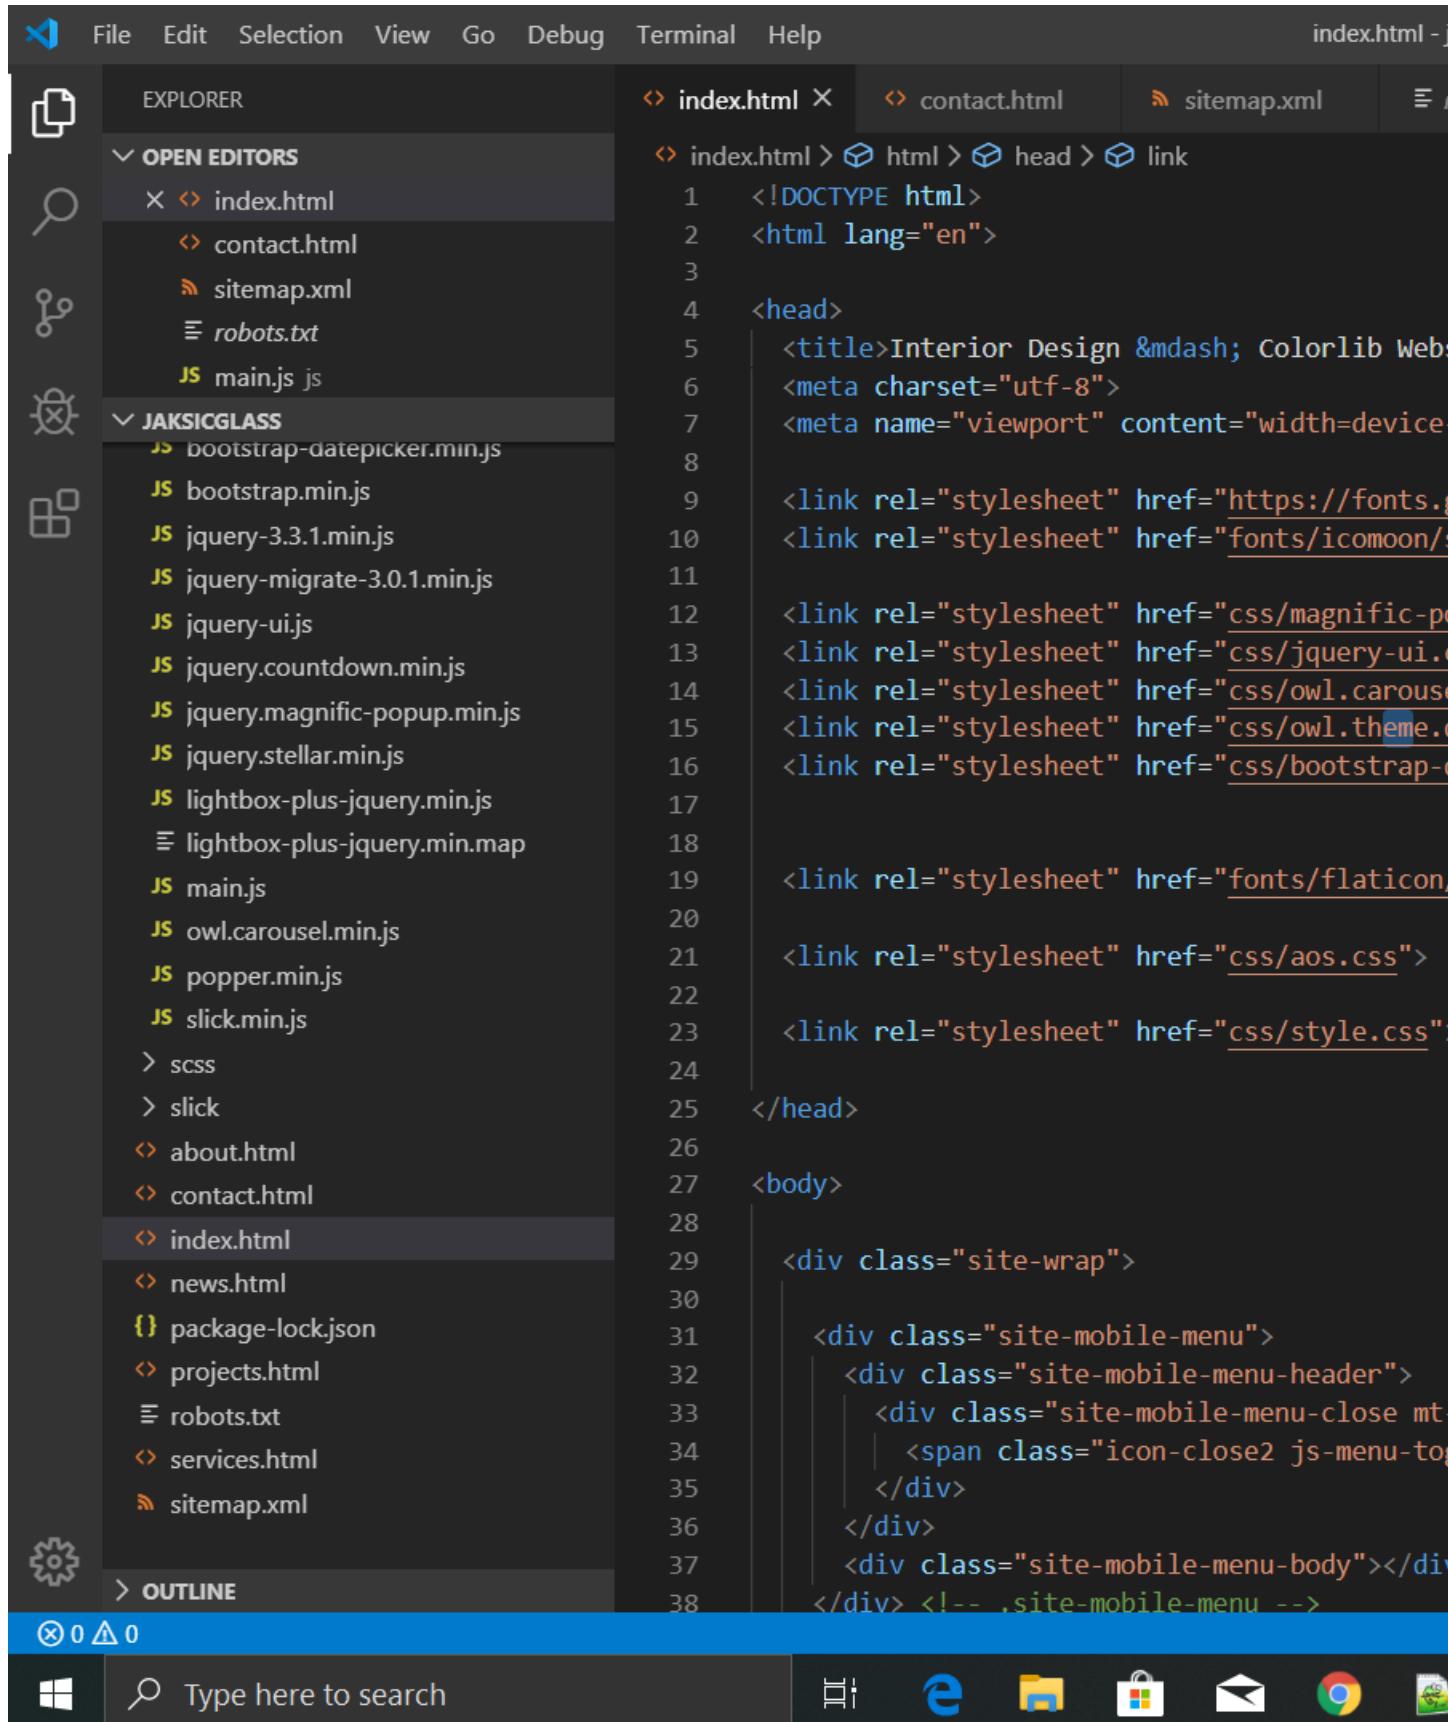

The screenshot shows a Windows desktop environment with Microsoft Edge running in the foreground. The address bar at the top of the browser window displays the URL `robots.txt - j`. The Edge interface includes a navigation bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help options.

The main content area of the browser shows the contents of the `robots.txt` file:

```
User-agent: *
Disallow:/img/

```

Below the browser, the Windows taskbar is visible, featuring the Start button, a search bar with the placeholder "Type here to search", and icons for File Explorer, Edge, Mail, and Google Chrome.

The left side of the screen shows the Windows File Explorer interface. The "OPEN EDITORS" section lists several files: index.html, contact.html, sitemap.xml, and main.js. The "JAKSICGLASS" folder is expanded, showing its contents: js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map), main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html, package-lock.json, projects.html, and robots.txt. The "robots.txt" file is currently selected in the list.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Status Bar:** main.js - ja
- Left Sidebar:** Explorer, Search, Open Editors, JAKSICGLASS, Outline, and a gear icon.
- Open Editors:** index.html, contact.html, sitemap.xml, style.css, main.js (selected), aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html, package-lock.json, projects.html, robots.txt.
- Code Area:** The main.js file content is displayed with line numbers 257 to 289. The code handles a click event on a gallery filter button, retrieves a storage value, and performs fade-in/fade-out transitions for different sections based on the storage value (1, 2, or 3). It also removes the storage item after each transition.

```
js > JS main.js > ...
257 $(".galleryFilter").click(klik);
258 function klik(e) {
259   e.preventDefault();
260   var x = $(this).attr("data-id");
261   localStorage.setItem("galerijaFilter", x);
262   window.location.href = "news.html";
263 }
264 if (localStorage.getItem("galerijaFilter")) {
265   sortirajGaleriju();
266 }
267 function sortirajGaleriju() {
268   let storage = localStorage.getItem("galerijaFilter");
269   if (storage == 1) {
270     $(".kupatilo").fadeIn();
271     $(".kuhnja").fadeOut();
272     $(".zidovi").fadeOut();
273     localStorage.removeItem("galerijaFilter");
274   }
275   if (storage == 2) {
276     $(".kupatilo").fadeOut();
277     $(".kuhnja").fadeIn();
278     $(".zidovi").fadeOut();
279     localStorage.removeItem("galerijaFilter");
280   }
281   if (storage == 3) {
282     $(".kupatilo").fadeOut();
283     $(".kuhnja").fadeOut();
284     $(".zidovi").fadeIn();
285     localStorage.removeItem("galerijaFilter");
286   }
287 }
288
289 }
```

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar on the right shows "main.js - ja".

The Explorer sidebar on the left lists files and folders:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css.css
 - main.js** (selected)
- JAKSICGLASS:
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
- > scss
- > slick
- > about.html
- > contact.html
- > index.html
- > news.html
- { package-lock.json
- > projects.html
- robots.txt

The Editor area displays the content of main.js:

```
js > main.js > ...
219
220 if (document.querySelector(".filterBlokZidova")) {
221 let filterBlokZidova = document.querySelector(".filterBlokZidova");
222 filterBlokZidova.addEventListener("click", function(e) {
223
224
225 function filterStaklaZidova(e) {
226   localStorage.setItem("filterProizvoda", "stakla");
227   window.location.href = "projects.html";
228 }
229
230 if (localStorage.getItem("filterProizvoda") === "stakla") {
231   // alert("a");
232   var filterParam = localStorage.getItem("filterProizvoda");
233
234 if (filterParam === "kupatila") {
235   $(".kuhinja").fadeOut();
236   $(".zidovi").fadeOut();
237   $(".kupatilo").fadeIn();
238   localStorage.removeItem("filterProizvoda");
239 }
240
241 if (filterParam === "kuhinje") {
242   $(".kuhinja").fadeIn();
243   $(".zidovi").fadeOut();
244   $(".kupatilo").fadeOut();
245   localStorage.removeItem("filterProizvoda");
246 }
247
248 if (filterParam === "zidovi") {
249   $(".kuhinja").fadeOut();
250   $(".zidovi").fadeIn();
251   $(".kupatilo").fadeOut();
252   localStorage.removeItem("filterProizvoda");
253 }
254
255 }
```

The Taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar on the right shows "main.js - ja".

The Explorer sidebar on the left lists files and folders:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css.css
 - JS main.js js (selected)
- JAKSICGLASS:
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js (selected)
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
- SCSS
 - scss
 - slick
- HTML
 - about.html
 - contact.html
 - index.html
 - news.html
- JSON
 - package-lock.json
 - projects.html
- Text
 - robots.txt
- OUTLINE

The main editor area displays the content of the "main.js" file, which includes several functions and conditional statements for handling different page components like "menjaSesliku", "stZidovi", "filterBlokKupatila", "filterStakla", "filterBlokKuhinje", and "filterBlokZidova". The code uses document.querySelectorAll and localStorage.setItem methods.

At the bottom, the taskbar shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar on the right shows "main.js - ja".

The Explorer sidebar on the left lists files and folders:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css.css
 - JS main.js (selected)
- JAKSICGLASS
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
- > scss
- > slick
- > about.html
- > contact.html
- > index.html
- > news.html
- { package-lock.json
- > projects.html
- robots.txt

The Editor tab bar shows index.html, contact.html, sitemap.xml, and main.js - ja.

The main editor area displays the content of main.js:

```
js > JS main.js > ...
151 $( "#filterKlik" ).click(function () {
152     let id = $(this).data("id");
153     if (id == 1) {
154         $(".kuhinja").fadeOut();
155         $(".zidovi").fadeOut();
156         $(".kupatilo").fadeIn();
157     }
158     if (id == 2) {
159         $(".kupatilo").fadeOut();
160         $(".zidovi").fadeOut();
161         $(".kuhinja").fadeIn();
162     }
163     if (id == 3) {
164         $(".kupatilo").fadeOut();
165         $(".kuhinja").fadeOut();
166         $(".zidovi").fadeIn();
167     }
168 }
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
```

The Taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The main code editor displays the file `main.js`. The code is a JavaScript file containing logic for a mobile menu and off-canvas functionality. It includes event listeners for click and mouseup events, and classes like `offcanvas` and `active`.
- Explorer Panel:** Shows the project structure with files like `index.html`, `contact.html`, `sitemap.xml`, `style.css`, and various JavaScript files under `JAKSICGLASS/js`. The file `main.js` is currently selected.
- Taskbar:** At the bottom, there is a taskbar with icons for Windows, Search, Task View, Edge browser, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
if (w > 768) {
    if ($('body').hasClass('offcanvas')) {
        $('body').removeClass('offcanvas');
    }
}

$('body').on('click', '.js-menu-toggle', function(e) {
    var $this = $(this);
    e.preventDefault();

    if ($('body').hasClass('offcanvas')) {
        $('body').removeClass('offcanvas');
        $this.removeClass('active');
    } else {
        $('body').addClass('offcanvas');
        $this.addClass('active');
    }
});

// click outside offcanvas
$(document).mouseup(function(e) {
    var container = $(".site-mobile-menu");
    if (!container.is(e.target) && container.has(e.target)) {
        if ($('body').hasClass('offcanvas')) {
            $('body').removeClass('offcanvas');
        }
    }
});

$(".filterklik").click(function () {
    let id = $(this).data("id");
    siteMenuClone();
});
```

The screenshot shows the Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The status bar on the right indicates "main.js - ja".

The Explorer sidebar on the left lists files and folders:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css.css
 - JS main.js (selected)
- JAKSICGLASS:
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
 - lightbox-plus-jquery.min.js
 - lightbox-plus-jquery.min.map
 - main.js
 - owl.carousel.min.js
 - popper.min.js
 - slick.min.js
- SCSS
 - scss
 - slick
- HTML
 - about.html
 - contact.html
 - index.html
 - news.html
- JSON
 - package-lock.json
 - projects.html
- Text
 - robots.txt
- OUTLINE

⊗ 1 △ 1



Type here to search




The screenshot shows the Visual Studio Code interface with the following details:

- Top Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Status Bar:** main.js - ja
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css, main.js (selected).
 - JAKSICGLASS:** js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map).
 - SCSS:** main.scss, owl.carousel.min.scss, popper.min.scss, slick.min.scss.
 - HTML:** about.html, contact.html, index.html, news.html.
 - JSON:** package-lock.json, projects.json.
 - Text:** robots.txt.
- Editor Area:** Shows the code for `main.js`. The code includes functions for cloning site menu items and handling mobile menu collapses. It uses jQuery and Bootstrap libraries.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- Top Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Status Bar:** main.js - ja
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (2), **main.js** (selected).
 - JAKSICGLASS:** js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js, lightbox-plus-jquery.min.js, lightbox-plus-jquery.min.map), main.js, owl.carousel.min.js, popper.min.js, slick.min.js, scss, slick, about.html, contact.html, index.html, news.html, package-lock.json, projects.html, robots.txt.
 - OUTLINE:**
- Editor Area:** Displays the content of the main.js file. The code uses arrays to store URLs and icons, then iterates through them to generate HTML for a list. It also defines a function iconLista2() which likely handles icon placement. The code includes comments and line numbers.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

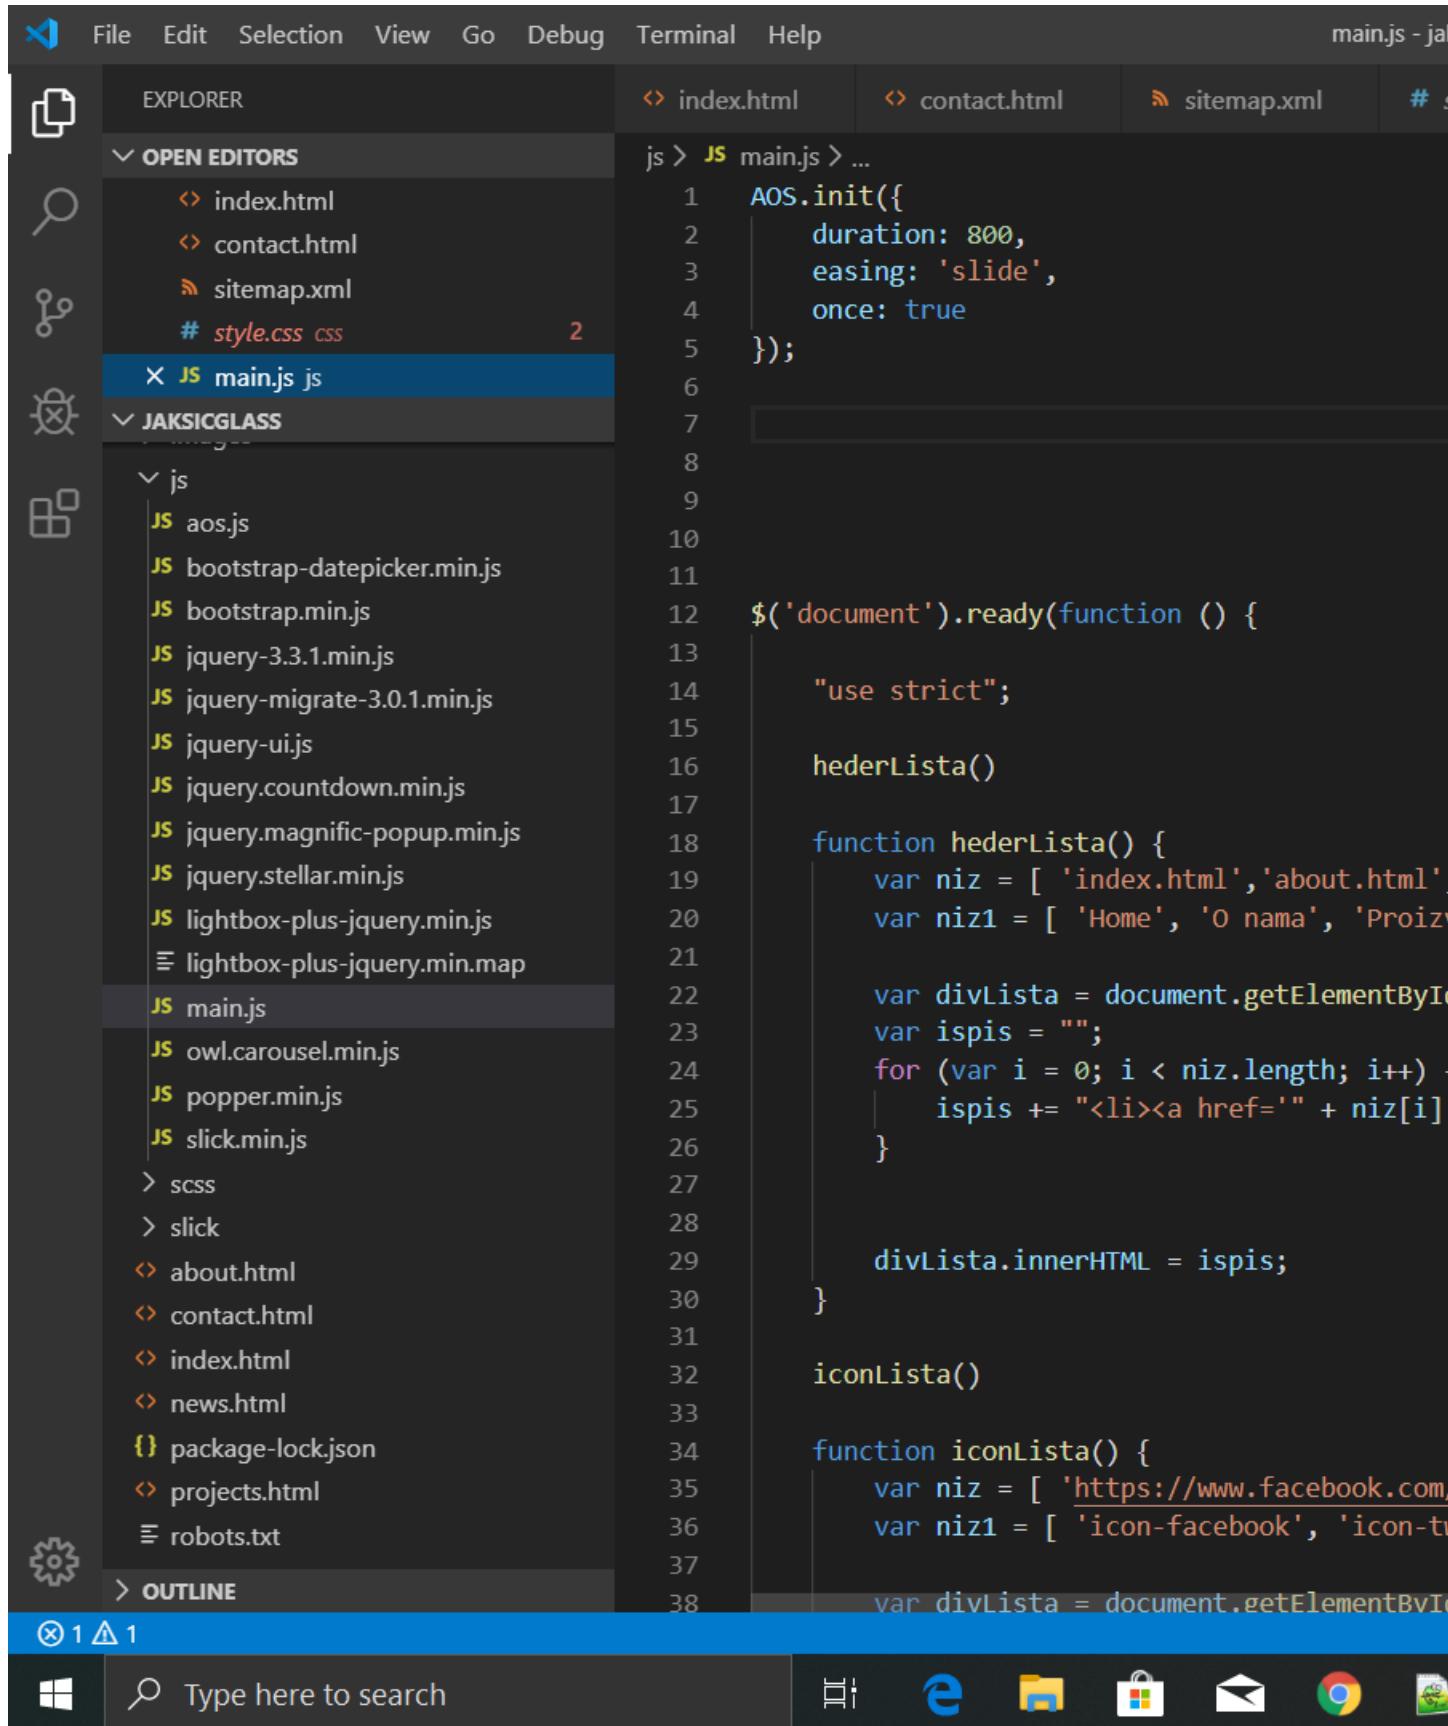

The screenshot shows the Visual Studio Code interface with the following details:

- Top Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Left Sidebar (Explorer):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js (JS).
 - JAKSICGLASS:**
 - css:** bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css:** (selected)
 - data, fonts, images:**
 - js:** aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE:**

Editor Area: The code editor displays the content of style.css, specifically the section for .list-group-item-info.list-group-item-action: hover. The code includes:

```
css > # style.css > .list-group-item-info.list-group-item-action: hover  
8528 }  
8529 .blokDrzacSlike{  
8530 | height: 250px !important;  
8531 }  
8532  
8533 #iconLista2{  
8534 margin-top:35px;  
8535 }  
8536 .btn{  
8537 margin-right:100px;  
8538 }  
8539 ~  
8540 ~
```

Taskbar: Shows 1 error and 1 warning. Includes icons for Windows Start, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor Area:** The right pane displays the content of the file `style.css`. The code includes various CSS rules for classes like `.gallerypictureBlock`, `.no-padding-top`, and `.cena`, along with some JavaScript imports at the bottom.
- Explorer Bar (Left):**
 - OPEN EDITORS:** index.html, contact.html, sitemap.xml, style.css (selected), main.js.
 - JAKSICGLASS:** A folder containing:
 - css: bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css.
 - style.css (selected).
 - data, fonts, images.
 - js: aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js.
 - OUTLINE: (empty)
- Taskbar (Bottom):** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, style.css:

```
css > # style.css > .list-group-item-info.list-group-item-action:ho...  
8430  
8431 .block-25 ul li a:hover img {  
8432 opacity: .5; }  
8433  
8434 .block-25 ul li a:hover .text .heading {  
8435 color: #fff; }  
8436  
8437 .pictureBlock{  
8438 width: 350px;  
8439 height: 250px;  
8440 background-color: red;  
8441 border-radius: 2px;  
8442 }  
8443  
8444 .pictureBlock a, .pictureBlock a img {  
8445 width: 350px;  
8446 height: 250px;  
8447 }  
8448  
8449 .proizvodiImg {  
8450 width: 400px;  
8451 height: 330px;  
8452 padding: 0px !important;  
8453 display: flex;  
8454 justify-content: space-around;  
8455 }  
8456  
8457 .proizvodiImg img{  
8458 min-width: 270px;  
8459 height: 330px;  
8460 }  
8461  
8462 .proizvodiText{  
8463 width: 470px;  
8464 min-height: auto;  
8465 }  
8466  
8467 contactCard_
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Edge browser window with the developer tools open. The address bar at the top displays "style.css - ja...". The developer tools interface includes a menu bar with File, Edit, Selection, View, Go, Debug, Terminal, and Help. The left sidebar has icons for Explorer, Find, Open Editors, JAKSICGLASS, and Outline. The "OPEN EDITORS" section lists index.html, contact.html, sitemap.xml, style.css (selected), and main.js. The "JAKSICGLASS" section lists various CSS and JS files. The main pane shows the CSS code for style.css, with line numbers from 8381 to 8418. The code includes styles for .list-group-item-info, .list-group-item-action, .block-16 figure .play-button, .block-16 figure .play-button > span, .block-25 ul li, .block-25 ul li .date, .block-25 ul li a .image, and .block-25 ul li a .image img.

```
height: 70px;
background: #fff;
display: block;
border-radius: 50%;
opacity: 1;
color: #98ccfd !important; }

.block-16 figure .play-button:hover {
    opacity: 1; }

.block-16 figure .play-button > span {
    position: absolute;
    left: 55%;
    top: 50%;
    -webkit-transform: translate(-60%, -50%);
    -ms-transform: translate(-60%, -50%);
    transform: translate(-60%, -50%); }

.block-25 ul, .block-25 ul li {
    padding: 0;
    margin: 0; }

.block-25 ul li .date {
    color: rgba(255, 255, 255, 0.25);
    font-size: 0.8rem;
    display: block; }

.block-25 ul li a .image {
    -webkit-box-flex: 0;
    -ms-flex: 0 0 90px;
    flex: 0 0 90px; }

.block-25 ul li a .image img {
    border-radius: 4px;
    max-width: 100%;
    opacity: 1;
    -webkit-transition: .3s all ease-in-out;
    -o-transition: .3s all ease-in-out;
    transition: .3s all ease-in-out; }

.block-25 ul li a .text, .block-25 ul li a .heading {
```

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, "style.css". The code includes various CSS rules for styling elements like .list-group-item, .text-overlay, and .text-inner, along with media queries for different screen widths.

```
css > # style.css > .list-group-item.info.list-group-item-action:ho  
8319  
bottom: 0,  
left: 0;  
background: -moz-linear-gradient(top,   
background: -webkit-linear-gradient(to  
background: -webkit-gradient(linear, l  
background: -o-linear-gradient(to  
background: linear-gradient(to bottom,  
filter: progid:DXImageTransform.Microsoft.  
.block-12 .text-overlay {  
position: absolute;  
bottom: 20px;  
left: 20px;  
right: 20px;  
z-index: 10; }  
.block-12 .text-overlay h2 {  
color: #fff; }  
.block-12 .text {  
position: relative;  
top: -100px; }  
.block-12 .text .meta {  
text-transform: uppercase;  
padding-left: 40px;  
color: #fff;  
display: block;  
margin-bottom: 20px; }  
.block-12 .text .text-inner {  
-webkit-box-shadow: 0 0 20px -5px rgba(0, 0, 0, 0.1);  
box-shadow: 0 0 20px -5px rgba(0, 0, 0, 0.1);  
background: #fff;  
padding: 10px;  
margin-right: 30px;  
position: relative; }  
 @media (min-width: 576px) {  
 .block-12 .text .text-inner {  
 padding: 20px; } }  
 @media (min-width: 768px) {  
 .block-12 .text .text-inner {  
 padding: 30px 40px; } }
```

The bottom taskbar includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help. The title bar indicates the file "style.css - ja".

The left sidebar (Explorer) displays the project structure:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The right pane shows the content of the selected file, style.css:

```
index.html    contact.html    sitemap.xml    # style.css - ja

css > # style.css > .list-group-item-info.list-group-item-action:ho
8295 .testimony h3 {
8296   font-size: 18px; }

8298 .site-block-testimony img {
8299   max-width: 140px;
8300   border-radius: 50%; }

8302 .site-block-testimony p {
8303   font-size: 1.2rem; }

8305 .site-block-testimony.active {
8306   background: #fff;
8307   -webkit-box-shadow: 0 5px 20px -2px rgba(0, 0, 0, 0.1);
8308   box-shadow: 0 5px 20px -2px rgba(0, 0, 0, 0.1); }

8310 .block-12 {
8311   position: relative; }
8312 .block-12 figure {
8313   position: relative; }
8314 .block-12 figure:before {
8315   content: '';
8316   position: absolute;
8317   top: 0;
8318   right: 0;
8319   bottom: 0;
8320   left: 0;
8321   background: -moz-linear-gradient(top, transparent 0%, transparent 100%, #fff 50%, #fff 51%, transparent 100%); }
8322   background: -webkit-linear-gradient(top, transparent 0%, transparent 100%, #fff 50%, #fff 51%, transparent 100%); }
8323   background: -webkit-gradient(linear, left top, left bottom, color-stop(50%, #fff), color-stop(51%, #fff), color-stop(100%, transparent)); }
8324   background: -o-linear-gradient(top, transparent 0%, transparent 100%, #fff 50%, #fff 51%, transparent 100%); }
8325   background: linear-gradient(to bottom, transparent 0%, transparent 100%, #fff 50%, #fff 51%, transparent); }
8326   filter: progid:DXImageTransform.Microsoft.gradient(gradientType=1, startColor=transparent, endColor=transparent, midpoint=50%); }

8327 .block-12 .text-overlay {
8328   position: absolute;
8329   bottom: 20px;
8330   left: 20px;
8331   right: 20px;
8332   z-index: 10; }
```

The status bar at the bottom shows 1 error and 1 warning, and includes icons for Windows, search, taskbar, and browser links.

File Edit Selection View Go Debug Terminal Help style.css - j...

EXPLORER

OPEN EDITORS

- index.html 8234
- contact.html 8235
- sitemap.xml 8236
- # style.css css 8237 2
- main.js js 8238

JAKSICGLASS

- css 8240
 - bootstrap 8242
 - aos.css 8243
 - bootstrap-datepicker.css 8244
 - bootstrap.min.css 8245
 - bootstrap.min.css.map 8246
 - jquery-ui.css 8247
 - lightbox.css 8249
 - lightbox.min.css 8250
 - magnific-popup.css 8251
 - owl.carousel.min.css 8252
 - owl.theme.default.min.css 8253
 - style.css 8255 2
- data 8256
- fonts 8257
- images 8258
- js 8259
 - aos.js 8260
 - bootstrap-datepicker.min.js 8261
 - bootstrap.min.js 8262
 - jquery-3.3.1.min.js 8263
 - jquery-migrate-3.0.1.min.js 8264
 - jquery-ui.js 8265
 - jquery.countdown.min.js 8266
 - jquery.magnific-popup.min.js 8267
 - jquery.stellar.min.js 8268
- OUTLINE 8269

index.html contact.html sitemap.xml # style.css

```
.person .bio-img .social {  
z-index: 2;  
padding: 10px 0;  
width: 100%;  
position: absolute;  
bottom: 0%;  
-webkit-transform: translateY(100%);  
-ms-transform: translateY(100%);  
transform: translateY(100%);  
left: 0;  
-webkit-transition: .3s all ease;  
-o-transition: .3s all ease;  
transition: .3s all ease;  
background: rgba(0, 0, 0, 0.25); }  
.person .bio-img .social a {  
display: inline-block;  
padding: 5px; }  
.person:hover .social {  
bottom: 0;  
-webkit-transform: translateY(0%);  
-ms-transform: translateY(0%);  
transform: translateY(0%); }  
.person:hover figure:before {  
opacity: 0;  
visibility: hidden; }  
.post-entry, .project-entry {  
overflow: hidden;  
position: relative;  
display: block; }  
.post-entry .figure, .project-entry .figure {  
overflow: hidden;  
margin-bottom: 20px; }  
.post-entry h3, .project-entry h3 {  
font-size: 18px;  
line-height: 1.3; }  
.post-entry h3 a, .project-entry h3 a {  
color: #000; }
```

⊗ 1 △ 1

Type here to search

Windows Edge File Explorer Mail Google Chrome

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top bar includes File, Edit, Selection, View, Go, Debug, Terminal, and Help menus. The title bar displays "style.css - ja...".

The Explorer sidebar on the left lists files and folders:

- OPEN EDITORS:
 - index.html
 - contact.html
 - sitemap.xml
 - # style.css (selected)
 - main.js
- JAKSICGLASS:
 - css
 - bootstrap
 - aos.css
 - bootstrap-datepicker.css
 - bootstrap.min.css
 - bootstrap.min.css.map
 - jquery-ui.css
 - lightbox.css
 - lightbox.min.css
 - magnific-popup.css
 - owl.carousel.min.css
 - owl.theme.default.min.css
 - style.css (selected)
 - data
 - fonts
 - images
 - js
 - aos.js
 - bootstrap-datepicker.min.js
 - bootstrap.min.js
 - jquery-3.3.1.min.js
 - jquery-migrate-3.0.1.min.js
 - jquery-ui.js
 - jquery.countdown.min.js
 - jquery.magnific-popup.min.js
 - jquery.stellar.min.js
- OUTLINE

The main editor area shows the content of the selected file, style.css:

```
8185 .block-13 .owl-nav .owl-next, .block-14 .owl-next {  
8186 right: -20px; }  
8187  
8188 .block-13 .owl-dots, .block-14 .owl-dots, .block-15 .owl-dots {  
8189 text-align: center; }  
8190 .block-13 .owl-dots .owl-dot, .block-14 .owl-dots .owl-dot, .block-15 .owl-dots .owl-dot {  
8191 display: inline-block;  
8192 margin: 5px; }  
8193 .block-13 .owl-dots .owl-dot > span, .block-14 .owl-dots .owl-dot > span, .block-15 .owl-dots .owl-dot > span {  
8194 line-height: 0;  
8195 display: inline-block;  
8196 width: 7px;  
8197 height: 7px;  
8198 border-radius: 50%;  
8199 border: none;  
8200 float: left;  
8201 background: #cccccc;  
8202 -webkit-transition: .3s all ease;  
8203 -o-transition: .3s all ease;  
8204 transition: .3s all ease; }  
8205 .block-13 .owl-dots .owl-dot.active > span, .block-14 .owl-dots .owl-dot.active > span, .block-15 .owl-dots .owl-dot.active > span {  
8206 background: #98cccd3; }  
8207  
8208 .person {  
8209 position: relative; }  
8210 .person figure {  
8211 position: relative;  
8212 margin-bottom: 0; }  
8213 .person figure:before {  
8214 position: absolute;  
8215 content: "";  
8216 z-index: 1;  
8217 left: 10px;  
8218 top: 10px;  
8219 right: 10px;  
8220 bottom: 10px;  
8221 border: 5px solid #98cccd3;  
8222 opacity: 1;
```

The taskbar at the bottom includes icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Editor:** The main editor window displays a CSS file named "style.css". The code includes various Bootstrap and custom styles. A line of code is highlighted:

```
8111 | .list-group-item-info.list-group-item-action:ho
```
- Explorer:** The sidebar shows the project structure under "OPEN EDITORS" and "JAKSICGLASS".
 - "OPEN EDITORS" contains: index.html, contact.html, sitemap.xml, style.css (selected), and main.js.
 - "JAKSICGLASS" contains: css (bootstrap, aos.css, bootstrap-datepicker.css, bootstrap.min.css, bootstrap.min.css.map, jquery-ui.css, lightbox.css, lightbox.min.css, magnific-popup.css, owl.carousel.min.css, owl.theme.default.min.css), style.css, data, fonts, images, and js (aos.js, bootstrap-datepicker.min.js, bootstrap.min.js, jquery-3.3.1.min.js, jquery-migrate-3.0.1.min.js, jquery-ui.js, jquery.countdown.min.js, jquery.magnific-popup.min.js, jquery.stellar.min.js).
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Debug, Terminal, Help.
- Explorer:** Shows the file structure. Open editors include index.html, contact.html, sitemap.xml, style.css (selected), and main.js. A folder named JAKSICGLASS contains CSS, JS, and image files.
- Editor:** Displays the content of style.css. The code includes various CSS rules for sections like .about-section, .img-years, .experience, .caption, .years, h3, and media queries for different screen widths. It also includes JavaScript files like aos.js and bootstrap-datepicker.min.js.
- Taskbar:** Shows icons for Windows, Search, Task View, Edge, File Explorer, Microsoft Store, Mail, and Google Chrome.

```
css > # style.css > .list-group-item-info.list-group-item-action:ho
position: relative; }
.about-section .img-years .experience {
position: absolute;
display: block;
right: 0; }
.about-section .img-years .caption {
display: block;
text-transform: uppercase;
letter-spacing: .8em;
font-size: 14px;
font-weight: 900;
color: #ff5733; }
@media (max-width: 991.98px) {
.about-section .img-years .caption {
letter-spacing: .3em; } }
.about-section .img-years .years {
line-height: 1.2;
font-weight: 900;
font-size: 100px;
color: #ff5733; }
@media (max-width: 991.98px) {
.about-section .img-years .years {
font-size: 80px; } }

.about-section h3 {
font-size: 30px;
font-weight: bold;
color: #000; }

.media.custom-media .icon {
position: relative;
color: #000; }
.media.custom-media .icon:before {
content: "";
position: absolute;
width: 60px;
height: 60px;
border-radius: 50%;
```

