# Username-less Passkey Auth

## 1 Overview

| component | name | version | notes |
|---|---|---|---|
| server library | *webauthn-rs* | `0.5.4`[1] | Latest as of 2026-02-01. |
| client web browser | *Brave* | `1.86.146` | Latest as of 2026-02-01. |
| client OS | *Windows 11* | `25H2`[2] | |

Example citations: an article [1] and a website [2].

Figure 1 approximates passkey creation process steps on a high level. Figure 2 depicts the process in more detail.

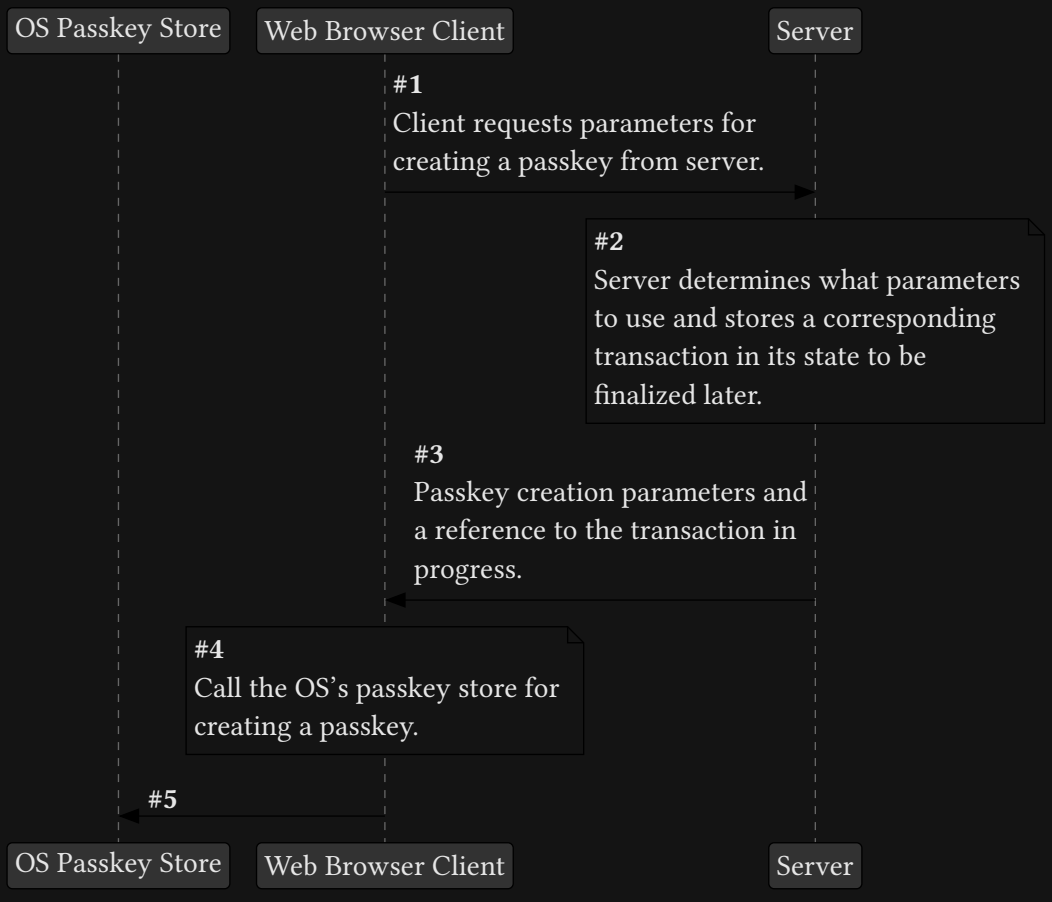



Figure 1: Overview of creating a passkey.

[1] https://docs.rs/webauthn-rs/0.5.4/webauthn_rs/index.html (accessed 2026-02-01)

[2] Edition Windows 11 Home, Version 25H2, OS build 26200.7623, Experience Windows Feature Experience Pack 1000.26100.275.0

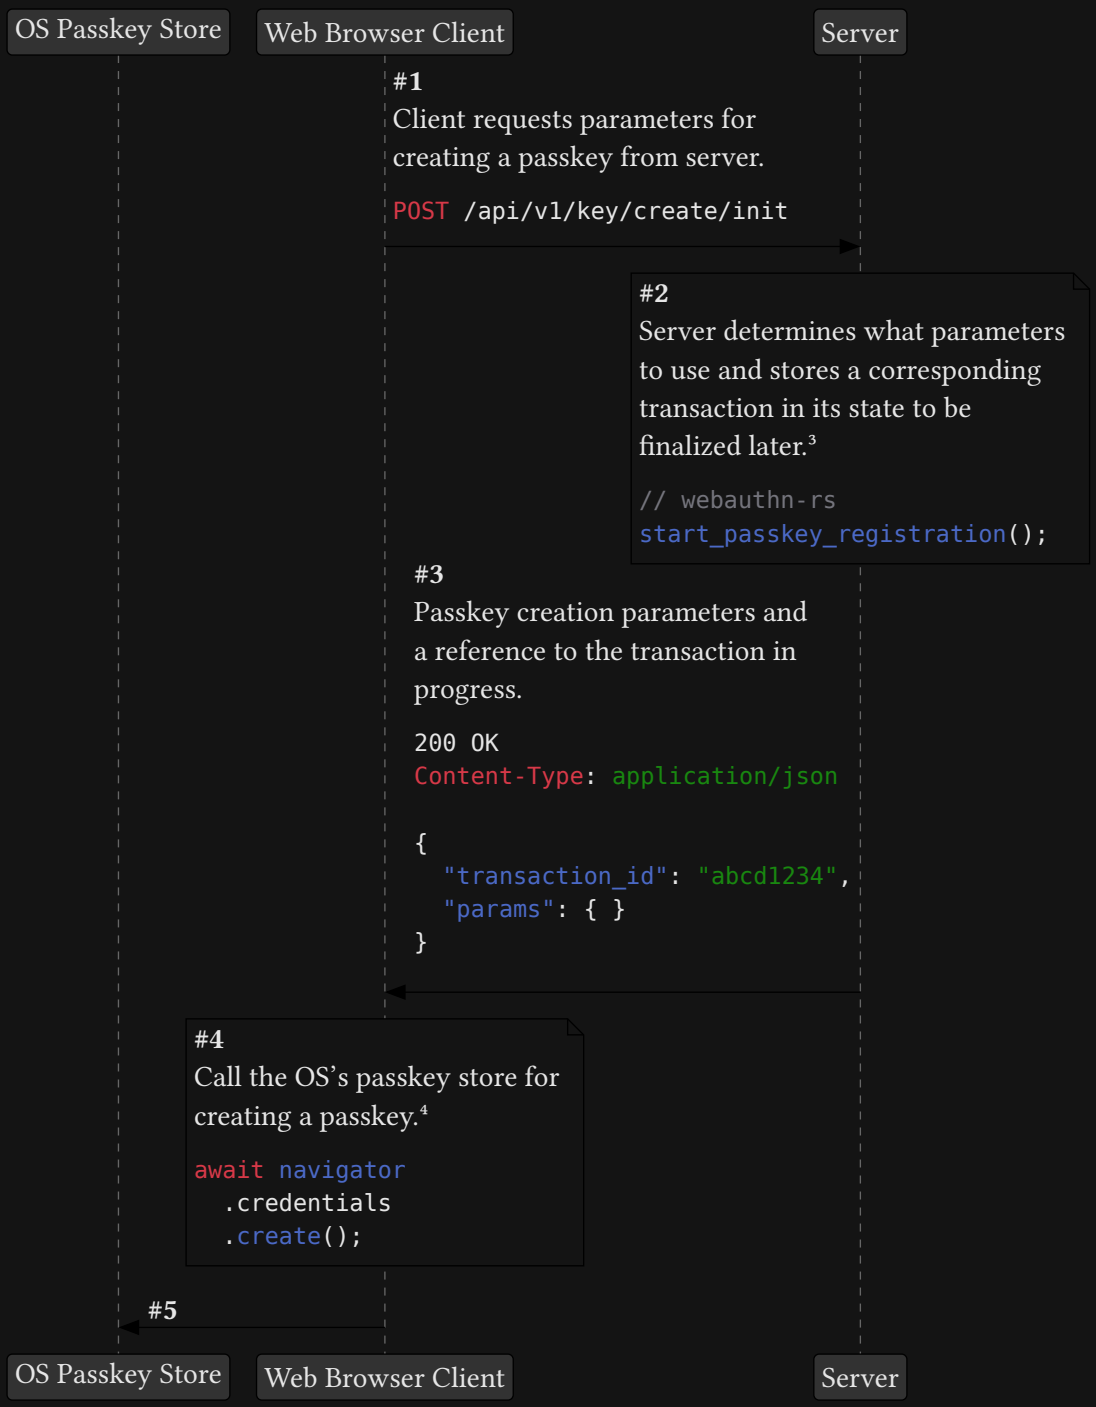



Figure 2: Creating a passkey.

## Bibliography

[1] P. Zhao *et al.*, "Fine-Tuning Qwen3-27B for C-to-Rust Code Translation: A Three-Stage Curriculum of Pretraining, Debugging-Aware SFT, and Task-Specific SFT," Aug. 13, 2026. [Online]. Available: https://arxiv.org/abs/2608.13681

[2] Cloudflare, "Cloudflare Radar: IP address 8.8.8.8." Accessed: Oct. 24, 2026. [Online]. Available: https://radar.cloudflare.com/ip/8.8.8.8

[3] https://docs.rs/webauthn-rs/0.5.4/webauthn_rs/struct.Webauthn.html#method.start_passkey_registration (accessed 2026-02-01)

[4] https://developer.mozilla.org/en-US/docs/Web/API/CredentialsContainer/create (accessed 2026-02-01)