Username-less Passkey Auth

John Doe, 2026-02-01

Contents

1 Overview 2
Bibliography 4

1 Overview

component	name	version	notes
server library	*webauthn-rs*	`0.5.4`[1]	Latest as of 2026-02-01.
client web browser	*Brave*	`1.86.146`	Latest as of 2026-02-01.
client OS	*Windows 11*	`25H2`[2]	

Example citations: an article [1] and a website [2]. Example citation with specific page. [1, p. 5]

Figure 1 approximates passkey creation process steps on a high level. Figure 2 depicts the process in more detail. Listing 1 shows how the server starts the registration with *webauthn-rs*.

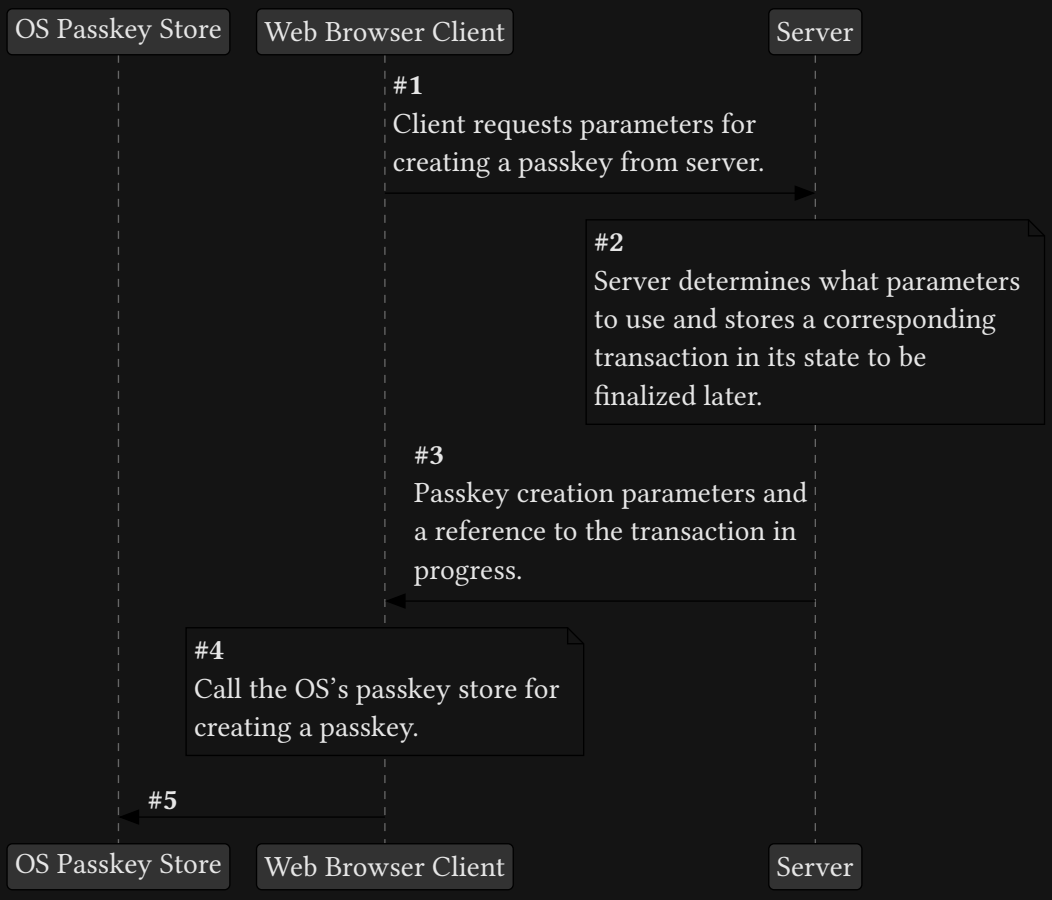


Figure 1: Overview of creating a passkey.

[1] https://docs.rs/webauthn-rs/0.5.4/webauthn_rs/index.html (accessed 2026-02-01)

[2] Edition Windows 11 Home, Version 25H2, OS build 26200.7623, Experience Windows Feature Experience Pack 1000.26100.275.0

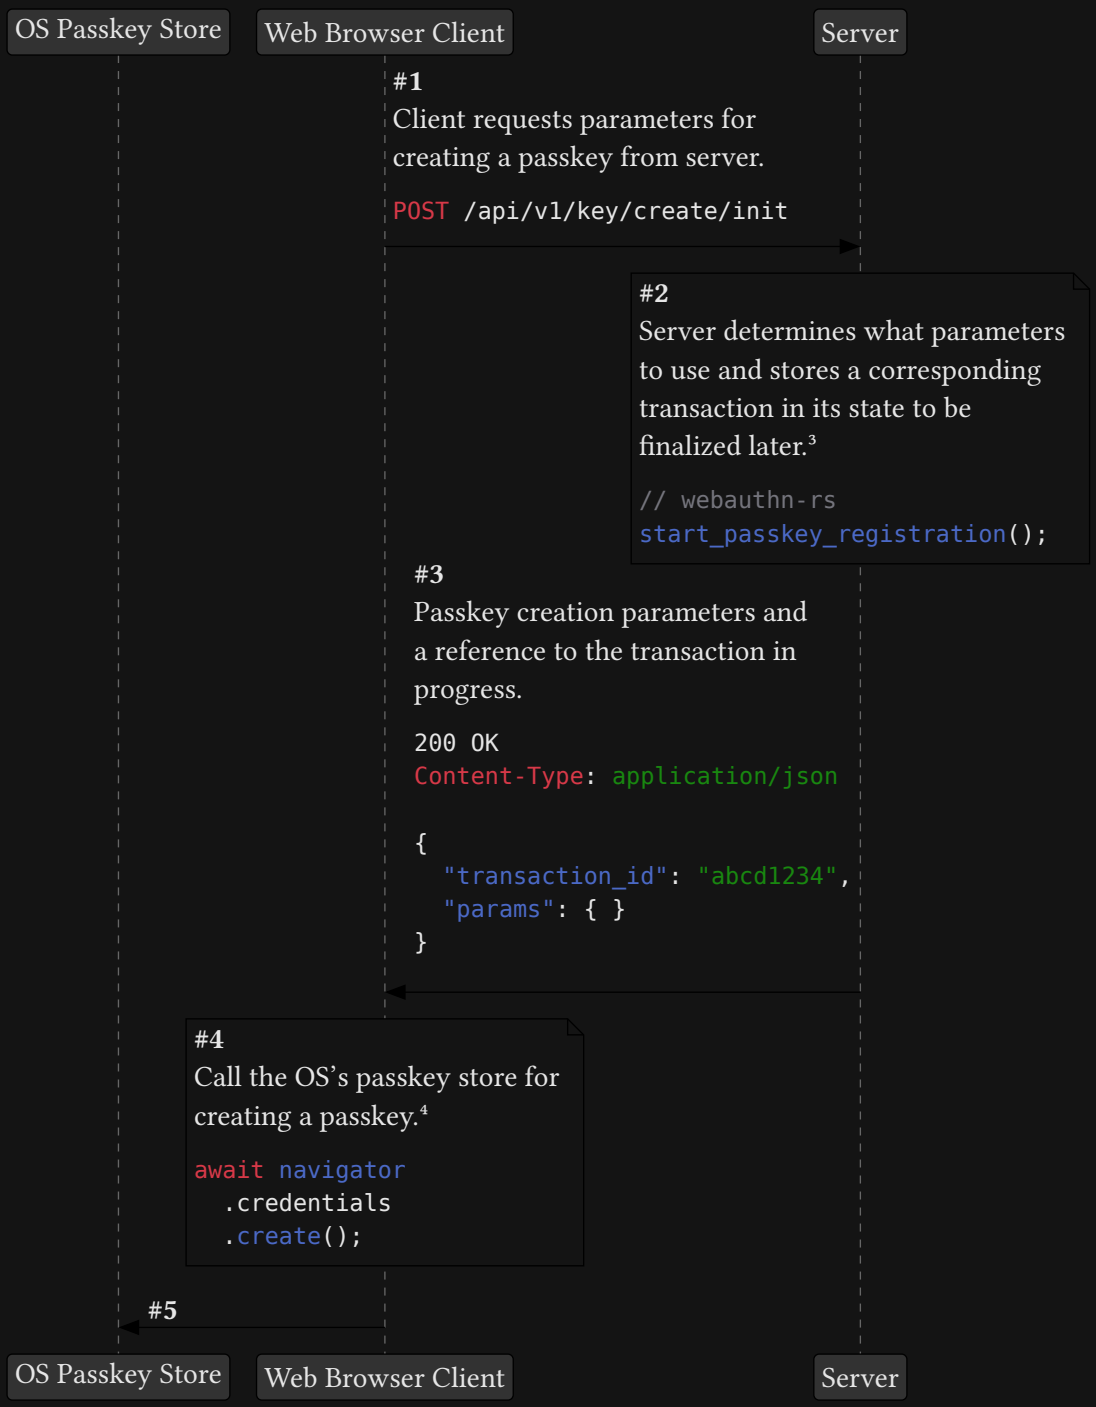


Figure 2: Creating a passkey.

```rust
fn start_registration(webauthn: &Webauthn, user_id: Uuid) {
    let (challenge, state) = webauthn
        .start_passkey_registration(user_id, "john", "John Doe", None)
        .expect("failed to start registration");
}
```

Listing 1: Starting a passkey registration.

[3] https://docs.rs/webauthn-rs/0.5.4/webauthn_rs/struct.Webauthn.html#method.start_passkey_registration (accessed 2026-02-01)

[4] https://developer.mozilla.org/en-US/docs/Web/API/CredentialsContainer/create (accessed 2026-02-01)

Bibliography

[1] P. Zhao *et al.*, "Fine-Tuning Qwen3-27B for C-to-Rust Code Translation: A Three-Stage Curriculum of Pretraining, Debugging-Aware SFT, and Task-Specific SFT," Aug. 13, 2026. [Online]. Available: https://arxiv.org/abs/2608.13681

[2] Cloudflare, "Cloudflare Radar: IP address 8.8.8.8." Accessed: Oct. 24, 2026. [Online]. Available: https://radar.cloudflare.com/ip/8.8.8.8