
openpyxl Documentation

发布 3.0.5

See AUTHORS

2020 年 09 月 17 日

1	支持	3
2	如何贡献	5
2.1	其他提供帮助的方式	5
3	安装	7
3.1	Working with a checkout	7
4	Usage examples	9
4.1	教程	9
4.2	Cookbook	16
5	性能	21
5.1	性能	21
6	其他主题	25
6.1	优化模式	25
6.2	插入删除行或列, 移动范围单元格	27
6.3	与 Pandas 和 NumPy 一起使用	28
6.4	图表	30
6.5	注释	82
6.6	样式	83
6.7	其他工作表属性	91
6.8	条件格式	93
6.9	数据透视表	98
6.10	打印设置	98
6.11	筛选和排序	100
6.12	数据验证	101
6.13	定义名称	104

6.14	工作簿表格	105
6.15	Parsing Formulas	108
6.16	保护	110
7	开发者信息	113
7.1	Development	113
8	API 文档	119
8.1	关键类	119
8.2	完整 API	119
9	Indices and tables	411
10	发布说明	413
10.1	3.0.4 (2020-06-24)	413
10.2	3.0.3 (2020-01-20)	414
10.3	3.0.2 (2019-11-25)	414
10.4	3.0.1 (2019-11-14)	414
10.5	3.0.0 (2019-09-25)	415
10.6	2.6.4 (2019-09-25)	415
10.7	2.6.3 (2019-08-19)	415
10.8	2.6.2 (2019-03-29)	415
10.9	2.6.1 (2019-03-04)	416
10.10	2.6.0 (2019-02-06)	416
10.11	2.6.-b1 (2019-01-08)	416
10.12	2.6-a1 (2018-11-21)	417
10.13	2.5.14 (2019-01-23)	417
10.14	2.5.13 (brown bag)	418
10.15	2.5.12 (2018-11-29)	418
10.16	2.5.11 (2018-11-21)	418
10.17	2.5.10 (2018-11-13)	418
10.18	2.5.9 (2018-10-19)	419
10.19	2.5.8 (2018-09-25)	419
10.20	2.5.7 (2018-09-13)	419
10.21	2.5.6 (2018-08-30)	419
10.22	2.5.5 (2018-08-04)	420
10.23	2.5.4 (2018-06-07)	420
10.24	2.5.3 (2018-04-18)	420
10.25	2.5.2 (2018-04-06)	421
10.26	2.5.1 (2018-03-12)	421
10.27	2.5.0 (2018-01-24)	421
10.28	2.5.0-b2 (2018-01-19)	422
10.29	2.5.0-b1 (2017-10-19)	422

10.30 2.5.0-a3 (2017-08-14)	423
10.31 2.5.0-a2 (2017-06-25)	423
10.32 2.5.0-a1 (2017-05-30)	424
10.33 2.4.11 (2018-01-24)	424
10.34 2.4.10 (2018-01-19)	425
10.35 2.4.9 (2017-10-19)	425
10.36 2.4.8 (2017-05-30)	426
10.37 2.4.7 (2017-04-24)	426
10.38 2.4.6 (2017-04-14)	426
10.39 2.4.5 (2017-03-07)	427
10.40 2.4.4 (2017-02-23)	427
10.41 2.4.3 (unreleased)	428
10.42 2.4.2 (2017-01-31)	428
10.43 2.4.1 (2016-11-23)	428
10.44 2.4.0 (2016-09-15)	429
10.45 2.4.0-b1 (2016-06-08)	430
10.46 2.4.0-a1 (2016-04-11)	430
10.47 2.3.5 (2016-04-11)	432
10.48 2.3.4 (2016-03-16)	432
10.49 2.3.3 (2016-01-18)	432
10.50 2.3.2 (2015-12-07)	433
10.51 2.3.1 (2015-11-20)	433
10.52 2.3.0 (2015-10-20)	434
10.53 2.3.0-b2 (2015-09-04)	434
10.54 2.3.0-b1 (2015-06-29)	435
10.55 2.2.6 (unreleased)	436
10.56 2.2.5 (2015-06-29)	436
10.57 2.2.4 (2015-06-17)	436
10.58 2.2.3 (2015-05-26)	437
10.59 2.2.2 (2015-04-28)	437
10.60 2.2.1 (2015-03-31)	437
10.61 2.2.0 (2015-03-11)	438
10.62 2.2.0-b1 (2015-02-18)	438
10.63 2.1.5 (2015-02-18)	439
10.64 2.1.4 (2014-12-16)	439
10.65 2.1.3 (2014-12-09)	440
10.66 2.1.2 (2014-10-23)	440
10.67 2.1.1 (2014-10-08)	440
10.68 2.1.0 (2014-09-21)	441
10.69 2.0.5 (2014-08-08)	442
10.70 2.0.4 (2014-06-25)	442
10.71 2.0.3 (2014-05-22)	442

10.72 2.0.2 (2014-05-13)	443
10.73 2.0.1 (2014-05-13) brown bag	443
10.74 2.0.0 (2014-05-13) brown bag	443
10.75 1.8.6 (2014-05-05)	445
10.76 1.8.5 (2014-03-25)	445
10.77 1.8.4 (2014-02-25)	445
10.78 1.8.3 (2014-02-09)	445
10.79 1.8.2 (2014-01-17)	446
10.80 1.8.1 (2014-01-14)	446
10.81 1.8.0 (2014-01-08)	446
10.82 1.7.0 (2013-10-31)	447
Python 模块索引	449
索引	453

Author Eric Gazoni, Charlie Clark

Source code <http://bitbucket.org/openpyxl/openpyxl/src>

Issues <http://bitbucket.org/openpyxl/openpyxl/issues>

Generated 2020 年 09 月 17 日

License MIT/Expat

Version 3.0.5

CHAPTER 1

支持

这是一个由志愿者在业余时间维护的开源项目。这很可能意味着会缺少你想要的特定的功能。But things don' t have to stay that way. 你可以对这个项目进行贡献`Development` 或者和开发者联系来开发特定的功能。

可以向 'Clark Consulting & Research <<http://www.clark-consulting.eu/>>' 和 Adimian 寻求专业支持。欢迎为该项目捐款以支持进一步的开发和维护。

错误报告和功能请求可以使用 `issue tracker` 来提交。请提供错误的完整最终，并尽可能提交示例文件。如果出于保密原因您无法公开提供文件，请与开发人员联系。

只要遵从了以下步骤，我们欢迎任何帮助：

1. 为了每一个独立的功能开了新的 fork (<https://bitbucket.org/openpyxl/openpyxl/fork>)，也不要想着同时解决所有的问题，这也能使为 review 和 merge 你的 changes 的人更加方便;-)
2. Hack hack hack
3. 不要忘了为你的修改添加单元测试！（是的，即使只有一行代码，没有单元测试也是不会被接受的哦。）如果不知道怎么做，可以参考源代码中大量的例子
4. 如果添加了一个完整的功能或者对某个功能做出了改进，你可以自豪地把自己加入作者文件中:-)
5. 为了让大家都知道你刚提交的功能是多么的棒，务必更新一下文档！
6. 当以上步骤都完成之后，提一个 pull request（在 **你的** repository 页点击大大的“pull request”按钮）然后等你的代码被 review。如果以上步骤都完成了，那么就会合并到主 repository。

更多信息请查询 *Development*

2.1 其他提供帮助的方式

即使你不会写代码（或者代码写得不是很好），也有多种方式来作出贡献

- 为 bug 追踪器（bug tracker）进行分流：关闭已经解决的，无关的，不能复现的 bug
- 对几乎每个方面的文档进行更新：增加了大量大型的特性（主要是图表和图像）但是没有文档，因此很难用新特性来做点什么

- proposing compatibility fixes for different versions of Python: 我们支持 2.7, 3.4, 3.5, 3.6 和 3.7

安装

使用 pip 安装 openpyxl。建议在不带系统软件包的 Python virtualenv 中执行此操作:

```
$ pip install openpyxl
```

注解: 支持流行的 `lxml` 库，在创建大量文件的时候特别有用。

警告: 为了在 openpyxl 文件中包含 (jpeg, png, bmp, ...) 等图片，你还需要安装 *pillow*:

```
$ pip install pillow
```

或者你也可以浏览 <https://pypi.python.org/pypi/Pillow/>，选择最新版本或下拉到页面最后选择 Windows 二进制版

3.1 Working with a checkout

Sometimes you might want to work with the checkout of a particular version. This may be the case if bugs have been fixed but a release has not yet been made.

```
$ pip install -e hg+https://bitbucket.org/openpyxl/openpyxl@3.0#egg=openpyxl
```


4.1 教程

4.1.1 教程

新建工作表

无须再文件系统中创建文件即可开始使用 `openpyxl`。只要导入 `Workbook` 类就可以开始工作了：

```
>>> from openpyxl import Workbook
>>> wb = Workbook()
```

一个工作表至少有一个工作簿，你可以通过 `Workbook.active` 来获取这个属性：

```
>>> ws = wb.active
```

注解： 这个值默认为 0。除非你修改了这个值，不然这个方法会一直获取第一个工作表。

你可以使用 `Workbook.create_sheet` 方法来创建新的工作簿：

```
>>> ws1 = wb.create_sheet("Mysheet") # insert at the end (default)
# or
```

(下页继续)

(续上页)

```
>>> ws2 = wb.create_sheet("Mysheet", 0) # insert at first position
# or
>>> ws3 = wb.create_sheet("Mysheet", -1) # insert at the penultimate position
```

工作簿在创建时会自动生成一个名字，以 (Sheet, Sheet1, Sheet2, ...) 来进行命名。你也可以通过 `Worksheet.title` 属性来改名：

```
ws.title = "New Title"
```

默认情况下，包含该标题的选项卡的背景颜色为白色。你也可以使用 `RRGGBB` 颜色来改变 `Worksheet.sheet_properties.tabColor` 属性：

```
ws.sheet_properties.tabColor = "1072BA"
```

给工作表命名后，就可以将其作为工作簿的键：

```
>>> ws3 = wb["New Title"]
```

你可以使用 `Workbook.sheetnames` 属性查看工作簿中所有工作表的名称：

```
>>> print(wb.sheetnames)
['Sheet2', 'New Title', 'Sheet1']
```

你可以遍历工作表：

```
>>> for sheet in wb:
...     print(sheet.title)
```

你可以 ** 一个工作表 ** 中创建一个工作簿的复制：

`Workbook.copy_worksheet` method:

```
>>> source = wb.active
>>> target = wb.copy_worksheet(source)
```

注解： 只有单元格（包含值、样式、超链接和注释）以及确定的工作簿属性（包含尺寸、格式和属性）会被复制。其余的工作表/工作簿属性都不会被复制，例如：文件、图表。

你也 ** 不能 ** 跨工作表复制工作簿。在工作表以 `read-only` 或 `write_only` 模式打开时也无法复制。

Playing with data

访问单元格

现在我们已经知道如何创建工作表，我们可以开始修改单元格内容了。可以直接通过工作表的键来访问单元格：

```
>>> c = ws['A4']
```

此处会返回 A4 单元格，如果不存在不将会进行创建可以直接分配值：

```
>>> ws['A4'] = 4
```

这里是 *Worksheet.cell* 方法。

也可以通过行列符号访问单元格：

```
>>> d = ws.cell(row=4, column=2, value=10)
```

注解： 当工作簿在内存中被创建之后并没有单元格 *cells*，单元格只有在被第一次访问 (access) 的时候才会创建

警告： 由于这个特性，即使你未对单元格赋值，滚动浏览而非直接访问时也会在内存中直接创建。

Something like

```
>>> for x in range(1,101):
...     for y in range(1,101):
...         ws.cell(row=x, column=y)
```

will create 100x100 cells in memory, for nothing.

访问大量单元格

可以使用切片来访问一系列单元格：

```
>>> cell_range = ws['A1':'C2']
```

一系列的行和列也可以通过类似的方法获取：

```
>>> colC = ws['C']
>>> col_range = ws['C:D']
>>> row10 = ws[10]
>>> row_range = ws[5:10]
```

你也使用 `Worksheet.iter_rows` 方法:

```
>>> for row in ws.iter_rows(min_row=1, max_col=3, max_row=2):
...     for cell in row:
...         print(cell)
<Cell Sheet1.A1>
<Cell Sheet1.B1>
<Cell Sheet1.C1>
<Cell Sheet1.A2>
<Cell Sheet1.B2>
<Cell Sheet1.C2>
```

同样 `Worksheet.iter_cols` 方法会返回列:

```
>>> for col in ws.iter_cols(min_row=1, max_col=3, max_row=2):
...     for cell in col:
...         print(cell)
<Cell Sheet1.A1>
<Cell Sheet1.A2>
<Cell Sheet1.B1>
<Cell Sheet1.B2>
<Cell Sheet1.C1>
<Cell Sheet1.C2>
```

注解: 由于性能原因 `Worksheet.iter_cols()` 方法在只读模式下不可用。

如果你需要遍历文件中的所有行和列, 你可以使用 `Worksheet.rows` 属性

```
>>> ws = wb.active
>>> ws['C9'] = 'hello world'
>>> tuple(ws.rows)
((<Cell Sheet.A1>, <Cell Sheet.B1>, <Cell Sheet.C1>),
 (<Cell Sheet.A2>, <Cell Sheet.B2>, <Cell Sheet.C2>),
 (<Cell Sheet.A3>, <Cell Sheet.B3>, <Cell Sheet.C3>),
 (<Cell Sheet.A4>, <Cell Sheet.B4>, <Cell Sheet.C4>),
 (<Cell Sheet.A5>, <Cell Sheet.B5>, <Cell Sheet.C5>),
 (<Cell Sheet.A6>, <Cell Sheet.B6>, <Cell Sheet.C6>),
 (<Cell Sheet.A7>, <Cell Sheet.B7>, <Cell Sheet.C7>),
 (<Cell Sheet.A8>, <Cell Sheet.B8>, <Cell Sheet.C8>),
 (<Cell Sheet.A9>, <Cell Sheet.B9>, <Cell Sheet.C9>))
```

或者 *Worksheet.columns* 属性:

```
>>> tuple(ws.columns)
((<Cell Sheet.A1>,
<Cell Sheet.A2>,
<Cell Sheet.A3>,
<Cell Sheet.A4>,
<Cell Sheet.A5>,
<Cell Sheet.A6>,
...
<Cell Sheet.B7>,
<Cell Sheet.B8>,
<Cell Sheet.B9>),
(<Cell Sheet.C1>,
<Cell Sheet.C2>,
<Cell Sheet.C3>,
<Cell Sheet.C4>,
<Cell Sheet.C5>,
<Cell Sheet.C6>,
<Cell Sheet.C7>,
<Cell Sheet.C8>,
<Cell Sheet.C9>))
```

注解: 由于性能原因 *Worksheet.columns* 方法在只读模式下不可用。

Values only

如果你只想要工作簿的值, 你可以使用 *Worksheet.values* 属性。这会遍历工作簿中所有的行但只返回单元格值:

```
for row in ws.values:
    for value in row:
        print(value)
```

Worksheet.iter_rows 和 *Worksheet.iter_cols* 可以用 *values_only* 参数来返回单元格值:

```
>>> for row in ws.iter_rows(min_row=1, max_col=3, max_row=2, values_only=True):
...     print(row)
```

(下页继续)

(续上页)

```
(None, None, None)
(None, None, None)
```

数据存储

一旦有了 `Cell`, 我们可以为其分配一个值:

```
>>> c.value = 'hello, world'
>>> print(c.value)
'hello, world'

>>> d.value = 3.14
>>> print(d.value)
3.14
```

保存至文件

保存工作表最简单和安全的方法就是使用 `Workbook` 类的 `Workbook.save()` 方法:

```
>>> wb = Workbook()
>>> wb.save('balances.xlsx')
```

警告: 这个操作将会无警告直接覆盖已有文件

注解: 文件名后缀并不强制为 `xlsx` 或 `xlsm`, 但是如果你没使用官方后缀名会在用其他的应用打开的时候会遇到一些麻烦。

由于 `OOXML` 文件基本上都是 `ZIP` 文件, 你也可以用你喜欢的 `ZIP` 压缩管理器打开

你可以指定属性 `template=True` 将工作表保存为模板:

```
>>> wb = load_workbook('document.xlsx')
>>> wb.template = True
>>> wb.save('document_template.xltx')
```

或者设置属性为 `False` (默认) 将其保存为一个文档:

```
>>> wb = load_workbook('document_template.xltx')
>>> wb.template = False
>>> wb.save('document.xlsx', as_template=False)
```

警告： 你应当在保存模板文档时监视数据的属性和我文档拓展名，否则引擎可能会无法打开文档。

注解： 以下操作将会失败：

```
>>> wb = load_workbook('document.xlsx')
>>> # 需要保存为 *.xlsx 拓展名
>>> wb.save('new_document.xlsm')
>>> # 微软 Excel 无法打开这个文档
>>>
>>> # or
>>>
>>> # 需要执行 keep_vba=True
>>> wb = load_workbook('document.xlsm')
>>> wb.save('new_document.xlsm')
>>> # 微软 Excel 将不会打开这个文档
>>>
>>> # or
>>>
>>> wb = load_workbook('document.xlsm', keep_vba=True)
>>> # 如果需要一个模板文档，需要将拓展名指定为 *.xltm.
>>> wb.save('new_document.xlsm')
>>> # 微软 Excel 将不会打开这个文档
```

保存成流 (stream)

如果你想把文件保存成流。例如当使用 Pyramid, Flask 或 Django 等 web 应用程序时，你可以提供 NamedTemporaryFile()：

```
>>> from tempfile import NamedTemporaryFile
>>> from openpyxl import Workbook
>>> wb = Workbook()
>>> with NamedTemporaryFile() as tmp:
>>>     wb.save(tmp.name)
```

(下页继续)

(续上页)

```
tmp.seek(0)
stream = tmp.read()
```

从文件加载

你可以使用 `openpyxl.load_workbook()` 方法来打开一个已存在的工作表:

```
>>> from openpyxl import load_workbook
>>> wb2 = load_workbook('test.xlsx')
>>> print wb2.sheetnames
['Sheet2', 'New Title', 'Sheet1']
```

教程到这里就结束了, 你可以继续[简单用法](#) 部分

4.2 Cookbook

4.2.1 简单用法

写入工作表

```
>>> from openpyxl import Workbook
>>> from openpyxl.utils import get_column_letter
>>>
>>> wb = Workbook()
>>>
>>> dest_filename = 'empty_book.xlsx'
>>>
>>> ws1 = wb.active
>>> ws1.title = "range names"
>>>
>>> for row in range(1, 40):
...     ws1.append(range(600))
>>>
>>> ws2 = wb.create_sheet(title="Pi")
>>>
>>> ws2['F5'] = 3.14
>>>
>>> ws3 = wb.create_sheet(title="Data")
```

(下页继续)

(续上页)

```
>>> for row in range(10, 20):
...     for col in range(27, 54):
...         _ = ws3.cell(column=col, row=row, value="{0}".format(get_column_letter(col)))
>>> print(ws3['AA10'].value)
AA
>>> wb.save(filename = dest_filename)
```

读取已有的工作表

```
>>> from openpyxl import load_workbook
>>> wb = load_workbook(filename = 'empty_book.xlsx')
>>> sheet_ranges = wb['range names']
>>> print(sheet_ranges['D18'].value)
3
```

注解: 在使用 `load_workbook` 函数时有几个可供选择。

- `data_only` controls whether cells with formulae have either the formula (default) or the value stored the last time Excel read the sheet.
- `keep_vba` controls whether any Visual Basic elements are preserved or not (default). If they are preserved they are still not editable.

警告: 用 openpyxl 打开文件并进行保存会导致图片和图表的丢失, 因为 openpyxl 无法读取 Excel 文件所有可能的项。

使用数字格式

```
>>> import datetime
>>> from openpyxl import Workbook
>>> wb = Workbook()
>>> ws = wb.active
>>> # set date using a Python datetime
>>> ws['A1'] = datetime.datetime(2010, 7, 21)
>>>
>>> ws['A1'].number_format
'yyyy-mm-dd h:mm:ss'
```

使用公式

```
>>> from openpyxl import Workbook
>>> wb = Workbook()
>>> ws = wb.active
>>> # add a simple formula
>>> ws["A1"] = "=SUM(1, 1)"
>>> wb.save("formula.xlsx")
```

警告： 您必须为函数使用英文名称，并且函数参数必须用逗号分隔，而不能使用其他标点符号，例如分号。

openpyxl 不会检查公式但可以检查公式的名称:

```
>>> from openpyxl.utils import FORMULAE
>>> "HEX2DEC" in FORMULAE
True
```

如果你正在尝试使用一个未知的公式，可能是因为这公式未被包含在最初的规范中。这样的公式只有以 `_xlfn` 为前缀才能起作用。

合并 / 拆分单元格

When you merge cells all cells but the top-left one are **removed** from the worksheet. To carry the border-information of the merged cell, the boundary cells of the merged cell are created as MergeCells which always have the value None. See [合并单元格的样式](#) for information on formatting merged cells.

```
>>> from openpyxl.workbook import Workbook
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> ws.merge_cells('A2:D2')
>>> ws.unmerge_cells('A2:D2')
>>>
>>> # or equivalently
>>> ws.merge_cells(start_row=2, start_column=1, end_row=4, end_column=4)
>>> ws.unmerge_cells(start_row=2, start_column=1, end_row=4, end_column=4)
```


插入图像

```
>>> from openpyxl import Workbook
>>> from openpyxl.drawing.image import Image
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>> ws['A1'] = 'You should see three logos below'
```

```
>>> # create an image
>>> img = Image('logo.png')
```

```
>>> # add to worksheet and anchor next to cells
>>> ws.add_image(img, 'A1')
>>> wb.save('logo.xlsx')
```

隐藏

```
>>> import openpyxl
>>> wb = openpyxl.Workbook()
>>> ws = wb.create_sheet()
>>> ws.column_dimensions.group('A','D', hidden=True)
>>> ws.row_dimensions.group(1,10, hidden=True)
>>> wb.save('group.xlsx')
```


5.1 性能

openpyxl 尝试来平衡功能与性能。如果有疑问，我们把重点放在功能而非性能上：一旦建立了 API，性能调整将变得更简单。与其他库和应用程序相比，内存使用率很高，约为原始文件大小的 50 倍，例如 50 MB 的 Excel 文件为内存使用约为 2.5 GB。由于许多用例只涉及读取或写入文件，the 优化模式 modes mean this is less of a problem.

5.1.1 基准测试

所有基准都是综合性的，并且高度依赖于硬件，但是它们仍然可以提供说明 (indication)。

写入性能

benchmark code 可以调整使用更多的工作表以及数据中字符串的比例。由于不同版本的 Python 也会对性能有着显著影响，所以使用了 driver script 对 tox 环境下不同的版本 Python 进行测试。

性能与出色的替代库 xlsxwriter 进行了比较

```
Versions:
python: 3.6.9
openpyxl: 3.0.1
xlsxwriter: 1.2.5
```

(下页继续)

(续上页)

Dimensions:

```
Rows = 1000
Cols = 50
Sheets = 1
Proportion text = 0.10
```

Times:

```
xlswriter          : 0.59
xlswriter (optimised): 0.54
openpyxl           : 0.73
openpyxl (optimised) : 0.61
```

Versions:

```
python: 3.7.5
openpyxl: 3.0.1
xlswriter: 1.2.5
```

Dimensions:

```
Rows = 1000
Cols = 50
Sheets = 1
Proportion text = 0.10
```

Times:

```
xlswriter          : 0.65
xlswriter (optimised): 0.53
openpyxl           : 0.70
openpyxl (optimised) : 0.63
```

Versions:

```
python: 3.8.0
openpyxl: 3.0.1
xlswriter: 1.2.5
```

Dimensions:

```
Rows = 1000
Cols = 50
```

(下页继续)

(续上页)

```

    Sheets = 1
    Proportion text = 0.10

Times:
    xlsxwriter           :    0.54
    xlsxwriter (optimised):    0.50
    openpyxl             :    1.10
    openpyxl (optimised)  :    0.57

```

读取性能

读取性能测试使用了 [bug report](#) 提供的文件，和早期的 xlrd 库进行比较。xlrd 主要用于 .XLS 文件较旧的 BIFF 文件格式，它对 XLSX 文件支持有限。

基准测试 代码显示了处理文件时正确选项的重要性。在这种情况下，禁用外部链接将让 openpyxl 停止打开链接工作表的缓存副本。

两个库的一个主要区别是 openpyxl 的只读模式可以快速打开工作簿，使其适用于多进程，这也大大减少了内存的使用。xlrd 也不会自动将日期和时间转换为 Python 的 datetime，尽管它会相应地注释单元格 (annotate cells)，但是在客户端代码中这样做会大大降低性能。

```

Versions:
python: 3.6.9
xlread: 1.2.0
openpyxl: 3.0.1

openpyxl, read-only
    Workbook loaded 1.14s
    OptimizationData 23.17s
    Output Model 0.00s
    >>DATA>> 0.00s
    Store days 0% 23.92s
    Store days 100% 17.35s
    Total time 65.59s
    0 cells in total

```

```

Versions:
python: 3.7.5
xlread: 1.2.0
openpyxl: 3.0.1

```

(下页继续)

(续上页)

```
openpyxl, read-only
  Workbook loaded 0.98s
  OptimizationData 21.35s
  Output Model 0.00s
  >>DATA>> 0.00s
  Store days 0% 20.70s
  Store days 100% 16.16s
  Total time 59.19s
  0 cells in total
```

Versions:

```
python: 3.8.0
xlread: 1.2.0
openpyxl: 3.0.1
```

```
openpyxl, read-only
  Workbook loaded 0.90s
  OptimizationData 19.58s
  Output Model 0.00s
  >>DATA>> 0.00s
  Store days 0% 19.35s
  Store days 100% 15.02s
  Total time 54.85s
  0 cells in total
```

并行

读取工作表会占用大量 CPU 从而限制了从并行中获取好处。但是，如果你主要对 dump 工作表内容感兴趣，你可以使用 openpyxl 的只读模式打开复数工作表来利用多核 CPU。

[Sample code](#) using the same source file as for read performance shows that performance scales reasonably with only a slight overhead due to creating additional Python processes.

6.1 优化模式

6.1.1 只读模式

有时，你可能需要打开或写入极端大的 XLSX 文件，但通用的 `openpyxl` 程序无法处理这么大的负载。幸运的是，有两种模式可以使你在（几乎）恒定的内存消耗下读写无限量的数据。

介绍 `openpyxl.worksheet._read_only.ReadOnlyWorksheet`:

```
from openpyxl import load_workbook
wb = load_workbook(filename='large_file.xlsx', read_only=True)
ws = wb['big_data']

for row in ws.rows:
    for cell in row:
        print(cell.value)
```

警告:

- `openpyxl.worksheet._read_only.ReadOnlyWorksheet` 是只读的

单元格的返回值不是 `openpyxl.cell.cell.Cell` 而是 `openpyxl.cell._read_only.`

ReadOnlyCell.

工作表尺寸 (dimensions)

只读模式依赖创建文件的应用以及库提供工作表的正确信息，尤其是文件的已使用部分，称之为尺寸 (dimensions)。一些应用汇进行设置错误。可以使用 `ws.calculate_dimension()` 函数来检查工作表的尺寸 (dimensions)。如果返回和范围和你知道的不一样，比如说 `A1:A1`，你可以简单重置 `max_row` 和 `max_column` 属性，即可使用该文件：

```
ws.reset_dimensions()
```

6.1.2 只写模式

常规的 `openpyxl.worksheet.worksheet.Worksheet` 被替代成更快的 `openpyxl.worksheet._write_only.WriteOnlyWorksheet`。当你想导出大量数据的时候请确保安装了 `lxml` 库。

```
>>> from openpyxl import Workbook
>>> wb = Workbook(write_only=True)
>>> ws = wb.create_sheet()
>>>
>>> # now we'll fill it with 100 rows x 200 columns
>>>
>>> for irow in range(100):
...     ws.append(['%d' % i for i in range(200)])
>>> # save the file
>>> wb.save('new_big_file.xlsx') # doctest: +SKIP
```

如果你想要带有样式或者注释的单元格可以使用 `openpyxl.cell.WriteOnlyCell()`

```
>>> from openpyxl import Workbook
>>> wb = Workbook(write_only = True)
>>> ws = wb.create_sheet()
>>> from openpyxl.cell import WriteOnlyCell
>>> from openpyxl.comments import Comment
>>> from openpyxl.styles import Font
>>> cell = WriteOnlyCell(ws, value="hello world")
>>> cell.font = Font(name='Courier', size=36)
>>> cell.comment = Comment(text="A comment", author="Author's Name")
>>> ws.append([cell, 3.14, None])
>>> wb.save('write_only_file.xlsx')
```


以上会创建只有一张工作表的只写工作簿，一行写入（append）三个单元格：一个带有自定义字体和注释的文字单元格，一个浮点数单元格和一个空单元格（一定会被丢弃）。

警告：

- 和普通工作簿不同的是，新创建的只写工作簿没有任何工作表；工作表只能由 `create_sheet()` 方法进行创建。
- 在只读工作簿中，只能由 `append()` 来添加行。无法使用 `cell()` 或 `iter_rows()` 对任意位置的单元进行读取或写入。
- 可以导出不限量的数据（即使超过 Excel 的处理上限），同时内存使用量小于 10Mb。
- 一个只写工作簿只能保存一次。之后如果任何尝试保存和添加数据（`append()`）的操作都会引发 `openpyxl.utils.exceptions.WorkbookAlreadySaved` 错误。
- Everything that appears in the file before the actual cell data must be created before cells are added because it must be written to the file before then. For example, `freeze_panes` should be set before cells are added.

6.2 插入删除行或列，移动范围单元格

6.2.1 插入行和列

你可以使用工作表相关的方法来插入行和列：

- `openpyxl.worksheet.worksheet.Worksheet.insert_rows()`
- `openpyxl.worksheet.worksheet.Worksheet.insert_cols()`
- `openpyxl.worksheet.worksheet.Worksheet.delete_rows()`
- `openpyxl.worksheet.worksheet.Worksheet.delete_cols()`

默认是一行或一列。例如在第七行插入一行（存在第七行）：

```
>>> ws.insert_rows(7)
```

6.2.2 删除多行或多列

删除 F:H 列：

```
>>> ws.delete_cols(6, 3)
```

6.2.3 Moving ranges of cells

你也可以在一个工作表内移动范围单元格:

```
>>> ws.move_range("D4:F10", rows=-1, cols=2)
```

这会将 D4:F10 单元格向上移动一行向右移动两列, 已存在的单元格将会被覆盖

如果单元格包含公式, 你可以让 openpyxl 帮你进行 translate, 但也并非总是你想要的结果, 因此默认是禁用的。同时, 只有单元格本身的公式将会被 translate。其他单元格对该单元格的引用或 defined name 将不会被更新。你可以使用 *Parsing Formulas* 来做这件事:

```
>>> ws.move_range("G4:H10", rows=1, cols=1, translate=True)
```

公式中的相对引用移动一行和一列

6.3 与 Pandas 和 NumPy 一起使用

openpyxl 可以与流行的 Pandas 和 NumPy 一起使用

6.3.1 NumPy 支持

openpyxl 内置支持 NumPy 的 float, integer 和 boolean 类型。DateTimes are supported using the Pandas' Timestamp type.

6.3.2 和 Pandas Dataframes 一起使用

`openpyxl.utils.dataframe.dataframe_to_rows()` 提供了一种使用 Pandas Dataframes 的简单方法:

```
from openpyxl.utils.dataframe import dataframe_to_rows
wb = Workbook()
ws = wb.active

for r in dataframe_to_rows(df, index=True, header=True):
    ws.append(r)
```

虽然 Pandas 本身支持对 Excel 的转换, 但这为客户端代码提供了更多的灵活性, 包括直接将数据帧 (stream dataframes) 流传输到文件的能力。

将 dataframe 转换为工作簿时高亮表头和索引:

```
wb = Workbook()
ws = wb.active

for r in dataframe_to_rows(df, index=True, header=True):
    ws.append(r)

for cell in ws['A'] + ws[1]:
    cell.style = 'Pandas'

wb.save("pandas_openpyxl.xlsx")
```

另外，如果你只想转换数据，你可以使用只写模式：

```
from openpyxl.cell.cell import WriteOnlyCell
wb = Workbook(write_only=True)
ws = wb.create_sheet()

cell = WriteOnlyCell(ws)
cell.style = 'Pandas'

def format_first_row(row, cell):

    for c in row:
        cell.value = c
        yield cell

rows = dataframe_to_rows(df)
first_row = format_first_row(next(rows), cell)
ws.append(first_row)

for row in rows:
    row = list(row)
    cell.value = row[0]
    row[0] = cell
    ws.append(row)

wb.save("openpyxl_stream.xlsx")
```

此代码和标准工作簿一起起作用。

6.3.3 将工作簿转换为 Dataframe (PS: 样例文件可以参考 df.to_excel() 的文件)

如果工作簿没有表头和索引很容易用 *values* 属性将一个工作簿转换为 Dataframe:

```
df = DataFrame(ws.values)
```

如果工作簿确实有表头和索引, 例如 Pandas 创建的文件, 那还要做更多的一些工作:

```
from itertools import islice
data = ws.values
cols = next(data)[1:]
data = list(data)
idx = [r[0] for r in data]
data = (islice(r, 1, None) for r in data)
df = DataFrame(data, index=idx, columns=cols)
```

6.4 图表

6.4.1 图标类型

以下图表是可用的:

面积图

二维面积图

面积图类似于折线图, 不同之处在于填充了绘制线下方的区域。通过将分组设置为“标准”, “堆叠”或“百分比堆叠”, 可以使用不同的变体。默认为“标准”。

```
from openpyxl import Workbook
from openpyxl.chart import (
    AreaChart,
    Reference,
    Series,
)

wb = Workbook()
ws = wb.active
```

(下页继续)

(续上页)

```
rows = [
    ['Number', 'Batch 1', 'Batch 2'],
    [2, 40, 30],
    [3, 40, 25],
    [4, 50, 30],
    [5, 30, 10],
    [6, 25, 5],
    [7, 50, 10],
]


for row in rows:
    ws.append(row)

chart = AreaChart()
chart.title = "Area Chart"
chart.style = 13
chart.x_axis.title = 'Test'
chart.y_axis.title = 'Percentage'

cats = Reference(ws, min_col=1, min_row=1, max_row=7)
data = Reference(ws, min_col=2, min_row=1, max_col=3, max_row=7)
chart.add_data(data, titles_from_data=True)
chart.set_categories(cats)

ws.add_chart(chart, "A10")

wb.save("area.xlsx")
```

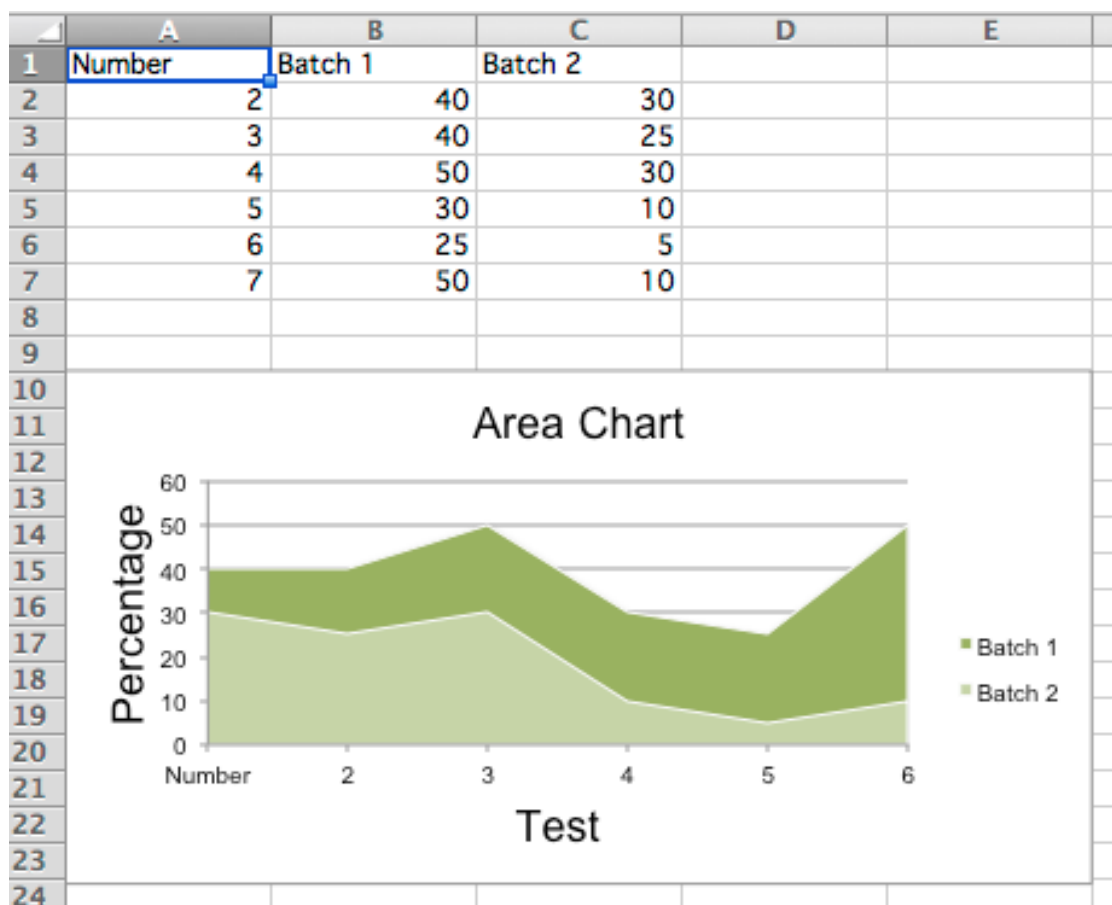

三维面积图

你也可以创建三维面积图

```
from openpyxl import Workbook
from openpyxl.chart import (
    AreaChart3D,
    Reference,
    Series,
)

wb = Workbook()
ws = wb.active

rows = [
    ['Number', 'Batch 1', 'Batch 2'],
    [2, 30, 40],
    [3, 25, 40],
```

(下页继续)

(续上页)

```
[4 ,30, 50],
[5 ,10, 30],
[6,  5, 25],
[7 ,10, 50],
]

for row in rows:
    ws.append(row)


chart = AreaChart3D()
chart.title = "Area Chart"
chart.style = 13
chart.x_axis.title = 'Test'
chart.y_axis.title = 'Percentage'
chart.legend = None

cats = Reference(ws, min_col=1, min_row=1, max_row=7)
data = Reference(ws, min_col=2, min_row=1, max_col=3, max_row=7)
chart.add_data(data, titles_from_data=True)
chart.set_categories(cats)

ws.add_chart(chart, "A10")

wb.save("area3D.xlsx")
```

这将生成一个简单的三维面积图，其中第三个轴可用于替换图例：

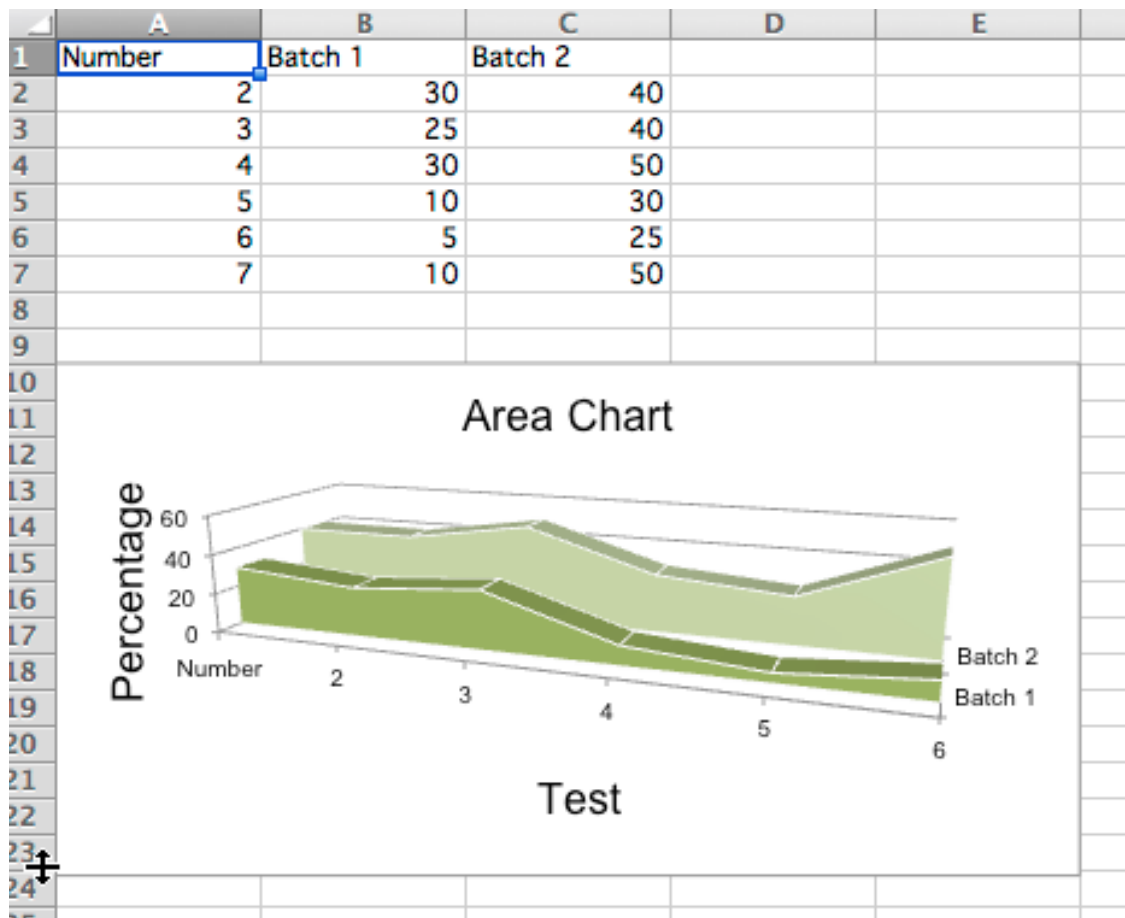

条形图和柱状图

在条形图中，值被绘制为水平条或垂直列。(In bar charts values are plotted as either horizontal bars or vertical columns.)


垂直水平和堆叠条形图

注解： 以下设置会影响不同的图表类型。

通过分别将 *type* 设置为 *col* 或 *bar*，可以柱状和水平条形图之间切换。

使用堆叠图表时，需要将 *overlap* 属性设置为 100。

如果条是水平的，则 *x* 和 *y* 轴将反转。

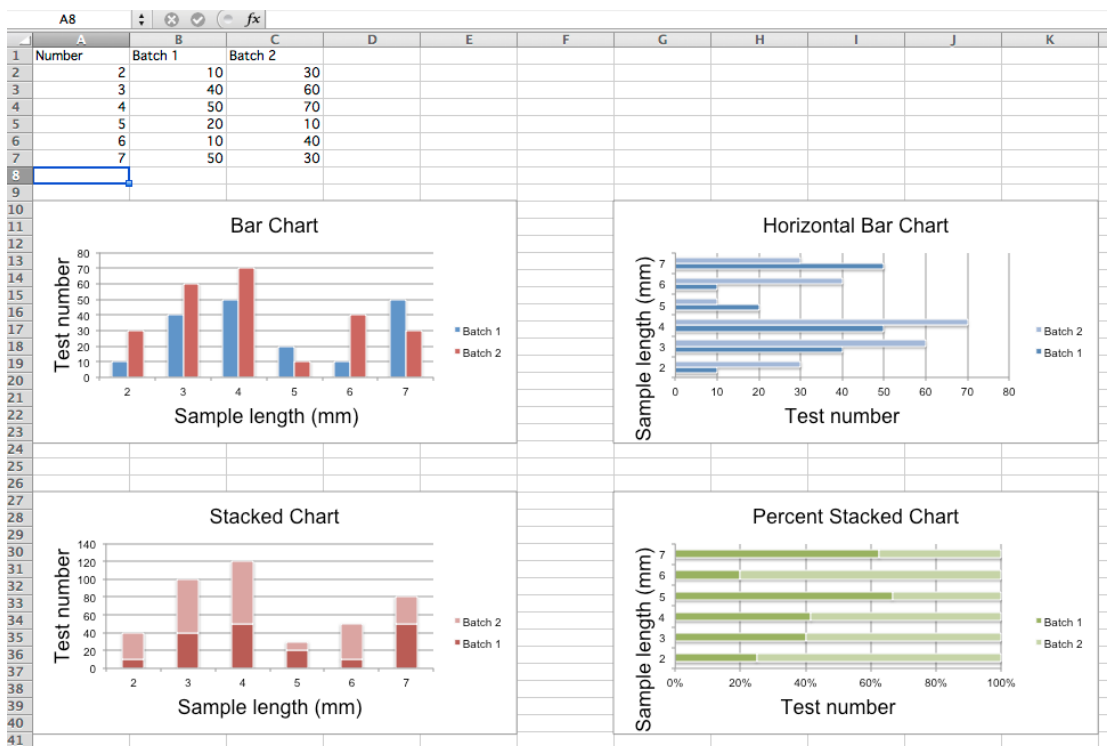

```

from openpyxl import Workbook
from openpyxl.chart import BarChart, Series, Reference

wb = Workbook(write_only=True)
ws = wb.create_sheet()

rows = [
    ('Number', 'Batch 1', 'Batch 2'),
    (2, 10, 30),
    (3, 40, 60),
    (4, 50, 70),
    (5, 20, 10),
    (6, 10, 40),
    (7, 50, 30),
]

for row in rows:
    ws.append(row)

chart1 = BarChart()

```

(下页继续)

(续上页)

```
chart1.type = "col"
chart1.style = 10
chart1.title = "Bar Chart"
chart1.y_axis.title = 'Test number'
chart1.x_axis.title = 'Sample length (mm)'

data = Reference(ws, min_col=2, min_row=1, max_row=7, max_col=3)
cats = Reference(ws, min_col=1, min_row=2, max_row=7)
chart1.add_data(data, titles_from_data=True)
chart1.set_categories(cats)
chart1.shape = 4
ws.add_chart(chart1, "A10")

from copy import deepcopy

chart2 = deepcopy(chart1)
chart2.style = 11
chart2.type = "bar"
chart2.title = "Horizontal Bar Chart"

ws.add_chart(chart2, "G10")

chart3 = deepcopy(chart1)
chart3.type = "col"
chart3.style = 12
chart3.grouping = "stacked"
chart3.overlap = 100
chart3.title = 'Stacked Chart'

ws.add_chart(chart3, "A27")

chart4 = deepcopy(chart1)
chart4.type = "bar"
chart4.style = 13
chart4.grouping = "percentStacked"
chart4.overlap = 100
chart4.title = 'Percent Stacked Chart'
```

(下页继续)

(续上页)

```
ws.add_chart(chart4, "G27")

wb.save("bar.xlsx")
```

以上创建了四个图表，展示了各种可能性。

三维条形图

你也能创建三维条形图

```
from openpyxl import Workbook
from openpyxl.chart import (
    Reference,
    Series,
    BarChart3D,
)

wb = Workbook()
ws = wb.active


rows = [
    (None, 2013, 2014),
    ("Apples", 5, 4),
    ("Oranges", 6, 2),
    ("Pears", 8, 3)
]

for row in rows:
    ws.append(row)

data = Reference(ws, min_col=2, min_row=1, max_col=3, max_row=4)
titles = Reference(ws, min_col=1, min_row=2, max_row=4)
chart = BarChart3D()
chart.title = "3D Bar Chart"
chart.add_data(data=data, titles_from_data=True)
chart.set_categories(titles)

ws.add_chart(chart, "E5")
wb.save("bar3d.xlsx")
```

这样能创建一个简单的三维条形图

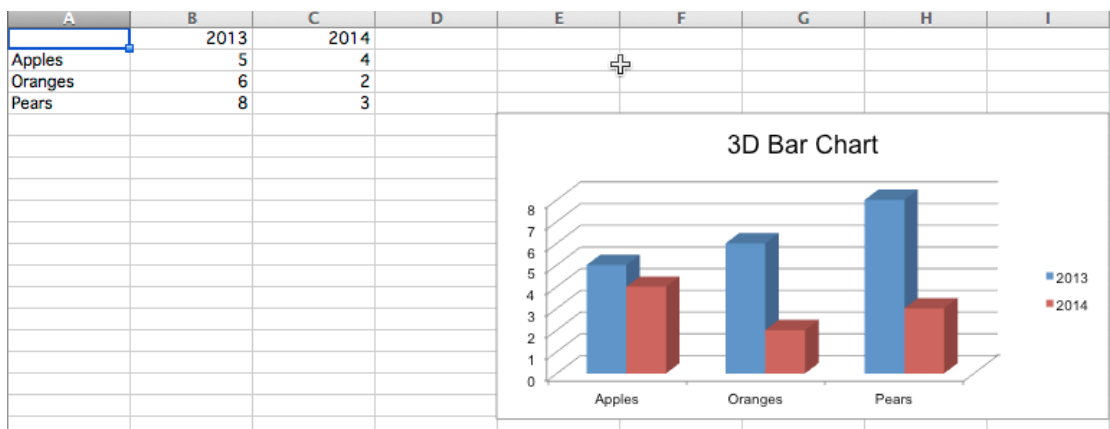

气泡图

气泡图类似于散点图但使用第三维来决定气泡的大小，可以包含多个图例。

```
"""
Sample bubble chart
"""

from openpyxl import Workbook
from openpyxl.chart import Series, Reference, BubbleChart

wb = Workbook()
ws = wb.active

rows = [
    ("Number of Products", "Sales in USD", "Market share"),
    (14, 12200, 15),
    (20, 60000, 33),
    (18, 24400, 10),
    (22, 32000, 42),
    (),
    (12, 8200, 18),
    (15, 50000, 30),
    (19, 22400, 15),
    (25, 25000, 50),
]

for row in rows:
    ws.append(row)
```

(下页继续)

(续上页)

```

chart = BubbleChart()
chart.style = 18 # use a preset style


# add the first series of data
xvalues = Reference(ws, min_col=1, min_row=2, max_row=5)
yvalues = Reference(ws, min_col=2, min_row=2, max_row=5)
size = Reference(ws, min_col=3, min_row=2, max_row=5)
series = Series(values=yvalues, xvalues=xvalues, zvalues=size, title="2013")
chart.series.append(series)

# add the second
xvalues = Reference(ws, min_col=1, min_row=7, max_row=10)
yvalues = Reference(ws, min_col=2, min_row=7, max_row=10)
size = Reference(ws, min_col=3, min_row=7, max_row=10)
series = Series(values=yvalues, xvalues=xvalues, zvalues=size, title="2014")
chart.series.append(series)

# place the chart starting in cell E1
ws.add_chart(chart, "E1")
wb.save("bubble.xlsx")

```

这会产生一个有两个图例的气泡图，并且样式如下

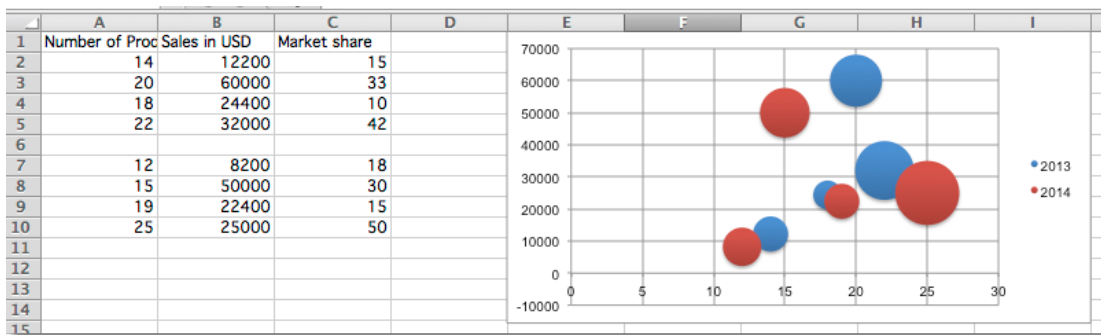

Line Charts

Line Charts

Line charts allow data to be plotted against a fixed axis. They are similar to scatter charts, the main difference is that with line charts each data series is plotted against the same values. Different kinds of axes can be used for the secondary axes.

Similar to bar charts there are three kinds of line charts: standard, stacked and percentStacked.

```
from datetime import date

from openpyxl import Workbook
from openpyxl.chart import (
    LineChart,
    Reference,
)
from openpyxl.chart.axis import DateAxis

wb = Workbook()
ws = wb.active

rows = [
    ['Date', 'Batch 1', 'Batch 2', 'Batch 3'],
    [date(2015,9, 1), 40, 30, 25],
    [date(2015,9, 2), 40, 25, 30],
    [date(2015,9, 3), 50, 30, 45],
    [date(2015,9, 4), 30, 25, 40],
    [date(2015,9, 5), 25, 35, 30],
    [date(2015,9, 6), 20, 40, 35],
]

for row in rows:
    ws.append(row)

c1 = LineChart()
c1.title = "Line Chart"
c1.style = 13
c1.y_axis.title = 'Size'
c1.x_axis.title = 'Test Number'

data = Reference(ws, min_col=2, min_row=1, max_col=4, max_row=7)
c1.add_data(data, titles_from_data=True)

# Style the lines
s1 = c1.series[0]
s1.marker.symbol = "triangle"
s1.marker.graphicalProperties.solidFill = "FF0000" # Marker filling
s1.marker.graphicalProperties.line.solidFill = "FF0000" # Marker outline
```

(下页继续)

(续上页)

```

s1.graphicalProperties.line.noFill = True

s2 = c1.series[1]
s2.graphicalProperties.line.solidFill = "00AAAA"
s2.graphicalProperties.line.dashStyle = "sysDot"
s2.graphicalProperties.line.width = 100050 # width in EMUs

s2 = c1.series[2]
s2.smooth = True # Make the line smooth

ws.add_chart(c1, "A10")

from copy import deepcopy
stacked = deepcopy(c1)
stacked.grouping = "stacked"
stacked.title = "Stacked Line Chart"
ws.add_chart(stacked, "A27")

percent_stacked = deepcopy(c1)
percent_stacked.grouping = "percentStacked"
percent_stacked.title = "Percent Stacked Line Chart"
ws.add_chart(percent_stacked, "A44")

# Chart with date axis
c2 = LineChart()
c2.title = "Date Axis"
c2.style = 12
c2.y_axis.title = "Size"
c2.y_axis.crossAx = 500
c2.x_axis = DateAxis(crossAx=100)
c2.x_axis.number_format = 'd-mmm'
c2.x_axis.majorTimeUnit = "days"
c2.x_axis.title = "Date"

c2.add_data(data, titles_from_data=True)
dates = Reference(ws, min_col=1, min_row=2, max_row=7)
c2.set_categories(dates)


ws.add_chart(c2, "A61")

```

(下页继续)

(续上页)

```
wb.save("line.xlsx")
```

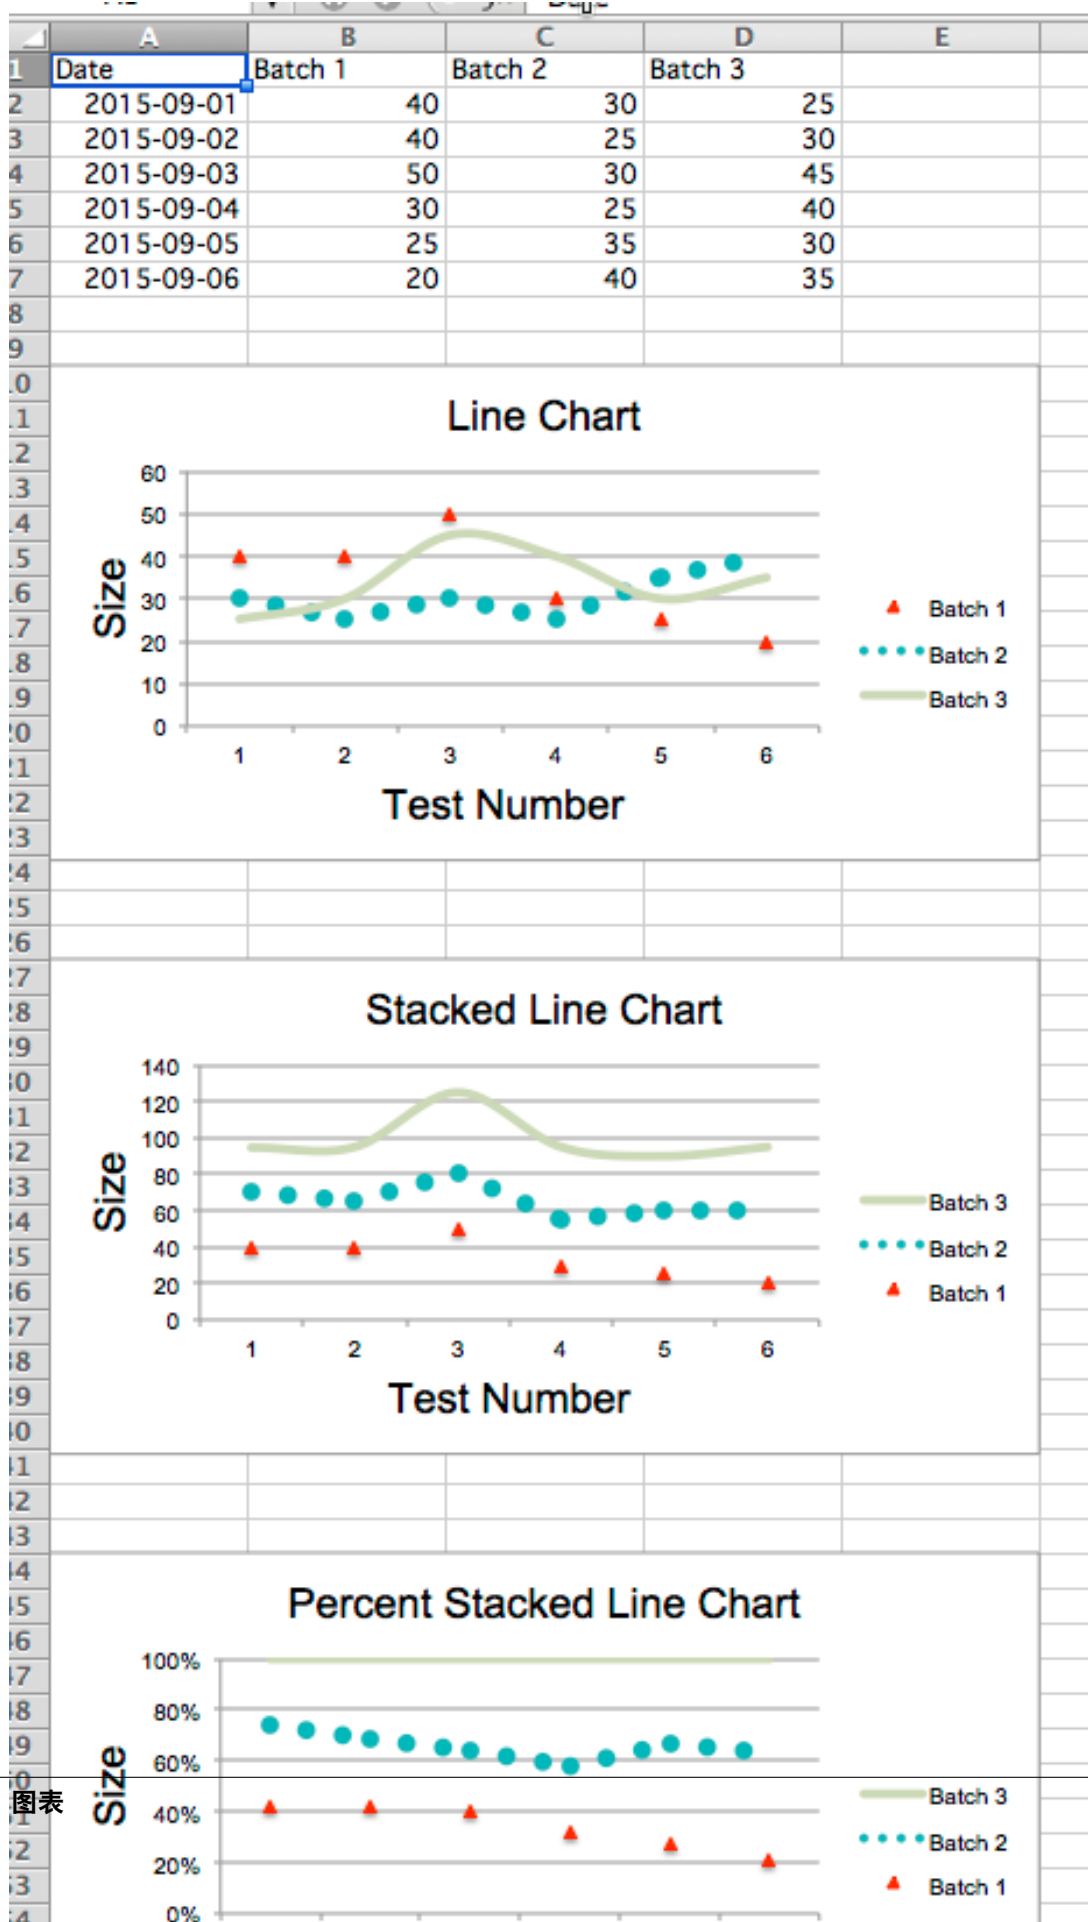3D Line Charts

In 3D line charts the third axis is the same as the legend for the series.

```
from datetime import date

from openpyxl import Workbook
from openpyxl.chart import (
    LineChart3D,
    Reference,
)
from openpyxl.chart.axis import DateAxis

wb = Workbook()
ws = wb.active

rows = [
    ['Date', 'Batch 1', 'Batch 2', 'Batch 3'],
    [date(2015,9, 1), 40, 30, 25],
    [date(2015,9, 2), 40, 25, 30],
    [date(2015,9, 3), 50, 30, 45],
    [date(2015,9, 4), 30, 25, 40],
    [date(2015,9, 5), 25, 35, 30],
    [date(2015,9, 6), 20, 40, 35],
]

for row in rows:
    ws.append(row)

c1 = LineChart3D()
c1.title = "3D Line Chart"
c1.legend = None
c1.style = 15
c1.y_axis.title = 'Size'
c1.x_axis.title = 'Test Number'


data = Reference(ws, min_col=2, min_row=1, max_col=4, max_row=7)
c1.add_data(data, titles_from_data=True)

ws.add_chart(c1, "A10")
```

(下页继续)

(续上页)

```
wb.save("line3D.xlsx")
```

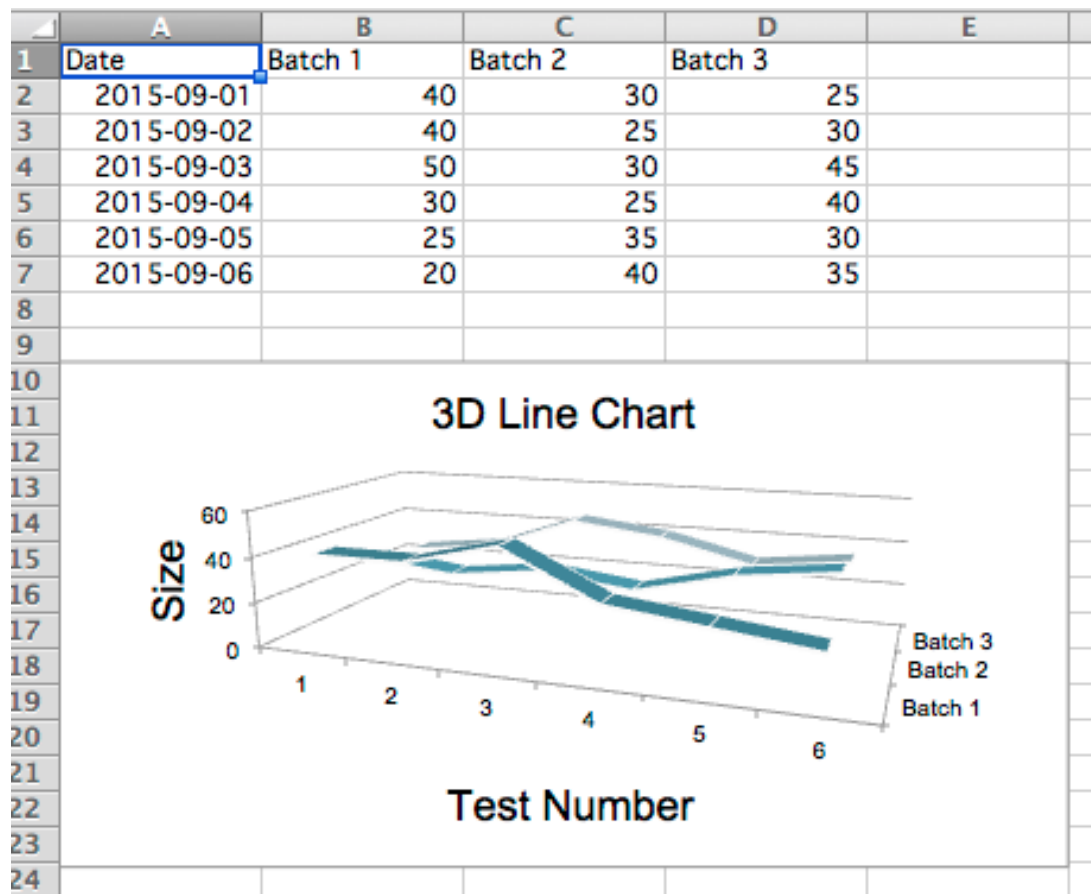

Scatter Charts

Scatter, or xy, charts are similar to some line charts. The main difference is that one series of values is plotted against another. This is useful where values are unordered.

```
from openpyxl import Workbook
from openpyxl.chart import (
    ScatterChart,
    Reference,
    Series,
)

wb = Workbook()
ws = wb.active
```

(下页继续)

(续上页)

```
rows = [
    ['Size', 'Batch 1', 'Batch 2'],
    [2, 40, 30],
    [3, 40, 25],
    [4, 50, 30],
    [5, 30, 25],
    [6, 25, 35],
    [7, 20, 40],
]


for row in rows:
    ws.append(row)

chart = ScatterChart()
chart.title = "Scatter Chart"
chart.style = 13
chart.x_axis.title = 'Size'
chart.y_axis.title = 'Percentage'

xvalues = Reference(ws, min_col=1, min_row=2, max_row=7)
for i in range(2, 4):
    values = Reference(ws, min_col=i, min_row=1, max_row=7)
    series = Series(values, xvalues, title_from_data=True)
    chart.series.append(series)

ws.add_chart(chart, "A10")

wb.save("scatter.xlsx")
```

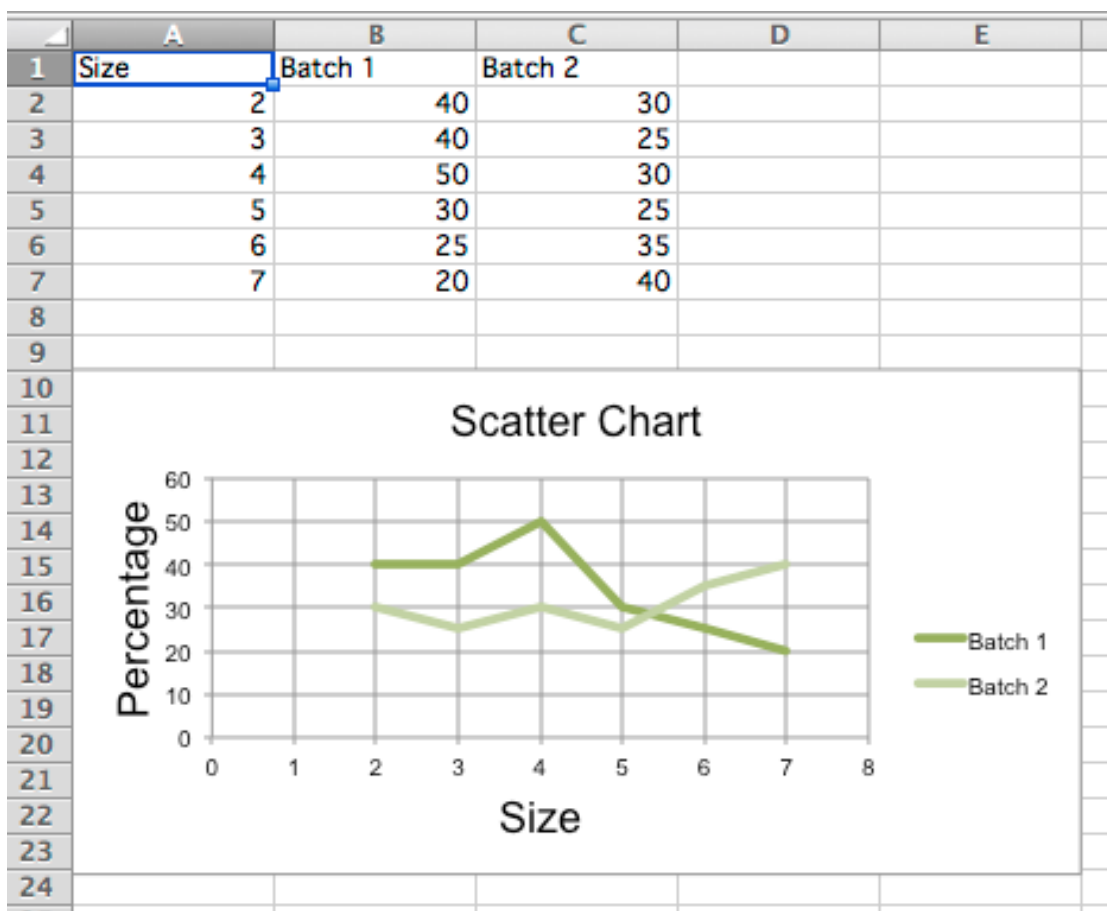

注解: The specification says that there are the following types of scatter charts: ‘line’, ‘lineMarker’, ‘marker’, ‘smooth’, ‘smoothMarker’. However, at least in Microsoft Excel, this is just a shortcut for other settings that otherwise have no effect. For consistency with line charts, the style for each series should be set manually.

Pie Charts

Pie Charts

Pie charts plot data as slices of a circle with each slice representing the percentage of the whole. Slices are plotted in a clockwise direction with 0° being at the top of the circle. Pie charts can only take a single series of data. The title of the chart will default to being the title of the series.

```
from openpyxl import Workbook

from openpyxl.chart import (
```

(下页继续)

(续上页)

```
PieChart,
ProjectedPieChart,
Reference
)
from openpyxl.chart.series import DataPoint

data = [
    ['Pie', 'Sold'],
    ['Apple', 50],
    ['Cherry', 30],
    ['Pumpkin', 10],
    ['Chocolate', 40],
]

wb = Workbook()
ws = wb.active

for row in data:
    ws.append(row)

pie = PieChart()
labels = Reference(ws, min_col=1, min_row=2, max_row=5)
data = Reference(ws, min_col=2, min_row=1, max_row=5)
pie.add_data(data, titles_from_data=True)
pie.set_categories(labels)
pie.title = "Pies sold by category"

# Cut the first slice out of the pie
slice = DataPoint(idx=0, explosion=20)
pie.series[0].data_points = [slice]

ws.add_chart(pie, "D1")

ws = wb.create_sheet(title="Projection")

data = [
    ['Page', 'Views'],
    ['Search', 95],
    ['Products', 4],
```

(下页继续)

(续上页)

```

    ['Offers', 0.5],
    ['Sales', 0.5],
]

for row in data:
    ws.append(row)

projected_pie = ProjectedPieChart()
projected_pie.type = "pie"
projected_pie.splitType = "val" # split by value
labels = Reference(ws, min_col=1, min_row=2, max_row=5)
data = Reference(ws, min_col=2, min_row=1, max_row=5)
projected_pie.add_data(data, titles_from_data=True)
projected_pie.set_categories(labels)


ws.add_chart(projected_pie, "A10")

from copy import deepcopy
projected_bar = deepcopy(projected_pie)
projected_bar.type = "bar"
projected_bar.splitType = 'pos' # split by position

ws.add_chart(projected_bar, "A27")


wb.save("pie.xlsx")

```

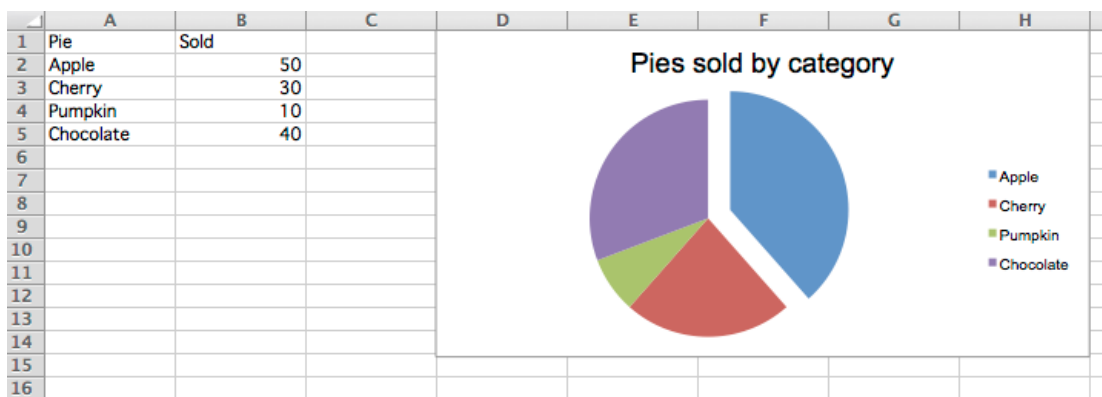

Projected Pie Charts

Projected pie charts extract some slices from a pie chart and project them into a second pie or bar chart. This is useful when there are several smaller items in the data series. The chart can be split according to percent, val(ue) or pos(ition). If nothing is set then the application decides which to use. In addition custom splits can be defined.

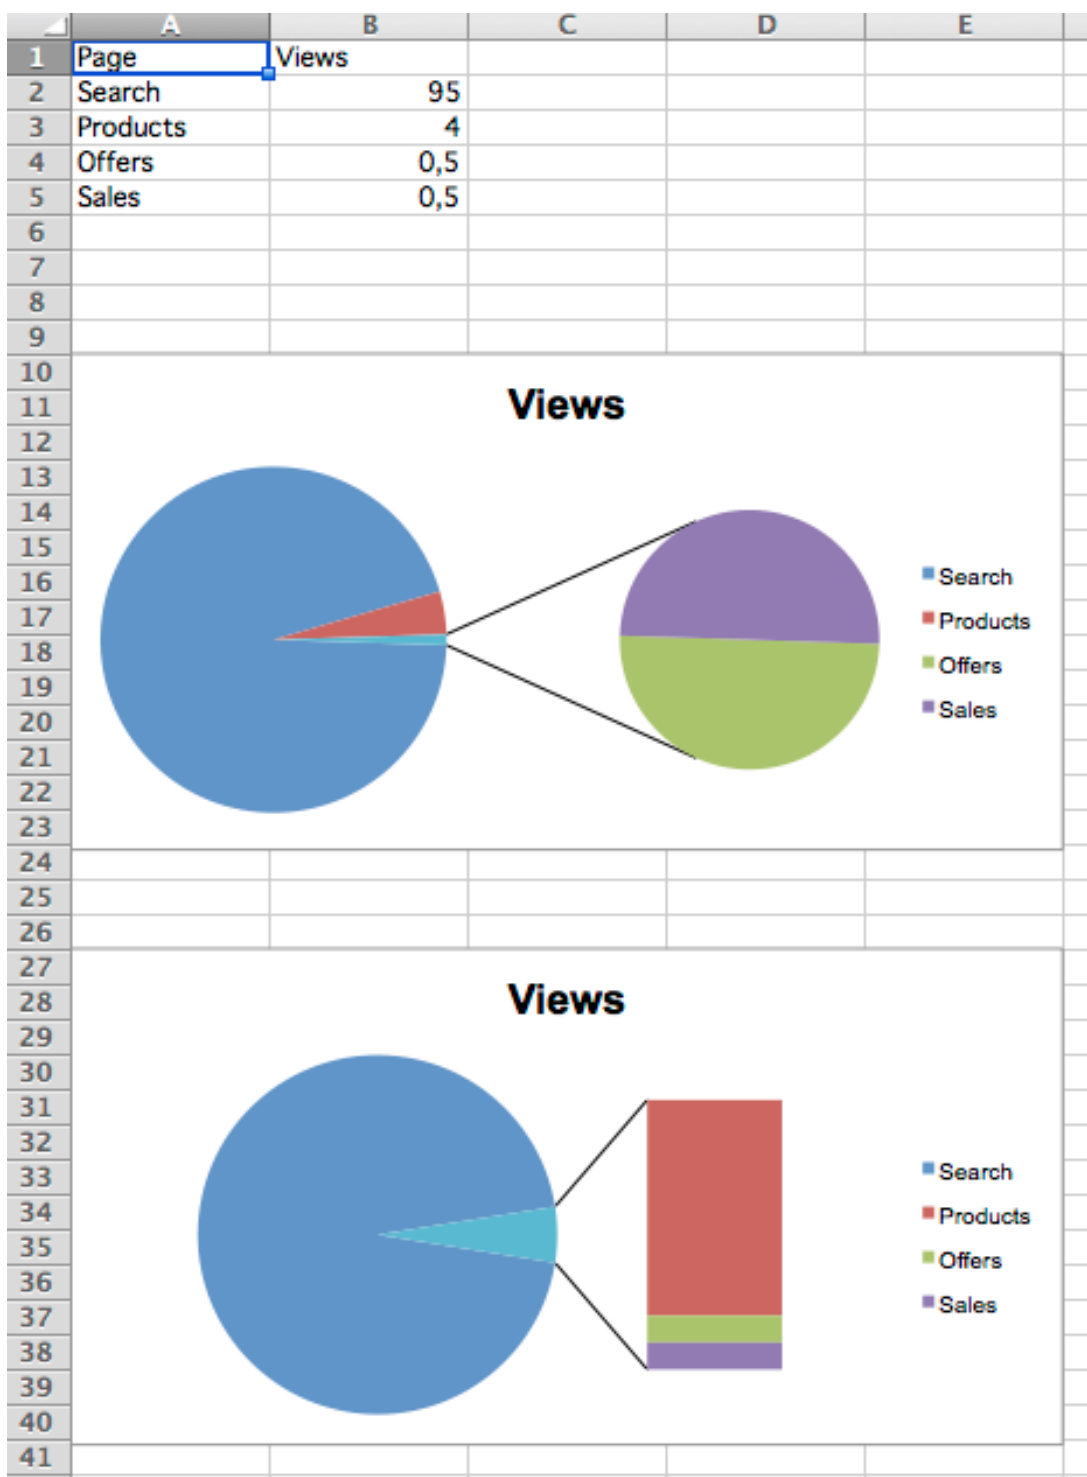

3D Pie Charts

Pie charts can also be created with a 3D effect.

```
from openpyxl import Workbook

from openpyxl.chart import (
    PieChart3D,
    Reference
)

data = [
    ['Pie', 'Sold'],
    ['Apple', 50],
    ['Cherry', 30],
    ['Pumpkin', 10],
    ['Chocolate', 40],
]


wb = Workbook()
ws = wb.active

for row in data:
    ws.append(row)

pie = PieChart3D()
labels = Reference(ws, min_col=1, min_row=2, max_row=5)
data = Reference(ws, min_col=2, min_row=1, max_row=5)
pie.add_data(data, titles_from_data=True)
pie.set_categories(labels)
pie.title = "Pies sold by category"

ws.add_chart(pie, "D1")


wb.save("pie3D.xlsx")
```

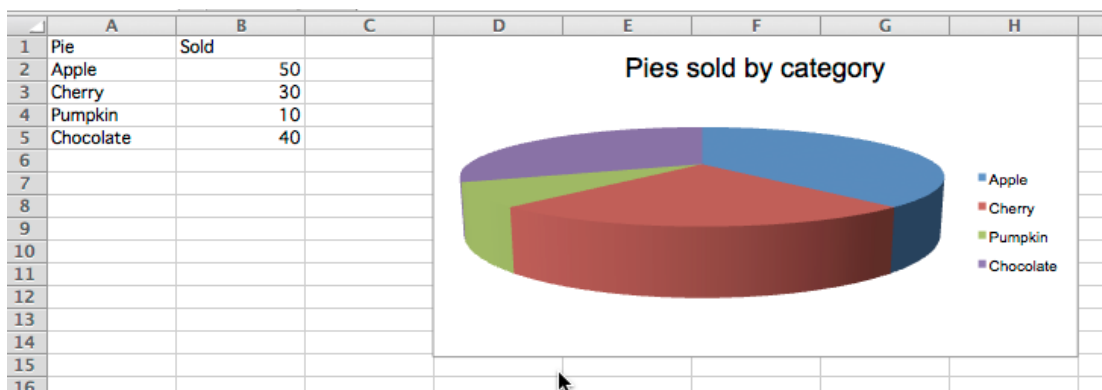

Gradient Pie Charts

Pie charts can also be created with gradient series.

..literalinclude:: pie-gradient.py

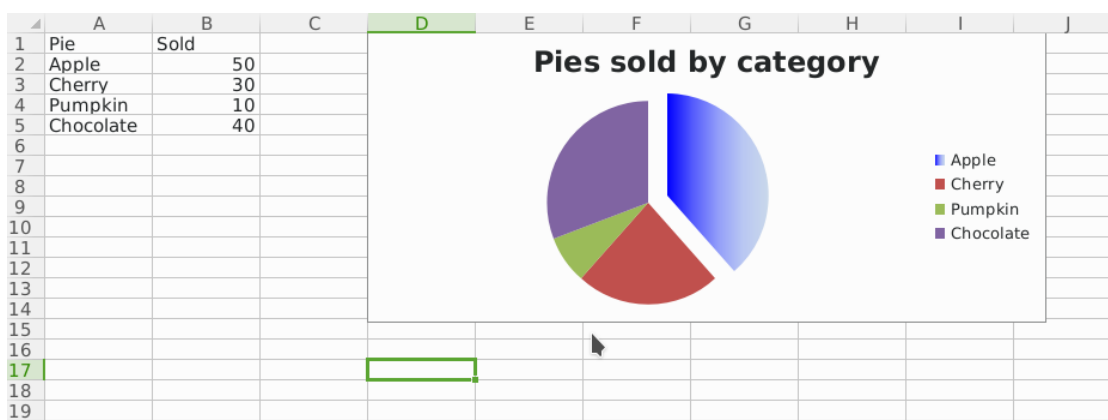

旭日图

旭日图和饼图相似，不同之处在于使用的是圆形还是圆环。他们还可以将多个系列的数据绘制为同心环。

```
from openpyxl import Workbook

from openpyxl.chart import (
    DoughnutChart,
    Reference,
    Series,
)

from openpyxl.chart.series import DataPoint
```

(下页继续)

(续上页)

```
data = [
    ['Pie', 2014, 2015],
    ['Plain', 40, 50],
    ['Jam', 2, 10],
    ['Lime', 20, 30],
    ['Chocolate', 30, 40],
]

wb = Workbook()
ws = wb.active

for row in data:
    ws.append(row)

chart = DoughnutChart()
labels = Reference(ws, min_col=1, min_row=2, max_row=5)
data = Reference(ws, min_col=2, min_row=1, max_row=5)
chart.add_data(data, titles_from_data=True)
chart.set_categories(labels)
chart.title = "Doughnuts sold by category"
chart.style = 26

# Cut the first slice out of the doughnut
slices = [DataPoint(idx=i) for i in range(4)]
plain, jam, lime, chocolate = slices
chart.series[0].data_points = slices
plain.graphicalProperties.solidFill = "FAE1D0"
jam.graphicalProperties.solidFill = "BB2244"
lime.graphicalProperties.solidFill = "22DD22"
chocolate.graphicalProperties.solidFill = "61210B"
chocolate.explosion = 10

ws.add_chart(chart, "E1")

from copy import deepcopy

chart2 = deepcopy(chart)
chart2.title = None
data = Reference(ws, min_col=3, min_row=1, max_row=5)
series2 = Series(data, title_from_data=True)
```

(下页继续)

(续上页)


```

series2.data_points = slices
chart2.series.append(series2)

ws.add_chart(chart2, "E17")

wb.save("doughnut.xlsx")

```

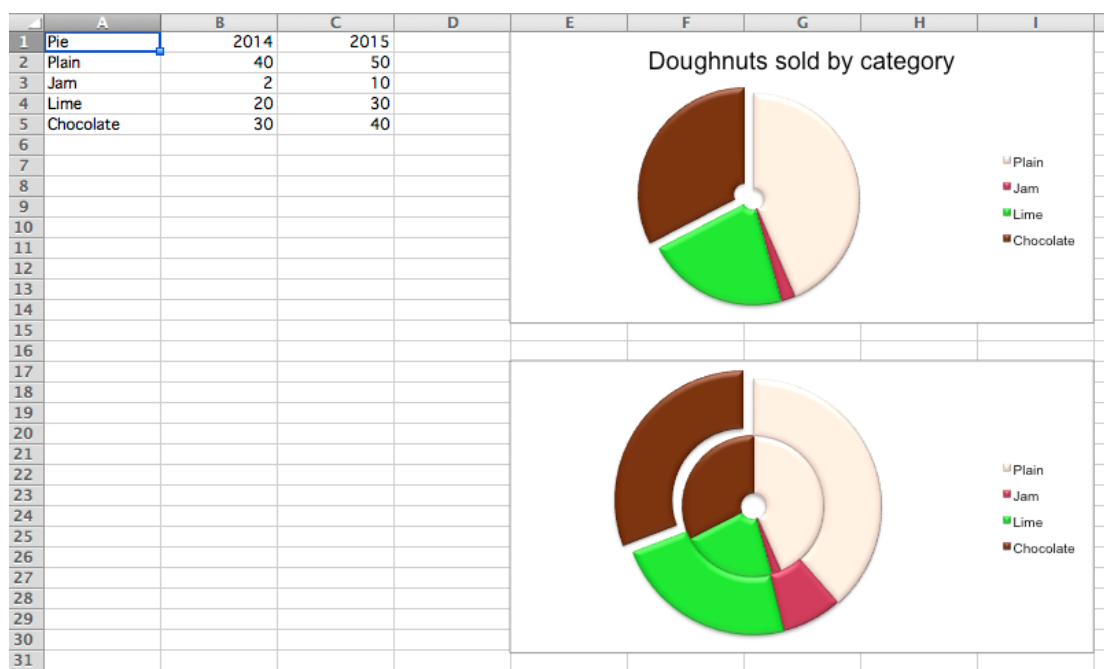

Radar Charts

Data that is arranged in columns or rows on a worksheet can be plotted in a radar chart. Radar charts compare the aggregate values of multiple data series. It is effectively a projection of an area chart on a circular x-axis.

There are two types of radar chart: standard, where the area is marked with a line; and filled, where the whole area is filled. The additional type “marker” has no effect. If markers are desired these can be set for the relevant series.

```

from openpyxl import Workbook
from openpyxl.chart import (
    RadarChart,
    Reference,
)

```

(下页继续)

(续上页)

```
wb = Workbook()
ws = wb.active


rows = [
    ['Month', "Bulbs", "Seeds", "Flowers", "Trees & shrubs"],
    ['Jan', 0, 2500, 500, 0,],
    ['Feb', 0, 5500, 750, 1500],
    ['Mar', 0, 9000, 1500, 2500],
    ['Apr', 0, 6500, 2000, 4000],
    ['May', 0, 3500, 5500, 3500],
    ['Jun', 0, 0, 7500, 1500],
    ['Jul', 0, 0, 8500, 800],
    ['Aug', 1500, 0, 7000, 550],
    ['Sep', 5000, 0, 3500, 2500],
    ['Oct', 8500, 0, 2500, 6000],
    ['Nov', 3500, 0, 500, 5500],
    ['Dec', 500, 0, 100, 3000 ],
]

for row in rows:
    ws.append(row)

chart = RadarChart()
chart.type = "filled"
labels = Reference(ws, min_col=1, min_row=2, max_row=13)
data = Reference(ws, min_col=2, max_col=5, min_row=1, max_row=13)
chart.add_data(data, titles_from_data=True)
chart.set_categories(labels)
chart.style = 26
chart.title = "Garden Centre Sales"
chart.y_axis.delete = True

ws.add_chart(chart, "A17")

wb.save("radar.xlsx")
```

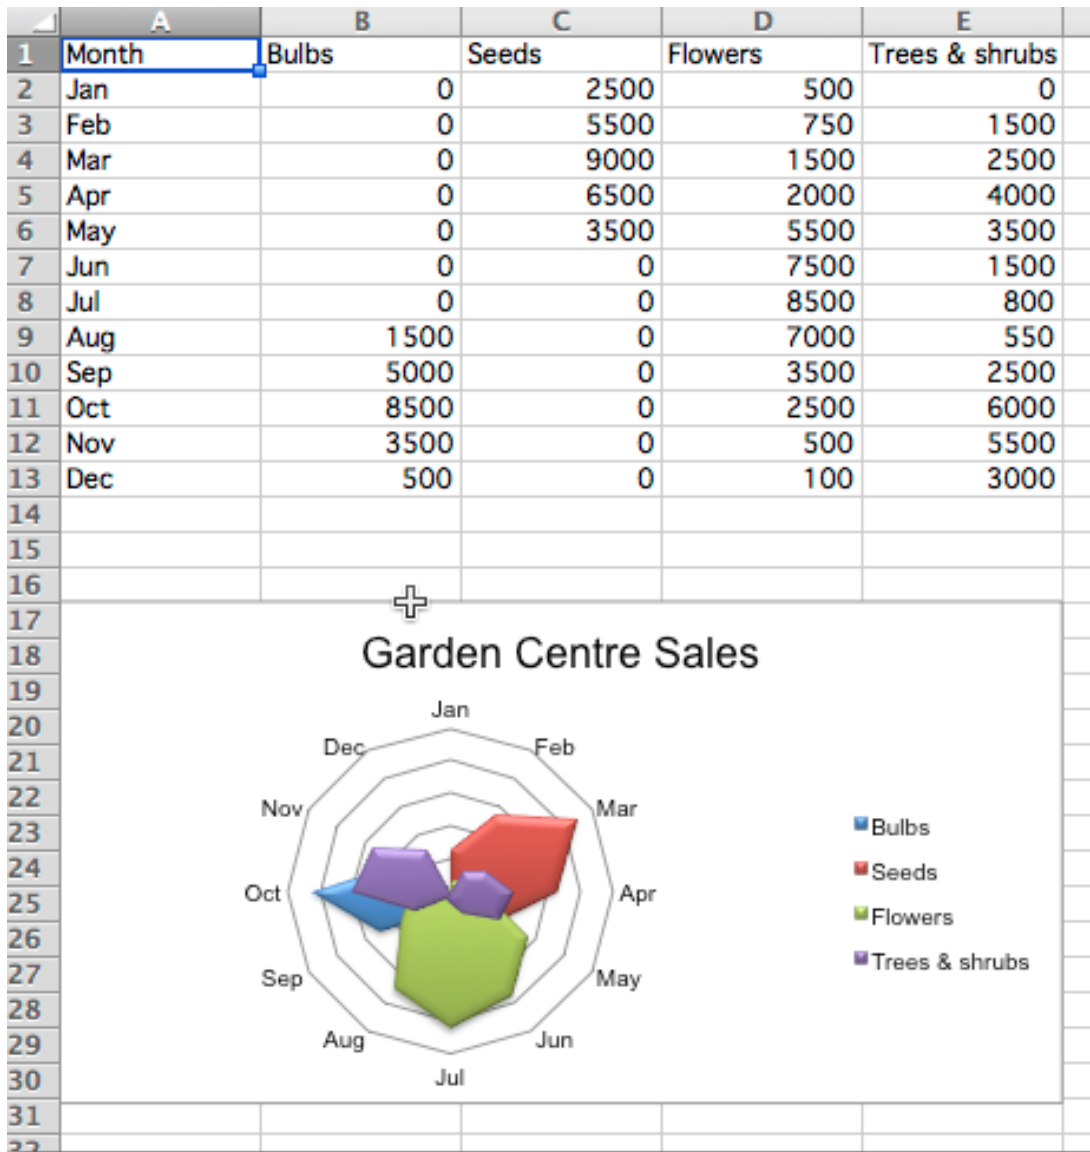

Stock Charts

Data that is arranged in columns or rows in a specific order on a worksheet can be plotted in a stock chart. As its name implies, a stock chart is most often used to illustrate the fluctuation of stock prices. However, this chart may also be used for scientific data. For example, you could use a stock chart to indicate the fluctuation of daily or annual temperatures. You must organize your data in the correct order to create stock charts.

The way stock chart data is organized in the worksheet is very important. For example, to create a simple high-low-close stock chart, you should arrange your data with High, Low, and Close entered as column headings, in that order.

Although stock charts are a distinct type, the various types are just shortcuts for particular

formatting options:

- high-low-close is essentially a line chart with no lines and the marker set to XYZ. It also sets hiLoLines to True
- open-high-low-close is the same as a high-low-close chart with the marker for each data point set to XZZ and upDownLines.

Volume can be added by combining the stock chart with a bar chart for the volume.

```
from datetime import date

from openpyxl import Workbook

from openpyxl.chart import (
    BarChart,
    StockChart,
    Reference,
    Series,
)

from openpyxl.chart.axis import DateAxis, ChartLines
from openpyxl.chart.updown_bars import UpDownBars

wb = Workbook()
ws = wb.active

rows = [
    ['Date', 'Volume', 'Open', 'High', 'Low', 'Close'],
    ['2015-01-01', 20000, 26.2, 27.20, 23.49, 25.45, ],
    ['2015-01-02', 10000, 25.45, 25.03, 19.55, 23.05, ],
    ['2015-01-03', 15000, 23.05, 24.46, 20.03, 22.42, ],
    ['2015-01-04', 2000, 22.42, 23.97, 20.07, 21.90, ],
    ['2015-01-05', 12000, 21.9, 23.65, 19.50, 21.51, ],
]

for row in rows:
    ws.append(row)

# High-low-close
c1 = StockChart()
labels = Reference(ws, min_col=1, min_row=2, max_row=6)
data = Reference(ws, min_col=4, max_col=6, min_row=1, max_row=6)
c1.add_data(data, titles_from_data=True)
```

(下页继续)

(续上页)

```

c1.set_categories(labels)
for s in c1.series:
    s.graphicalProperties.line.noFill = True
# marker for close
s.marker.symbol = "dot"
s.marker.size = 5
c1.title = "High-low-close"
c1.hiLowLines = ChartLines()

# Excel is broken and needs a cache of values in order to display hiLoLines :-/
from openpyxl.chart.data_source import NumData, NumVal
pts = [NumVal(idx=i) for i in range(len(data) - 1)]
cache = NumData(pt=pts)
c1.series[-1].val.numRef.numCache = cache

ws.add_chart(c1, "A10")

# Open-high-low-close
c2 = StockChart()
data = Reference(ws, min_col=3, max_col=6, min_row=1, max_row=6)
c2.add_data(data, titles_from_data=True)
c2.set_categories(labels)
for s in c2.series:
    s.graphicalProperties.line.noFill = True
c2.hiLowLines = ChartLines()
c2.upDownBars = UpDownBars()
c2.title = "Open-high-low-close"

# add dummy cache
c2.series[-1].val.numRef.numCache = cache

ws.add_chart(c2, "G10")

# Create bar chart for volume

bar = BarChart()
data = Reference(ws, min_col=2, min_row=1, max_row=6)
bar.add_data(data, titles_from_data=True)
bar.set_categories(labels)

```

(下页继续)

(续上页)

```
from copy import deepcopy

# Volume-high-low-close
b1 = deepcopy(bar)
c3 = deepcopy(c1)
c3.y_axis.majorGridlines = None
c3.y_axis.title = "Price"
b1.y_axis.axId = 20
b1.z_axis = c3.y_axis
b1.y_axis.crosses = "max"
b1 += c3

c3.title = "High low close volume"

ws.add_chart(b1, "A27")


## Volume-open-high-low-close
b2 = deepcopy(bar)
c4 = deepcopy(c2)
c4.y_axis.majorGridlines = None
c4.y_axis.title = "Price"
b2.y_axis.axId = 20
b2.z_axis = c4.y_axis
b2.y_axis.crosses = "max"
b2 += c4

ws.add_chart(b2, "G27")

wb.save("stock.xlsx")
```

警告: Due to a bug in Excel high-low lines will only be shown if at least one of the data series has some dummy values. This can be done with the following hack:

```
from openpyxl.chart.data_source import NumData, NumVal
pts = [NumVal(idx=i) for i in range(len(data) - 1)]
cache = NumData(pt=pts)
c1.series[-1].val.numRef.numCache = cache
```

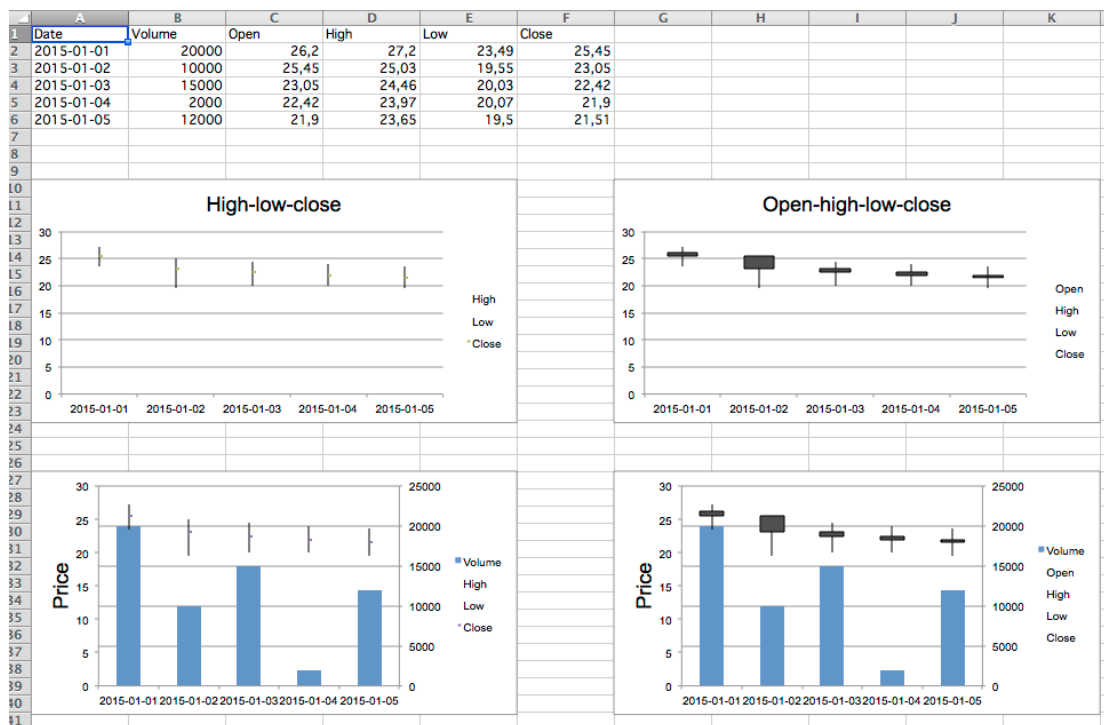

Surface charts

Data that is arranged in columns or rows on a worksheet can be plotted in a surface chart. A surface chart is useful when you want to find optimum combinations between two sets of data. As in a topographic map, colors and patterns indicate areas that are in the same range of values.

By default all surface charts are 3D. 2D wireframe and contour charts are created by setting the rotation and perspective.

```
from openpyxl import Workbook
from openpyxl.chart import (
    SurfaceChart,
    SurfaceChart3D,
    Reference,
    Series,
)
from openpyxl.chart.axis import SeriesAxis

wb = Workbook()
ws = wb.active

data = [
    [None, 10, 20, 30, 40, 50],
```

(下页继续)

(续上页)

```
[0.1, 15, 65, 105, 65, 15,],
[0.2, 35, 105, 170, 105, 35,],
[0.3, 55, 135, 215, 135, 55,],
[0.4, 75, 155, 240, 155, 75,],
[0.5, 80, 190, 245, 190, 80,],
[0.6, 75, 155, 240, 155, 75,],
[0.7, 55, 135, 215, 135, 55,],
[0.8, 35, 105, 170, 105, 35,],
[0.9, 15, 65, 105, 65, 15],
]

for row in data:
    ws.append(row)

c1 = SurfaceChart()
ref = Reference(ws, min_col=2, max_col=6, min_row=1, max_row=10)
labels = Reference(ws, min_col=1, min_row=2, max_row=10)
c1.add_data(ref, titles_from_data=True)
c1.set_categories(labels)
c1.title = "Contour"

ws.add_chart(c1, "A12")

from copy import deepcopy

# wireframe
c2 = deepcopy(c1)
c2.wireframe = True
c2.title = "2D Wireframe"

ws.add_chart(c2, "G12")

# 3D Surface
c3 = SurfaceChart3D()
c3.add_data(ref, titles_from_data=True)
c3.set_categories(labels)
c3.title = "Surface"

ws.add_chart(c3, "A29")
```

(下页继续)

(续上页)


```

c4 = deepcopy(c3)
c4.wireframe = True
c4.title = "3D Wireframe"

ws.add_chart(c4, "G29")

wb.save("surface.xlsx")

```

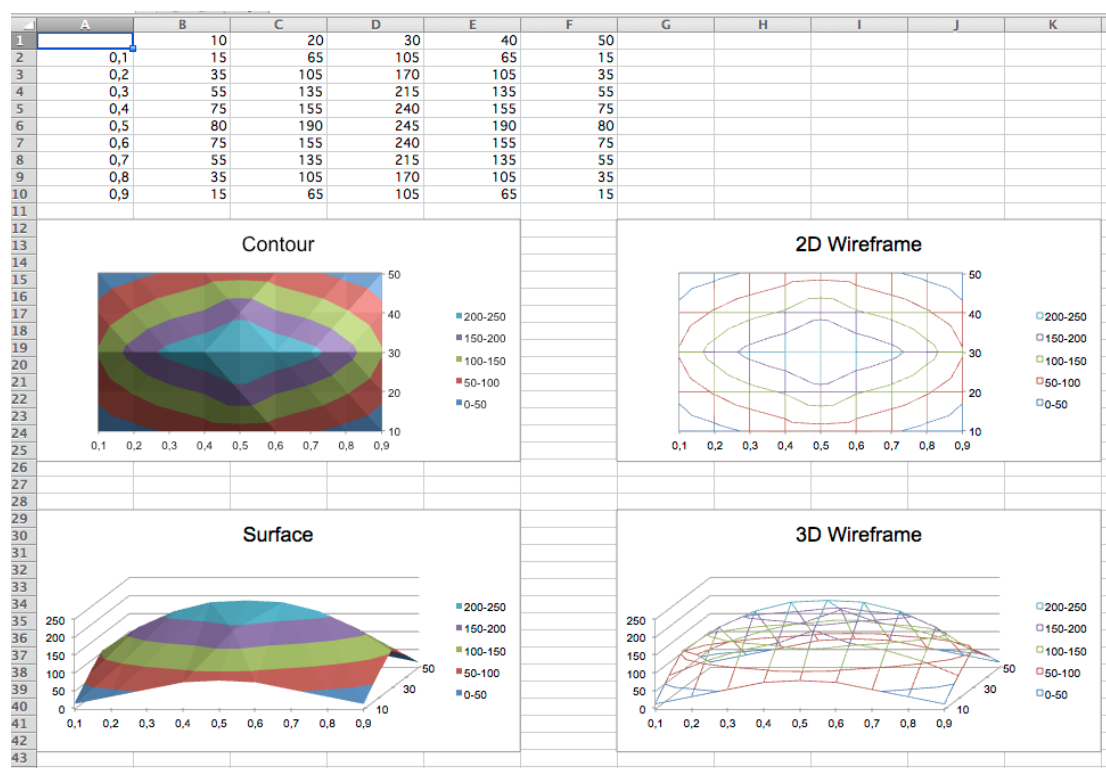

6.4.2 创建图表

图表由至少一个系列的一个或多个数据点组成。系列由单元格范围的引用组成。

```

>>> from openpyxl import Workbook
>>> wb = Workbook()
>>> ws = wb.active
>>> for i in range(10):
...     ws.append([i])
>>>
>>> from openpyxl.chart import BarChart, Reference, Series

```

(下页继续)

(续上页)

```
>>> values = Reference(ws, min_col=1, min_row=1, max_col=1, max_row=10)
>>> chart = BarChart()
>>> chart.add_data(values)
>>> ws.add_chart(chart, "E15")
>>> wb.save("SampleChart.xlsx")
```

默认情况下，图表的左上角固定在单元格 E15 上，大小为 15 x 7.5 厘米（大约 5 列乘 14 行）。可以通过设置图表的 *anchor*，*width* 和 *height* 属性来更改。实际大小将取决于操作系统和设备。其他锚点（anchors）也是有可能的。更多资料请参考 *openpyxl.drawing.spreadsheet_drawing*。

6.4.3 使用轴

Axis Limits and Scale

Minima and Maxima

Axis minimum and maximum values can be set manually to display specific regions on a chart.

```
from openpyxl import Workbook
from openpyxl.chart import (
    ScatterChart,
    Reference,
    Series,
)

wb = Workbook()
ws = wb.active

ws.append(['X', '1/X'])
for x in range(-10, 11):
    if x:
        ws.append([x, 1.0 / x])

chart1 = ScatterChart()
chart1.title = "Full Axes"
chart1.x_axis.title = 'x'
chart1.y_axis.title = '1/x'
chart1.legend = None

chart2 = ScatterChart()
```

(下页继续)

(续上页)


```
chart2.title = "Clipped Axes"
chart2.x_axis.title = 'x'
chart2.y_axis.title = '1/x'
chart2.legend = None

chart2.x_axis.scaling.min = 0
chart2.y_axis.scaling.min = 0
chart2.x_axis.scaling.max = 11
chart2.y_axis.scaling.max = 1.5

x = Reference(ws, min_col=1, min_row=2, max_row=22)
y = Reference(ws, min_col=2, min_row=2, max_row=22)
s = Series(y, xvalues=x)
chart1.append(s)
chart2.append(s)

ws.add_chart(chart1, "C1")
ws.add_chart(chart2, "C15")

wb.save("minmax.xlsx")
```

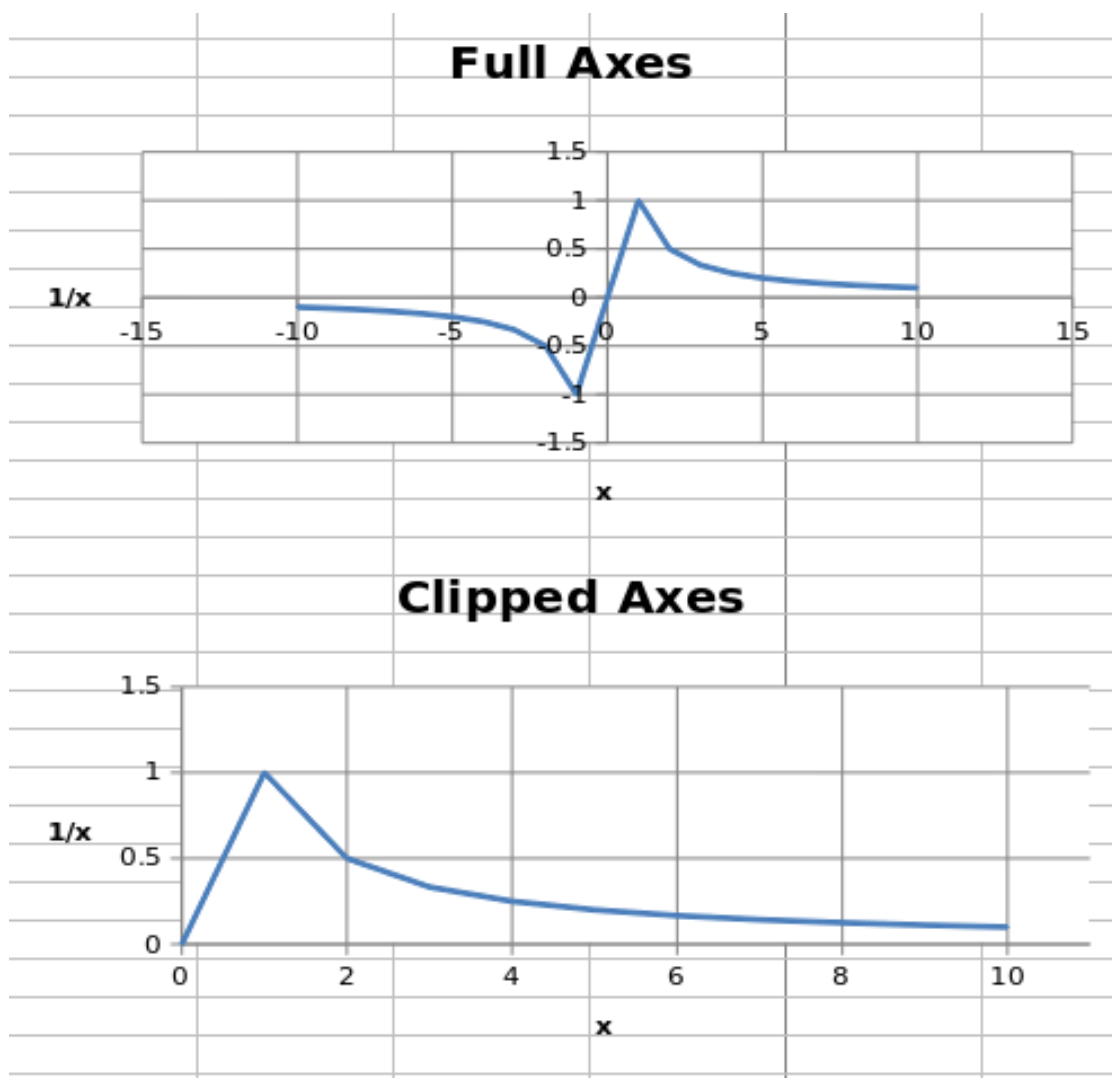

注解: In some cases such as the one shown, setting the axis limits is effectively equivalent to displaying a sub-range of the data. For large datasets, rendering of scatter plots (and possibly others) will be much faster when using subsets of the data rather than axis limits in both Excel and Open/Libre Office.

Logarithmic Scaling

Both the x- and y-axes can be scaled logarithmically. The base of the logarithm can be set to any valid float. If the x-axis is scaled logarithmically, negative values in the domain will be discarded.

```
from openpyxl import Workbook
from openpyxl.chart import (
```

(下页继续)

(续上页)

```
        ScatterChart,
        Reference,
        Series,
    )
import math

wb = Workbook()
ws = wb.active

ws.append(['X', 'Gaussian'])
for i, x in enumerate(range(-10, 11)):
    ws.append([x, "=EXP(-(($A${row})/6)^2)".format(row = i + 2)])

chart1 = ScatterChart()
chart1.title = "No Scaling"
chart1.x_axis.title = 'x'
chart1.y_axis.title = 'y'
chart1.legend = None

chart2 = ScatterChart()
chart2.title = "X Log Scale"
chart2.x_axis.title = 'x (log10)'
chart2.y_axis.title = 'y'
chart2.legend = None
chart2.x_axis.scaling.logBase = 10

chart3 = ScatterChart()
chart3.title = "Y Log Scale"
chart3.x_axis.title = 'x'
chart3.y_axis.title = 'y (log10)'
chart3.legend = None
chart3.y_axis.scaling.logBase = 10

chart4 = ScatterChart()
chart4.title = "Both Log Scale"
chart4.x_axis.title = 'x (log10)'
chart4.y_axis.title = 'y (log10)'
chart4.legend = None
chart4.x_axis.scaling.logBase = 10
chart4.y_axis.scaling.logBase = 10
```

(下页继续)

(续上页)


```
chart5 = ScatterChart()
chart5.title = "Log Scale Base e"
chart5.x_axis.title = 'x (ln)'
chart5.y_axis.title = 'y (ln)'
chart5.legend = None
chart5.x_axis.scaling.logBase = math.e
chart5.y_axis.scaling.logBase = math.e

x = Reference(ws, min_col=1, min_row=2, max_row=22)
y = Reference(ws, min_col=2, min_row=2, max_row=22)
s = Series(y, xvalues=x)
chart1.append(s)
chart2.append(s)
chart3.append(s)
chart4.append(s)
chart5.append(s)

ws.add_chart(chart1, "C1")
ws.add_chart(chart2, "I1")
ws.add_chart(chart3, "C15")
ws.add_chart(chart4, "I15")
ws.add_chart(chart5, "F30")

wb.save("log.xlsx")
```

This produces five charts that look something like this:

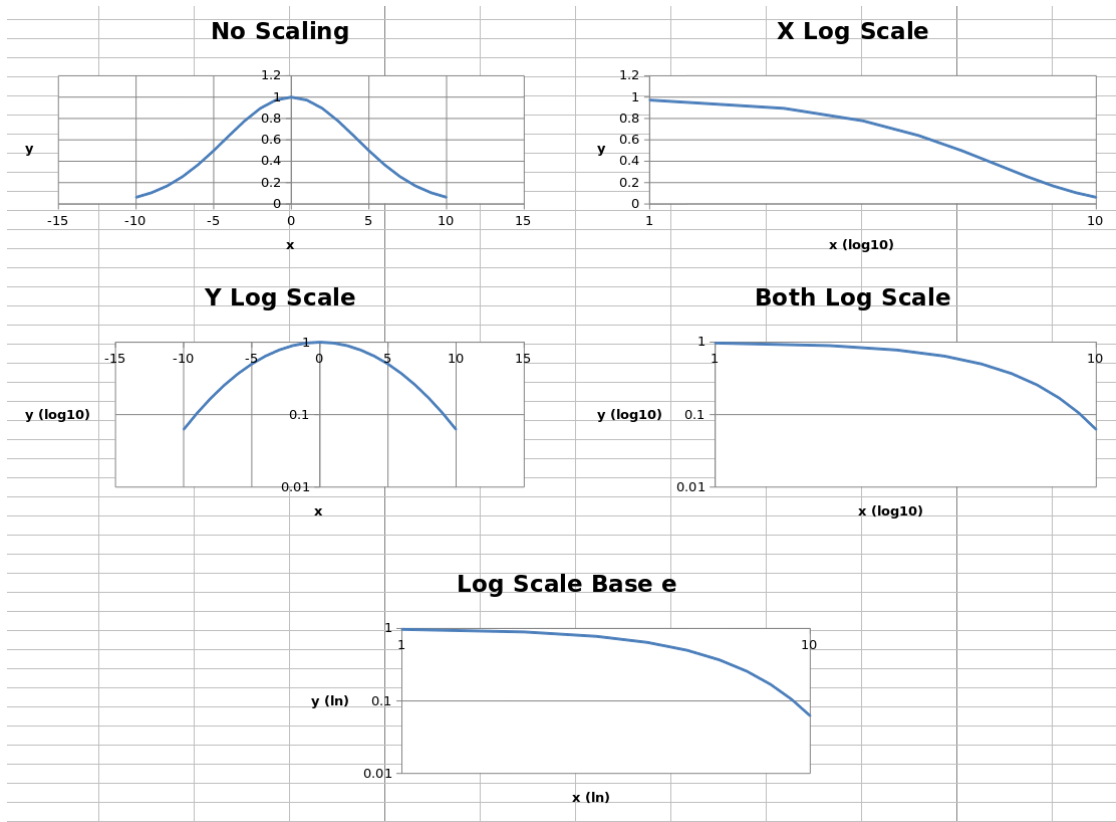

The first four charts show the same data unscaled, scaled logarithmically in each axis and in both axes, with the logarithm base set to 10. The final chart shows the same data with both axes scaled, but the base of the logarithm set to e.

Axis Orientation

Axes can be displayed “normally” or in reverse. Axis orientation is controlled by the scaling orientation property, which can have a value of either 'minMax' for normal orientation or 'maxMin' for reversed.

```
from openpyxl import Workbook
from openpyxl.chart import (
    ScatterChart,
    Reference,
    Series,
)

wb = Workbook()
ws = wb.active
```

(下页继续)

(续上页)

```

ws["A1"] = "Archimedean Spiral"
ws.append(["T", "X", "Y"])
for i, t in enumerate(range(100)):
    ws.append([t / 16.0, "={$A${row}*COS($A${row})".format(row = i + 3),
               "={$A${row}*SIN($A${row})".format(row = i + 3)])

chart1 = ScatterChart()
chart1.title = "Default Orientation"
chart1.x_axis.title = 'x'
chart1.y_axis.title = 'y'
chart1.legend = None

chart2 = ScatterChart()
chart2.title = "Flip X"
chart2.x_axis.title = 'x'
chart2.y_axis.title = 'y'
chart2.legend = None
chart2.x_axis.scaling.orientation = "maxMin"
chart2.y_axis.scaling.orientation = "minMax"

chart3 = ScatterChart()
chart3.title = "Flip Y"
chart3.x_axis.title = 'x'
chart3.y_axis.title = 'y'
chart3.legend = None
chart3.x_axis.scaling.orientation = "minMax"
chart3.y_axis.scaling.orientation = "maxMin"

chart4 = ScatterChart()
chart4.title = "Flip Both"
chart4.x_axis.title = 'x'
chart4.y_axis.title = 'y'
chart4.legend = None
chart4.x_axis.scaling.orientation = "maxMin"
chart4.y_axis.scaling.orientation = "maxMin"

x = Reference(ws, min_col=2, min_row=2, max_row=102)
y = Reference(ws, min_col=3, min_row=2, max_row=102)
s = Series(y, xvalues=x)
chart1.append(s)

```

(下页继续)

(续上页)

```


chart2.append(s)
chart3.append(s)
chart4.append(s)

ws.add_chart(chart1, "D1")
ws.add_chart(chart2, "J1")
ws.add_chart(chart3, "D15")
ws.add_chart(chart4, "J15")

wb.save("orientation.xlsx")

```

This produces four charts with the axes in each possible combination of orientations that look something like this:

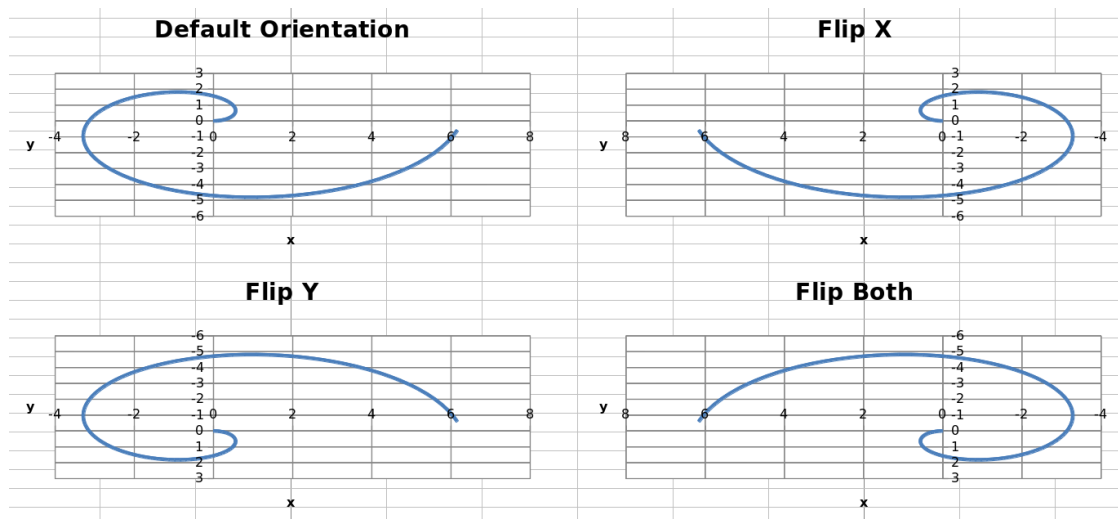

Adding a second axis

Adding a second axis actually involves creating a second chart that shares a common x-axis with the first chart but has a separate y-axis.

```

from openpyxl import Workbook
from openpyxl.chart import (
    LineChart,
    BarChart,
    Reference,
    Series,
)

```

(下页继续)

(续上页)

```
wb = Workbook()
ws = wb.active

rows = [
    ['Aliens', 2, 3, 4, 5, 6, 7],
    ['Humans', 10, 40, 50, 20, 10, 50],
]

for row in rows:
    ws.append(row)

c1 = BarChart()
v1 = Reference(ws, min_col=1, min_row=1, max_col=7)
c1.add_data(v1, titles_from_data=True, from_rows=True)

c1.x_axis.title = 'Days'
c1.y_axis.title = 'Aliens'
c1.y_axis.majorGridlines = None
c1.title = 'Survey results'


# Create a second chart
c2 = LineChart()
v2 = Reference(ws, min_col=1, min_row=2, max_col=7)
c2.add_data(v2, titles_from_data=True, from_rows=True)
c2.y_axis.axId = 200
c2.y_axis.title = "Humans"

# Display y-axis of the second chart on the right by setting it to cross the x-
↪ axis at its maximum
c1.y_axis.crosses = "max"
c1 += c2

ws.add_chart(c1, "D4")

wb.save("secondary.xlsx")
```

This produces a combined line and bar chart looking something like this:

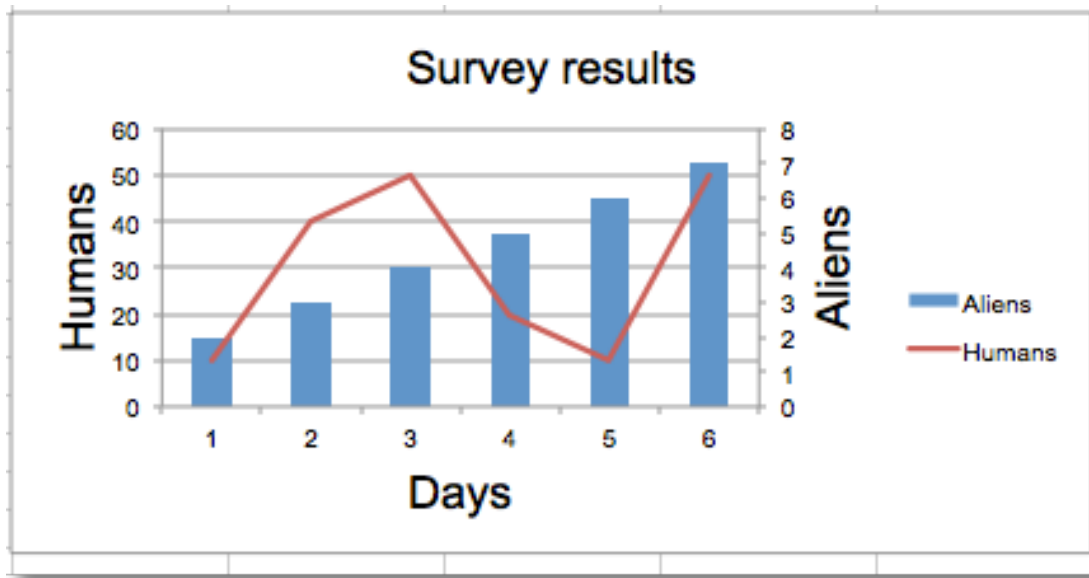

6.4.4 更改图表布局

更改绘图区和图例的布局

可以通过使用 `layout` 类实例的 `layout` 属性来设置图表的布局。

表格布局

位置和大小

图表可以放置在容器中。可以通过 `x` 和 `y` 调整位置。`w` 和 `h` 调整大小。单位是容器的比例。图表不能放置在容器的外部，并且宽度和高度是主要限制：如果 $x+w>1$ ，则 $x=1-w$ 。

`x` 是从左侧开始的水平位置

`y` 是从顶部开始的垂直位置

`h` 是图表相对于其容器的高度

`w` 是盒子 (box) 的宽度

模式

除了大小和位置外，相关属性的模式也可以设置为 `factor` 或 `edge`。默认值为 `factor`：

```
layout.xMode = edge
```

目标 (Target)

~layoutTarget' 属性可以设置成 outer 或者 inner. 默认值为 outer:

```
layout.layoutTarget = inner
```

图例布局

图例的位置可以通过设置位置参数来进行改变: r、l、t、b 和 tr, 分别代表右、左、上、下以及右上。默认值为 r.

```
legend.position = 'tr'
```

或者应用手动布局:

```
legend.layout = ManualLayout()
```

```
from openpyxl import Workbook, load_workbook
from openpyxl.chart import ScatterChart, Series, Reference
from openpyxl.chart.layout import Layout, ManualLayout

wb = Workbook()
ws = wb.active

rows = [
    ['Size', 'Batch 1', 'Batch 2'],
    [2, 40, 30],
    [3, 40, 25],
    [4, 50, 30],
    [5, 30, 25],
    [6, 25, 35],
    [7, 20, 40],
]

for row in rows:
    ws.append(row)

ch1 = ScatterChart()
xvalues = Reference(ws, min_col=1, min_row=2, max_row=7)
for i in range(2, 4):
    values = Reference(ws, min_col=i, min_row=1, max_row=7)
```

(下页继续)

(续上页)

```
series = Series(values, xvalues, title_from_data=True)
ch1.series.append(series)

ch1.title = "Default layout"
ch1.style = 13
ch1.x_axis.title = 'Size'
ch1.y_axis.title = 'Percentage'
ch1.legend.position = 'r'

ws.add_chart(ch1, "B10")

from copy import deepcopy

# Half-size chart, bottom right
ch2 = deepcopy(ch1)
ch2.title = "Manual chart layout"
ch2.legend.position = "tr"
ch2.layout=Layout(
    manualLayout=ManualLayout(
        x=0.25, y=0.25,
        h=0.5, w=0.5,
    )
)
ws.add_chart(ch2, "H10")

# Half-size chart, centred
ch3 = deepcopy(ch1)
ch3.layout = Layout(
    ManualLayout(
        x=0.25, y=0.25,
        h=0.5, w=0.5,
        xMode="edge",
        yMode="edge",
    )
)
ch3.title = "Manual chart layout, edge mode"
ws.add_chart(ch3, "B27")

# Manually position the legend bottom left
```

(下页继续)

(续上页)

```


ch4 = deepcopy(ch1)
ch4.title = "Manual legend layout"
ch4.legend.layout = Layout(
    manualLayout=ManualLayout(
        yMode='edge',
        xMode='edge',
        x=0, y=0.9,
        h=0.1, w=0.5
    )
)

ws.add_chart(ch4, "H27")

wb.save("chart_layout.xlsx")

```

以上会创建四个图表并展示了各种可能性：

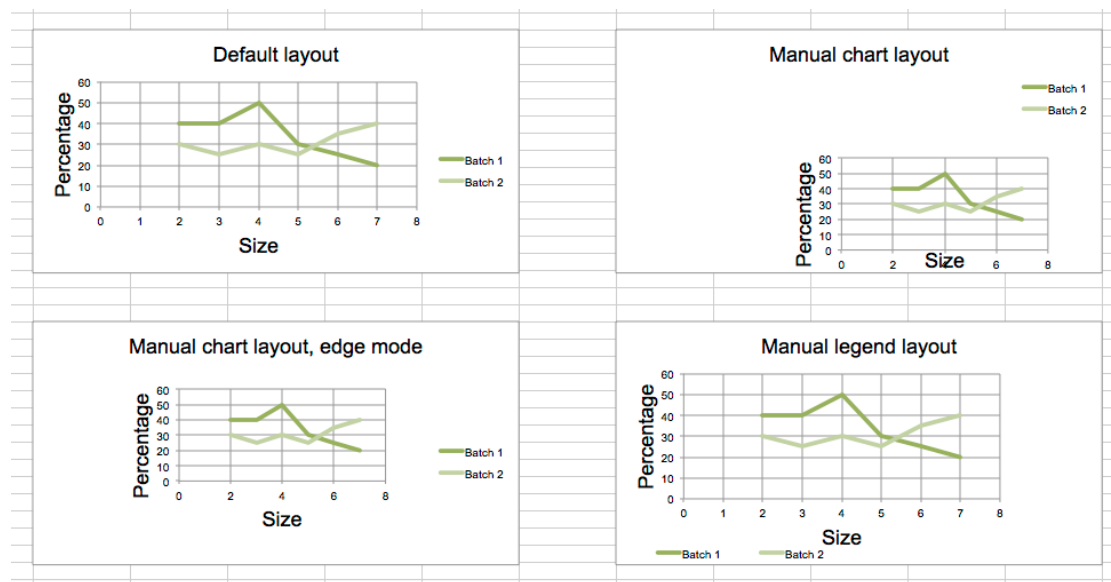

6.4.5 图表样式

Adding Patterns

Whole data series and individual data points can be extensively styled through the *graphical-Properties*. Getting things just right may take some time.

```

from openpyxl import Workbook
from openpyxl.chart import BarChart, Reference
from openpyxl.chart.marker import DataPoint

from openpyxl.drawing.fill import PatternFillProperties, ColorChoice

wb = Workbook()
ws = wb.active

rows = [
    ("Sample",),
    (1,),
    (2,),
    (3,),
    (2,),
    (3,),
    (3,),
    (1,),
    (2,),
]

for r in rows:
    ws.append(r)

c = BarChart()
data = Reference(ws, min_col=1, min_row=1, max_row=8)
c.add_data(data, titles_from_data=True)
c.title = "Chart with patterns"

# set a pattern for the whole series
series = c.series[0]
fill = PatternFillProperties(prst="pct5")
fill.foreground = ColorChoice(prstClr="red")
fill.background = ColorChoice(prstClr="blue")
series.graphicalProperties.pattFill = fill

# set a pattern for a 6th data point (0-indexed)
pt = DataPoint(idx=5)
pt.graphicalProperties.pattFill = PatternFillProperties(prst="ltHorz")

```

(下页继续)

(续上页)


```

series.dPt.append(pt)

ws.add_chart(c, "C1")

wb.save("pattern.xlsx")

```

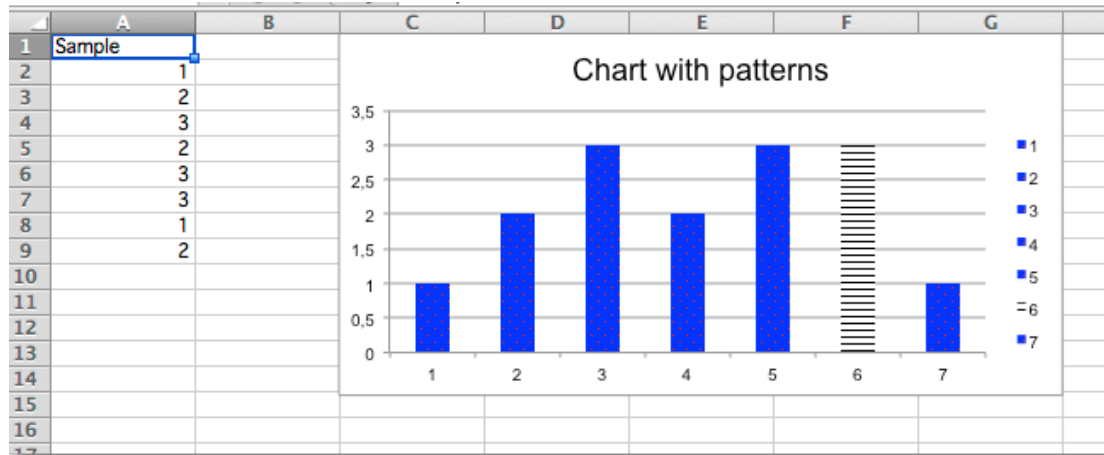

6.4.6 高级图表

图表能合并生成新的图表：

Gauge Charts

Gauge charts combine a pie chart and a doughnut chart to create a “gauge”. The first chart is a doughnut chart with four slices. The first three slices correspond to the colours of the gauge; the fourth slice, which is half of the doughnut, is made invisible.

A pie chart containing three slices is added. The first and third slice are invisible so that the second slice can act as the needle on the gauge.

The effects are done using the graphical properties of individual data points in a data series.

```

from openpyxl import Workbook

from openpyxl.chart import PieChart, DoughnutChart, Series, Reference
from openpyxl.chart.series import DataPoint

data = [
    ["Donut", "Pie"],

```

(下页继续)

(续上页)

```

    [25, 75],
    [50, 1],
    [25, 124],
    [100],
]

# based on http://www.excel-easy.com/examples/gauge-chart.html

wb = Workbook()
ws = wb.active
for row in data:
    ws.append(row)

# First chart is a doughnut chart
c1 = DoughnutChart(firstSliceAng=270, holeSize=50)
c1.title = "Code coverage"
c1.legend = None

ref = Reference(ws, min_col=1, min_row=2, max_row=5)
s1 = Series(ref, title_from_data=False)

slices = [DataPoint(idx=i) for i in range(4)]
slices[0].graphicalProperties.solidFill = "FF3300" # red
slices[1].graphicalProperties.solidFill = "FCF305" # yellow
slices[2].graphicalProperties.solidFill = "1FB714" # green
slices[3].graphicalProperties.noFill = True # invisible

s1.data_points = slices
c1.series = [s1]

# Second chart is a pie chart
c2 = PieChart(firstSliceAng=270)
c2.legend = None

ref = Reference(ws, min_col=2, min_row=2, max_col=2, max_row=4)
s2 = Series(ref, title_from_data=False)

slices = [DataPoint(idx=i) for i in range(3)]
slices[0].graphicalProperties.noFill = True # invisible
slices[1].graphicalProperties.solidFill = "000000" # black needle

```

(下页继续)

(续上页)

```


slices[2].graphicalProperties.noFill = True # invisible
s2.data_points = slices
c2.series = [s2]

c1 += c2 # combine charts

ws.add_chart(c1, "D1")

wb.save("gauge.xlsx")

```

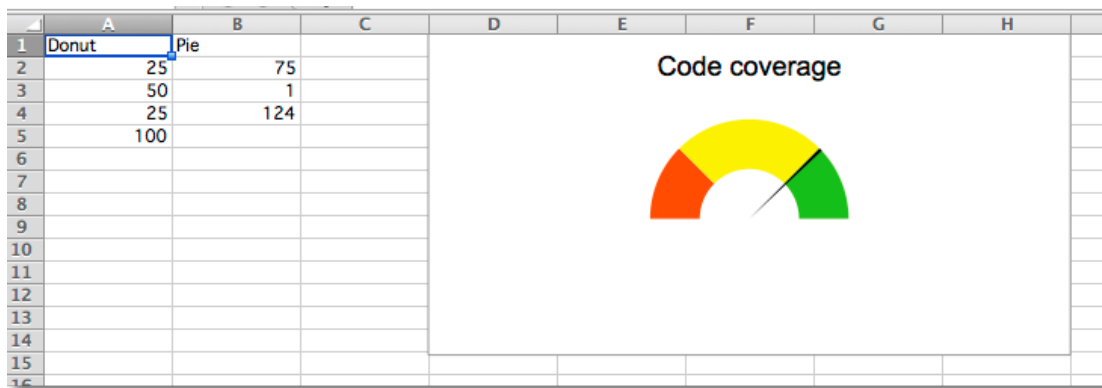

6.4.7 使用 chartsheets

图表能被加入到一个称为 chartsheets 特殊工作簿中:

Chartsheets

Chartsheets are special worksheets which only contain charts. All the data for the chart must be on a different worksheet.

```

from openpyxl import Workbook

from openpyxl.chart import PieChart, Reference, Series

wb = Workbook()
ws = wb.active
cs = wb.create_chartsheet()


rows = [
    ["Bob", 3],

```

(下页继续)

(续上页)

```
["Harry", 2],  
["James", 4],  
]  
  
for row in rows:  
    ws.append(row)  
  
chart = PieChart()  
labels = Reference(ws, min_col=1, min_row=1, max_row=3)  
data = Reference(ws, min_col=2, min_row=1, max_row=3)  
chart.series = (Series(data),)  
chart.title = "PieChart"  
  
cs.add_chart(chart)  
  
wb.save("demo.xlsx")
```

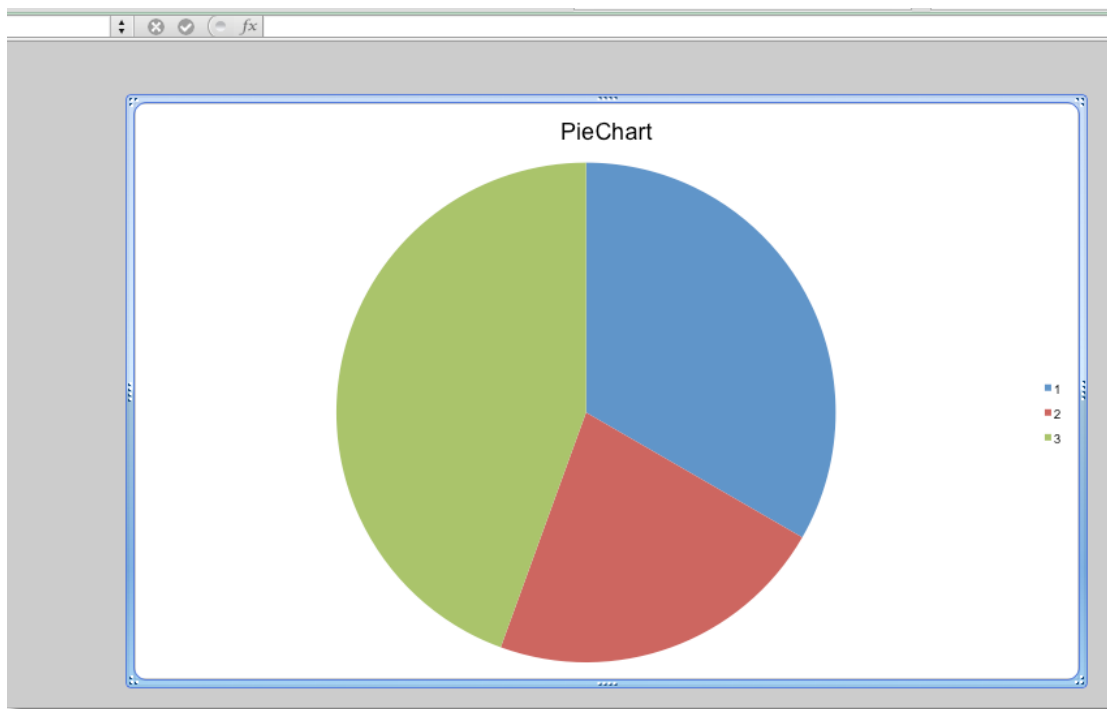

6.5 注释

警告： openpyxl 目前只支持读写文字注释。格式信息会丢失。在读取时，注释尺寸也会丢失，但是可以重新写入。注释目前不支持 `read_only=True` 模式下使用。

6.5.1 为单元格添加注释

注释的 `text` 和 `author` 是必填属性

```
>>> from openpyxl import Workbook
>>> from openpyxl.comments import Comment
>>> wb = Workbook()
>>> ws = wb.active
>>> comment = ws["A1"].comment
>>> comment = Comment('This is the comment text', 'Comment Author')
>>> comment.text
'This is the comment text'
>>> comment.author
'Comment Author'
```

如果你为不同的单元格设置了相同的注释，那么 openpyxl 会自动进行复制

```
>>> from openpyxl import Workbook
>>> from openpyxl.comments import Comment
>>> wb=Workbook()
>>> ws=wb.active
>>> comment = Comment("Text", "Author")
>>> ws["A1"].comment = comment
>>> ws["B2"].comment = comment
>>> ws["A1"].comment is comment
True
>>> ws["B2"].comment is comment
False
```

6.5.2 加载和保存注释

加载时工作簿中存在的注释会自动存储在其相应单元格的 `comment` 属性中。格式信息（如字体大小，粗体和斜体）以及注释的容器框的原始尺寸和位置都将丢失。

保存工作簿时保留在工作簿中的注释会自动保存到工作簿文件中。

注释尺寸可以设定成只写。注释尺寸以像素为单位。

```
>>> from openpyxl import Workbook
>>> from openpyxl.comments import Comment
>>> from openpyxl.utils import units
>>>
>>> wb=Workbook()
>>> ws=wb.active
>>>
>>> comment = Comment("Text", "Author")
>>> comment.width = 300
>>> comment.height = 50
>>>
>>> ws["A1"].comment = comment
>>>
>>> wb.save('commented_book.xlsx')
```

如果有需要的话, `openpyxl.utils.units` 有将其他度量单位 (mm, points) 转换为像素的辅助函数:

```
>>> from openpyxl import Workbook
>>> from openpyxl.comments import Comment
>>> from openpyxl.utils import units
>>>
>>> wb=Workbook()
>>> ws=wb.active
>>>
>>> comment = Comment("Text", "Author")
>>> comment.width = units.points_to_pixels(300)
>>> comment.height = units.points_to_pixels(50)
>>>
>>> ws["A1"].comment = comment
```

6.6 样式

6.6.1 介绍

样式用于在屏幕上显示时更改数据的外观。它们还用于确定数字的格式。

样式可以应用于以下方面:

- Font: 设置字体大小、颜色、下划线等等

- PatternFill: 设置图案或者颜色渐变
- Border: 设置单元格的边框
- Alignment: 单元格对齐
- Protection: 保护工作表

以下是默认值

```
>>> from openpyxl.styles import PatternFill, Border, Side, Alignment, \
↳Protection, Font
>>> font = Font(name='Calibri',
...             size=11,
...             bold=False,
...             italic=False,
...             vertAlign=None,
...             underline='none',
...             strike=False,
...             color='FF000000')
>>> fill = PatternFill(fill_type=None,
...                     start_color='FFFFFFF',
...                     end_color='FF000000')
>>> border = Border(left=Side(border_style=None,
...                             color='FF000000'),
...                  right=Side(border_style=None,
...                              color='FF000000'),
...                  top=Side(border_style=None,
...                            color='FF000000'),
...                  bottom=Side(border_style=None,
...                               color='FF000000'),
...                  diagonal=Side(border_style=None,
...                                 color='FF000000'),
...                  diagonal_direction=0,
...                  outline=Side(border_style=None,
...                                color='FF000000'),
...                  vertical=Side(border_style=None,
...                                 color='FF000000'),
...                  horizontal=Side(border_style=None,
...                                  color='FF000000')
...                  )
>>> alignment=Alignment(horizontal='general',
...                       vertical='bottom',
...                       text_rotation=0,
```

(下页继续)

(续上页)

```
...         wrap_text=False,
...         shrink_to_fit=False,
...         indent=0)
>>> number_format = 'General'
>>> protection = Protection(locked=True,
...                           hidden=False)
>>>
```

6.6.2 单元格样式和命名样式

有两种不同的样式：单元格样式和命名样式，也被成为样式模板。

单元格样式

单元格样式在对象之间共享，一旦被分配之后就无法更改。这样可以避免不必要的副作用，例如仅更改一个单元格时就更改许多单元格的样式。

```
>>> from openpyxl.styles import colors
>>> from openpyxl.styles import Font, Color
>>> from openpyxl import Workbook
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> a1 = ws['A1']
>>> d4 = ws['D4']
>>> ft = Font(color="FF0000")
>>> a1.font = ft
>>> d4.font = ft
>>>
>>> a1.font.italic = True # is not allowed # doctest: +SKIP
>>>
>>> # If you want to change the color of a Font, you need to reassign it
>>>
>>> a1.font = Font(color="FF0000", italic=True) # the change only affects A1
```

6.6.3 复制样式

样式也可以被复制

```
>>> from openpyxl.styles import Font
>>> from copy import copy
>>>
>>> ft1 = Font(name='Arial', size=14)
>>> ft2 = copy(ft1)
>>> ft2.name = "Tahoma"
>>> ft1.name
'Arial'
>>> ft2.name
'Tahoma'
>>> ft2.size # copied from the
14.0
```

6.6.4 颜色

可以通过三种方式：indexed, aRGB 或者 theme 来设置字体、背景、边框等的颜色。索引颜色 (indexed colours) 是旧版实现，颜色本身取决于工作簿或应用程序默认提供的索引。主题颜色可用于互补色，但也取决于工作簿中存在的主题。因此，建议使用 aRGB 颜色。

aRGB 颜色

使用红色，绿色和蓝色的十六进制值设置 RGB 颜色。

```
>>> from openpyxl.styles import Font
>>> font = Font(color="FF0000")
```

理论上，alpha 值是指颜色的透明度，但这与单元格样式无关。默认值 00 将前置任何简单的 RGB 值：

```
>>> from openpyxl.styles import Font
>>> font = Font(color="00FF00")
>>> font.color.rgb
'0000FF00'
```

还支持传统索引颜色以及主题和色彩 (themes and tints)。

```
>>> from openpyxl.styles.colors import Color
>>> c = Color(indexed=32)
>>> c = Color(theme=6, tint=0.5)
```

Indexed Colours

索引 64 和 65 不能设置，并且分别保留给系统前景色和背景色。

6.6.5 应用样式

样式被直接应用到单元格

```
>>> from openpyxl.workbook import Workbook
>>> from openpyxl.styles import Font, Fill
>>> wb = Workbook()
>>> ws = wb.active
>>> c = ws['A1']
>>> c.font = Font(size=12)
```

样式也可以应用于列和行，但是请注意，这仅适用于关闭文件后创建的单元格（在 Excel）。如果要对整个行和列应用样式，则必须自己将样式应用于每个单元格。这是文件格式的限制： Styles can also applied to columns and rows but note that this applies only to cells created (in Excel) after the file is closed. If you want to apply styles to entire rows and columns then you must apply the style to each cell yourself. This is a restriction of the file format:

```
>>> col = ws.column_dimensions['A']
>>> col.font = Font(bold=True)
>>> row = ws.row_dimensions[1]
>>> row.font = Font(underline="single")
```

6.6.6 合并单元格的样式

合并单元格和其他单元格对象的行为相似，通过左上单元格来定义值和样式。可以改变左上单元格的边框来改变整个合并单元格的边框。这种格式是出于编辑目的才被生成（The formatting is generated for the purpose of writing.）

```
>>> from openpyxl.styles import Border, Side, PatternFill, Font, GradientFill, \
↳ Alignment
>>> from openpyxl import Workbook
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>> ws.merge_cells('B2:F4')
>>>
>>> top_left_cell = ws['B2']
```

(下页继续)

(续上页)

```

>>> top_left_cell.value = "My Cell"
>>>
>>> thin = Side(border_style="thin", color="000000")
>>> double = Side(border_style="double", color="ff0000")
>>>
>>> top_left_cell.border = Border(top=double, left=thin, right=thin,
↳bottom=double)
>>> top_left_cell.fill = PatternFill("solid", fgColor="DDDDDD")
>>> top_left_cell.fill = fill = GradientFill(stop=("000000", "FFFFFF"))
>>> top_left_cell.font = Font(b=True, color="FF0000")
>>> top_left_cell.alignment = Alignment(horizontal="center", vertical="center")
>>>
>>> wb.save("styled.xlsx")

```

6.6.7 编辑页面设置

```

>>> from openpyxl.workbook import Workbook
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> ws.page_setup.orientation = ws.ORIENTATION_LANDSCAPE
>>> ws.page_setup.paperSize = ws.PAPERSIZE_TABLOID
>>> ws.page_setup.fitToHeight = 0
>>> ws.page_setup.fitToWidth = 1

```

命名样式

与单元格样式相反，命名样式是可变的。当您想一次将格式应用于许多不同的单元格时，它们很有意义。注意一旦将命名样式分配给单元格后，对该样式的更改将 **不会** 影响单元格。

一旦命名样式被注册到工作簿，就可以简单的通过名字来进行引用

6.6.8 创建命名样式

```

>>> from openpyxl.styles import NamedStyle, Font, Border, Side
>>> highlight = NamedStyle(name="highlight")
>>> highlight.font = Font(bold=True, size=20)

```

(下页继续)

(续上页)

```
>>> bd = Side(style='thick', color="000000")
>>> highlight.border = Border(left=bd, top=bd, right=bd, bottom=bd)
```

创建命名样式后，即可将其注册到工作簿中：

```
>>> wb.add_named_style(highlight)
```

命名样式在首次分配给单元格时也会自动注册：

```
>>> ws['A1'].style = highlight
```

注册后，仅使用名称分配样式：

```
>>> ws['D5'].style = 'highlight'
```

6.6.9 使用内置样式 (Ps: 以下注释由译者根据 office365 中文版进行添加)

该规范 (specification) 包括一些可以使用的内置样式。不幸的是，这些样式的名称以其本地化形式存储。openpyxl 仅会识别英文名称，并且只能与此处的文字完全一样。

- ‘Normal’ # 无样式

数字格式

- ‘Comma’ # 千位分隔，保留两位小数 ‘Warning Text’
- ‘Comma [0]’ # 千位分隔，不保留小数
- ‘Currency’ # 货币，保留两位小数
- ‘Currency [0]’ # 货币，不保留小数
- ‘Percent’ # 百分比

Informative

- ‘Calculation’ # 计算
- ‘Total’ # 汇总
- ‘Note’ # 注释
- ‘Warning Text’ # 警告文本
- ‘Explanatory Text’ # 解释性文本

文字样式

- ‘Title’ # 标题
- ‘Headline 1’ # 标题 1
- ‘Headline 2’ # 标题 2
- ‘Headline 3’ # 标题 3
- ‘Headline 4’ # 标题 4
- ‘Hyperlink’ # 超链接
- ‘Followed Hyperlink’ # 已访问的超链接
- ‘Linked Cell’ # 链接单元格

Comparisons

- ‘Input’ # 输入
- ‘Output’ # 输出
- ‘Check Cell’ # 检查单元格
- ‘Good’ # 好
- ‘Bad’ # 坏
- ‘Neutral’ # 始终

高亮

- ‘Accent1’ # 着色 1
- ‘20 % - Accent1’
- ‘40 % - Accent1’
- ‘60 % - Accent1’
- ‘Accent2’ # 着色 2
- ‘20 % - Accent2’
- ‘40 % - Accent2’
- ‘60 % - Accent2’
- ‘Accent3’ # 着色 3
- ‘20 % - Accent3’
- ‘40 % - Accent3’

- ‘60 % - Accent3’
- ‘Accent4’ # 着色 4
- ‘20 % - Accent4’
- ‘40 % - Accent4’
- ‘60 % - Accent4’
- ‘Accent5’ # 着色 5
- ‘20 % - Accent5’
- ‘40 % - Accent5’
- ‘60 % - Accent5’
- ‘Accent6’ # 着色 6
- ‘20 % - Accent6’
- ‘40 % - Accent6’
- ‘60 % - Accent6’
- ‘Pandas’ # 好像是自定义的

有关内置样式的更多信息，请参阅[`openpyxl.styles.builtins`](#)

6.7 其他工作表属性

有一些特定行为的高级属性，最常用的是页面设置参数（page setup property）*fitTopage* 和定义工作表选项卡颜色的 ‘tabColor’。

6.7.1 工作表可用属性

- “enableFormatConditionsCalculation”
- “filterMode”
- “published”
- “syncHorizontal”
- “syncRef”
- “syncVertical”
- “transitionEvaluation”
- “transitionEntry”
- “tabColor”

6.7.2 页面设置属性的可用字段

“autoPageBreaks” “fitToPage”

6.7.3 outlines 的可用字段

- “applyStyles”
- “summaryBelow”
- “summaryRight”
- “showOutlineSymbols”

更多信息请查询 http://msdn.microsoft.com/en-us/library/documentformat.openxml.spreadsheet.sheetproperties%28v=office.14%29.aspx__

注解: 默认情况下, 会对 *outline* 属性进行初始化, 因此您可以直接修改它们的 4 个属性, 而页面设置属性不一样。如果要修改后者, 首先要必要的参数初始化对 *openpyxl.worksheet.properties.PageSetupProperties* 对象进行初始化。一旦完成, 可以在以后需要时通过例程直接对其进行修改。

```
>>> from openpyxl.workbook import Workbook
>>> from openpyxl.worksheet.properties import WorksheetProperties, PageSetupProperties
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> wsprops = ws.sheet_properties
>>> wsprops.tabColor = "1072BA"
>>> wsprops.filterMode = False
>>> wsprops.pageSetUpPr = PageSetupProperties(fitToPage=True, autoPageBreaks=False)
>>> wsprops.outlinePr.summaryBelow = False
>>> wsprops.outlinePr.applyStyles = True
>>> wsprops.pageSetUpPr.autoPageBreaks = True
```

6.8 条件格式

Excel 支持三种类型的条件格式：内置、标准和自定义内建条件格式将特定规则与预定义样式结合在一起。标准条件格式将特定规则与自定义格式结合在一起。In addition it is possible to define custom formulae for applying custom formats using differential styles.

注解： 不同规则的语法差异很大，以至于 openpyxl 不知道规则是否有意义。

创建条件格式规则的基本语法为：

```
>>> from openpyxl.formatting import Rule
>>> from openpyxl.styles import Font, PatternFill, Border
>>> from openpyxl.styles.differential import DifferentialStyle
>>> dxf = DifferentialStyle(font=Font(bold=True), fill=PatternFill(start_color=
↪ 'EE1111', end_color='EE1111'))
>>> rule = Rule(type='cellIs', dxf=dxf, formula=["10"])
```

由于某些规则的签名可能非常冗长，因此也有一些方便的工厂（factories）来创建它们。

6.8.1 内置格式

内置格式有：

- 色阶（ColorScale）
- 图表集（IconSet）
- 数据条（DataBar）

Builtin formats contain a sequence of formatting settings which combine a type with an integer for comparison. 可能的类型有：'num'，'percent'，'max'，'min'，'formula'，'percentile'。

色阶

你可以使用 2 或 3 种颜色的色阶。2 种色阶产生一种颜色到另一种颜色的渐变；3 种颜色色阶会将 1 种颜色用于 2 个颜色的渐变。

创建色阶的完整规则为：

```
>>> from openpyxl.formatting.rule import ColorScale, FormatObject
>>> from openpyxl.styles import Color
>>> first = FormatObject(type='min')
>>> last = FormatObject(type='max')
```

(下页继续)

(续上页)

```

>>> # colors match the format objects:
>>> colors = [Color('AA0000'), Color('00AA00')]
>>> cs2 = ColorScale(cfvo=[first, last], color=colors)
>>> # a three color scale would extend the sequences
>>> mid = FormatObject(type='num', val=40)
>>> colors.insert(1, Color('00AA00'))
>>> cs3 = ColorScale(cfvo=[first, mid, last], color=colors)
>>> # create a rule with the color scale
>>> from openpyxl.formatting.rule import Rule
>>> rule = Rule(type='colorScale', colorScale=cs3)

```

有一个方便创建色阶规则的函数：

```

>>> from openpyxl.formatting.rule import ColorScaleRule
>>> rule = ColorScaleRule(start_type='percentile', start_value=10, start_color=
↪ 'FFAA0000',
...                        mid_type='percentile', mid_value=50, mid_color=
↪ 'FF0000AA',
...                        end_type='percentile', end_value=90, end_color=
↪ 'FF00AA00')

```

图标集

从以下图标中进行选择： '3Arrows' , '3ArrowsGray' , '3Flags' , '3TrafficLights1' , '3TrafficLights2' , '3Signs' , '3Symbols' , '3Symbols2' , '4Arrows' , '4ArrowsGray' , '4RedToBlack' , '4Rating' , '4TrafficLights' , '5Arrows' , '5ArrowsGray' , '5Rating' , '5Quarters'

创建图表集完整规则为：

```

>>> from openpyxl.formatting.rule import IconSet, FormatObject
>>> first = FormatObject(type='percent', val=0)
>>> second = FormatObject(type='percent', val=33)
>>> third = FormatObject(type='percent', val=67)
>>> iconset = IconSet(iconSet='3TrafficLights1', cfvo=[first, second, third],
↪ showValue=None, percent=None, reverse=None)
>>> # assign the icon set to a rule
>>> from openpyxl.formatting.rule import Rule
>>> rule = Rule(type='iconSet', iconSet=iconset)

```

有一个方便创建色阶图表集规则的函数：

```
>>> from openpyxl.formatting.rule import IconSetRule
>>> rule = IconSetRule('5Arrows', 'percent', [10, 20, 30, 40, 50],
↳ showValue=None, percent=None, reverse=None)
```

数据条

目前，openpyxl 支持原始规范中定义的数据条。之后的扩展中添加了边框和方向。

完整创建数据条的规则为：

```
>>> from openpyxl.formatting.rule import DataBar, FormatObject
>>> first = FormatObject(type='min')
>>> second = FormatObject(type='max')
>>> data_bar = DataBar(cfvo=[first, second], color="638EC6", showValue=None,
↳ minLength=None, maxLength=None)
>>> # assign the data bar to a rule
>>> from openpyxl.formatting.rule import Rule
>>> rule = Rule(type='dataBar', dataBar=data_bar)
```

有一个方便创建数据条规则的函数：

```
>>> from openpyxl.formatting.rule import DataBarRule
>>> rule = DataBarRule(start_type='percentile', start_value=10, end_type=
↳ 'percentile', end_value='90',
... color="FF638EC6", showValue="None", minLength=None,
↳ maxLength=None)
```

6.8.2 标准条件格式

标准条件格式为：

- 平均值 (Average)
- 百分比 (Percent)
- 唯一值或重复值 (Unique or duplicate)
- 值 (Value)
- 排名 (Rank)

```
>>> from openpyxl import Workbook
>>> from openpyxl.styles import Color, PatternFill, Font, Border
>>> from openpyxl.styles.differential import DifferentialStyle
```

(下页继续)

(续上页)

```

>>> from openpyxl.formatting.rule import ColorScaleRule, CellIsRule, \
↳ FormulaRule
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> # Create fill
>>> redFill = PatternFill(start_color='EE1111',
...                       end_color='EE1111',
...                       fill_type='solid')
>>>
>>> # Add a two-color scale
>>> # Takes colors in excel 'RRGGBB' style.
>>> ws.conditional_formatting.add('A1:A10',
...                               ColorScaleRule(start_type='min', start_color='AA0000',
...                                               end_type='max', end_color='00AA00')
...                               )
>>>
>>> # Add a three-color scale
>>> ws.conditional_formatting.add('B1:B10',
...                               ColorScaleRule(start_type='percentile', start_value=10, \
↳ start_color='AA0000',
...                                               mid_type='percentile', mid_value=50, mid_color=
↳ '0000AA',
...                                               end_type='percentile', end_value=90, end_color=
↳ '00AA00')
...                               )
>>>
>>> # Add a conditional formatting based on a cell comparison
>>> # addCellIs(range_string, operator, formula, stopIfTrue, wb, font, border, \
↳ fill)
>>> # Format if cell is less than 'formula'
>>> ws.conditional_formatting.add('C2:C10',
...                               CellIsRule(operator='lessThan', formula=['C$1'], \
↳ stopIfTrue=True, fill=redFill))
>>>
>>> # Format if cell is between 'formula'
>>> ws.conditional_formatting.add('D2:D10',
...                               CellIsRule(operator='between', formula=['1', '5'], \
↳ stopIfTrue=True, fill=redFill))

```

(下页继续)

(续上页)

```

>>>
>>> # Format using a formula
>>> ws.conditional_formatting.add('E1:E10',
...                               FormulaRule(formula=['ISBLANK(E1)'], stopIfTrue=True,
↪ fill=redFill))
>>>
>>> # Aside from the 2-color and 3-color scales, format rules take fonts,
↪ borders and fills for styling:
>>> myFont = Font()
>>> myBorder = Border()
>>> ws.conditional_formatting.add('E1:E10',
...                               FormulaRule(formula=['E1=0'], font=myFont, border=myBorder,
↪ fill=redFill))
>>>
>>> # Highlight cells that contain particular text by using a special formula
>>> red_text = Font(color="9C0006")
>>> red_fill = PatternFill(bgColor="FFC7CE")
>>> dxf = DifferentialStyle(font=red_text, fill=red_fill)
>>> rule = Rule(type="containsText", operator="containsText", text="highlight",
↪ dxf=dxf)
>>> rule.formula = ['NOT(ISERROR(SEARCH("highlight",A1)))']
>>> ws.conditional_formatting.add('A1:F40', rule)
>>> wb.save("test.xlsx")

```

6.8.3 条件格式应用在全部行

有时你想将条件格式应用于多个单元格，例如一行包含特定值的一些单元格。

```

>>> ws.append(['Software', 'Developer', 'Version'])
>>> ws.append(['Excel', 'Microsoft', '2016'])
>>> ws.append(['openpyxl', 'Open source', '2.6'])
>>> ws.append(['OpenOffice', 'Apache', '4.1.4'])
>>> ws.append(['Word', 'Microsoft', '2010'])

```

我们要突出开发人员是 Microsoft 的行。我们通过创建表达式规则并使用公式来识别哪些行包含了 Microsoft 开发的 Software。

```

>>> red_fill = PatternFill(bgColor="FFC7CE")
>>> dxf = DifferentialStyle(fill=red_fill)
>>> r = Rule(type="expression", dxf=dxf, stopIfTrue=True)

```

(下页继续)

(续上页)

```
>>> r.formula = ['$A2="Microsoft"']
>>> ws.conditional_formatting.add("A1:C10", r)
```

注解： 在这种情况下，该公式使用 **** 绝对引用 **** B 列，以及 **** 相对引用 **** 行号，在这种情况下，1 是行号相对于应用格式的范围。做到这一点可能很棘手，但是即使已将规则添加到工作表的条件格式集合中，也可以对其进行调整。

6.9 数据透视表

openpyxl 为数据透视表提供读取支持以便于可以保留在现有的文件中。数据透视表的规范虽然很广泛，但不是很清楚，也不意味着客户端代码应该能够创建数据透视表。(The specification for pivot tables, while extensive, is not very clear and it is not intended that client code should be able to create pivot tables.) 但是，应该可以编辑和操作现有的数据透视表，例如。更改其范围或是能自动更新设置。

和图表、图片、表格一样，数据透视表没有专门管理的 API，因此客户端代码不得不遍历工作表 `_pivots` 列表

6.9.1 例子

```
from openpyxl import load_workbook
wb = load_workbook("campaign.xlsx")
ws = wb["Results"]
pivot = ws._pivots[0] # any will do as they share the same cache
pivot.cache.refreshOnLoad = True
```

更多信息请查询 `openpyxl.pivot.cache.CacheDefinition`

6.10 打印设置

openpyxl 为打印设置提供合理的全面支持

6.10.1 编辑打印设置

```
>>> from openpyxl.workbook import Workbook
>>>
```

(下页继续)

(续上页)

```

>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> ws.print_options.horizontalCentered = True
>>> ws.print_options.verticalCentered = True

```

6.10.2 页眉页脚

页眉和页脚使用自己的格式语言。在编辑的时候完全可以支持但是由于于复杂和嵌套的可能性，在读取它们时仅部分支持。支持字体，大小和颜色，居左，居中或居右元素。粒度控制（突出显示单个单词）需要手动应用控制代码（Granular control (highlighting individuals words) will require applying control codes manually）

```

>>> from openpyxl.workbook import Workbook
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> ws.oddHeader.left.text = "Page &[Page] of &N"
>>> ws.oddHeader.left.size = 14
>>> ws.oddHeader.left.font = "Tahoma,Bold"
>>> ws.oddHeader.left.color = "CC3366"

```

也支持 *evenHeader* 和 *evenFooter* 以及 *firstHeader* 和 *firstFooter*。

6.10.3 增加打印标题

您可以在每页上打印标题，以确保正确标记数据。

```

>>> from openpyxl.workbook import Workbook
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> ws.print_title_cols = 'A:B' # the first two cols
>>> ws.print_title_rows = '1:1' # the first row

```

6.10.4 增加打印区域

你可以只选择工作簿的一部分来作为打印区域

```
>>> from openpyxl.workbook import Workbook
>>>
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> ws.print_area = 'A1:F10'
```

6.11 筛选和排序

在工作簿中添加筛选是可能的

注解： 筛选和排序只能通过 openpyxl 进行设置，但是只有在 Excel 这样的程序中才会被应用。这是由于他们会在范围内重新排列或者格式化单元格或行。（This is because they actually rearranges or format cells or rows in the range）

定义一个范围后，你可以对一系列添加筛选或者添加排序条件：（To add a filter you define a range and then add columns and sort conditions:）

```
from openpyxl import Workbook

wb = Workbook()
ws = wb.active

data = [
    ["Fruit", "Quantity"],
    ["Kiwi", 3],
    ["Grape", 15],
    ["Apple", 3],
    ["Peach", 3],
    ["Pomegranate", 3],
    ["Pear", 3],
    ["Tangerine", 3],
    ["Blueberry", 3],
    ["Mango", 3],
    ["Watermelon", 3],
    ["Blackberry", 3],
    ["Orange", 3],
    ["Raspberry", 3],
```

（下页继续）

(续上页)

```

["Banana", 3]
]

for r in data:
    ws.append(r)

ws.auto_filter.ref = "A1:B15"
ws.auto_filter.add_filter_column(0, ["Kiwi", "Apple", "Mango"])
ws.auto_filter.add_sort_condition("B2:B15")

wb.save("filtered.xlsx")

```

这会将相关指令添加到文件中，但实际上不会 **过滤或排序**。(PS：译者使用上诉代码在 Excel 中试了一下这个功能，其中已经出现了筛选栏控件，但是未生效，点击“确认”即可生效，排序功能点了“确认也没办法使用”)

	A	B
1	Fruit	Quantity
2	Kiwi	3
3	Grape	15
4	Apple	3
5	Peach	3
6	Pomegranate	3
7	Pear	3
8	Tangerine	3
9	Blueberry	3
10	Mango	3
11	Watermelon	3
12	Blackberry	3
13	Orange	3
14	Raspberry	3
15	Banana	3
16		

6.12 数据验证

数据验证器可以应用于范围单元格，但也不是强制和 evaluated。范围不必是连续的：例如“A1 B2: B5”包含 A1 和单元格 B2 至 B5，但不包含 A2 或 B2。

6.12.1 例子

```
>>> from openpyxl import Workbook
>>> from openpyxl.worksheet.datavalidation import DataValidation
>>>
>>> # Create the workbook and worksheet we'll be working with
>>> wb = Workbook()
>>> ws = wb.active
>>>
>>> # Create a data-validation object with list validation
>>> dv = DataValidation(type="list", formula1="Dog,Cat,Bat", allow_
↪blank=True)
>>>
>>> # Optionally set a custom error message
>>> dv.error = 'Your entry is not in the list'
>>> dv.errorTitle = 'Invalid Entry'
>>>
>>> # Optionally set a custom prompt message
>>> dv.prompt = 'Please select from the list'
>>> dv.promptTitle = 'List Selection'
>>>
>>> # Add the data-validation object to the worksheet
>>> ws.add_data_validation(dv)

>>> # Create some cells, and add them to the data-validation object
>>> c1 = ws["A1"]
>>> c1.value = "Dog"
>>> dv.add(c1)
>>> c2 = ws["A2"]
>>> c2.value = "An invalid value"
>>> dv.add(c2)
>>>
>>> # Or, apply the validation to a range of cells
>>> dv.add('B1:B1048576') # This is the same as for the whole of column B
>>>
>>> # Check with a cell is in the validator
>>> "B4" in dv
True
```

注解: 没有在任何单元格应用的验证将会在保存的时候被忽略。

6.12.2 其他验证的例子

任何证书:

```
dv = DataValidation(type="whole")
```

任何大于 100 的整数:

```
dv = DataValidation(type="whole",  
                    operator="greaterThan",  
                    formula1=100)
```

任何小数:

```
dv = DataValidation(type="decimal")
```

任何在 0 至 1 之间的小数:

```
dv = DataValidation(type="decimal",  
                    operator="between",  
                    formula1=0,  
                    formula2=1)
```

任何日期:

```
dv = DataValidation(type="date")
```

时间:

```
dv = DataValidation(type="time")
```

15 长度以下的文本:

```
dv = DataValidation(type="textLength",  
                    operator="lessThanOrEqual"),  
                    formula1=15)
```

序列:

```
from openpyxl.utils import quote_sheetname
dv = DataValidation(type="list",
                    formula1="{0}!$B$1:$B$10".format(quote_
↪sheetname(sheetname))
                    )
```

自定义规则:

```
dv = DataValidation(type="custom",
                    formula1="SOMEFORMULA")
```

注解: See <http://www.contextures.com/xlDataVal07.html> for custom rules

6.13 定义名称

该规范对定义的名称有以下说法:

“定义名称是用于表示单元格，区域，公式或常量值的描述性文本。”

这意味着它们的定义是非常宽松的。它们可能包含一个常数，一个公式，一个单元格引用，一个区域或跨不同工作表的多个区域。它们在工作簿全局定义并可以通过 `defined_names` 属性进行访问。

6.13.1 区域的使用示例

访问名为 “my_range” 的区域:

```
my_range = wb.defined_names['my_range']
# if this contains a range of cells then the destinations attribute is not None
dests = my_range.destinations # returns a generator of (worksheet title, cell_
↪range) tuples

cells = []
for title, coord in dests:
    ws = wb[title]
    cells.append(ws[coord])
```

6.13.2 创建新的命名区域

```
import openpyxl
wb = openpyxl.Workbook()
new_range = openpyxl.workbook.defined_name.DefinedName('newrange', attr_text=
    ↳ 'Sheet!$A$1:$A$5')
wb.defined_names.append(new_range)

# create a local named range (only valid for a specific sheet)
sheetid = wb.sheetnames.index('Sheet')
private_range = openpyxl.workbook.defined_name.DefinedName('privaterange',
    ↳ attr_text='Sheet!$A$6', localSheetId=sheetid)
wb.defined_names.append(private_range)
# this local range can't be retrieved from the global defined names
assert('privaterange' not in wb.defined_names)

# the scope has to be supplied to retrieve local ranges:
print(wb.defined_names.localnames(sheetid))
print(wb.defined_names.get('privaterange', sheetid).attr_text)
```

```
['privaterange']
Sheet!$A$6
```

6.14 工作簿表格

工作簿表格是对单元格组的引用。这使得某些操作（例如，对表格中的单元格进行样式设置）更加容易。

6.14.1 创建表格

```
from openpyxl import Workbook
from openpyxl.worksheet.table import Table, TableStyleInfo

wb = Workbook()
ws = wb.active

data = [
    ['Apples', 10000, 5000, 8000, 6000],
```

(下页继续)

(续上页)

```

    ['Pears', 2000, 3000, 4000, 5000],
    ['Bananas', 6000, 6000, 6500, 6000],
    ['Oranges', 500, 300, 200, 700],
]

# add column headings. NB. these must be strings
ws.append(["Fruit", "2011", "2012", "2013", "2014"])
for row in data:
    ws.append(row)

tab = Table(displayName="Table1", ref="A1:E5")

# Add a default style with striped rows and banded columns
style = TableStyleInfo(name="TableStyleMedium9", showFirstColumn=False,
                        showLastColumn=False, showRowStripes=True,
                        showColumnStripes=True)
tab.tableStyleInfo = style

'''
Table must be added using ws.add_table() method to avoid duplicate names.
Using this method ensures table name is unique through out defined names and
all other table name.
'''

ws.add_table(tab)
wb.save("table.xlsx")

```

在一个工作簿中表格名称必须是唯一的。默认情况下，表是从第一行的标题开始创建的，并且所有列的筛选以及表标题和列标题必须始终包含字符串。

警告： 在只写模式下，您必须手动将列标题添加到表格中，并且值必须始终与相应单元格的值相同（有关如何执行此操作的示例，请参见下面的例子），否则 Excel 可能会认为该文件无效并删除表格。

通过 `TableStyleInfo` 来管理样式。这允许你对行和列设置条纹以及应用不同的颜色主题。

6.14.2 使用表格

`ws.tables` 是特定工作簿下所有表格的 dictionary-like 对象：


```
>>> ws.tables
{"Table1", <openpyxl.worksheet.table.Table object>}
```

通过范围或者名称获取表格

```
>>> ws.tables["Table1"]
or
>>> ws.tables["A1:D10"]
```

遍历工作簿下所有的表格

```
>>> for table in ws.tables.values():
>>>     print(table)
```

获取表名以及工作簿内所有表格的范围

返回表格名和范围的列表

```
>>> ws.tables.items()
>>> [("Table1", "A1:D10")]
```

删除表格

```
>>> del ws.tables["Table1"]
```

工作簿中的表格数量

```
>>> len(ws.tables)
>>> 1
```

6.14.3 手动添加表格表头

在只写模式下你可以添加没有表头的表格:

```
>>> table.headerRowCount = False
```

或者手动初始化表头:

```
>>> headings = ["Fruit", "2011", "2012", "2013", "2014"] # all values must be
↳ strings
>>> table._initialise_columns()
>>> for column, value in zip(table.tableColumns, headings):
    column.name = value
```

6.15 Parsing Formulas

openpyxl 支持对单元格中嵌入的公式进行有限的解析。*openpyxl.formula* 类包含 *Tokenizer* 类用于将公式分解为其组成的 tokens (*openpyxl.formula* package contains a *Tokenizer* class to break formulas into their constituent tokens.) 用法如下:

```
>>> from openpyxl.formula import Tokenizer
>>> tok = Tokenizer('""=IF($A$1,"then True",MAX(DEFAULT_VAL,"Sheet 2"!B1))"')
>>> print("\n".join("%12s%11s%9s" % (t.value, t.type, t.subtype) for t in tok.
↳ items))
```

IF(FUNC	OPEN
\$A\$1	OPERAND	RANGE
,	SEP	ARG
"then True"	OPERAND	TEXT
,	SEP	ARG
MAX(FUNC	OPEN
DEFAULT_VAL	OPERAND	RANGE
,	SEP	ARG
'Sheet 2'!B1	OPERAND	RANGE
)	FUNC	CLOSE
)	FUNC	CLOSE

如上所示, tokens 有三个令人感兴趣的属性:

- **.value**: The substring of the formula that produced this token
- **.type**: The type of token this represents. Can be one of
 - **Token.LITERAL**: If the cell does not contain a formula, its value is represented by a single **LITERAL** token.
 - **Token.OPERAND**: A generic term for any value in the Excel formula. (See **.subtype** below for more details).
 - **Token.FUNC**: Function calls are broken up into tokens for the opener (e.g., **SUM()**, followed by the arguments, followed by the closer (i.e., **)**). The function name and opening

parenthesis together form one **FUNC** token, and the matching parenthesis forms another **FUNC** token.

- **Token.ARRAY**: Array literals (enclosed between curly braces) get two **ARRAY** tokens each, one for the opening **{** and one for the closing **}**.
- **Token.PAREN**: When used for grouping subexpressions (and not to denote function calls), parentheses are tokenized as **PAREN** tokens (one per character).
- **Token.SEP**: These tokens are created from either commas (,) or semicolons (;). Commas create **SEP** tokens when they are used to separate function arguments (e.g., **SUM(a, b)**) or when they are used to separate array elements (e.g., **{a,b}**). (They have another use as an infix operator for joining ranges). Semicolons are always used to separate rows in an array literal, so always create **SEP** tokens.
- **Token.OP_PRE**: Designates a prefix unary operator. Its value is always **+** or **-**
- **Token.OP_IN**: Designates an infix binary operator. Possible values are **>=**, **<=**, **<>**, **=**, **>**, **<**, *****, **/**, **+**, **-**, **^**, or **&**.
- **Token.OP_POST**: Designates a postfix unary operator. Its value is always **%**.
- **Token.WSPACE**: Created for any whitespace encountered. Its value is always a single space, regardless of how much whitespace is found.
- **.subtype**: Some of the token types above use the subtype to provide additional information about the token. Possible subtypes are:
 - **Token.TEXT**, **Token.NUMBER**, **Token.LOGICAL**, **Token.ERROR**, **Token.RANGE**: these subtypes describe the various forms of **OPERAND** found in formulae. **LOGICAL** is either **TRUE** or **FALSE**, **RANGE** is either a named range or a direct reference to another range. **TEXT**, **NUMBER**, and **ERROR** all refer to literal values in the formula
 - **Token.OPEN** and **Token.CLOSE**: these two subtypes are used by **PAREN**, **FUNC**, and **ARRAY**, to describe whether the token is opening a new subexpression or closing it.
 - **Token.ARG** and **Token.ROW**: are used by the **SEP** tokens, to distinguish between the comma and semicolon. Commas produce tokens of subtype **ARG** whereas semicolons produce tokens of subtype **ROW**

6.15.1 Translating formulae from one location to another

It is possible to translate (in the mathematical sense) formulae from one location to another using the `openpyxl.formulas.translate.Translator` class. For example, there a range of cells **B2:E7** with a sum of each row in column **F**:

```
>>> from openpyxl.formula.translate import Translator
>>> ws['F2'] = "=SUM(B2:E2)"
```

(下页继续)

(续上页)

```
>>> # move the formula one column to the right
>>> ws['G2'] = Translator("=SUM(B2:E2)", origin="F2").translate_formula("G2")
>>> ws['G2'].value
' =SUM(C2:F2) '
```

注解： This is limited to the same general restrictions of formulae: A1 cell-references only and no support for defined names.

6.16 保护

警告： 工作簿或工作表的密码保护仅提供了十分基础的安全。数据未进行加密，所以可以使用各种免费工具进行修改。实际上，规范指出：工作表或工作簿的保护不应该与文件安全性混淆。这是为了保护你的工作簿免受意外修改的影响，并不能保护免受恶意修改的影响。

Openpyxl 支持保护工作簿和工作表不被修改。除非指定明确算法，否则将使用 Open XML “Legacy Password Hash Algorithm” 来生成哈希密码值。

6.16.1 工作簿保护

为防止其他用户查看隐藏的工作表、添加、移动、删除或隐藏工作表以及重命名工作表，可以使用密码保护工作簿的结构。可以使用 `openpyxl.workbook.protection.WorkbookProtection.workbookPassword` 属性设置密码：

```
>>> wb.security.workbookPassword = '...'
>>> wb.security.lockStructure = True
```

同样，可以通过设置另一个密码来防止从共享工作簿中删除更改跟踪和更改历史记录。可以使用 `openpyxl.workbook.protection.WorkbookProtection.revisionsPassword` 属性设置密码：

```
>>> wb.security.revisionsPassword = '...'

:class: `openpyxl.workbook.protection.WorkbookProtection` 对象上的其他属性可以精确控制所设置的限制 (restrictions are in place)，但是只有设置密码后，这些属性才能生效。
```

如果需要设置原始密码值而非使用默认哈希算法，我们也提供特定的设置函数-例如：

```
hashed_password = ...  
wb.security.set_workbook_password(hashed_password, already_hashed=True)
```

6.16.2 工作表保护

也可以通过在 `openpyxl.worksheet.protection.SheetProtection` 对象上设置属性来锁定工作表。与工作簿保护不同，可以使用或不使用密码来启用工作表保护。使用 `openpyxl.worksheet.protection.SheetProtection.sheet` 属性或调用 `enable()` 或 `disable()` 俩启用工作表保护：

```
>>> ws = wb.active  
>>> ws.protection.sheet = True  
>>> ws.protection.enable()  
>>> ws.protection.disable()
```

如果未设置密码，那么用户不需要密码即可禁用工作表保护。否则，他们必要提供密码才能修改保护配置。使用 `openpyxl.worksheet.protection.SheetProtection.password()` 设置密码：

```
>>> ws = wb.active  
>>> ws.protection.password = '...'
```


7.1 Development

If you find the openpyxl project intriguing and want to contribute a new awesome feature, fix a nasty bug or improve the documentation this section will guide you in setting up your development environment.

We will look into the coding standards and version control system workflows used, as well as cloning the openpyxl code to your local machine, setting up a virtual Python environment, running tests and building the documentation.

7.1.1 Getting the source

The source code of openpyxl is hosted on [BitBucket](https://bitbucket.org/openpyxl/openpyxl) as a Mercurial project which you can download using e.g. the GUI client [SourceTree](#) by Atlassian. If you prefer working with the command line you can use the following:

```
$ hg clone https://bitbucket.org/openpyxl/openpyxl
$ hg up 3.0
```

Please note that the default branch should never be used for development work. For bug fixes and minor patches you should base your work on the branch of the current release, e.g 3.0. New features should generally be based on the development branch of the **next** minor version. If in doubt get in touch with the openpyxl development team.

It is worthwhile to add an upstream remote reference to the original repository to update your fork with the latest changes, by adding to the `./hg/hgrc` file the following:

```
[paths]
default = ...
openpyxl-master = https://bitbucket.org/openpyxl/openpyxl
```

You can then grab any new changes using:

```
$ hg pull openpyxl-master
```

After that you should create a virtual environment using `virtualenv` and install the project requirements and the project itself:

```
$ cd openpyxl
$ virtualenv openpyxl-env
```

Activate the environment using:

```
$ source bin/activate # or ./openpyxl-env/Scripts/activate on Windows
```

Install the dev and prod dependencies and the package itself using:

```
(openpyxl-env) $ pip install -U -r requirements.txt
(openpyxl-env) $ pip install -e .
```

7.1.2 Running tests

Note that contributions to the project without tests will **not** be accepted.

We use `pytest` as the test runner with `pytest-cov` for coverage information and `pytest-flakes` for static code analysis.

To run all the tests you need to either execute:

```
(openpyxl-env) $ pytest -xrf openpyxl # the flags will stop testing at the
↪first error
```

Or use `tox` to run the tests on different Python versions and configurations:

```
$ tox openpyxl
```


Coverage

The goal is 100 % coverage for unit tests - data types and utility functions. Coverage information can be obtained using:

```
py.test --cov openpyxl
```

Organisation

Tests should be preferably at package / module level e.g `openpyxl/cell`. This makes testing and getting statistics for code under development easier:

```
py.test --cov openpyxl/cell openpyxl/cell
```

Checking XML

Use the `openpyxl.tests.helper.compare_xml` function to compare generated and expected fragments of XML.

Schema validation

When working on code to generate XML it is possible to validate that the generated XML conforms to the published specification. Note, this won't necessarily guarantee that everything is fine but is preferable to reverse engineering!

Microsoft Tools

Along with the SDK, Microsoft also has a “[Productivity Tool](#)” for working with Office OpenXML.

This allows you to quickly inspect or compare whole Excel files. Unfortunately, validation errors contain many false positives. The tool also contain links to the specification and implementers' notes.

7.1.3 File Support and Specifications

The primary aim of openpyxl is to support reading and writing Microsoft Excel 2010 files. These are zipped OOXML files that are specified by [ECMA 376](#) and [ISO 29500](#).

Where possible we try to support files generated by other libraries or programs, but can't guarantee it, because often these do not strictly adhere to the above format.

7.1.4 Support of Python Versions

Python 3.6 and upwards are supported

7.1.5 Coding style

We orient ourselves at PEP-8 for the coding style, except when implementing attributes for roundtripping. Despite that you are encouraged to use Python data conventions (boolean, None, etc.). Note exceptions from this convention in docstrings.

7.1.6 Contributing

Contributions in the form of pull requests are always welcome. Don't forget to add yourself to the list of authors!

7.1.7 Branch naming convention

We use a “major.minor.patch” numbering system, ie. 3.0.5. Development branches are named after “major.minor” releases. In general, API change will only happen major releases but there will be exceptions. Always communicate API changes to the mailing list before making them. If you are changing an API try and implement a fallback (with deprecation warning) for the old behaviour.

The “default branch” is used for releases and always has changes from a development branch merged in. It should never be the target for a pull request.

7.1.8 Pull Requests

Pull requests should be submitted to the current, unreleased development branch. Eg. if the current release is 3.0.5, pull requests should be made to the 3.0 branch. Exceptions are bug fixes to released versions which should be made to the relevant release branch and merged upstream into development.

Please use `tox` to test code for different submissions **before** making a pull request. This is especially important for picking up problems across Python versions.

Documentation

Remember to update the documentation when adding or changing features. Check that documentation is syntactically correct.:

```
tox -e doc
```

7.1.9 Benchmarking

Benchmarking and profiling are ongoing tasks. Contributions to these are very welcome as we know there is a lot to do.

Memory Use

There is a tox profile for long-running memory benchmarks using the *memory_utils* package.:

```
tox -e memory
```

Pympler

As openpyxl does not include any internal memory benchmarking tools, the python *pympler* package was used during the testing of styles to profile the memory usage in `openpyxl.reader.excel.read_style_table()`:

```
# in openpyxl/reader/style.py
from pympler import muppy, summary

def read_style_table(xml_source):
    ...
    if cell_xfs is not None: # ~ line 47
        initialState = summary.summarize(muppy.get_objects()) # Capture the
↪initial state
        for index, cell_xfs_node in enumerate(cell_xfs_nodes):
            ...
            table[index] = new_style
            finalState = summary.summarize(muppy.get_objects()) # Capture the final
↪state
            diff = summary.get_diff(initialState, finalState) # Compare
            summary.print_(diff)
```

`pympler.summary.print_()` prints to the console a report of object memory usage, allowing the comparison of different methods and examination of memory usage. A useful future development would be to construct a benchmarking package to measure the performance of different components.

8.1 关键类

- `openpyxl.workbook.workbook.Workbook`
- `openpyxl.worksheet.worksheet.Worksheet`
- `openpyxl.cell.cell.Cell`

8.2 完整 API

8.2.1 openpyxl package

Subpackages

`openpyxl.cell` package

Submodules

`openpyxl.cell.cell` module

Manage individual cells in a spreadsheet.

The Cell class is required to know its value and type, display options, and any other features of an Excel cell. Utilities for referencing cells using Excel's 'A1' column/row nomenclature are also provided.

```
class openpyxl.cell.cell.Cell(worksheet, row=None, column=None, value=None,  
                             style__array=None)
```

基类: *openpyxl.styles.styleable.StyleableObject*

Describes cell associated properties.

Properties of interest include style, type, value, and address.

base_date

check_error(*value*)

Tries to convert Error" else N/A

check_string(*value*)

Check string coding, length, and line break character

col_idx

The numerical index of the column

column

Column number of this cell (1-based)

column_letter

comment

Returns the comment associated with this cell

Type *openpyxl.comments.Comment*

coordinate

This cell's coordinate (ex. 'A5')

data_type

encoding

hyperlink

Return the hyperlink target or an empty string

internal_value

Always returns the value for excel.

is_date

True if the value is formatted as a date

Type bool

offset(*row=0, column=0*)

Returns a cell location relative to this cell.

参数

- `row (int)` – number of rows to offset
- `column (int)` – number of columns to offset

返回类型 `openpyxl.cell.Cell`

`parent`

`row`

Row number of this cell (1-based)

`value`

Get or set the value held in the cell.

Type depends on the value (string, float, int or `datetime.datetime`)

`class openpyxl.cell.cell.MergedCell(worksheet, row=None, column=None)`

基类: `openpyxl.styles.styleable.StyleableObject`

Describes the properties of a cell in a merged cell and helps to display the borders of the merged cell.

The value of a `MergedCell` is always `None`.

`column`

`comment = None`

`coordinate`

This cell's coordinate (ex. 'A5')

`data_type = 'n'`

`hyperlink = None`

`row`

`value = None`

`openpyxl.cell.cell.WriteOnlyCell(ws=None, value=None)`

`openpyxl.cell.cell.get_type(t, value)`

`openpyxl.cell.read_only` module

`class openpyxl.cell.read_only.EmptyCell`

基类: `object`

`alignment = None`

`border = None`

`data_type = 'n'`

`fill = None`

```
font = None

is_date = False

number_format = None

value = None

class openpyxl.cell.read_only.ReadOnlyCell(sheet, row, column, value, data_type='n',
                                             style_id=0)
    基类: object

    alignment

    border

    column

    column_letter

    coordinate

    data_type

    fill

    font

    internal_value

    is_date

    number_format

    parent

    protection

    row

    style_array

    value
```

openpyxl.cell.text module

Richtext definition

```
class openpyxl.cell.text.InlineFont(rFont=None, charset=None, family=None, b=None,
                                     i=None, strike=None, outline=None, shadow=None,
                                     condense=None, extend=None, color=None, sz=None,
                                     u=None, vertAlign=None, scheme=None)
    基类: openpyxl.styles.fonts.Font
```


Font for inline text because, yes what you need are different objects with the same elements but different constraints.

b

Values must be of type <class 'bool' >

charset

Values must be of type <class 'int' >

color

Values must be of type <class 'openpyxl.styles.colors.Color' >

condense

Values must be of type <class 'bool' >

extend

Values must be of type <class 'bool' >

family

Values must be of type <class 'float' >

i

Values must be of type <class 'bool' >

outline

Values must be of type <class 'bool' >

rFont

Values must be of type <class 'str' >

scheme

Value must be one of { 'major' , 'minor' }

shadow

Values must be of type <class 'bool' >

strike

Values must be of type <class 'bool' >

sz

Values must be of type <class 'float' >

tagname = 'RPrElt'

u

Value must be one of { 'singleAccounting' , 'single' , 'double' , 'doubleAccounting' }

vertAlign

Value must be one of { 'baseline' , 'superscript' , 'subscript' }

class openpyxl.cell.text.PhoneticProperties(fontId=None, type=None, alignment=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

alignment

Value must be one of { 'center' , 'noControl' , 'left' , 'distributed' }

fontId

Values must be of type <class 'int' >

tagname = 'phoneticPr'

type

Value must be one of { 'halfwidthKatakana', 'Hiragana', 'noConversion', 'fullwidthKatakana' }

class openpyxl.cell.text.PhoneticText(sb=None, eb=None, t=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

eb

Values must be of type <class 'int' >

sb

Values must be of type <class 'int' >

t

Values must be of type <class 'str' >

tagname = 'rPh'

text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

class openpyxl.cell.text.RichText(rPr=None, t=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

font

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

rPr

Values must be of type <class 'openpyxl.cell.text.InlineFont' >

t

Values must be of type <class 'str' >

tagname = 'RElt'

text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

class openpyxl.cell.text.Text(t=None, r=(), rPh=(), phoneticPr=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

PhoneticProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

content

Text stripped of all formatting

formatted

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

phonetic

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

phoneticPr

Values must be of type <class ‘openpyxl.cell.text.PhoneticProperties’ >

plain

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

r

A sequence (list or tuple) that may only contain objects of the declared type

rPh

A sequence (list or tuple) that may only contain objects of the declared type

t

Values must be of type <class ‘str’ >

tagname = 'text'

openpyxl.chart package

Submodules

openpyxl.chart.area_chart module

```
class openpyxl.chart.area_chart.AreaChart(axId=None, extLst=None, **kw)
```

基类: openpyxl.chart.area_chart._AreaChartBase

dLbls

Values must be of type <class ‘openpyxl.chart.label.DataLabelList’ >

dropLines

Values must be of type <class ‘openpyxl.chart.axis.ChartLines’ >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

grouping

Value must be one of { 'standard' , 'percentStacked' , 'stacked' }

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'areaChart'

varyColors

Values must be of type <class 'bool' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.TextAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

class openpyxl.chart.area_chart.AreaChart3D(*gapDepth=None, **kw*)

基类: *openpyxl.chart.area_chart.AreaChart*

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

dropLines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

gapDepth

Values must be of type <class 'float' >

grouping

Value must be one of { 'standard' , 'percentStacked' , 'stacked' }

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'area3DChart'

varyColors

Values must be of type <class 'bool' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.TextAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

z_axis

Values must be of type <class 'openpyxl.chart.axis.SeriesAxis' >

openpyxl.chart.axis module

```
class openpyxl.chart.axis.ChartLines(spPr=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

spPr

Values must be of type <class ‘openpyxl.chart.shapes.GraphicalProperties’ >

tagname = 'chartLines'

```
class openpyxl.chart.axis.DateAxis(auto=None, lblOffset=None, baseTimeUnit=None, majorUnit=None, majorTimeUnit=None, minorUnit=None, minorTimeUnit=None, extLst=None, **kw)
```

基类: *openpyxl.chart.axis.TextAxis*

auto

Values must be of type <class ‘bool’ >

axId

Values must be of type <class ‘int’ >

axPos

Value must be one of { ‘b’ , ‘l’ , ‘t’ , ‘r’ }

baseTimeUnit

Value must be one of { ‘months’ , ‘years’ , ‘days’ }

crossAx

Values must be of type <class ‘int’ >

crosses

Value must be one of { ‘max’ , ‘min’ , ‘autoZero’ }

crossesAt

Values must be of type <class ‘float’ >

delete

Values must be of type <class ‘bool’ >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

lblOffset

Values must be of type <class ‘int’ >

majorGridlines

Values must be of type <class ‘openpyxl.chart.axis.ChartLines’ >

majorTickMark

Value must be one of { ‘cross’ , ‘out’ , ‘in’ }

majorTimeUnit

Value must be one of { ‘months’ , ‘years’ , ‘days’ }

majorUnit

Values must be of type <class ‘float’ >

minorGridlines

Values must be of type <class ‘openpyxl.chart.axis.ChartLines’ >

minorTickMark

Value must be one of { ‘cross’ , ‘out’ , ‘in’ }

minorTimeUnit

Value must be one of { ‘months’ , ‘years’ , ‘days’ }

minorUnit

Values must be of type <class ‘float’ >

numFmt

Values must be of type <class ‘openpyxl.chart.data_source.NumFmt’ >

scaling

Values must be of type <class ‘openpyxl.chart.axis.Scaling’ >

spPr

Values must be of type <class ‘openpyxl.chart.shapes.GraphicalProperties’ >

tagname = ‘dateAx’
tickLblPos

Value must be one of { ‘nextTo’ , ‘low’ , ‘high’ }

title

Values must be of type <class ‘openpyxl.chart.title.Title’ >

txPr

Values must be of type <class ‘openpyxl.chart.text.RichText’ >

```
class openpyxl.chart.axis.DisplayUnitsLabel(layout=None, tx=None, spPr=None,
                                             txPr=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

layout

Values must be of type <class ‘openpyxl.chart.layout.Layout’ >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'dispUnitsLbl'

text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

textPropertes

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

tx

Values must be of type <class 'openpyxl.chart.text.Text' >

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

class openpyxl.chart.axis.DisplayUnitsLabelList(*custUnit=None, builtInUnit=None, dispUnitsLbl=None, extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

builtInUnit

Value must be one of { 'tenThousands' , 'millions' , 'hundredMillions' , 'hundredThousands' , 'hundreds' , 'trillions' , 'thousands' , 'billions' , 'tenMillions' }

custUnit

Values must be of type <class 'float' >

dispUnitsLbl

Values must be of type <class 'openpyxl.chart.axis.DisplayUnitsLabel' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

tagname = 'dispUnits'

class openpyxl.chart.axis.NumericAxis(*crossBetween=None, majorUnit=None, minorUnit=None, dispUnits=None, extLst=None, **kw*)

基类: *openpyxl.chart.axis._BaseAxis*

axId

Values must be of type <class 'int' >

axPos

Value must be one of { 'b' , 'l' , 't' , 'r' }

crossAx

Values must be of type <class 'int' >

crossBetween

Value must be one of { 'midCat' , 'between' }

crosses

Value must be one of { 'max' , 'min' , 'autoZero' }

crossesAt

Values must be of type <class 'float' >

delete

Values must be of type <class 'bool' >

dispUnits

Values must be of type <class 'openpyxl.chart.axis.DisplayUnitsLabelList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

classmethod from_tree(*node*)

Special case value axes with no gridlines

majorGridlines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

majorTickMark

Value must be one of { 'cross' , 'out' , 'in' }

majorUnit

Values must be of type <class 'float' >

minorGridlines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

minorTickMark

Value must be one of { 'cross' , 'out' , 'in' }

minorUnit

Values must be of type <class 'float' >

numFmt

Values must be of type <class 'openpyxl.chart.data_source.NumFmt' >

scaling

Values must be of type <class 'openpyxl.chart.axis.Scaling' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'valAx'

tickLblPos

Value must be one of { 'nextTo' , 'low' , 'high' }


```

title
    Values must be of type <class 'openpyxl.chart.title.Title' >

txPr
    Values must be of type <class 'openpyxl.chart.text.RichText' >

class openpyxl.chart.axis.Scaling(logBase=None,      orientation='minMax',      max=None,
                                min=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

logBase
    Values must be of type <class 'float' >

max
    Values must be of type <class 'float' >

min
    Values must be of type <class 'float' >

orientation
    Value must be one of { 'maxMin' , 'minMax' }

    tagname = 'scaling'

class openpyxl.chart.axis.SeriesAxis(tickLblSkip=None, tickMarkSkip=None, extLst=None,
                                     **kw)
    基类: openpyxl.chart.axis._BaseAxis

axId
    Values must be of type <class 'int' >

axPos
    Value must be one of { 'b' , 'l' , 't' , 'r' }

crossAx
    Values must be of type <class 'int' >

crosses
    Value must be one of { 'max' , 'min' , 'autoZero' }

crossesAt
    Values must be of type <class 'float' >

delete
    Values must be of type <class 'bool' >

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

```

majorGridlines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

majorTickMark

Value must be one of { 'cross' , 'out' , 'in' }

minorGridlines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

minorTickMark

Value must be one of { 'cross' , 'out' , 'in' }

numFmt

Values must be of type <class 'openpyxl.chart.data_source.NumFmt' >

scaling

Values must be of type <class 'openpyxl.chart.axis.Scaling' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'serAx'

tickLblPos

Value must be one of { 'nextTo' , 'low' , 'high' }

tickLblSkip

Values must be of type <class 'int' >

tickMarkSkip

Values must be of type <class 'int' >

title

Values must be of type <class 'openpyxl.chart.title.Title' >

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

```
class openpyxl.chart.axis.TextAxis(auto=None,    lblAlgn=None,    lblOffset=100,    tickL-
                                   blSkip=None,    tickMarkSkip=None,    noMultiLvlLbl=None,
                                   extLst=None, **kw)
```

基类: openpyxl.chart.axis._BaseAxis

auto

Values must be of type <class 'bool' >

axId

Values must be of type <class 'int' >

axPos

Value must be one of { 'b' , 'l' , 't' , 'r' }

crossAx

Values must be of type <class 'int' >

crosses

Value must be one of { 'max' , 'min' , 'autoZero' }

crossesAt

Values must be of type <class 'float' >

delete

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

lblAlgn

Value must be one of { 'ctr' , 'l' , 'r' }

lblOffset

Values must be of type <class 'float' >

majorGridlines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

majorTickMark

Value must be one of { 'cross' , 'out' , 'in' }

minorGridlines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

minorTickMark

Value must be one of { 'cross' , 'out' , 'in' }

noMultiLvlLbl

Values must be of type <class 'bool' >

numFmt

Values must be of type <class 'openpyxl.chart.data_source.NumFmt' >

scaling

Values must be of type <class 'openpyxl.chart.axis.Scaling' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'catAx'**tickLblPos**

Value must be one of { 'nextTo' , 'low' , 'high' }

tickLblSkip

Values must be of type <class 'int' >

tickMarkSkip

Values must be of type <class 'int' >

title

Values must be of type <class 'openpyxl.chart.title.Title' >

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

openpyxl.chart.bar_chart module

```
class openpyxl.chart.bar_chart.BarChart(gapWidth=150, overlap=None, serLines=None,
                                         extLst=None, **kw)
```

基类: openpyxl.chart.bar_chart._BarChartBase

barDir

Value must be one of { 'bar' , 'col' }

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gapWidth

Values must be of type <class 'float' >

grouping

Value must be one of { 'standard' , 'clustered' , 'percentStacked' , 'stacked' }

overlap

Values must be of type <class 'float' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

serLines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

tagname = 'barChart'

varyColors

Values must be of type <class 'bool' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.TextAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

`class openpyxl.chart.bar_chart.BarChart3D(gapWidth=150, gapDepth=150, shape=None, ser-`

`Lines=None, extLst=None, **kw)`

基类: `openpyxl.chart.bar_chart._BarChartBase, openpyxl.chart._3d._3DBase`

backWall

Values must be of type <class 'openpyxl.chart._3d.Surface' >

barDir

Value must be one of { 'bar' , 'col' }

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

floor

Values must be of type <class 'openpyxl.chart._3d.Surface' >

gapDepth

Values must be of type <class 'float' >

gapWidth

Values must be of type <class 'float' >

grouping

Value must be one of { 'standard' , 'clustered' , 'percentStacked' , 'stacked' }

ser

A sequence (list or tuple) that may only contain objects of the declared type

serLines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

shape

Value must be one of { 'coneToMax' , 'cone' , 'box' , 'cylinder' , 'pyramid' , 'pyramidToMax' }

sideWall

Values must be of type <class 'openpyxl.chart._3d.Surface' >

tagname = 'bar3DChart'

varyColors

Values must be of type <class 'bool' >

view3D

Values must be of type <class 'openpyxl.chart._3d.View3D' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.TextAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

z_axis

Values must be of type <class 'openpyxl.chart.axis.SeriesAxis' >

openpyxl.chart.bubble_chart module

```
class openpyxl.chart.bubble_chart.BubbleChart(varyColors=None, ser=(), dLbIs=None,
                                              bubble3D=None, bubbleScale=None, showNeg-
                                              Bubbles=None, sizeRepresents=None,
                                              extLst=None, **kw)
```

基类: openpyxl.chart._chart.ChartBase

bubble3D

Values must be of type <class 'bool' >

bubbleScale

Values must be of type <class 'float' >

dLbIs

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

dataLabels

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

showNegBubbles

Values must be of type <class 'bool' >

sizeRepresents

Value must be one of { 'area' , 'w' }

tagname = 'bubbleChart'

varyColors

Values must be of type <class 'bool' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

openpyxl.chart.chartspace module

```
class openpyxl.chart.chartspace.ChartContainer(title=None, autoTitleDeleted=None, pivotFmts=(), view3D=None, floor=None, sideWall=None, backWall=None, plotArea=None, legend=None, plotVisOnly=True, dispBlanksAs='gap', showDLblsOverMax=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

autoTitleDeleted

Values must be of type <class 'bool' >

backWall

Values must be of type <class 'openpyxl.chart._3d.Surface' >

dispBlanksAs

Value must be one of { 'gap' , 'span' , 'zero' }

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

floor

Values must be of type <class 'openpyxl.chart._3d.Surface' >

legend

Values must be of type <class 'openpyxl.chart.legend.Legend' >

pivotFmts

Wrap a sequence in an containing object

plotArea

Values must be of type <class 'openpyxl.chart.plotarea.PlotArea' >

plotVisOnly

Values must be of type <class 'bool' >

showDLblsOverMax

Values must be of type <class 'bool' >

sideWall

Values must be of type <class 'openpyxl.chart._3d.Surface' >

tagname = 'chart'

title

Values must be of type <class 'openpyxl.chart.title.Title' >

view3D

Values must be of type <class 'openpyxl.chart._3d.View3D' >

```
class openpyxl.chart.chartspace.ChartSpace(date1904=None, lang=None, rounded-
                                             Corners=None, style=None, clrMapOvr=None,
                                             pivotSource=None, protection=None,
                                             chart=None, spPr=None, txPr=None, ex-
                                             ternalData=None, printSettings=None, user-
                                             Shapes=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

chart

Values must be of type <class 'openpyxl.chart.chartspace.ChartContainer' >

clrMapOvr

Values must be of type <class 'openpyxl.drawing.colors.ColorMapping' >

date1904

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

externalData

Values must be of type <class 'openpyxl.chart.chartspace.ExternalData' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

lang

Values must be of type <class 'str' >

pivotSource

Values must be of type <class 'openpyxl.chart.pivot.PivotSource' >

printSettings

Values must be of type <class 'openpyxl.chart.print_settings.PrintSettings' >

protection

Values must be of type <class 'openpyxl.chart.chartspace.Protection' >

roundedCorners

Values must be of type <class 'bool' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

style

Values must be of type <class 'float' >

tagname = 'chartSpace'

textProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

to_tree(*tagname=None, idx=None, namespace=None*)

txPr

Values must be of type <class ‘openpyxl.chart.text.RichText’ >

userShapes

Values must be of type <class ‘str’ >

class openpyxl.chart.chartspace.ExternalData(*autoUpdate=None, id=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

autoUpdate

Values must be of type <class ‘bool’ >

id

Values must be of type <class ‘str’ >

tagname = 'externalData'

class openpyxl.chart.chartspace.Protection(*chartObject=None, data=None, formatting=None, selection=None, userInterface=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

chartObject

Values must be of type <class ‘bool’ >

data

Values must be of type <class ‘bool’ >

formatting

Values must be of type <class ‘bool’ >

selection

Values must be of type <class ‘bool’ >

tagname = 'protection'

userInterface

Values must be of type <class ‘bool’ >

openpyxl.chart.data_source module

Collection of utility primitives for charts.

class openpyxl.chart.data_source.AxDataSource(*numRef=None, numLit=None, strRef=None, strLit=None, multiLvlStrRef=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

multiLvlStrRef

Values must be of type <class 'openpyxl.chart.data_source.MultiLevelStrRef' >

numLit

Values must be of type <class 'openpyxl.chart.data_source.NumData' >

numRef

Values must be of type <class 'openpyxl.chart.data_source.NumRef' >

strLit

Values must be of type <class 'openpyxl.chart.data_source.StrData' >

strRef

Values must be of type <class 'openpyxl.chart.data_source.StrRef' >

tagname = 'cat'

class openpyxl.chart.data_source.Level(pt=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

pt

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'lvl'

class openpyxl.chart.data_source.MultiLevelStrData(ptCount=None, lvl=(), extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

lvl

A sequence (list or tuple) that may only contain objects of the declared type

ptCount

Values must be of type <class 'int' >

tagname = 'multiLvlStrData'

class openpyxl.chart.data_source.MultiLevelStrRef(f=None, multiLvlStrCache=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

f

Values must be of type <class 'str' >

multiLvlStrCache

Values must be of type <class 'openpyxl.chart.data_source.MultiLevelStrData' >

tagname = 'multiLvlStrRef'

```
class openpyxl.chart.data_source.NumData(formatCode=None, ptCount=None, pt=(),
```

```
extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

formatCode

Values must be of type <class 'str' >

pt

A sequence (list or tuple) that may only contain objects of the declared type

ptCount

Values must be of type <class 'int' >

```
class openpyxl.chart.data_source.NumDataSource(numRef=None, numLit=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

numLit

Values must be of type <class 'openpyxl.chart.data_source.NumData' >

numRef

Values must be of type <class 'openpyxl.chart.data_source.NumRef' >

```
class openpyxl.chart.data_source.NumFmt(formatCode=None, sourceLinked=False)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

formatCode

Values must be of type <class 'str' >

sourceLinked

Values must be of type <class 'bool' >

```
class openpyxl.chart.data_source.NumRef(f=None, numCache=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

f

Values must be of type <class 'str' >

numCache

Values must be of type <class 'openpyxl.chart.data_source.NumData' >

ref

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
class openpyxl.chart.data_source.NumVal(idx=None, formatCode=None, v=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```

formatCode
    Values must be of type <class 'str' >

idx
    Values must be of type <class 'int' >

v
    Values must be of type <class 'NoneType' >

class openpyxl.chart.data_source.NumberValueDescriptor(*args, **kw)
    基类: openpyxl.descriptors.nested.NestedText

    Data should be numerical but isn't always :-/

    allow_none = True

class openpyxl.chart.data_source.StrData(ptCount=None, pt=(), extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    pt
        A sequence (list or tuple) that may only contain objects of the declared type

    ptCount
        Values must be of type <class 'int' >

    tagname = 'strData'

class openpyxl.chart.data_source.StrRef(f=None, strCache=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    f
        Values must be of type <class 'str' >

    strCache
        Values must be of type <class 'openpyxl.chart.data_source.StrData' >

    tagname = 'strRef'

class openpyxl.chart.data_source.StrVal(idx=0, v=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    idx
        Values must be of type <class 'int' >

    tagname = 'strVal'

```

v

Values must be of type <class 'str' >

openpyxl.chart.descriptors module**class** openpyxl.chart.descriptors.NestedGapAmount(**kw)基类: *openpyxl.descriptors.nested.NestedMinMax*

allow_none = True

max = 500

min = 0

class openpyxl.chart.descriptors.NestedOverlap(**kw)基类: *openpyxl.descriptors.nested.NestedMinMax*

allow_none = True

max = 100

min = -100

class openpyxl.chart.descriptors.NumberFormatDescriptor(*args, **kw)基类: *openpyxl.descriptors.base.Typed*

Allow direct assignment of format code

allow_none = True

expected_type

openpyxl.chart.data_source.NumFmt 的别名**openpyxl.chart.error_bar module****class** openpyxl.chart.error_bar.ErrorBars(errDir=None, errBarType='both', errVal-

Type='fixedVal', noEndCap=None, plus=None,

minus=None, val=None, spPr=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable***direction**

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

errBarType

Value must be one of { 'plus' , 'minus' , 'both' }

errDir

Value must be one of { 'y' , 'x' }

errValType

Value must be one of { ‘percentage’ , ‘cust’ , ‘stdErr’ , ‘stdDev’ , ‘fixedVal’ }

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

minus

Values must be of type <class ‘openpyxl.chart.data_source.NumDataSource’ >

noEndCap

Values must be of type <class ‘bool’ >

plus

Values must be of type <class ‘openpyxl.chart.data_source.NumDataSource’ >

size

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

spPr

Values must be of type <class ‘openpyxl.chart.shapes.GraphicalProperties’ >

style

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

tagname = ‘errBars’

val

Values must be of type <class ‘float’ >

openpyxl.chart.label module

class openpyxl.chart.label.DataLabel(idx=0, **kw)

基类: openpyxl.chart.label._DataLabelBase

dLblPos

Value must be one of { ‘b’ , ‘l’ , ‘t’ , ‘inEnd’ , ‘bestFit’ , ‘ctr’ , ‘r’ , ‘outEnd’ , ‘inBase’ }

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

idx

Values must be of type <class ‘int’ >

numFmt

Values must be of type <class 'str' >

separator

Values must be of type <class 'str' >

showBubbleSize

Values must be of type <class 'bool' >

showCatName

Values must be of type <class 'bool' >

showLeaderLines

Values must be of type <class 'bool' >

showLegendKey

Values must be of type <class 'bool' >

showPercent

Values must be of type <class 'bool' >

showSerName

Values must be of type <class 'bool' >

showVal

Values must be of type <class 'bool' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'dLbl'**txPr**

Values must be of type <class 'openpyxl.chart.text.RichText' >

```
class openpyxl.chart.label.DataLabelList(dLbl=(), delete=None, **kw)
```

基类: openpyxl.chart.label._DataLabelBase

dLbl

A sequence (list or tuple) that may only contain objects of the declared type

dLblPos

Value must be one of { 'b' , 'l' , 't' , 'inEnd' , 'bestFit' , 'ctr' , 'r' , 'outEnd' , 'inBase' }

delete

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

numFmt

Values must be of type <class 'str' >

separator

Values must be of type <class 'str' >

showBubbleSize

Values must be of type <class 'bool' >

showCatName

Values must be of type <class 'bool' >

showLeaderLines

Values must be of type <class 'bool' >

showLegendKey

Values must be of type <class 'bool' >

showPercent

Values must be of type <class 'bool' >

showSerName

Values must be of type <class 'bool' >

showVal

Values must be of type <class 'bool' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'dLbls'

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

openpyxl.chart.layout module

class openpyxl.chart.layout.Layout(*manualLayout=None, extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

manualLayout

Values must be of type <class 'openpyxl.chart.layout.ManualLayout' >

tagname = 'layout'


```
class openpyxl.chart.layout.ManualLayout(layoutTarget=None, xMode=None, yMode=None,
                                         wMode='factor', hMode='factor', x=None, y=None,
                                         w=None, h=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

h

Values must be of type <class 'float' >

hMode

Value must be one of { 'factor' , 'edge' }

height

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

layoutTarget

Value must be one of { 'outer' , 'inner' }

tagname = 'manualLayout'

w

Values must be of type <class 'float' >

wMode

Value must be one of { 'factor' , 'edge' }

width

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

x

Values must be of type <class 'float' >

xMode

Value must be one of { 'factor' , 'edge' }

y

Values must be of type <class 'float' >

yMode

Value must be one of { 'factor' , 'edge' }

openpyxl.chart.legend module

```
class openpyxl.chart.legend.Legend(legendPos='r', legendEntry=(), layout=None, over-
                                  lay=None, spPr=None, txPr=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

layout

Values must be of type <class 'openpyxl.chart.layout.Layout' >

legendEntry

A sequence (list or tuple) that may only contain objects of the declared type

legendPos

Value must be one of { 'b' , 'tr' , 'l' , 't' , 'r' }

overlay

Values must be of type <class 'bool' >

position

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'legend'

textProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

class openpyxl.chart.legend.LegendEntry(idx=0, delete=False, txPr=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

delete

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

idx

Values must be of type <class 'int' >

tagname = 'legendEntry'

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

openpyxl.chart.line_chart module

```

class openpyxl.chart.line_chart.LineChart(hiLowLines=None, upDownBars=None,
                                           marker=None, smooth=None, extLst=None,
                                           **kw)
    基类: openpyxl.chart.line_chart._LineChartBase

    dLbIs
        Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

    dropLines
        Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    grouping
        Value must be one of { 'standard' , 'percentStacked' , 'stacked' }

    hiLowLines
        Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

    marker
        Values must be of type <class 'bool' >

    ser
        A sequence (list or tuple) that may only contain objects of the declared type

    smooth
        Values must be of type <class 'bool' >

    tagname = 'lineChart'

    upDownBars
        Values must be of type <class 'openpyxl.chart.updown_bars.UpDownBars' >

    varyColors
        Values must be of type <class 'bool' >

    x_axis
        Values must be of type <class 'openpyxl.chart.axis._BaseAxis' >

    y_axis
        Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

class openpyxl.chart.line_chart.LineChart3D(gapDepth=None, hiLowLines=None, upDown-
                                             Bars=None, marker=None, smooth=None,
                                             **kw)
    基类: openpyxl.chart.line_chart._LineChartBase

```

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

dropLines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gapDepth

Values must be of type <class 'float' >

grouping

Value must be one of { 'standard' , 'percentStacked' , 'stacked' }

hiLowLines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

marker

Values must be of type <class 'bool' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

smooth

Values must be of type <class 'bool' >

tagname = 'line3DChart'

upDownBars

Values must be of type <class 'openpyxl.chart.updown__bars.UpDownBars' >

varyColors

Values must be of type <class 'bool' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.TextAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

z_axis

Values must be of type <class 'openpyxl.chart.axis.SeriesAxis' >

openpyxl.chart.marker module

```
class openpyxl.chart.marker.DataPoint(idx=None, invertIfNegative=None, marker=None, bubble3D=None, explosion=None, spPr=None, pictureOptions=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

bubble3D

Values must be of type <class 'bool' >

explosion

Values must be of type <class 'int' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

idx

Values must be of type <class 'int' >

invertIfNegative

Values must be of type <class 'bool' >

marker

Values must be of type <class 'openpyxl.chart.marker.Marker' >

pictureOptions

Values must be of type <class 'openpyxl.chart.picture.PictureOptions' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'dPt'

class openpyxl.chart.marker.Marker(*symbol=None, size=None, spPr=None, extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

size

Values must be of type <class 'float' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

symbol

Value must be one of { 'plus' , 'dash' , 'star' , 'dot' , 'x' , 'diamond' , 'square' , 'auto' , 'triangle' , 'circle' , 'picture' }

tagname = 'marker'

openpyxl.chart.picture module

```
class openpyxl.chart.picture.PictureOptions(applyToFront=None, applyToSides=None,  
                                             applyToEnd=None, pictureFormat=None, pic-  
                                             tureStackUnit=None)  
    基类: openpyxl.descriptors.serialisable.Serialisable  
  
    applyToEnd  
        Values must be of type <class 'bool' >  
  
    applyToFront  
        Values must be of type <class 'bool' >  
  
    applyToSides  
        Values must be of type <class 'bool' >  
  
    pictureFormat  
        Value must be one of { 'stackScale' , 'stack' , 'stretch' }  
  
    pictureStackUnit  
        Values must be of type <class 'float' >  
  
    tagname = 'pictureOptions'
```

openpyxl.chart.pie_chart module

```
class openpyxl.chart.pie_chart.CustomSplit(secondPiePt=())  
    基类: openpyxl.descriptors.serialisable.Serialisable  
  
    secondPiePt  
        A sequence of primitive types that are stored as a single attribute. “val” is the default attribute  
  
    tagname = 'custSplit'  
  
class openpyxl.chart.pie_chart.DoughnutChart(firstSliceAng=0, holeSize=10, extLst=None,  
                                             **kw)  
    基类: openpyxl.chart.pie_chart._PieChartBase  
  
    dLbIs  
        Values must be of type <class 'openpyxl.chart.label.DataLabelList' >  
  
    extLst  
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >  
  
    firstSliceAng  
        Values must be of type <class 'float' >  
  
    holeSize  
        Values must be of type <class 'float' >
```

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'doughnutChart'

varyColors

Values must be of type <class 'bool' >

class openpyxl.chart.pie_chart.PieChart(*firstSliceAng=0, extLst=None, **kw*)

基类: openpyxl.chart.pie_chart._PieChartBase

dLbIs

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

firstSliceAng

Values must be of type <class 'float' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'pieChart'

varyColors

Values must be of type <class 'bool' >

class openpyxl.chart.pie_chart.PieChart3D(*varyColors=True, ser=(), dLbIs=None*)

基类: openpyxl.chart.pie_chart._PieChartBase

dLbIs

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'pie3DChart'

varyColors

Values must be of type <class 'bool' >

class openpyxl.chart.pie_chart.ProjectPieChart(*ofPieType='pie', gapWidth=None, splitType='auto', splitPos=None, custSplit=None, secondPieSize=75, serLines=None, extLst=None, **kw*)

基类: openpyxl.chart.pie_chart._PieChartBase

From the spec 21.2.2.126

This element contains the pie of pie or bar of pie series on this chart. Only the first series shall be displayed. The splitType element shall determine whether the splitPos and custSplit elements apply.

custSplit

Values must be of type <class 'openpyxl.chart.pie_chart.CustomSplit' >

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gapWidth

Values must be of type <class 'float' >

join_lines

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

ofPieType

Value must be one of { 'pie' , 'bar' }

secondPieSize

Values must be of type <class 'float' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

serLines

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

splitPos

Values must be of type <class 'float' >

splitType

Value must be one of { 'percent' , 'cust' , 'val' , 'pos' , 'auto' }

tagname = 'ofPieChart'

type

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

varyColors

Values must be of type <class 'bool' >

openpyxl.chart.pivot module

```
class openpyxl.chart.pivot.PivotFormat(idx=0, spPr=None, txPr=None, marker=None,
                                       dLbl=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

DataLabel

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

TextBody

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

dLbl

Values must be of type <class ‘openpyxl.chart.label.DataLabel’ >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

idx

Values must be of type <class ‘int’ >

marker

Values must be of type <class ‘openpyxl.chart.marker.Marker’ >

spPr

Values must be of type <class ‘openpyxl.chart.shapes.GraphicalProperties’ >

tagname = 'pivotFmt'

txPr

Values must be of type <class ‘openpyxl.chart.text.RichText’ >

```
class openpyxl.chart.pivot.PivotSource(name=None, fmtId=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

fmtId

Values must be of type <class ‘int’ >

name

Values must be of type <class ‘str’ >

tagname = 'pivotSource'

openpyxl.chart.plotarea module

```
class openpyxl.chart.plotarea.DataTable(showHorzBorder=None,      showVertBorder=None,
                                         showOutline=None, showKeys=None, spPr=None,
                                         txPr=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

showHorzBorder

Values must be of type <class 'bool' >

showKeys

Values must be of type <class 'bool' >

showOutline

Values must be of type <class 'bool' >

showVertBorder

Values must be of type <class 'bool' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'dTable'

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

```
class openpyxl.chart.plotarea.PlotArea(layout=None, dTable=None, spPr=None, __charts=(),
                                         __axes=(), extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

area3DChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

areaChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

bar3DChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

barChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

bubbleChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

catAx

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

dTable

Values must be of type `<class 'openpyxl.chart.plotarea.DataTable' >`

dateAx

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

doughnutChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

extLst

Values must be of type `<class 'openpyxl.descriptors.excel.ExtensionList' >`

classmethod from_tree(*node*)

Create object from XML

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

layout

Values must be of type `<class 'openpyxl.chart.layout.Layout' >`

line3DChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

lineChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

ofPieChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

pie3DChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

pieChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

radarChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

scatterChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

serAx

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

spPr

Values must be of type `<class 'openpyxl.chart.shapes.GraphicalProperties' >`

stockChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

surface3DChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

surfaceChart

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

tagname = 'plotArea'

to_tree(tagname=None, idx=None, namespace=None)

valAx

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

openpyxl.chart.print_settings module

```
class openpyxl.chart.print_settings.PageMargins(l=0.75, r=0.75, t=1, b=1, header=0.5,
                                              footer=0.5)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Identical to openpyxl.worksheet.page.Pagemargins but element names are different :-/

b

Values must be of type <class 'float' >

bottom

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

footer

Values must be of type <class 'float' >

header

Values must be of type <class 'float' >

l

Values must be of type <class 'float' >

left

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

r

Values must be of type <class 'float' >

right

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

t

Values must be of type <class 'float' >

tagname = 'pageMargins'

top

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

```
class openpyxl.chart.print_settings.PrintSettings(headerFooter=None, pageMargins=None,
                                                  pageSetup=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

headerFooter

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooter' >

pageMargins

Values must be of type <class 'openpyxl.chart.print_settings.PageMargins' >

pageSetup

Values must be of type <class 'openpyxl.worksheet.page.PrintPageSetup' >

tagname = 'printSettings'

openpyxl.chart.radar_chart module

```
class openpyxl.chart.radar_chart.RadarChart(radarStyle='standard', varyColors=None,
                                             ser=(), dLbls=None, extLst=None, **kw)
```

基类: openpyxl.chart._chart.ChartBase

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

dataLabels

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

radarStyle

Value must be one of { 'standard' , 'filled' , 'marker' }

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'radarChart'

type

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

varyColors

Values must be of type <class 'bool' >

x_axis

Values must be of type <class 'openpyxl.chart.axis.TextAxis' >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

openpyxl.chart.reader module

Read a chart

```
openpyxl.chart.reader.read_chart(chartspace)
```

openpyxl.chart.reference module

```
class openpyxl.chart.reference.DummyWorksheet(title)
```

基类: `object`

```
class openpyxl.chart.reference.Reference(worksheet=None, min_col=None, min_row=None,  
                                         max_col=None, max_row=None,  
                                         range_string=None)
```

基类: `openpyxl.descriptors.Strict`

Normalise cell range references

cols

Return all columns in the range

max_col

Values must be of type <class 'int' >

max_row

Values must be of type <class 'int' >

min_col

Values must be of type <class 'int' >

min_row

Values must be of type <class 'int' >

pop()

Return and remove the first cell

range_string

Values must be of type <class 'str' >

rows

Return all rows in the range

sheetname

openpyxl.chart.scatter_chart module

```
class openpyxl.chart.scatter_chart.ScatterChart(scatterStyle=None, varyColors=None,  
                                                ser=(), dLbIs=None, extLst=None, **kw)
```

基类: `openpyxl.chart._chart.ChartBase`

dLbIs

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

dataLabels

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

scatterStyle

Value must be one of { ‘lineMarker’ , ‘line’ , ‘smoothMarker’ , ‘smooth’ , ‘marker’ }

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'scatterChart'

varyColors

Values must be of type <class ‘bool’ >

x_axis

Values must be of type <class ‘openpyxl.chart.axis.NumericAxis’ >

y_axis

Values must be of type <class ‘openpyxl.chart.axis.NumericAxis’ >

openpyxl.chart.series module

```
class openpyxl.chart.series.Series(idx=0, order=0, tx=None, spPr=None, pictureOptions=None, dPt=(), dLbIs=None, trendline=None, errorBars=None, cat=None, val=None, invertIfNegative=None, shape=None, xVal=None, yVal=None, bubbleSize=None, bubble3D=None, marker=None, smooth=None, explosion=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Generic series object. Should not be instantiated directly. User the chart.Series factory instead.

bubble3D

Values must be of type <class ‘bool’ >

bubbleSize

Values must be of type <class ‘openpyxl.chart.data_source.NumDataSource’ >

cat

Values must be of type <class ‘openpyxl.chart.data_source.AxDataSource’ >

dLbIs

Values must be of type <class ‘openpyxl.chart.label.DataLabelList’ >

dPt

A sequence (list or tuple) that may only contain objects of the declared type

data_points

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

errBars

Values must be of type <class ‘openpyxl.chart.error_bar.ErrorBars’ >

explosion

Values must be of type <class ‘int’ >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

identifiers

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

idx

Values must be of type <class ‘int’ >

invertIfNegative

Values must be of type <class ‘bool’ >

labels

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

marker

Values must be of type <class ‘openpyxl.chart.marker.Marker’ >

order

Values must be of type <class ‘int’ >

pictureOptions

Values must be of type <class ‘openpyxl.chart.picture.PictureOptions’ >

shape

Value must be one of { ‘coneToMax’, ‘cone’, ‘box’, ‘cylinder’, ‘pyramid’, ‘pyramidToMax’ }

smooth

Values must be of type <class ‘bool’ >

spPr

Values must be of type <class ‘openpyxl.chart.shapes.GraphicalProperties’ >

tagname = ‘ser’

title

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

to_tree(*tagname=None, idx=None*)

trendline

Values must be of type <class ‘openpyxl.chart.trendline.Trendline’ >

tx

Values must be of type <class ‘openpyxl.chart.series.SeriesLabel’ >

val

Values must be of type <class ‘openpyxl.chart.data_source.NumDataSource’ >

xVal

Values must be of type <class ‘openpyxl.chart.data_source.AxDataSource’ >

yVal

Values must be of type <class ‘openpyxl.chart.data_source.NumDataSource’ >

zVal

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

class openpyxl.chart.series.SeriesLabel(*strRef=None, v=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

strRef

Values must be of type <class ‘openpyxl.chart.data_source.StrRef’ >

tagname = 'tx'

v

Values must be of type <class ‘str’ >

value

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

class openpyxl.chart.series.XYSeries(*idx=0, order=0, tx=None, spPr=None, pictureOptions=None, dPt=(), dLbIs=None, trendline=None, errBars=None, cat=None, val=None, invertIfNegative=None, shape=None, xVal=None, yVal=None, bubbleSize=None, bubble3D=None, marker=None, smooth=None, explosion=None, extLst=None*)

基类: *openpyxl.chart.series.Series*

Dedicated series for charts that have x and y series

bubble3D

Values must be of type <class 'bool' >

bubbleSize

Values must be of type <class 'openpyxl.chart.data_source.NumDataSource' >

dLbls

Values must be of type <class 'openpyxl.chart.label.DataLabelList' >

dPt

A sequence (list or tuple) that may only contain objects of the declared type

errBars

Values must be of type <class 'openpyxl.chart.error_bar.ErrorBars' >

idx

Values must be of type <class 'int' >

invertIfNegative

Values must be of type <class 'bool' >

marker

Values must be of type <class 'openpyxl.chart.marker.Marker' >

order

Values must be of type <class 'int' >

smooth

Values must be of type <class 'bool' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

trendline

Values must be of type <class 'openpyxl.chart.trendline.Trendline' >

tx

Values must be of type <class 'openpyxl.chart.series.SeriesLabel' >

xVal

Values must be of type <class 'openpyxl.chart.data_source.AxDataSource' >

yVal

Values must be of type <class 'openpyxl.chart.data_source.NumDataSource' >

openpyxl.chart.series_factory module

`openpyxl.chart.series_factory.SeriesFactory(values, xvalues=None, zvalues=None, title=None, title_from_data=False)`

Convenience Factory for creating chart data series.

openpyxl.chart.shapes module

```
class openpyxl.chart.shapes.GraphicalProperties(bwMode=None, xfrm=None, noFill=None,
                                                solidFill=None, gradFill=None, pattFill=None, ln=None, scene3d=None, custGeom=None, prstGeom=None, sp3d=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Somewhat vaguely 21.2.2.197 says this:

This element specifies the formatting for the parent chart element. The custGeom, prstGeom, scene3d, and xfrm elements are not supported. The bwMode attribute is not supported.

This doesn't leave much. And the element is used in different places.

bwMode

Value must be one of { 'gray', 'hidden', 'clr', 'auto', 'grayWhite', 'invGray', 'black', 'blackGray', 'white', 'blackWhite', 'ltGray' }

custGeom

Values must be of type <class 'openpyxl.drawing.geometry.CustomGeometry2D' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gradFill

Values must be of type <class 'openpyxl.drawing.fill.GradientFillProperties' >

line

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

ln

Values must be of type <class 'openpyxl.drawing.line.LineProperties' >

noFill

Values must be of type <class 'bool' >

pattFill

Values must be of type <class 'openpyxl.drawing.fill.PatternFillProperties' >

prstGeom

Values must be of type <class 'openpyxl.drawing.geometry.PresetGeometry2D' >

scene3d

Values must be of type <class 'openpyxl.drawing.geometry.Scene3D' >

shape3D

Aliases can be used when either the desired attribute name is not allowed or confusing in Python

(eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

solidFill

Values must be of type <class ‘openpyxl.drawing.colors.ColorChoice’ >

sp3d

Values must be of type <class ‘openpyxl.drawing.geometry.Shape3D’ >

tagname = ‘spPr’

transform

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

xfrm

Values must be of type <class ‘openpyxl.drawing.geometry.Transform2D’ >

openpyxl.chart.stock_chart module

```
class openpyxl.chart.stock_chart.StockChart(ser=(), dLbls=None, dropLines=None, hiLow-
Lines=None, upDownBars=None, extLst=None,
**kw)
```

基类: openpyxl.chart._chart.ChartBase

dLbls

Values must be of type <class ‘openpyxl.chart.label.DataLabelList’ >

dataLabels

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

dropLines

Values must be of type <class ‘openpyxl.chart.axis.ChartLines’ >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

hiLowLines

Values must be of type <class ‘openpyxl.chart.axis.ChartLines’ >

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = ‘stockChart’

upDownBars

Values must be of type <class ‘openpyxl.chart.updown_bars.UpDownBars’ >

x_axis

Values must be of type <class ‘openpyxl.chart.axis.TextAxis’ >

y_axis

Values must be of type <class 'openpyxl.chart.axis.NumericAxis' >

openpyxl.chart.surface_chart module

class openpyxl.chart.surface_chart.BandFormat(*idx=0, spPr=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

idx

Values must be of type <class 'int' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'bandFmt'

class openpyxl.chart.surface_chart.BandFormatList(*bandFmt=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

bandFmt

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'bandFmts'

class openpyxl.chart.surface_chart.SurfaceChart(*kw*)**

基类: *openpyxl.chart.surface_chart.SurfaceChart3D*

bandFmts

Values must be of type <class 'openpyxl.chart.surface_chart.BandFormatList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'surfaceChart'

wireframe

Values must be of type <class 'bool' >

class openpyxl.chart.surface_chart.SurfaceChart3D(*kw*)**

基类: *openpyxl.chart.surface_chart._SurfaceChartBase, openpyxl.chart._3d._3DBase*

bandFmts

Values must be of type <class 'openpyxl.chart.surface_chart.BandFormatList' >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

ser

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'surface3DChart'

wireframe

Values must be of type <class ‘bool’ >

x_axis

Values must be of type <class ‘openpyxl.chart.axis.TextAxis’ >

y_axis

Values must be of type <class ‘openpyxl.chart.axis.NumericAxis’ >

z_axis

Values must be of type <class ‘openpyxl.chart.axis.SeriesAxis’ >

openpyxl.chart.text module

class openpyxl.chart.text.RichText(*bodyPr=None, lstStyle=None, p=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

From the specification: 21.2.2.216

This element specifies text formatting. The lstStyle element is not supported.

bodyPr

Values must be of type <class ‘openpyxl.drawing.text.RichTextProperties’ >

lstStyle

Values must be of type <class ‘openpyxl.drawing.text.ListStyle’ >

p

A sequence (list or tuple) that may only contain objects of the declared type

paragraphs

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

properties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

tagname = 'rich'

class openpyxl.chart.text.Text(*strRef=None, rich=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

The value can be either a cell reference or a text element If both are present then the reference will be used.

rich

Values must be of type <class 'openpyxl.chart.text.RichText' >

strRef

Values must be of type <class 'openpyxl.chart.data_source.StrRef' >

tagname = 'tx'

to_tree(tagname=None, idx=None, namespace=None)

openpyxl.chart.title module

```
class openpyxl.chart.title.Title(tx=None, layout=None, overlay=None, spPr=None,
                                txPr=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

body

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

layout

Values must be of type <class 'openpyxl.chart.layout.Layout' >

overlay

Values must be of type <class 'bool' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'title'

text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

tx

Values must be of type <class 'openpyxl.chart.text.Text' >

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >


```
class openpyxl.chart.title.TitleDescriptor(*args, **kw)
```

基类: *openpyxl.descriptors.base.Typed*

allow_none = True

expected_type

Title 的别名

```
openpyxl.chart.title.title_maker(text)
```

openpyxl.chart.trendline module

```
class openpyxl.chart.trendline.Trendline(name=None, spPr=None, trendlineType='linear',
                                          order=None, period=None, forward=None, back-
                                          ward=None, intercept=None, dispRSqr=None, dis-
                                          pEq=None, trendlineLbl=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

backward

Values must be of type <class 'float' >

dispEq

Values must be of type <class 'bool' >

dispRSqr

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

forward

Values must be of type <class 'float' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

intercept

Values must be of type <class 'float' >

name

Values must be of type <class 'str' >

order

Values must be of type <class 'int' >

period

Values must be of type <class 'int' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'trendline'

trendlineLbl

Values must be of type <class 'openpyxl.chart.trendline.TrendlineLabel' >

trendlineType

Value must be one of { 'exp' , 'movingAvg' , 'power' , 'poly' , 'linear' , 'log' }

```
class openpyxl.chart.trendline.TrendlineLabel(layout=None, tx=None, numFmt=None,
                                              spPr=None, txPr=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

graphicalProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

layout

Values must be of type <class 'openpyxl.chart.layout.Layout' >

numFmt

Values must be of type <class 'openpyxl.chart.data_source.NumFmt' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

tagname = 'trendlineLbl'

textProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

tx

Values must be of type <class 'openpyxl.chart.text.Text' >

txPr

Values must be of type <class 'openpyxl.chart.text.RichText' >

openpyxl.chart.updown_bars module

```
class openpyxl.chart.updown_bars.UpDownBars(gapWidth=150, upBars=None, downBars=None,
                                              extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

downBars

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gapWidth

Values must be of type <class 'float' >

tagname = 'upbars'

upBars

Values must be of type <class 'openpyxl.chart.axis.ChartLines' >

openpyxl.chartsheet package**Submodules****openpyxl.chartsheet.chartsheet module**

```
class openpyxl.chartsheet.chartsheet.Chartsheet(sheetPr=None, sheetViews=None, sheetPro-
                                                tection=None, customSheetViews=None,
                                                pageMargins=None, pageSetup=None,
                                                headerFooter=None, drawing=None, draw-
                                                ingHF=None, picture=None, webPub-
                                                lishItems=None, extLst=None, par-
                                                ent=None, title="", sheet_state='visible')
基 类: openpyxl.workbook.child._WorkbookChild, openpyxl.descriptors.serialisable.
Serialisable
```

HeaderFooter

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

add_chart(chart)

customSheetViews

Values must be of type <class 'openpyxl.chartsheet.custom.CustomChartsheetViews' >

drawing

Values must be of type <class 'openpyxl.worksheet.drawing.Drawing' >

drawingHF

Values must be of type <class 'openpyxl.chartsheet.relation.DrawingHF' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

headerFooter

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooter' >

`mime_type = 'application/vnd.openxmlformats-officedocument.spreadsheetml.chartsheet+xml'`

pageMargins

Values must be of type <class 'openpyxl.worksheet.page.PageMargins' >

pageSetup

Values must be of type <class 'openpyxl.worksheet.page.PrintPageSetup' >

picture

Values must be of type <class 'openpyxl.chartsheet.relation.SheetBackgroundPicture' >

sheetPr

Values must be of type <class 'openpyxl.chartsheet.properties.ChartsheetProperties' >

sheetProtection

Values must be of type <class 'openpyxl.chartsheet.protection.ChartsheetProtection' >

sheetViews

Values must be of type <class 'openpyxl.chartsheet.views.ChartsheetViewList' >

sheet_state

Value must be one of { 'visible' , 'hidden' , 'veryHidden' }

tagname = 'chartsheet'

to_tree()

webPublishItems

Values must be of type <class 'openpyxl.chartsheet.publish.WebPublishItems' >

openpyxl.chartsheet.custom module

```
class openpyxl.chartsheet.custom.CustomChartsheetView(guid=None, scale=None,
                                                         state='visible', zoomToFit=None,
                                                         pageMargins=None, page-
                                                         Setup=None, headerFooter=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

guid

headerFooter

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooter' >

pageMargins

Values must be of type <class 'openpyxl.worksheet.page.PageMargins' >

pageSetup

Values must be of type <class 'openpyxl.worksheet.page.PrintPageSetup' >

scale

Values must be of type <class 'int' >

state

Value must be one of { 'visible' , 'hidden' , 'veryHidden' }

tagname = 'customSheetView'

zoomToFit

Values must be of type <class 'bool' >

class openpyxl.chartsheet.custom.CustomChartsheetViews(*customSheetView=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

customSheetView

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'customSheetViews'

openpyxl.chartsheet.properties module

class openpyxl.chartsheet.properties.ChartsheetProperties(*published=None, code-*

Name=None, tabColor=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

codeName

Values must be of type <class 'str' >

published

Values must be of type <class 'bool' >

tabColor

Values must be of type <class 'openpyxl.styles.colors.Color' >

tagname = 'sheetPr'

openpyxl.chartsheet.protection module

class openpyxl.chartsheet.protection.ChartsheetProtection(*content=None, objects=None,*

hashValue=None, spin-

Count=None, saltValue=None,

algorithmName=None, pass-

word=None)

基类: *openpyxl.descriptors.serialisable.Serialisable, openpyxl.worksheet.protection.*

_Protected

algorithmName

Values must be of type <class 'str' >

content

Values must be of type <class 'bool' >

hashValue

objects

Values must be of type <class 'bool' >

saltValue

spinCount

Values must be of type <class 'int' >

tagname = 'sheetProtection'

openpyxl.chartsheet.publish module

```
class openpyxl.chartsheet.publish.WebPublishItem(id=None, divId=None, sourceType=None,
                                                  sourceRef=None, sourceObject=None, destinationFile=None, title=None, autoRepublish=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

autoRepublish

Values must be of type <class 'bool' >

destinationFile

Values must be of type <class 'str' >

divId

Values must be of type <class 'str' >

id

Values must be of type <class 'int' >

sourceObject

Values must be of type <class 'str' >

sourceRef

Values must be of type <class 'str' >

sourceType

Value must be one of { 'sheet', 'autoFilter', 'range', 'pivotTable', 'label', 'printArea', 'chart', 'query' }

tagname = 'webPublishItem'

title

Values must be of type <class 'str' >

```
class openpyxl.chartsheet.publish.WebPublishItems(count=None, webPublishItem=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

Values must be of type <class 'int' >

tagname = 'WebPublishItems'

webPublishItem

A sequence (list or tuple) that may only contain objects of the declared type

openpyxl.chartsheet.relation module

```
class openpyxl.chartsheet.relation.DrawingHF(id=None, lho=None, lhe=None, lhf=None,
                                              cho=None, che=None, chf=None, rho=None,
                                              rhe=None, rhf=None, lfo=None, lfe=None,
                                              lff=None, cfo=None, cfe=None, cff=None,
                                              rfo=None, rfe=None, rff=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

centerFooterEvenPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

centerFooterFirstPage

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

centerFooterOddPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

centerHeaderEvenPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

centerHeaderFirstPage

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

centerHeaderOddPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

cfe

Values must be of type <class 'int' >

cff

Values must be of type <class 'int' >

cfo

Values must be of type <class 'int' >

che

Values must be of type <class 'int' >

chf

Values must be of type <class 'int' >

cho

Values must be of type <class 'int' >

id

Values must be of type <class 'str' >

leftFooterEvenPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

leftFooterFirstPage

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

leftFooterOddPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

leftHeaderEvenPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

leftHeaderFirstPage

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

leftHeaderOddPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

lfe

Values must be of type <class 'int' >

lff

Values must be of type <class 'int' >

lfo

Values must be of type <class 'int' >

lhe

Values must be of type <class 'int' >

lhf

Values must be of type <class 'int' >

lho

Values must be of type <class 'int' >

rfe

Values must be of type <class 'int' >

rff

Values must be of type <class 'int' >

rfo

Values must be of type <class 'int' >

rhe

Values must be of type <class 'int' >

rhf

Values must be of type <class 'int' >

rho

Values must be of type <class 'int' >

rightFooterEvenPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

rightFooterFirstPage

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

rightFooterOddPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

rightHeaderEvenPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

rightHeaderFirstPage

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

rightHeaderOddPages

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

class openpyxl.chartsheet.relation.SheetBackgroundPicture(*id*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

id

Values must be of type <class 'str' >

tagname = 'picture'

openpyxl.chartsheet.views module

```
class openpyxl.chartsheet.views.ChartsheetView(tabSelected=None,          zoomScale=None,
                                                workbookViewId=0,          zoomToFit=None,
                                                extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

tabSelected

Values must be of type <class 'bool' >

tagname = 'sheetView'

workbookViewId

Values must be of type <class 'int' >

zoomScale

Values must be of type <class 'int' >

zoomToFit

Values must be of type <class 'bool' >

```
class openpyxl.chartsheet.views.ChartsheetViewList(sheetView=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

sheetView

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'sheetViews'

openpyxl.comments package

Submodules

openpyxl.comments.author module

```
class openpyxl.comments.author.AuthorList(author=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

author

A sequence (list or tuple) that may only contain objects of the declared type

authors

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
tagname = 'authors'
```

openpyxl.comments.comment_sheet module

```
class openpyxl.comments.comment_sheet.CommentRecord(ref="", authorId=0, guid=None,
                                                    shapeId=0, text=None, commentPr=None, author=None,
                                                    height=79, width=144)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

author

Values must be of type <class ‘str’ >

authorId

Values must be of type <class ‘int’ >

commentPr

Values must be of type <class ‘openpyxl.comments.comment_sheet.Properties’ >

content

Remove all inline formatting and stuff

classmethod from_cell(cell)

Class method to convert cell comment

guid

ref

Values must be of type <class ‘str’ >

shapeId

Values must be of type <class ‘int’ >

```
tagname = 'comment'
```

text

Values must be of type <class ‘openpyxl.cell.text.Text’ >

```
class openpyxl.comments.comment_sheet.CommentSheet(authors=None, commentList=None,
                                                    extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

authors

Values must be of type <class ‘openpyxl.comments.author.AuthorList’ >

commentList

Wrap a sequence in an containing object

comments

Return a dictionary of comments keyed by coord

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

classmethod from_comments(comments)

Create a comment sheet from a list of comments for a particular worksheet

mime_type = 'application/vnd.openxmlformats-officedocument.spreadsheetml.comments+xml'

path

Return path within the archive

tagname = 'comments'

to_tree()

write_shapes(vml=None)

Create the VML for comments

```
class openpyxl.comments.comment_sheet.Properties(locked=None,          defaultSize=None,
                                                  __print=None,    disabled=None,    uiOb-
                                                  ject=None,      autoFill=None,    auto-
                                                  Line=None,      altText=None,    tex-
                                                  tHAlign=None,    textVAlign=None,
                                                  lockText=None,  justLastX=None,    au-
                                                  toScale=None,   rowHidden=None,   colHid-
                                                  den=None, anchor=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

altText

Values must be of type <class 'str' >

autoFill

Values must be of type <class 'bool' >

autoLine

Values must be of type <class 'bool' >

autoScale

Values must be of type <class 'bool' >

colHidden

Values must be of type <class 'bool' >

defaultSize

Values must be of type <class 'bool' >

disabled

Values must be of type <class 'bool' >

justLastX

Values must be of type <class 'bool' >

lockText

Values must be of type <class 'bool' >

locked

Values must be of type <class 'bool' >

rowHidden

Values must be of type <class 'bool' >

textHAlign

Value must be one of { 'distributed' , 'left' , 'center' , 'justify' , 'right' }

textVAlign

Value must be one of { 'justify' , 'distributed' , 'center' , 'bottom' , 'top' }

uiObject

Values must be of type <class 'bool' >

```
openpyxl.comments.comment_sheet.tostring(element, *, encoding='utf-8', method=None,
                                         short_empty_elements=True)
```

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an *Element* instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.comments.comments module

```
class openpyxl.comments.comments.Comment(text, author, height=79, width=144)
```

基类: object

bind(*cell*)

Bind comment to a particular cell

parent**text**

Any comment text stripped of all formatting.

unbind()

Unbind a comment from a cell

openpyxl.comments.shape_writer module

```
class openpyxl.comments.shape_writer.ShapeWriter(comments)
```

基类: object

Create VML for comments

```
add_comment_shape(root, idx, coord, height, width)
```

```
add_comment_shapetype(root)
```

```
vml = None
```

```
vml_path = None
```

```
write(root)
```

```
openpyxl.comments.shape_writer.tostring(element, *, encoding='utf-8', method=None,
                                         short_empty_elements=True)
```

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.compat package

```
class openpyxl.compat.DummyCode
```

基类: object

```
openpyxl.compat.deprecated(reason)
```

Submodules

openpyxl.compat.abc module

openpyxl.compat.accumulate module

Python 2 implementation of the accumulate function in itertools From the Python documentation <https://docs.python.org/3/library/itertools.html#itertools-functions>

```
openpyxl.compat.accumulate.accumulate(iterable, func=<built-in function add>)
```

Return running totals

openpyxl.compat.numbers module

openpyxl.compat.singleton module

```
class openpyxl.compat.singleton.Cached(*args, **kw)
```

基类: type

Caching metaclass Child classes will only create new instances of themselves if one doesn't already exist. Does not work with `__slots__`

```
class openpyxl.compat.singleton.Singleton(*args, **kw)
```

基类: type

Singleton metaclass Based on Python Cookbook 3rd Edition Recipe 9.13 Only one instance of a class can exist. Does not work with `__slots__`

openpyxl.compat.strings module

```
openpyxl.compat.strings.safe_string(value)
```

Safely and consistently format numeric values

openpyxl.descriptors package

```
class openpyxl.descriptors.MetaSerialisable
```

基类: type

```
class openpyxl.descriptors.MetaStrict
```

基类: type

```
class openpyxl.descriptors.Strict
```

基类: object

Submodules

openpyxl.descriptors.base module

Based on Python Cookbook 3rd Edition, 8.13 http://chimera.labs.oreilly.com/books/1230000000393/ch08.html#_discussion_130

```
class openpyxl.descriptors.base.ASCII(*args, **kw)
```

基类: *openpyxl.descriptors.base.Typed*

`expected_type`

`builtins.bytes` 的别名

```
class openpyxl.descriptors.base.Alias(alias)
```

基类: *openpyxl.descriptors.base.Descriptor*

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
class openpyxl.descriptors.base.Bool(*args, **kw)
```

基类: *openpyxl.descriptors.base.Convertible*

expected_type

builtins.bool 的别名

```
class openpyxl.descriptors.base.Convertible(*args, **kw)
```

基类: *openpyxl.descriptors.base.Typed*

Values must be convertible to a particular type

```
class openpyxl.descriptors.base.DateTime(*args, **kw)
```

基类: *openpyxl.descriptors.base.Typed*

expected_type

datetime.datetime 的别名

```
class openpyxl.descriptors.base.Default(name=None, **kw)
```

基类: *openpyxl.descriptors.base.Typed*

When called returns an instance of the expected type. Additional default values can be passed in to the descriptor

```
class openpyxl.descriptors.base.Descriptor(name=None, **kw)
```

基类: object

```
class openpyxl.descriptors.base.Float(*args, **kw)
```

基类: *openpyxl.descriptors.base.Convertible*

expected_type

builtins.float 的别名

```
class openpyxl.descriptors.base.Integer(*args, **kw)
```

基类: *openpyxl.descriptors.base.Convertible*

expected_type

builtins.int 的别名

```
class openpyxl.descriptors.base.Length(name=None, **kw)
```

基类: *openpyxl.descriptors.base.Descriptor*

```
class openpyxl.descriptors.base.MatchPattern(name=None, **kw)
```

基类: *openpyxl.descriptors.base.Descriptor*

Values must match a regex pattern

allow_none = False


```
class openpyxl.descriptors.base.Max(**kw)
    基类: openpyxl.descriptors.base.Convertible

    Values must be less than a max value

    allow_none = False

    expected_type
        builtins.float 的别名

class openpyxl.descriptors.base.Min(**kw)
    基类: openpyxl.descriptors.base.Convertible

    Values must be greater than a min value

    allow_none = False

    expected_type
        builtins.float 的别名

class openpyxl.descriptors.base.MinMax(**kw)
    基类: openpyxl.descriptors.base.Min, openpyxl.descriptors.base.Max

    Values must be greater than min value and less than a max one

class openpyxl.descriptors.base.NoneSet(name=None, **kw)
    基类: openpyxl.descriptors.base.Set

    'none' will be treated as None

class openpyxl.descriptors.base.Set(name=None, **kw)
    基类: openpyxl.descriptors.base.Descriptor

    Value can only be from a set of know values

class openpyxl.descriptors.base.String(*args, **kw)
    基类: openpyxl.descriptors.base.Typed

    expected_type
        builtins.str 的别名

class openpyxl.descriptors.base.Text(*args, **kw)
    基类: openpyxl.descriptors.base.String, openpyxl.descriptors.base.Convertible

class openpyxl.descriptors.base.Tuple(*args, **kw)
    基类: openpyxl.descriptors.base.Typed

    expected_type
        builtins.tuple 的别名

class openpyxl.descriptors.base.Typed(*args, **kw)
    基类: openpyxl.descriptors.base.Descriptor

    Values must of a particular type
```

```
allow_none = False

expected_type
    builtins.NoneType 的别名

nested = False
```

openpyxl.descriptors.excel module

Excel specific descriptors

```
class openpyxl.descriptors.excel.Base64Binary(name=None, **kw)
```

基类: *openpyxl.descriptors.base.MatchPattern*

```
pattern = '^(?:[A-Za-z0-9+/]{4})*(?:[A-Za-z0-9+/]{2}==|[A-Za-z0-9+/]{3}=|[A-Za-z0-9+/]{4})$'
```

```
class openpyxl.descriptors.excel.CellRange(name=None, **kw)
```

基类: *openpyxl.descriptors.base.MatchPattern*

```
allow_none = True
```

```
pattern = '^[$]?([A-Za-z]{1,3})[$]?(\d+)(:[$]?([A-Za-z]{1,3})[$]?(\d+)?)?$|^([A-Za-z]{1,3}):([A-Za-z]{1,3})$'
```

```
class openpyxl.descriptors.excel.Extension(uri=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
uri
```

Values must be of type <class 'str' >

```
class openpyxl.descriptors.excel.ExtensionList(ext=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
ext
```

A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.descriptors.excel.Guid(name=None, **kw)
```

基类: *openpyxl.descriptors.base.MatchPattern*

```
pattern = '{[0-9A-F]{8}-[0-9A-F]{4}-[0-9A-F]{4}-[0-9A-F]{4}-[0-9A-F]{12}}'
```

```
class openpyxl.descriptors.excel.HexBinary(name=None, **kw)
```

基类: *openpyxl.descriptors.base.MatchPattern*

```
pattern = '[0-9a-fA-F]+$'
```

```
class openpyxl.descriptors.excel.Percentage(**kw)
```

基类: *openpyxl.descriptors.base.MinMax*

```
max = 1000000
```

```
min = -1000000
```

```
pattern = '((100)|([0-9][0-9]?))(\.\.[0-9][0-9]?)?%'
```

```
class openpyxl.descriptors.excel.Relation(*args, **kw)
    基类: openpyxl.descriptors.base.String

    allow_none = True

    namespace = 'http://schemas.openxmlformats.org/officeDocument/2006/relationships'

class openpyxl.descriptors.excel.TextPoint(**kw)
    基类: openpyxl.descriptors.base.MinMax

    Size in hundredths of points. In theory other units of measurement can be used but these are unbounded

    expected_type
        builtins.int 的别名

    max = 400000

    min = -400000

class openpyxl.descriptors.excel.UniversalMeasure(name=None, **kw)
    基类: openpyxl.descriptors.base.MatchPattern

    pattern = '[0-9]+(\\.[0-9]+)?(mm|cm|in|pt|pc|pi)'
```

openpyxl.descriptors.namespace module

```
openpyxl.descriptors.namespace.namespaced(obj, tagname, namespace=None)
    Utility to create a namespaced tag for an object
```

openpyxl.descriptors.nested module

Generic serialisable classes

```
class openpyxl.descriptors.nested.EmptyTag(*args, **kw)
    基类: openpyxl.descriptors.nested.Nested, openpyxl.descriptors.base.Bool

    Boolean if a tag exists or not.

    from_tree(node)

    to_tree(tagname=None, value=None, namespace=None)

class openpyxl.descriptors.nested.Nested(name=None, **kw)
    基类: openpyxl.descriptors.base.Descriptor

    attribute = 'val'

    from_tree(node)

    nested = True
```

```
to_tree(tagname=None, value=None, namespace=None)
```

```
class openpyxl.descriptors.nested.NestedBool(*args, **kw)
```

基类: `openpyxl.descriptors.nested.NestedValue`, `openpyxl.descriptors.base.Bool`

```
from_tree(node)
```

```
class openpyxl.descriptors.nested.NestedFloat(*args, **kw)
```

基类: `openpyxl.descriptors.nested.NestedValue`, `openpyxl.descriptors.base.Float`

```
class openpyxl.descriptors.nested.NestedInteger(*args, **kw)
```

基类: `openpyxl.descriptors.nested.NestedValue`, `openpyxl.descriptors.base.Integer`

```
class openpyxl.descriptors.nested.NestedMinMax(**kw)
```

基类: `openpyxl.descriptors.nested.Nested`, `openpyxl.descriptors.base.MinMax`

```
class openpyxl.descriptors.nested.NestedNoneSet(name=None, **kw)
```

基类: `openpyxl.descriptors.nested.Nested`, `openpyxl.descriptors.base.NoneSet`

```
class openpyxl.descriptors.nested.NestedSet(name=None, **kw)
```

基类: `openpyxl.descriptors.nested.Nested`, `openpyxl.descriptors.base.Set`

```
class openpyxl.descriptors.nested.NestedString(*args, **kw)
```

基类: `openpyxl.descriptors.nested.NestedValue`, `openpyxl.descriptors.base.String`

```
class openpyxl.descriptors.nested.NestedText(*args, **kw)
```

基类: `openpyxl.descriptors.nested.NestedValue`

Represents any nested tag with the value as the contents of the tag

```
from_tree(node)
```

```
to_tree(tagname=None, value=None, namespace=None)
```

```
class openpyxl.descriptors.nested.NestedValue(*args, **kw)
```

基类: `openpyxl.descriptors.nested.Nested`, `openpyxl.descriptors.base.Convertible`

Nested tag storing the value on the ‘val’ attribute

openpyxl.descriptors.sequence module

```
class openpyxl.descriptors.sequence.MultiSequence(name=None, **kw)
```

基类: `openpyxl.descriptors.sequence.Sequence`

Sequences can contain objects with different tags

```
to_tree(tagname, obj, namespace=None)
```

Convert the sequence represented by the descriptor to an XML element

```
class openpyxl.descriptors.sequence.MultiSequencePart(expected_type, store)
```

基类: `openpyxl.descriptors.base.Alias`

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

```
class openpyxl.descriptors.sequence.NestedSequence(name=None, **kw)
```

基类: `openpyxl.descriptors.sequence.Sequence`

Wrap a sequence in an containing object

`count = False`

`from_tree(node)`

`to_tree(tagname, obj, namespace=None)`

Convert the sequence represented by the descriptor to an XML element

```
class openpyxl.descriptors.sequence.Sequence(name=None, **kw)
```

基类: `openpyxl.descriptors.base.Descriptor`

A sequence (list or tuple) that may only contain objects of the declared type

`expected_type`

`builtins.NoneType` 的别名

`idx_base = 0`

`seq_types = (<class 'list'>, <class 'tuple'>)`

`to_tree(tagname, obj, namespace=None)`

Convert the sequence represented by the descriptor to an XML element

`unique = False`

```
class openpyxl.descriptors.sequence.ValueSequence(name=None, **kw)
```

基类: `openpyxl.descriptors.sequence.Sequence`

A sequence of primitive types that are stored as a single attribute. “val” is the default attribute

`attribute = 'val'`

`from_tree(node)`

`to_tree(tagname, obj, namespace=None)`

Convert the sequence represented by the descriptor to an XML element

openpyxl.descriptors.serialisable module

```
class openpyxl.descriptors.serialisable.Serialisable
```

基类: `openpyxl.descriptors._Serialisable`

Objects can serialise to XML their attributes and child objects. The following class attributes are created by the metaclass at runtime: `__attrs__` = attributes `__nested__` = single-valued child treated as an attribute `__elements__` = child elements

```

classmethod from_tree(node)
    Create object from XML

idx_base = 0

namespace = None

tagname

to_tree(tagname=None, idx=None, namespace=None)

```

openpyxl.descriptors.slots module

```

class openpyxl.descriptors.slots.AutoSlotProperties
    基类: type

```

openpyxl.drawing package

Submodules

openpyxl.drawing.colors module

```

class openpyxl.drawing.colors.ColorChoice(srgbClr=None, srgbClr=None, hslClr=None,
                                           sysClr=None, schemeClr=None, prstClr=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

```

RGB

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

RGBPercent

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

hslClr

Values must be of type <class ‘openpyxl.drawing.colors.HSLColor’ >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

prstClr

Value must be one of { ‘green’, ‘brown’, ‘ltSlateGray’, ‘darkCyan’, ‘lime’, ‘dkMagenta’, ‘pink’, ‘medOrchid’, ‘olive’, ‘darkSlateBlue’, ‘seaShell’, ‘gainsboro’, ‘whiteSmoke’, ‘paleGoldenrod’, ‘salmon’, ‘lightCoral’, ‘white’, ‘plum’, ‘firebrick’, ‘lavender’, ‘slateBlue’, ‘medTurquoise’, ‘gray’, ‘aqua’, ‘midnightBlue’, ‘mistyRose’, ‘dkRed’, ‘darkOliveGreen’, ‘dkCyan’, ‘lightGoldenrodYellow’, ‘violet’, ‘aliceBlue’, ‘chocolate’, ‘darkTurquoise’, ‘cornsilk’, ‘springGreen’, ‘black’, ‘dkGoldenrod’, ‘chartreuse’, ‘moccasin’, ‘mediumBlue’, ‘limeGreen’, ‘orchid’, ‘dkBlue’, ‘slateGray’, ‘peachPuff’

```
, 'dkOrange', 'medBlue', 'goldenrod', 'teal', 'lightSlateGray', 'mediumTurquoise',
'mediumAquamarine', 'aquamarine', 'darkSlateGrey', 'crimson', 'red', 'darkSlateGray',
'navy', 'papayaWhip', 'indigo', 'lemonChiffon', 'ltYellow', 'dkViolet', 'paleGreen',
'dkSalmon', 'deepPink', 'forestGreen', 'skyBlue', 'purple', 'darkOrange', 'mediumOrchid',
'cadetBlue', 'cornflowerBlue', 'lightSalmon', 'steelBlue', 'lightYellow', 'seaGreen',
'ltPink', 'indianRed', 'deepSkyBlue', 'lightGray', 'honeydew', 'wheat', 'linen',
'ltSalmon', 'navajoWhite', 'darkSalmon', 'lavenderBlush', 'ltSkyBlue', 'mediumSeaGreen',
'lightSteelBlue', 'ltGray', 'rosyBrown', 'dkKhaki', 'gold', 'lightGrey', 'lightCyan',
'lightSkyBlue', 'tomato', 'floralWhite', 'orange', 'snow', 'darkViolet', 'sienna',
'ltCyan', 'darkGray', 'peru', 'silver', 'dkSeaGreen', 'grey', 'blueViolet', 'dkTurquoise',
'ghostWhite', 'darkGrey', 'hotPink', 'blanchedAlmond', 'medSpringGreen', 'sandyBrown',
'azure', 'dkGreen', 'dkSlateGrey', 'mediumPurple', 'maroon', 'ltSteelBlue',
'yellow', 'turquoise', 'powderBlue', 'bisque', 'lightGreen', 'lightSeaGreen', 'beige',
'darkGreen', 'darkBlue', 'oldLace', 'ltGreen', 'dkOrchid', 'ltGoldenrodYellow',
'dkGrey', 'oliveDrab', 'lightSlateGrey', 'darkGoldenrod', 'dodgerBlue', 'yellowGreen',
'cyan', 'medSeaGreen', 'blue', 'mintCream', 'dkSlateGray', 'medAquamarine',
'orangeRed', 'burlyWood', 'greenYellow', 'lawnGreen', 'ivory', 'darkSeaGreen',
'thistle', 'medVioletRed', 'ltBlue', 'ltGrey', 'antiqueWhite', 'darkKhaki', 'fuchsia',
'lightBlue', 'ltSeaGreen', 'dkGray', 'dkOliveGreen', 'ltCoral', 'lightPink', 'dimGray',
'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue',
'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown',
'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise',
'darkOrchid', 'dimGrey' }
```

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

srgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

tagname = 'colorChoice'

class openpyxl.drawing.colors.ColorChoiceDescriptor(*args, **kw)

基类: *openpyxl.descriptors.base.Typed*

Objects can choose from 7 different kinds of color system. Assume RGBHex if a string is passed in.

allow_none = True

expected_type

ColorChoice 的别名

```
class openpyxl.drawing.colors.ColorMapping(bg1='lt1',    tx1='dk1',    bg2='lt2',    tx2='dk2',
                                           accent1='accent1',    accent2='accent2',    ac-
                                           cent3='accent3',    accent4='accent4',    ac-
                                           cent5='accent5',    accent6='accent6',    hlink='hlink',
                                           folHlink='folHlink', extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

accent1

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

accent2

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

accent3

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

accent4

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

accent5

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

accent6

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

bg1

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

bg2

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

folHlink

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }

hlink

Value must be one of { 'accent6', 'accent4', 'lt2', 'accent3', 'folHlink', 'accent5', 'lt1', 'hlink', 'accent1', 'dk2', 'dk1', 'accent2' }


```

tagname = 'clrMapOvr'

tx1
    Value must be one of { 'accent6' , 'accent4' , 'lt2' , 'accent3' , 'folHlink' , 'accent5' ,
    'lt1' , 'hlink' , 'accent1' , 'dk2' , 'dk1' , 'accent2' }

tx2
    Value must be one of { 'accent6' , 'accent4' , 'lt2' , 'accent3' , 'folHlink' , 'accent5' ,
    'lt1' , 'hlink' , 'accent1' , 'dk2' , 'dk1' , 'accent2' }

class openpyxl.drawing.colors.HSLColor(hue=None, sat=None, lum=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    hue
        Values must be of type <class 'int' >

    lum
        Values must be of type <class 'float' >

    sat
        Values must be of type <class 'float' >

    tagname = 'hslClr'

class openpyxl.drawing.colors.RGBPercent(r=None, g=None, b=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    b
        Values must be of type <class 'float' >

    g
        Values must be of type <class 'float' >

    r
        Values must be of type <class 'float' >

    tagname = 'rgbClr'

class openpyxl.drawing.colors.SchemeColor(tint=None, shade=None, comp=None, inv=None,
    gray=None, alpha=None, alphaOff=None, al-
    phaMod=None, hue=None, hueOff=None,
    hueMod=None, sat=None, satOff=None, sat-
    Mod=None, lum=None, lumOff=None, lum-
    Mod=None, red=None, redOff=None, red-
    Mod=None, green=None, greenOff=None,
    greenMod=None, blue=None, blueOff=None,
    blueMod=None, gamma=None, invGamma=None,
    val=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

```

alpha

Values must be of type <class 'int' >

alphaMod

Values must be of type <class 'int' >

alphaOff

Values must be of type <class 'int' >

blue

Values must be of type <class 'int' >

blueMod

Values must be of type <class 'int' >

blueOff

Values must be of type <class 'int' >

comp

Values must be of type <class 'bool' >

gamma

Values must be of type <class 'bool' >

gray

Values must be of type <class 'int' >

green

Values must be of type <class 'int' >

greenMod

Values must be of type <class 'int' >

greenOff

Values must be of type <class 'int' >

hue

Values must be of type <class 'int' >

hueMod

Values must be of type <class 'int' >

hueOff

Values must be of type <class 'int' >

inv

Values must be of type <class 'int' >

invGamma

Values must be of type <class 'bool' >

```

lum
    Values must be of type <class 'int' >

lumMod
    Values must be of type <class 'int' >

lumOff
    Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

red
    Values must be of type <class 'int' >

redMod
    Values must be of type <class 'int' >

redOff
    Values must be of type <class 'int' >

sat
    Values must be of type <class 'int' >

satMod
    Values must be of type <class 'int' >

satOff
    Values must be of type <class 'int' >

shade
    Values must be of type <class 'int' >

tagname = 'schemeClr'

tint
    Values must be of type <class 'int' >

val
    Value must be one of { 'accent2', 'accent6', 'tx1', 'accent4', 'lt2', 'tx2', 'folHlink',
    , 'accent5', 'phClr', 'bg1', 'hlink', 'lt1', 'accent1', 'accent3', 'dk1', 'dk2'
    , 'bg2' }

```

```
class openpyxl.drawing.colors.SystemColor(val='windowText',    lastClr=None,    tint=None,
                                           shade=None, comp=None, inv=None, gray=None,
                                           alpha=None,  alphaOff=None,  alphaMod=None,
                                           hue=None,    hueOff=None,    hueMod=None,
                                           sat=None,    satOff=None,    satMod=None,
                                           lum=None,    lumOff=None,    lumMod=None,
                                           red=None,    redOff=None,    redMod=None,
                                           green=None,  greenOff=None,  greenMod=None,
                                           blue=None,    blueOff=None,    blueMod=None,
                                           gamma=None, invGamma=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

alpha

Values must be of type <class 'int' >

alphaMod

Values must be of type <class 'int' >

alphaOff

Values must be of type <class 'int' >

blue

Values must be of type <class 'int' >

blueMod

Values must be of type <class 'int' >

blueOff

Values must be of type <class 'int' >

comp

Values must be of type <class 'openpyxl.drawing.colors.Transform' >

gamma

Values must be of type <class 'openpyxl.drawing.colors.Transform' >

gray

Values must be of type <class 'openpyxl.drawing.colors.Transform' >

green

Values must be of type <class 'int' >

greenMod

Values must be of type <class 'int' >

greenOff

Values must be of type <class 'int' >

hue

Values must be of type <class 'int' >

hueMod

Values must be of type <class 'int' >

hueOff

Values must be of type <class 'int' >

inv

Values must be of type <class 'openpyxl.drawing.colors.Transform' >

invGamma

Values must be of type <class 'openpyxl.drawing.colors.Transform' >

lastClr

Values must be of type <class 'str' >

lum

Values must be of type <class 'int' >

lumMod

Values must be of type <class 'int' >

lumOff

Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

red

Values must be of type <class 'int' >

redMod

Values must be of type <class 'int' >

redOff

Values must be of type <class 'int' >

sat

Values must be of type <class 'int' >

satMod

Values must be of type <class 'int' >

satOff

Values must be of type <class 'int' >

shade

Values must be of type <class 'int' >

tagname = 'sysClr'

tint

Values must be of type <class 'int' >

val

Value must be one of { 'infoText' , 'inactiveCaptionText' , 'btnFace' , 'menuText' , 'inactiveBorder' , 'btnShadow' , 'grayText' , 'menuBar' , 'btnText' , 'activeBorder' , 'windowFrame' , 'menuHighlight' , 'activeCaption' , 'infoBk' , 'highlightText' , 'captionText' , 'gradientActiveCaption' , 'background' , 'appWorkspace' , 'btnHighlight' , 'window' , '3dLight' , 'scrollBar' , 'hotLight' , '3dDkShadow' , 'menu' , 'windowText' , 'gradientInactiveCaption' , 'inactiveCaption' , 'highlight' }

class openpyxl.drawing.colors.Transform

基类: *openpyxl.descriptors.serialisable.Serialisable*

openpyxl.drawing.connector module

class openpyxl.drawing.connector.Connection(id=None, idx=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

id

Values must be of type <class 'int' >

idx

Values must be of type <class 'int' >

class openpyxl.drawing.connector.ConnectorLocking(extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

class openpyxl.drawing.connector.ConnectorNonVisual(cNvPr=None, cNvCxnSpPr=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

cNvCxnSpPr

Values must be of type <class 'openpyxl.drawing.connector.NonVisualConnectorProperties' >

cNvPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualDrawingProps' >

class openpyxl.drawing.connector.ConnectorShape(nvCxnSpPr=None, style=None, macro=None, fPublished=None, spPr=None, lished=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fPublished

Values must be of type <class 'bool' >

macro

Values must be of type <class 'str' >

```

nvCxnSpPr
    Values must be of type <class 'openpyxl.drawing.connector.ConnectorNonVisual' >

spPr
    Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

style
    Values must be of type <class 'openpyxl.drawing.geometry.ShapeStyle' >

tagname = 'cxnSp'

class openpyxl.drawing.connector.NonVisualConnectorProperties(cxnSpLocks=None,
                                                             stCxn=None,          end-
                                                             Cxn=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

cxnSpLocks
    Values must be of type <class 'openpyxl.drawing.connector.ConnectorLocking' >

endCxn
    Values must be of type <class 'openpyxl.drawing.connector.Connection' >

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

stCxn
    Values must be of type <class 'openpyxl.drawing.connector.Connection' >

class openpyxl.drawing.connector.Shape(macro=None, textlink=None, fPublished=None, fLock-
                                         sText=None, nvSpPr=None, spPr=None, style=None,
                                         txBody=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

fLocksText
    Values must be of type <class 'bool' >

fPublished
    Values must be of type <class 'bool' >

graphicalProperties
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

macro
    Values must be of type <class 'str' >

meta
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

```

nvSpPr

Values must be of type <class 'openpyxl.drawing.connector.ShapeMeta' >

spPr

Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

style

Values must be of type <class 'openpyxl.drawing.geometry.ShapeStyle' >

textlink

Values must be of type <class 'str' >

txBody

Values must be of type <class 'openpyxl.chart.text.RichText' >

class openpyxl.drawing.connector.ShapeMeta(cNvPr=None, cNvSpPr=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

cNvPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualDrawingProps' >

cNvSpPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualDrawingShapeProps' >

tagname = 'nvSpPr'

openpyxl.drawing.drawing module

class openpyxl.drawing.drawing.Drawing

基类: object

a drawing object - eg container for shapes or charts we assume user specifies dimensions in pixels; units are converted to EMU in the drawing part

anchor

count = 0

get_emu_dimensions()

return (x, y, w, h) in EMU

注解: Deprecated: Private method used when serialising

height

set_dimension(w=0, h=0)

width

openpyxl.drawing.effect module

```
class openpyxl.drawing.effect.AlphaBiLevelEffect(thresh=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

thresh

Values must be of type <class 'int' >

```
class openpyxl.drawing.effect.AlphaCeilingEffect
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
class openpyxl.drawing.effect.AlphaFloorEffect
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
class openpyxl.drawing.effect.AlphaInverseEffect
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
class openpyxl.drawing.effect.AlphaModulateEffect(cont=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

cont

Values must be of type <class 'openpyxl.drawing.effect.EffectContainer' >

```
class openpyxl.drawing.effect.AlphaModulateFixedEffect(amt=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

amt

Values must be of type <class 'int' >

```
class openpyxl.drawing.effect.AlphaReplaceEffect(a=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

a

Values must be of type <class 'int' >

```
class openpyxl.drawing.effect.BiLevelEffect(thresh=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

thresh

Values must be of type <class 'int' >

```
class openpyxl.drawing.effect.BlurEffect(rad=None, grow=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

grow

Values must be of type <class 'bool' >

rad

Values must be of type <class 'float' >

class openpyxl.drawing.effect.Color

基类: *openpyxl.descriptors.serialisable.Serialisable*

class openpyxl.drawing.effect.ColorChangeEffect(*useA=None, clrFrom=None, clrTo=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

clrFrom

Values must be of type <class 'openpyxl.drawing.effect.Color' >

clrTo

Values must be of type <class 'openpyxl.drawing.effect.Color' >

useA

Values must be of type <class 'bool' >

class openpyxl.drawing.effect.ColorReplaceEffect

基类: *openpyxl.descriptors.serialisable.Serialisable*

class openpyxl.drawing.effect.DuotoneEffect

基类: *openpyxl.descriptors.serialisable.Serialisable*

class openpyxl.drawing.effect.EffectContainer(*type=None, name=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

type

Value must be one of { 'tree' , 'sib' }

class openpyxl.drawing.effect.EffectList(*blur=None, fillOverlay=None, glow=None, innerShdw=None, outerShdw=None, prstShdw=None, reflection=None, softEdge=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

blur

Values must be of type <class 'openpyxl.drawing.effect.BlurEffect' >

fillOverlay

Values must be of type <class 'openpyxl.drawing.effect.FillOverlayEffect' >

glow

Values must be of type <class 'openpyxl.drawing.effect.GlowEffect' >

innerShdw

Values must be of type <class 'openpyxl.drawing.effect.InnerShadowEffect' >

outerShdw

Values must be of type <class 'openpyxl.drawing.effect.OuterShadow' >

prstShdw

Values must be of type <class 'openpyxl.drawing.effect.PresetShadowEffect' >

reflection

Values must be of type <class 'openpyxl.drawing.effect.ReflectionEffect' >

softEdge

Values must be of type <class 'openpyxl.drawing.effect.SoftEdgesEffect' >

class openpyxl.drawing.effect.FillOverlayEffect(blend=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

blend

Value must be one of { 'darken' , 'mult' , 'screen' , 'lighten' , 'over' }

class openpyxl.drawing.effect.GlowEffect(rad=None, **kw)

基类: *openpyxl.drawing.colors.ColorChoice*

hslClr

Values must be of type <class 'openpyxl.drawing.colors.HSLColor' >

prstClr

Value must be one of { 'green' , 'brown' , 'ltSlateGray' , 'darkCyan' , 'lime' , 'dkMagenta' , 'pink' , 'medOrchid' , 'olive' , 'darkSlateBlue' , 'seaShell' , 'gainsboro' , 'whiteSmoke' , 'paleGoldenrod' , 'salmon' , 'lightCoral' , 'white' , 'plum' , 'firebrick' , 'lavender' , 'slateBlue' , 'medTurquoise' , 'gray' , 'aqua' , 'midnightBlue' , 'mistyRose' , 'dkRed' , 'darkOliveGreen' , 'dkCyan' , 'lightGoldenrodYellow' , 'violet' , 'aliceBlue' , 'chocolate' , 'darkTurquoise' , 'cornsilk' , 'springGreen' , 'black' , 'dkGoldenrod' , 'chartreuse' , 'moccasin' , 'mediumBlue' , 'limeGreen' , 'orchid' , 'dkBlue' , 'slateGray' , 'peachPuff' , 'dkOrange' , 'medBlue' , 'goldenrod' , 'teal' , 'lightSlateGray' , 'mediumTurquoise' , 'mediumAquamarine' , 'aquamarine' , 'darkSlateGrey' , 'crimson' , 'red' , 'darkSlateGray' , 'navy' , 'papayaWhip' , 'indigo' , 'lemonChiffon' , 'ltYellow' , 'dkViolet' , 'paleGreen' , 'dkSalmon' , 'deepPink' , 'forestGreen' , 'skyBlue' , 'purple' , 'darkOrange' , 'mediumOrchid' , 'cadetBlue' , 'cornflowerBlue' , 'lightSalmon' , 'steelBlue' , 'lightYellow' , 'seaGreen' , 'ltPink' , 'indianRed' , 'deepSkyBlue' , 'lightGray' , 'honeydew' , 'wheat' , 'linen' , 'ltSalmon' , 'navajoWhite' , 'darkSalmon' , 'lavenderBlush' , 'ltSkyBlue' , 'mediumSeaGreen' , 'lightSteelBlue' , 'ltGray' , 'rosyBrown' , 'dkKhaki' , 'gold' , 'lightGrey' , 'lightCyan' , 'lightSkyBlue' , 'tomato' , 'floralWhite' , 'orange' , 'snow' , 'darkViolet' , 'sienna' , 'ltCyan' , 'darkGray' , 'peru' , 'silver' , 'dkSeaGreen' , 'grey' , 'blueViolet' , 'dkTurquoise' , 'ghostWhite' , 'darkGrey' , 'hotPink' , 'blanchedAlmond' , 'medSpringGreen' , 'sandyBrown' , 'azure' , 'dkGreen' , 'dkSlateGrey' , 'mediumPurple' , 'maroon' , 'ltSteelBlue' , 'yellow' , 'turquoise' , 'powderBlue' , 'bisque' , 'lightGreen' , 'lightSeaGreen' , 'beige' , 'darkGreen' , 'darkBlue' , 'oldLace' , 'ltGreen' , 'dkOrchid' , 'ltGoldenrodYellow' , 'dkGrey' , 'oliveDrab' , 'lightSlateGrey' , 'darkGoldenrod' , 'dodgerBlue' , 'yellowGreen' , 'cyan' , 'medSeaGreen' , 'blue' , 'mintCream' , 'dkSlateGray' , 'medAquamarine' , 'orangeRed' , 'burlyWood' , 'greenYellow' , 'lawnGreen' , 'ivory' , 'darkSeaGreen' , 'thistle' , 'medVioletRed' , 'ltBlue' , 'ltGrey' , 'antiqueWhite' , 'darkKhaki' , 'fuchsia' , 'lightBlue' , 'ltSeaGreen' , 'dkGray' , 'dkOliveGreen' , 'ltCoral' , 'lightPink' , 'dimGray' ,

```

        'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue',
        'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown',
        'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise',
        'darkOrchid', 'dimGrey' }

```

rad

Values must be of type <class 'float' >

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

scrgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

class openpyxl.drawing.effect.GrayscaleEffect

基类: *openpyxl.descriptors.serialisable.Serialisable*

tagname = 'grayscl'

class openpyxl.drawing.effect.HSLEffect(hue=None, sat=None, lum=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

hue

Values must be of type <class 'int' >

lum

Values must be of type <class 'int' >

sat

Values must be of type <class 'int' >

class openpyxl.drawing.effect.InnerShadowEffect(blurRad=None, dist=None, dir=None,

****kw)**

基类: *openpyxl.drawing.colors.ColorChoice*

blurRad

Values must be of type <class 'float' >

dir

Values must be of type <class 'int' >

dist

Values must be of type <class 'float' >

hslClr

Values must be of type <class 'openpyxl.drawing.colors.HSLColor' >

prstClr

Value must be one of { 'green', 'brown', 'ltSlateGray', 'darkCyan', 'lime', 'dkMagenta', 'pink', 'medOrchid', 'olive', 'darkSlateBlue', 'seaShell', 'gainsboro', 'whiteSmoke', 'paleGoldenrod', 'salmon', 'lightCoral', 'white', 'plum', 'firebrick', 'lavender', 'slateBlue', 'medTurquoise', 'gray', 'aqua', 'midnightBlue', 'mistyRose', 'dkRed', 'darkOliveGreen', 'dkCyan', 'lightGoldenrodYellow', 'violet', 'aliceBlue', 'chocolate', 'darkTurquoise', 'cornsilk', 'springGreen', 'black', 'dkGoldenrod', 'chartreuse', 'moccasin', 'mediumBlue', 'limeGreen', 'orchid', 'dkBlue', 'slateGray', 'peachPuff', 'dkOrange', 'medBlue', 'goldenrod', 'teal', 'lightSlateGray', 'mediumTurquoise', 'mediumAquamarine', 'aquamarine', 'darkSlateGrey', 'crimson', 'red', 'darkSlateGray', 'navy', 'papayaWhip', 'indigo', 'lemonChiffon', 'ltYellow', 'dkViolet', 'paleGreen', 'dkSalmon', 'deepPink', 'forestGreen', 'skyBlue', 'purple', 'darkOrange', 'mediumOrchid', 'cadetBlue', 'cornflowerBlue', 'lightSalmon', 'steelBlue', 'lightYellow', 'seaGreen', 'ltPink', 'indianRed', 'deepSkyBlue', 'lightGray', 'honeydew', 'wheat', 'linen', 'ltSalmon', 'navajoWhite', 'darkSalmon', 'lavenderBlush', 'ltSkyBlue', 'mediumSeaGreen', 'lightSteelBlue', 'ltGray', 'rosyBrown', 'dkKhaki', 'gold', 'lightGrey', 'lightCyan', 'lightSkyBlue', 'tomato', 'floralWhite', 'orange', 'snow', 'darkViolet', 'sienna', 'ltCyan', 'darkGray', 'peru', 'silver', 'dkSeaGreen', 'grey', 'blueViolet', 'dkTurquoise', 'ghostWhite', 'darkGrey', 'hotPink', 'blanchedAlmond', 'medSpringGreen', 'sandyBrown', 'azure', 'dkGreen', 'dkSlateGrey', 'mediumPurple', 'maroon', 'ltSteelBlue', 'yellow', 'turquoise', 'powderBlue', 'bisque', 'lightGreen', 'lightSeaGreen', 'beige', 'darkGreen', 'darkBlue', 'oldLace', 'ltGreen', 'dkOrchid', 'ltGoldenrodYellow', 'dkGrey', 'oliveDrab', 'lightSlateGrey', 'darkGoldenrod', 'dodgerBlue', 'yellowGreen', 'cyan', 'medSeaGreen', 'blue', 'mintCream', 'dkSlateGray', 'medAquamarine', 'orangeRed', 'burlyWood', 'greenYellow', 'lawnGreen', 'ivory', 'darkSeaGreen', 'thistle', 'medVioletRed', 'ltBlue', 'ltGrey', 'antiqueWhite', 'darkKhaki', 'fuchsia', 'lightBlue', 'ltSeaGreen', 'dkGray', 'dkOliveGreen', 'ltCoral', 'lightPink', 'dimGray', 'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue', 'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown', 'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise', 'darkOrchid', 'dimGrey' }

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

srgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

```
class openpyxl.drawing.effect.LuminanceEffect(bright=0, contrast=0)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

bright

Values must be of type <class 'int' >

contrast

Values must be of type <class 'int' >

tagname = 'lum'

```
class openpyxl.drawing.effect.OuterShadow(blurRad=None, dist=None, dir=None, sx=None,
                                           sy=None, kx=None, ky=None, algn=None,
                                           rotWithShape=None, **kw)
```

基类: *openpyxl.drawing.colors.ColorChoice*

algn

Value must be one of { 'b' , 'tr' , 'br' , 'bl' , 'l' , 't' , 'ctr' , 'r' , 'tl' }

blurRad

Values must be of type <class 'float' >

dir

Values must be of type <class 'int' >

dist

Values must be of type <class 'float' >

hslClr

Values must be of type <class 'openpyxl.drawing.colors.HSLColor' >

kx

Values must be of type <class 'int' >

ky

Values must be of type <class 'int' >

prstClr

Value must be one of { 'green' , 'brown' , 'ltSlateGray' , 'darkCyan' , 'lime' , 'dkMagenta' , 'pink' , 'medOrchid' , 'olive' , 'darkSlateBlue' , 'seaShell' , 'gainsboro' , 'whiteSmoke' , 'paleGoldenrod' , 'salmon' , 'lightCoral' , 'white' , 'plum' , 'firebrick' , 'lavender' , 'slateBlue' , 'medTurquoise' , 'gray' , 'aqua' , 'midnightBlue' , 'mistyRose' , 'dkRed' , 'darkOliveGreen' , 'dkCyan' , 'lightGoldenrodYellow' , 'violet' , 'aliceBlue' , 'chocolate' , 'darkTurquoise' , 'cornsilk' , 'springGreen' , 'black' , 'dkGoldenrod' , 'chartreuse' , 'moccasin' , 'mediumBlue' , 'limeGreen' , 'orchid' , 'dkBlue' , 'slateGray' , 'peachPuff' , 'dkOrange' , 'medBlue' , 'goldenrod' , 'teal' , 'lightSlateGray' , 'mediumTurquoise' , 'mediumAquamarine' , 'aquamarine' , 'darkSlateGrey' , 'crimson' , 'red' , 'darkSlateGray' , 'navy' , 'papayaWhip' , 'indigo' , 'lemonChiffon' , 'ltYellow' , 'dkViolet' , 'paleGreen' , 'dkSalmon' , 'deepPink' , 'forestGreen' , 'skyBlue' , 'purple' , 'darkOrange' , 'mediumOrchid' , 'cadetBlue' , 'cornflowerBlue' , 'lightSalmon' , 'steelBlue' , 'lightYellow' , 'seaGreen' }

```
, 'ltPink', 'indianRed', 'deepSkyBlue', 'lightGray', 'honeydew', 'wheat', 'linen',
'ltSalmon', 'navajoWhite', 'darkSalmon', 'lavenderBlush', 'ltSkyBlue', 'mediumSeaGreen',
'lightSteelBlue', 'ltGray', 'rosyBrown', 'dkKhaki', 'gold', 'lightGrey', 'lightCyan',
'lightSkyBlue', 'tomato', 'floralWhite', 'orange', 'snow', 'darkViolet', 'sienna',
'ltCyan', 'darkGray', 'peru', 'silver', 'dkSeaGreen', 'grey', 'blueViolet', 'dkTurquoise',
'ghostWhite', 'darkGrey', 'hotPink', 'blanchedAlmond', 'medSpringGreen', 'sandyBrown',
'azure', 'dkGreen', 'dkSlateGrey', 'mediumPurple', 'maroon', 'ltSteelBlue',
'yellow', 'turquoise', 'powderBlue', 'bisque', 'lightGreen', 'lightSeaGreen', 'beige',
'darkGreen', 'darkBlue', 'oldLace', 'ltGreen', 'dkOrchid', 'ltGoldenrodYellow',
'dkGrey', 'oliveDrab', 'lightSlateGrey', 'darkGoldenrod', 'dodgerBlue', 'yellowGreen',
'cyan', 'medSeaGreen', 'blue', 'mintCream', 'dkSlateGray', 'medAquamarine',
'orangeRed', 'burlyWood', 'greenYellow', 'lawnGreen', 'ivory', 'darkSeaGreen',
'thistle', 'medVioletRed', 'ltBlue', 'ltGrey', 'antiqueWhite', 'darkKhaki', 'fuchsia',
'lightBlue', 'ltSeaGreen', 'dkGray', 'dkOliveGreen', 'ltCoral', 'lightPink', 'dimGray',
'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue',
'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown',
'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise',
'darkOrchid', 'dimGrey' }
```

rotWithShape

Values must be of type <class 'bool' >

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

scrgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sx

Values must be of type <class 'int' >

sy

Values must be of type <class 'int' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

tagname = 'outerShdw'

class openpyxl.drawing.effect.PresetShadowEffect(prst=None, dist=None, dir=None, **kw)

基类: *openpyxl.drawing.colors.ColorChoice*

dir

Values must be of type <class 'int' >

dist

Values must be of type <class 'float' >

hslClr

Values must be of type <class 'openpyxl.drawing.colors.HSLColor' >

prst

Value must be one of { 'shdw10', 'shdw1', 'shdw8', 'shdw13', 'shdw7', 'shdw4', 'shdw11', 'shdw17', 'shdw3', 'shdw5', 'shdw6', 'shdw19', 'shdw14', 'shdw12', 'shdw15', 'shdw9', 'shdw20', 'shdw18', 'shdw16', 'shdw2' }

prstClr

Value must be one of { 'green', 'brown', 'ltSlateGray', 'darkCyan', 'lime', 'dkMagenta', 'pink', 'medOrchid', 'olive', 'darkSlateBlue', 'seaShell', 'gainsboro', 'whiteSmoke', 'paleGoldenrod', 'salmon', 'lightCoral', 'white', 'plum', 'firebrick', 'lavender', 'slateBlue', 'medTurquoise', 'gray', 'aqua', 'midnightBlue', 'mistyRose', 'dkRed', 'darkOliveGreen', 'dkCyan', 'lightGoldenrodYellow', 'violet', 'aliceBlue', 'chocolate', 'darkTurquoise', 'cornsilk', 'springGreen', 'black', 'dkGoldenrod', 'chartreuse', 'moccasin', 'mediumBlue', 'limeGreen', 'orchid', 'dkBlue', 'slateGray', 'peachPuff', 'dkOrange', 'medBlue', 'goldenrod', 'teal', 'lightSlateGray', 'mediumTurquoise', 'mediumAquamarine', 'aquamarine', 'darkSlateGrey', 'crimson', 'red', 'darkSlateGray', 'navy', 'papayaWhip', 'indigo', 'lemonChiffon', 'ltYellow', 'dkViolet', 'paleGreen', 'dkSalmon', 'deepPink', 'forestGreen', 'skyBlue', 'purple', 'darkOrange', 'mediumOrchid', 'cadetBlue', 'cornflowerBlue', 'lightSalmon', 'steelBlue', 'lightYellow', 'seaGreen', 'ltPink', 'indianRed', 'deepSkyBlue', 'lightGray', 'honeydew', 'wheat', 'linen', 'ltSalmon', 'navajoWhite', 'darkSalmon', 'lavenderBlush', 'ltSkyBlue', 'mediumSeaGreen', 'lightSteelBlue', 'ltGray', 'rosyBrown', 'dkKhaki', 'gold', 'lightGrey', 'lightCyan', 'lightSkyBlue', 'tomato', 'floralWhite', 'orange', 'snow', 'darkViolet', 'sienna', 'ltCyan', 'darkGray', 'peru', 'silver', 'dkSeaGreen', 'grey', 'blueViolet', 'dkTurquoise', 'ghostWhite', 'darkGrey', 'hotPink', 'blanchedAlmond', 'medSpringGreen', 'sandyBrown', 'azure', 'dkGreen', 'dkSlateGrey', 'mediumPurple', 'maroon', 'ltSteelBlue', 'yellow', 'turquoise', 'powderBlue', 'bisque', 'lightGreen', 'lightSeaGreen', 'beige', 'darkGreen', 'darkBlue', 'oldLace', 'ltGreen', 'dkOrchid', 'ltGoldenrodYellow', 'dkGrey', 'oliveDrab', 'lightSlateGrey', 'darkGoldenrod', 'dodgerBlue', 'yellowGreen', 'cyan', 'medSeaGreen', 'blue', 'mintCream', 'dkSlateGray', 'medAquamarine', 'orangeRed', 'burlyWood', 'greenYellow', 'lawnGreen', 'ivory', 'darkSeaGreen', 'thistle', 'medVioletRed', 'ltBlue', 'ltGrey', 'antiqueWhite', 'darkKhaki', 'fuchsia', 'lightBlue', 'ltSeaGreen', 'dkGray', 'dkOliveGreen', 'ltCoral', 'lightPink', 'dimGray', 'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue', 'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown', 'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise', 'darkOrchid', 'dimGrey' }

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

scrgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

```
class openpyxl.drawing.effect.ReflectionEffect(blurRad=None,  stA=None,  stPos=None,
                                              endA=None,  endPos=None,  dist=None,
                                              dir=None,  fadeDir=None,  sx=None,
                                              sy=None,  kx=None,  ky=None,  algn=None,
                                              rotWithShape=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

algn

Value must be one of { 'b' , 'tr' , 'br' , 'bl' , 'l' , 't' , 'ctr' , 'r' , 'tl' }

blurRad

Values must be of type <class 'float' >

dir

Values must be of type <class 'int' >

dist

Values must be of type <class 'float' >

endA

Values must be of type <class 'int' >

endPos

Values must be of type <class 'int' >

fadeDir

Values must be of type <class 'int' >

kx

Values must be of type <class 'int' >

ky

Values must be of type <class 'int' >

rotWithShape

Values must be of type <class 'bool' >

stA

Values must be of type <class 'int' >

stPos

Values must be of type <class 'int' >

sx

Values must be of type <class 'int' >

sy

Values must be of type <class 'int' >

class openpyxl.drawing.effect.SoftEdgesEffect(rad=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

rad

Values must be of type <class 'float' >

class openpyxl.drawing.effect.TintEffect(hue=0, amt=0)

基类: *openpyxl.descriptors.serialisable.Serialisable*

amt

Values must be of type <class 'int' >

hue

Values must be of type <class 'int' >

tagname = 'tint'

openpyxl.drawing.fill module

class openpyxl.drawing.fill.Blip(cstate=None, embed=None, link=None, noGrp=None, noSelect=None, noRot=None, noChangeAspect=None, noMove=None, noResize=None, noEditPoints=None, noAdjustHandles=None, noChangeArrowheads=None, noChangeShapeType=None, extLst=None, alphaBiLevel=None, alphaCeiling=None, alphaFloor=None, alphaInv=None, alphaMod=None, alphaModFix=None, alphaRepl=None, biLevel=None, blur=None, clrChange=None, clrRepl=None, duotone=None, fillOverlay=None, grayscl=None, hsl=None, lum=None, tint=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

alphaBiLevel

Values must be of type <class 'openpyxl.drawing.effect.AlphaBiLevelEffect' >

alphaCeiling

Values must be of type <class 'openpyxl.drawing.effect.AlphaCeilingEffect' >

alphaFloor

Values must be of type <class 'openpyxl.drawing.effect.AlphaFloorEffect' >

alphaInv

Values must be of type <class 'openpyxl.drawing.effect.AlphaInverseEffect' >

alphaMod

Values must be of type <class 'openpyxl.drawing.effect.AlphaModulateEffect' >

alphaModFix

Values must be of type <class 'openpyxl.drawing.effect.AlphaModulateFixedEffect' >

alphaRepl

Values must be of type <class 'openpyxl.drawing.effect.AlphaReplaceEffect' >

biLevel

Values must be of type <class 'openpyxl.drawing.effect.BiLevelEffect' >

blur

Values must be of type <class 'openpyxl.drawing.effect.BlurEffect' >

clrChange

Values must be of type <class 'openpyxl.drawing.effect.ColorChangeEffect' >

clrRepl

Values must be of type <class 'openpyxl.drawing.effect.ColorReplaceEffect' >

cstate

Value must be one of { 'print' , 'email' , 'screen' , 'hqprint' }

duotone

Values must be of type <class 'openpyxl.drawing.effect.DuotoneEffect' >

embed

Values must be of type <class 'str' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fillOverlay

Values must be of type <class 'openpyxl.drawing.effect.FillOverlayEffect' >

grayscale

Values must be of type <class 'openpyxl.drawing.effect.GrayscaleEffect' >

hsl

Values must be of type <class 'openpyxl.drawing.effect.HSLEffect' >

link

Values must be of type <class 'str' >

lum

Values must be of type <class 'openpyxl.drawing.effect.LuminanceEffect' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

noAdjustHandles

Values must be of type <class 'bool' >

noChangeArrowheads

Values must be of type <class 'bool' >

noChangeAspect

Values must be of type <class 'bool' >

noChangeShapeType

Values must be of type <class 'bool' >

noEditPoints

Values must be of type <class 'bool' >

noGrp

Values must be of type <class 'bool' >

noMove

Values must be of type <class 'bool' >

noResize

Values must be of type <class 'bool' >

noRot

Values must be of type <class 'bool' >

noSelect

Values must be of type <class 'bool' >

tagname = 'blip'

tint

Values must be of type <class 'openpyxl.drawing.effect.TintEffect' >

```
class openpyxl.drawing.fill.BlipFillProperties(dpi=None, rotWithShape=None,
                                             blip=None, tile=None,
                                             stretch=<openpyxl.drawing.fill.StretchInfoProperties
                                             object> Parameters: fill-
                                             Rect=<openpyxl.drawing.fill.RelativeRect
                                             object> Parameters: l=None, t=None,
                                             r=None, b=None, srcRect=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

blip

Values must be of type <class 'openpyxl.drawing.fill.Blip' >

dpi

Values must be of type <class 'int' >

```

rotWithShape
    Values must be of type <class 'bool' >

srcRect
    Values must be of type <class 'openpyxl.drawing.fill.RelativeRect' >

stretch
    Values must be of type <class 'openpyxl.drawing.fill.StretchInfoProperties' >

tagname = 'blipFill'

tile
    Values must be of type <class 'openpyxl.drawing.fill.TileInfoProperties' >

class openpyxl.drawing.fill.GradientFillProperties(flip=None,      rotWithShape=None,
                                                    gsLst=(),      lin=None,      path=None,
                                                    tileRect=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

flip
    Value must be one of { 'xy' , 'y' , 'x' }

gsLst
    Wrap a sequence in an containing object

lin
    Values must be of type <class 'openpyxl.drawing.fill.LinearShadeProperties' >

linear
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

path
    Values must be of type <class 'openpyxl.drawing.fill.PathShadeProperties' >

rotWithShape
    Values must be of type <class 'bool' >

stop_list
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

tagname = 'gradFill'

tileRect
    Values must be of type <class 'openpyxl.drawing.fill.RelativeRect' >

class openpyxl.drawing.fill.GradientStop(pos=None,      scrGbClr=None,      srgbClr=None,
                                          hslClr=None,      sysClr=None,      schemeClr=None,
                                          prstClr=None)

```

基类: `openpyxl.descriptors.serialisable.Serialisable`

RGB

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

RGBPercent

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

hslClr

Values must be of type <class ‘openpyxl.drawing.colors.HSLColor’ >

`namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'`

pos

Values must be of type <class ‘float’ >

prstClr

Value must be one of { ‘green’, ‘brown’, ‘ltSlateGray’, ‘darkCyan’, ‘lime’, ‘dkMagenta’, ‘pink’, ‘medOrchid’, ‘olive’, ‘darkSlateBlue’, ‘seaShell’, ‘gainsboro’, ‘whiteSmoke’, ‘paleGoldenrod’, ‘salmon’, ‘lightCoral’, ‘white’, ‘plum’, ‘firebrick’, ‘lavender’, ‘slateBlue’, ‘medTurquoise’, ‘gray’, ‘aqua’, ‘midnightBlue’, ‘mistyRose’, ‘dkRed’, ‘darkOliveGreen’, ‘dkCyan’, ‘lightGoldenrodYellow’, ‘violet’, ‘aliceBlue’, ‘chocolate’, ‘darkTurquoise’, ‘cornsilk’, ‘springGreen’, ‘black’, ‘dkGoldenrod’, ‘chartreuse’, ‘moccasin’, ‘mediumBlue’, ‘limeGreen’, ‘orchid’, ‘dkBlue’, ‘slateGray’, ‘peachPuff’, ‘dkOrange’, ‘medBlue’, ‘goldenrod’, ‘teal’, ‘lightSlateGray’, ‘mediumTurquoise’, ‘mediumAquamarine’, ‘aquamarine’, ‘darkSlateGrey’, ‘crimson’, ‘red’, ‘darkSlateGray’, ‘navy’, ‘papayaWhip’, ‘indigo’, ‘lemonChiffon’, ‘ltYellow’, ‘dkViolet’, ‘paleGreen’, ‘dkSalmon’, ‘deepPink’, ‘forestGreen’, ‘skyBlue’, ‘purple’, ‘darkOrange’, ‘mediumOrchid’, ‘cadetBlue’, ‘cornflowerBlue’, ‘lightSalmon’, ‘steelBlue’, ‘lightYellow’, ‘seaGreen’, ‘ltPink’, ‘indianRed’, ‘deepSkyBlue’, ‘lightGray’, ‘honeydew’, ‘wheat’, ‘linen’, ‘ltSalmon’, ‘navajoWhite’, ‘darkSalmon’, ‘lavenderBlush’, ‘ltSkyBlue’, ‘mediumSeaGreen’, ‘lightSteelBlue’, ‘ltGray’, ‘rosyBrown’, ‘dkKhaki’, ‘gold’, ‘lightGrey’, ‘lightCyan’, ‘lightSkyBlue’, ‘tomato’, ‘floralWhite’, ‘orange’, ‘snow’, ‘darkViolet’, ‘sienna’, ‘ltCyan’, ‘darkGray’, ‘peru’, ‘silver’, ‘dkSeaGreen’, ‘grey’, ‘blueViolet’, ‘dkTurquoise’, ‘ghostWhite’, ‘darkGrey’, ‘hotPink’, ‘blanchedAlmond’, ‘medSpringGreen’, ‘sandyBrown’, ‘azure’, ‘dkGreen’, ‘dkSlateGrey’, ‘mediumPurple’, ‘maroon’, ‘ltSteelBlue’, ‘yellow’, ‘turquoise’, ‘powderBlue’, ‘bisque’, ‘lightGreen’, ‘lightSeaGreen’, ‘beige’, ‘darkGreen’, ‘darkBlue’, ‘oldLace’, ‘ltGreen’, ‘dkOrchid’, ‘ltGoldenrodYellow’, ‘dkGrey’, ‘oliveDrab’, ‘lightSlateGrey’, ‘darkGoldenrod’, ‘dodgerBlue’, ‘yellowGreen’, ‘cyan’, ‘medSeaGreen’, ‘blue’, ‘mintCream’, ‘dkSlateGray’, ‘medAquamarine’, ‘orangeRed’, ‘burlyWood’, ‘greenYellow’, ‘lawnGreen’, ‘ivory’, ‘darkSeaGreen’, ‘thistle’, ‘medVioletRed’, ‘ltBlue’, ‘ltGrey’, ‘antiqueWhite’, ‘darkKhaki’, ‘fuchsia’, ‘lightBlue’, ‘ltSeaGreen’, ‘dkGray’, ‘dkOliveGreen’, ‘ltCoral’, ‘lightPink’, ‘dimGray’,

```

'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue',
'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown',
'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise',
'darkOrchid', 'dimGrey' }

```

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

scrgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

tagname = 'gs'

class openpyxl.drawing.fill.LinearShadeProperties(*ang=None, scaled=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

ang

Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

scaled

Values must be of type <class 'bool' >

tagname = 'lin'

class openpyxl.drawing.fill.PathShadeProperties(*path=None, fillToRect=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fillToRect

Values must be of type <class 'openpyxl.drawing.fill.RelativeRect' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

path

Value must be one of { 'rect', 'circle', 'shape' }

tagname = 'path'

class openpyxl.drawing.fill.PatternFillProperties(*prst=None, fgClr=None, bgClr=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

background

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

bgClr

Values must be of type <class 'openpyxl.drawing.colors.ColorChoice' >

fgClr

Values must be of type <class 'openpyxl.drawing.colors.ColorChoice' >

foreground

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

preset

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

prst

Value must be one of { 'wdDnDiag' , 'diagCross' , 'weave' , 'dashDnDiag' , 'smCheck' , 'lgGrid' , 'sphere' , 'pct60' , 'vert' , 'upDiag' , 'cross' , 'pct75' , 'pct5' , 'pct20' , 'dkHorz' , 'pct80' , 'dashHorz' , 'dkDnDiag' , 'horz' , 'narVert' , 'divot' , 'lgConfetti' , 'dashUpDiag' , 'dkVert' , 'wdUpDiag' , 'diagBrick' , 'narHorz' , 'plaid' , 'smConfetti' , 'ltVert' , 'ltUpDiag' , 'horzBrick' , 'wave' , 'ltHorz' , 'smGrid' , 'dotDmnd' , 'pct25' , 'pct30' , 'ltDnDiag' , 'pct50' , 'pct40' , 'dkUpDiag' , 'trellis' , 'pct70' , 'lgCheck' , 'solidDmnd' , 'dashVert' , 'zigZag' , 'dotGrid' , 'dnDiag' , 'shingle' , 'pct10' , 'openDmnd' , 'pct90' }

tagname = 'pattFill'

class openpyxl.drawing.fill.RelativeRect(l=None, t=None, r=None, b=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

b

Values must be of type <class 'float' >

bottom

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

l

Values must be of type <class 'float' >

left

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

r

Values must be of type <class 'float' >

right

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

t

Values must be of type <class ‘float’ >

tagname = 'rect'

top

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
class openpyxl.drawing.fill.SolidColorFillProperties(scrbgClr=None,          srgbClr=None,
                                                    hslClr=None, sysClr=None, scheme-
                                                    Clr=None, prstClr=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

RGB

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

RGBPercent

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

hslClr

Values must be of type <class ‘openpyxl.drawing.colors.HSLColor’ >

prstClr

Value must be one of { ‘green’, ‘brown’, ‘ltSlateGray’, ‘darkCyan’, ‘lime’, ‘dkMagenta’, ‘pink’, ‘medOrchid’, ‘olive’, ‘darkSlateBlue’, ‘seaShell’, ‘gainsboro’, ‘whiteSmoke’, ‘paleGoldenrod’, ‘salmon’, ‘lightCoral’, ‘white’, ‘plum’, ‘firebrick’, ‘lavender’, ‘slateBlue’, ‘medTurquoise’, ‘gray’, ‘aqua’, ‘midnightBlue’, ‘mistyRose’, ‘dkRed’, ‘darkOliveGreen’, ‘dkCyan’, ‘lightGoldenrodYellow’, ‘violet’, ‘aliceBlue’, ‘chocolate’, ‘darkTurquoise’, ‘cornsilk’, ‘springGreen’, ‘black’, ‘dkGoldenrod’, ‘chartreuse’, ‘moccasin’, ‘mediumBlue’, ‘limeGreen’, ‘orchid’, ‘dkBlue’, ‘slateGray’, ‘peachPuff’, ‘dkOrange’, ‘medBlue’, ‘goldenrod’, ‘teal’, ‘lightSlateGray’, ‘mediumTurquoise’, ‘mediumAquamarine’, ‘aquamarine’, ‘darkSlateGrey’, ‘crimson’, ‘red’, ‘darkSlateGray’, ‘navy’, ‘papayaWhip’, ‘indigo’, ‘lemonChiffon’, ‘ltYellow’, ‘dkViolet’, ‘paleGreen’, ‘dkSalmon’, ‘deepPink’, ‘forestGreen’, ‘skyBlue’, ‘purple’, ‘darkOrange’, ‘mediumOrchid’, ‘cadetBlue’, ‘cornflowerBlue’, ‘lightSalmon’, ‘steelBlue’, ‘lightYellow’, ‘seaGreen’, ‘ltPink’, ‘indianRed’, ‘deepSkyBlue’, ‘lightGray’, ‘honeydew’, ‘wheat’, ‘linen’, ‘ltSalmon’, ‘navajoWhite’, ‘darkSalmon’, ‘lavenderBlush’, ‘ltSkyBlue’, ‘mediumSeaGreen’, ‘lightSteelBlue’, ‘ltGray’, ‘rosyBrown’, ‘dkKhaki’, ‘gold’, ‘lightGrey’, ‘lightCyan’, ‘lightSkyBlue’, ‘tomato’, ‘floralWhite’, ‘orange’, ‘snow’, ‘darkViolet’, ‘sienna’, ‘ltCyan’, ‘darkGray’, ‘peru’, ‘silver’, ‘dkSeaGreen’, ‘grey’, ‘blueViolet’, ‘dkTurquoise’,

```

'ghostWhite', 'darkGrey', 'hotPink', 'blanchedAlmond', 'medSpringGreen', 'sandyBrown',
'azure', 'dkGreen', 'dkSlateGrey', 'mediumPurple', 'maroon', 'ltSteelBlue',
'yellow', 'turquoise', 'powderBlue', 'bisque', 'lightGreen', 'lightSeaGreen', 'beige',
'darkGreen', 'darkBlue', 'oldLace', 'ltGreen', 'dkOrchid', 'ltGoldenrodYellow',
'dkGrey', 'oliveDrab', 'lightSlateGrey', 'darkGoldenrod', 'dodgerBlue', 'yellowGreen',
'cyan', 'medSeaGreen', 'blue', 'mintCream', 'dkSlateGray', 'medAquamarine',
'orangeRed', 'burlyWood', 'greenYellow', 'lawnGreen', 'ivory', 'darkSeaGreen',
'thistle', 'medVioletRed', 'ltBlue', 'ltGrey', 'antiqueWhite', 'darkKhaki', 'fuchsia',
'lightBlue', 'ltSeaGreen', 'dkGray', 'dkOliveGreen', 'ltCoral', 'lightPink', 'dimGray',
'darkRed', 'royalBlue', 'tan', 'paleVioletRed', 'medSlateBlue', 'khaki', 'dkSlateBlue',
'magenta', 'mediumSlateBlue', 'mediumSpringGreen', 'slateGrey', 'saddleBrown',
'medPurple', 'coral', 'ltSlateGrey', 'darkMagenta', 'mediumVioletRed', 'paleTurquoise',
'darkOrchid', 'dimGrey' }

```

schemeClr

Values must be of type <class 'openpyxl.drawing.colors.SchemeColor' >

srgbClr

Values must be of type <class 'openpyxl.drawing.colors.RGBPercent' >

srgbClr

Values must be of type <class 'str' >

sysClr

Values must be of type <class 'openpyxl.drawing.colors.SystemColor' >

tagname = 'solidFill'

```

class openpyxl.drawing.fill.StretchInfoProperties(fillRect=<openpyxl.drawing.fill.RelativeRect
object> Parameters: l=None, t=None,
r=None, b=None)

```

基类: *openpyxl.descriptors.serialisable.Serialisable*

fillRect

Values must be of type <class 'openpyxl.drawing.fill.RelativeRect' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

tagname = 'stretch'

```

class openpyxl.drawing.fill.TileInfoProperties(tx=None, ty=None, sx=None, sy=None,
flip=None, algn=None)

```

基类: *openpyxl.descriptors.serialisable.Serialisable*

algn

Value must be one of { 'b', 'tr', 'br', 'bl', 'l', 't', 'ctr', 'r', 'tl' }

flip

Value must be one of { 'xy', 'y', 'x' }

sx
Values must be of type <class 'int' >

sy
Values must be of type <class 'int' >

tx
Values must be of type <class 'int' >

ty
Values must be of type <class 'int' >

openpyxl.drawing.geometry module

class openpyxl.drawing.geometry.AdjPoint2D(x=None, y=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

x
Values must be of type <class 'int' >

y
Values must be of type <class 'int' >

class openpyxl.drawing.geometry.AdjustHandleList

基类: *openpyxl.descriptors.serialisable.Serialisable*

class openpyxl.drawing.geometry.Backdrop(anchor=None, norm=None, up=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

anchor
Values must be of type <class 'openpyxl.drawing.geometry.Point3D' >

extLst
Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

norm
Values must be of type <class 'openpyxl.drawing.geometry.Vector3D' >

up
Values must be of type <class 'openpyxl.drawing.geometry.Vector3D' >

class openpyxl.drawing.geometry.Bevel(w=None, h=None, prst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

h
Values must be of type <class 'int' >

prst
Value must be one of { 'hardEdge' , 'divot' , 'riblet' , 'slope' , 'angle' , 'convex' ,

‘coolSlant’ , ‘relaxedInset’ , ‘artDeco’ , ‘cross’ , ‘circle’ , ‘softRound’ }

tagname = 'bevel'

w

Values must be of type <class ‘int’ >

class openpyxl.drawing.geometry.Camera(*prst=None, fov=None, zoom=None, rot=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fov

Values must be of type <class ‘int’ >

prst

Value must be one of { ‘isometricOffAxis2Top’ , ‘obliqueBottomRight’ , ‘obliqueTopRight’ , ‘isometricOffAxis1Right’ , ‘legacyObliqueRight’ , ‘perspectiveAbove’ , ‘isometricLeftUp’ , ‘legacyObliqueBottomLeft’ , ‘isometricBottomUp’ , ‘legacyObliqueTopRight’ , ‘perspectiveHeroicLeftFacing’ , ‘isometricOffAxis1Left’ , ‘isometricOffAxis3Bottom’ , ‘legacyPerspectiveBottom’ , ‘perspectiveHeroicRightFacing’ , ‘legacyPerspectiveTopRight’ , ‘isometricTopUp’ , ‘legacyPerspectiveBottomLeft’ , ‘perspectiveFront’ , ‘legacyPerspectiveTop’ , ‘obliqueTop’ , ‘perspectiveAboveLeftFacing’ , ‘legacyObliqueFront’ , ‘perspectiveContrastingRightFacing’ , ‘perspectiveHeroicExtremeRightFacing’ , ‘legacyPerspectiveTopLeft’ , ‘isometricLeftDown’ , ‘perspectiveRelaxed’ , ‘legacyPerspectiveBottomRight’ , ‘perspectiveHeroicExtremeLeftFacing’ , ‘legacyObliqueBottomRight’ , ‘isometricTopDown’ , ‘legacyObliqueTop’ , ‘isometricOffAxis1Top’ , ‘legacyPerspectiveRight’ , ‘orthographicFront’ , ‘obliqueBottomLeft’ , ‘legacyObliqueLeft’ , ‘isometricOffAxis2Left’ , ‘isometricOffAxis3Left’ , ‘isometricOffAxis2Right’ , ‘obliqueRight’ , ‘isometricRightDown’ , ‘legacyObliqueTopLeft’ , ‘obliqueBottom’ , ‘perspectiveContrastingLeftFacing’ , ‘legacyPerspectiveLeft’ , ‘isometricOffAxis4Left’ , ‘perspectiveLeft’ , ‘isometricBottomDown’ , ‘isometricOffAxis4Right’ , ‘isometricRightUp’ , ‘obliqueTopLeft’ , ‘perspectiveRelaxedModerately’ , ‘perspectiveRight’ , ‘perspectiveAboveRightFacing’ , ‘legacyPerspectiveFront’ , ‘perspectiveBelow’ , ‘obliqueLeft’ , ‘legacyObliqueBottom’ , ‘isometricOffAxis4Bottom’ , ‘isometricOffAxis3Right’ }

rot

Values must be of type <class ‘openpyxl.drawing.geometry.SphereCoords’ >

tagname = 'camera'

zoom

Values must be of type <class ‘openpyxl.descriptors.excel.Percentage’ >

class openpyxl.drawing.geometry.ConnectionSite(*ang=None, pos=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

ang

Values must be of type <class ‘float’ >

pos

Values must be of type <class 'openpyxl.drawing.geometry.AdjPoint2D' >

class openpyxl.drawing.geometry.ConnectionSiteList(cxn=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

cxn

Values must be of type <class 'openpyxl.drawing.geometry.ConnectionSite' >

class openpyxl.drawing.geometry.CustomGeometry2D(avLst=None, gdLst=None, ahLst=None, cxnLst=None, rect=None, pathLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

ahLst

Values must be of type <class 'openpyxl.drawing.geometry.AdjustHandleList' >

avLst

Values must be of type <class 'openpyxl.drawing.geometry.GeomGuideList' >

cxnLst

Values must be of type <class 'openpyxl.drawing.geometry.ConnectionSiteList' >

gdLst

Values must be of type <class 'openpyxl.drawing.geometry.GeomGuideList' >

pathLst

Values must be of type <class 'openpyxl.drawing.geometry.Path2DList' >

class openpyxl.drawing.geometry.FontReference(idx=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

idx

Value must be one of { 'major' , 'minor' }

class openpyxl.drawing.geometry.GeomGuide(name=None, fmla=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fmla

Values must be of type <class 'str' >

name

Values must be of type <class 'str' >

class openpyxl.drawing.geometry.GeomGuideList(gd=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

gd

Values must be of type <class 'openpyxl.drawing.geometry.GeomGuide' >

class openpyxl.drawing.geometry.GeomRect(l=None, t=None, r=None, b=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

b
Values must be of type <class 'int' >

l
Values must be of type <class 'int' >

r
Values must be of type <class 'int' >

t
Values must be of type <class 'int' >

```
class openpyxl.drawing.geometry.GroupTransform2D(rot=0,      flipH=None,      flipV=None,
                                                  off=None,      ext=None,      chOff=None,
                                                  chExt=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

chExt
Values must be of type <class 'openpyxl.drawing.geometry.PositiveSize2D' >

chOff
Values must be of type <class 'openpyxl.drawing.geometry.Point2D' >

ext
Values must be of type <class 'openpyxl.drawing.geometry.PositiveSize2D' >

flipH
Values must be of type <class 'bool' >

flipV
Values must be of type <class 'bool' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

off
Values must be of type <class 'openpyxl.drawing.geometry.Point2D' >

rot
Values must be of type <class 'int' >

tagname = 'xfrm'

```
class openpyxl.drawing.geometry.LightRig(rig=None, dir=None, rot=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

dir
Value must be one of { 'b' , 'tr' , 'br' , 'bl' , 'l' , 't' , 'r' , 'tl' }

rig
Value must be one of { 'sunset' , 'threePt' , 'legacyNormal1' , 'legacyFlat4' , 'brightRoom' , 'legacyFlat3' , 'flood' , 'legacyHarsh3' , 'flat' , 'legacyHarsh2' , 'soft' , 'twoPt' , 'legacyNormal2' , 'freezing' , 'legacyFlat1' , 'glow' , 'legacyHarsh4' , 'contrasting' ,

```

        'harsh', 'balanced', 'sunrise', 'legacyNormal4', 'legacyFlat2', 'chilly', 'morning',
        'legacyNormal3', 'legacyHarsh1' }

    rot
        Values must be of type <class 'openpyxl.drawing.geometry.SphereCoords' >

    tagname = 'lightRig'

class openpyxl.drawing.geometry.Path2D(w=None, h=None, fill=None, stroke=None, extru-
                                     sionOk=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    extrusionOk
        Values must be of type <class 'bool' >

    fill
        Value must be one of { 'darkenLess', 'darken', 'lighten', 'lightenLess', 'norm' }

    h
        Values must be of type <class 'float' >

    stroke
        Values must be of type <class 'bool' >

    w
        Values must be of type <class 'float' >

class openpyxl.drawing.geometry.Path2DList(path=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    path
        Values must be of type <class 'openpyxl.drawing.geometry.Path2D' >

class openpyxl.drawing.geometry.Point2D(x=None, y=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

    tagname = 'off'

    x
        Values must be of type <class 'int' >

    y
        Values must be of type <class 'int' >

class openpyxl.drawing.geometry.Point3D(x=None, y=None, z=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    tagname = 'anchor'

    x
        Values must be of type <class 'int' >

```

y

Values must be of type <class 'int' >

z

Values must be of type <class 'int' >

class openpyxl.drawing.geometry.PositiveSize2D(cx=None, cy=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

cx

Values must be of type <class 'int' >

cy

Values must be of type <class 'int' >

height

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

Dimensions in EMUs

tagname = 'ext'

width

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

class openpyxl.drawing.geometry.PresetGeometry2D(prst=None, avLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

avLst

Values must be of type <class 'openpyxl.drawing.geometry.GeomGuideList' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

prst

Value must be one of { 'curvedDownArrow' , 'flowChartPunchedTape' , 'ellipseRibbon2' , 'actionButtonSound' , 'flowChartTerminator' , 'rightArrowCallout' , 'nonIsoscelesTrapezoid' , 'bentArrow' , 'snip1Rect' , 'flowChartMagneticDisk' , 'mathDivide' , 'flowChartOnlineStorage' , 'star24' , 'leftUpArrow' , 'round1Rect' , 'curvedConnector3' , 'flowChartInternalStorage' , 'homePlate' , 'flowChartDocument' , 'curvedUpArrow' , 'flowChartDisplay' , 'mathNotEqual' , 'leftArrowCallout' , 'gear6' , 'callout1' , 'corner' , 'accentCallout1' , 'lineInv' , 'actionButtonForwardNext' , 'leftRightCircularArrow' , 'stripedRightArrow' , 'swooshArrow' , 'actionButtonReturn' , 'star6' , 'heart' , 'downArrowCallout' , 'borderCallout2' , 'chartStar' , 'flowChartDecision' , 'star8' , 'bracePair' , 'borderCallout3' , 'roundRect' , 'bentUpArrow' , 'upArrow' , 'flowChartManualOperation' , 'donut' , 'leftRightArrowCallout' , 'star5' , 'uturnArrow' , 'mathEqual' , 'curvedLeftArrow' , 'actionButtonEnd' , 'wedgeRectCallout' , 'flowChartMagneticDrum' , 'leftBracket' , 'flowChartOr' , 'callout3' , 'star4' , 'blockArc' ,

‘trapezoid’, ‘plaque’, ‘decagon’, ‘diagStripe’, ‘snip2SameRect’, ‘wedgeRoundRectCallout’, ‘moon’, ‘flowChartManualInput’, ‘lightningBolt’, ‘notchedRightArrow’, ‘octagon’, ‘accentBorderCallout3’, ‘flowChartOffpageConnector’, ‘mathMinus’, ‘quadArrowCallout’, ‘wave’, ‘leftRightRibbon’, ‘actionButtonBlank’, ‘pentagon’, ‘cube’, ‘leftBrace’, ‘rtTriangle’, ‘cloudCallout’, ‘flowChartInputOutput’, ‘star10’, ‘funnel’, ‘dodecagon’, ‘bentConnector3’, ‘line’, ‘foldedCorner’, ‘rightArrow’, ‘snipRoundRect’, ‘star32’, ‘smileyFace’, ‘upDownArrow’, ‘can’, ‘round2DiagRect’, ‘curvedRightArrow’, ‘snip2DiagRect’, ‘noSmoking’, ‘callout2’, ‘upArrowCallout’, ‘actionButtonHome’, ‘arc’, ‘hexagon’, ‘halfFrame’, ‘wedgeEllipseCallout’, ‘rightBracket’, ‘accentCallout2’, ‘ribbon’, ‘flowChartSort’, ‘chord’, ‘actionButtonInformation’, ‘flowChartExtract’, ‘leftCircularArrow’, ‘quadArrow’, ‘rect’, ‘verticalScroll’, ‘flowChartDelay’, ‘accentBorderCallout1’, ‘flowChartAlternateProcess’, ‘star7’, ‘curvedConnector2’, ‘flowChartPreparation’, ‘curvedConnector5’, ‘chevron’, ‘actionButtonBackPrevious’, ‘borderCallout1’, ‘squareTabs’, ‘doubleWave’, ‘chartPlus’, ‘star12’, ‘actionButtonDocument’, ‘leftArrow’, ‘irregularSeal1’, ‘circularArrow’, ‘round2SameRect’, ‘gear9’, ‘downArrow’, ‘cornerTabs’, ‘accentCallout3’, ‘actionButtonMovie’, ‘flowChartOfflineStorage’, ‘diamond’, ‘plaqueTabs’, ‘bevel’, ‘bentConnector4’, ‘teardrop’, ‘leftRightArrow’, ‘heptagon’, ‘star16’, ‘bentConnector5’, ‘flowChartConnector’, ‘mathMultiply’, ‘chartX’, ‘mathPlus’, ‘parallelogram’, ‘flowChartSummingJunction’, ‘ribbon2’, ‘irregularSeal2’, ‘pieWedge’, ‘frame’, ‘bentConnector2’, ‘flowChartMultidocument’, ‘leftRightUpArrow’, ‘straightConnector1’, ‘actionButtonBeginning’, ‘ellipse’, ‘flowChartMagneticTape’, ‘cloud’, ‘flowChartPredefinedProcess’, ‘horizontalScroll’, ‘bracketPair’, ‘accentBorderCallout2’, ‘curvedConnector4’, ‘plus’, ‘flowChartProcess’, ‘actionButtonHelp’, ‘rightBrace’, ‘flowChartCollate’, ‘flowChartPunchedCard’, ‘flowChartMerge’, ‘triangle’, ‘pie’, ‘upDownArrowCallout’, ‘ellipseRibbon’, ‘sun’ }

```
class openpyxl.drawing.geometry.Scene3D(camera=None, lightRig=None, backdrop=None,
                                         extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

backdrop

Values must be of type <class ‘openpyxl.drawing.geometry.Backdrop’ >

camera

Values must be of type <class ‘openpyxl.drawing.geometry.Camera’ >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

lightRig

Values must be of type <class ‘openpyxl.drawing.geometry.LightRig’ >

```
class openpyxl.drawing.geometry.Shape3D(z=None, extrusionH=None, contourW=None, prst-
                                         Material=None, bevelT=None, bevelB=None, extru-
                                         sionClr=None, contourClr=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

bevelB

Values must be of type <class 'openpyxl.drawing.geometry.Bevel' >

bevelT

Values must be of type <class 'openpyxl.drawing.geometry.Bevel' >

contourClr

Values must be of type <class 'openpyxl.styles.colors.Color' >

contourW

Values must be of type <class 'int' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

extrusionClr

Values must be of type <class 'openpyxl.styles.colors.Color' >

extrusionH

Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

prstMaterial

Value must be one of { 'matte', 'legacyMatte', 'legacyMetal', 'legacyWireframe', 'powder', 'flat', 'softmetal', 'plastic', 'softEdge', 'clear', 'legacyPlastic', 'warmMatte', 'translucentPowder', 'metal', 'dkEdge' }

z

Values must be of type <class 'openpyxl.descriptors.base.Integer' >

```
class openpyxl.drawing.geometry.ShapeStyle(lnRef=None, fillRef=None, effectRef=None,
                                           fontRef=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

effectRef

Values must be of type <class 'openpyxl.drawing.geometry.StyleMatrixReference' >

fillRef

Values must be of type <class 'openpyxl.drawing.geometry.StyleMatrixReference' >

fontRef

Values must be of type <class 'openpyxl.drawing.geometry.FontReference' >

lnRef

Values must be of type <class 'openpyxl.drawing.geometry.StyleMatrixReference' >

```
class openpyxl.drawing.geometry.SphereCoords(lat=None, lon=None, rev=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

lat

Values must be of type <class 'int' >

```

lon
    Values must be of type <class 'int' >

rev
    Values must be of type <class 'int' >

tagname = 'sphereCoords'

class openpyxl.drawing.geometry.StyleMatrixReference(idx=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    idx
        Values must be of type <class 'int' >

class openpyxl.drawing.geometry.Transform2D(rot=None, flipH=None, flipV=None, off=None,
                                             ext=None, chOff=None, chExt=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    chExt
        Values must be of type <class 'openpyxl.drawing.geometry.PositiveSize2D' >

    chOff
        Values must be of type <class 'openpyxl.drawing.geometry.Point2D' >

    ext
        Values must be of type <class 'openpyxl.drawing.geometry.PositiveSize2D' >

    flipH
        Values must be of type <class 'bool' >

    flipV
        Values must be of type <class 'bool' >

    namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

    off
        Values must be of type <class 'openpyxl.drawing.geometry.Point2D' >

    rot
        Values must be of type <class 'int' >

    tagname = 'xfrm'

class openpyxl.drawing.geometry.Vector3D(dx=None, dy=None, dz=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    dx
        Values must be of type <class 'int' >

    dy
        Values must be of type <class 'int' >

```

dz

Values must be of type <class 'int' >

tagname = 'vector'

openpyxl.drawing.graphic module

class openpyxl.drawing.graphic.**GraphicData**(uri='http://schemas.openxmlformats.org/drawingml/2006/chart',
chart=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

chart

Values must be of type <class 'openpyxl.drawing.relation.ChartRelation' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

tagname = 'graphicData'

uri

Values must be of type <class 'str' >

class openpyxl.drawing.graphic.**GraphicFrame**(nvGraphicFramePr=None, xfrm=None,
graphic=None, macro=None, fPublished=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fPublished

Values must be of type <class 'bool' >

graphic

Values must be of type <class 'openpyxl.drawing.graphic.GraphicObject' >

macro

Values must be of type <class 'str' >

nvGraphicFramePr

Values must be of type <class 'openpyxl.drawing.graphic.NonVisualGraphicFrame' >

tagname = 'graphicFrame'

xfrm

Values must be of type <class 'openpyxl.drawing.xdr.XDRTransform2D' >

class openpyxl.drawing.graphic.**GraphicFrameLocking**(noGrp=None, noDrilldown=None, noS-
elect=None, noChangeAspect=None,
noMove=None, noResize=None,
extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

noChangeAspect

Values must be of type <class 'bool' >

noDrilldown

Values must be of type <class 'bool' >

noGrp

Values must be of type <class 'bool' >

noMove

Values must be of type <class 'bool' >

noResize

Values must be of type <class 'bool' >

noSelect

Values must be of type <class 'bool' >

```
class openpyxl.drawing.graphic.GraphicObject(graphicData=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

graphicData

Values must be of type <class 'openpyxl.drawing.graphic.GraphicData' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

tagname = 'graphic'

```
class openpyxl.drawing.graphic.GroupShape(nvGrpSpPr=None, grpSpPr=None, pic=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

grpSpPr

Values must be of type <class 'openpyxl.drawing.properties.GroupShapeProperties' >

nonVisualProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

nvGrpSpPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualGroupShape' >

pic

Values must be of type <class 'openpyxl.drawing.picture.PictureFrame' >

visualProperties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

```
class openpyxl.drawing.graphic.NonVisualGraphicFrame(cNvPr=None, cNvGraphicFramePr=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

cNvGraphicFramePr

Values must be of type <class ‘openpyxl.drawing.graphic.NonVisualGraphicFrameProperties’ >

cNvPr

Values must be of type <class ‘openpyxl.drawing.properties.NonVisualDrawingProps’ >

tagname = 'nvGraphicFramePr'

class openpyxl.drawing.graphic.NonVisualGraphicFrameProperties(*graphicFrameLocks=None*,
extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

graphicFrameLocks

Values must be of type <class ‘openpyxl.drawing.graphic.GraphicFrameLocking’ >

tagname = 'cNvGraphicFramePr'

openpyxl.drawing.image module

class openpyxl.drawing.image.Image(*img*)

基类: *object*

Image in a spreadsheet

anchor = 'A1'

path

openpyxl.drawing.line module

class openpyxl.drawing.line.DashStop(*d=0*, *sp=0*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

d

Values must be of type <class ‘int’ >

length

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

sp

Values must be of type <class ‘int’ >

space

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

tagname = 'ds'

class openpyxl.drawing.line.DashStopList(ds=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

ds

A sequence (list or tuple) that may only contain objects of the declared type

class openpyxl.drawing.line.LineEndProperties(type=None, w=None, len=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

len

Value must be one of { ‘lg’ , ‘med’ , ‘sm’ }

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

tagname = 'end'

type

Value must be one of { ‘oval’ , ‘diamond’ , ‘arrow’ , ‘stealth’ , ‘triangle’ , ‘none’ }

w

Value must be one of { ‘lg’ , ‘med’ , ‘sm’ }

class openpyxl.drawing.line.LineProperties(w=None, cap=None, cmpd=None, algn=None, noFill=None, solidFill=None, gradFill=None, pattFill=None, prstDash=None, custDash=None, round=None, bevel=None, miter=None, head-End=None, tailEnd=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

algn

Value must be one of { ‘ctr’ , ‘in’ }

bevel

Values must be of type <class ‘bool’ >

cap

Value must be one of { ‘rnd’ , ‘flat’ , ‘sq’ }

cmpd

Value must be one of { ‘tri’ , ‘thinThick’ , ‘sng’ , ‘dbl’ , ‘thickThin’ }

custDash

Values must be of type <class ‘openpyxl.drawing.line.DashStop’ >

dashStyle

Aliases can be used when either the desired attribute name is not allowed or confusing in Python

(eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

gradFill

Values must be of type <class ‘openpyxl.drawing.fill.GradientFillProperties’ >

headEnd

Values must be of type <class ‘openpyxl.drawing.line.LineEndProperties’ >

miter

Values must be of type <class ‘int’ >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

noFill

Values must be of type <class ‘bool’ >

pattFill

Values must be of type <class ‘openpyxl.drawing.fill.PatternFillProperties’ >

prstDash

Value must be one of { ‘dash’, ‘dot’, ‘lgDashDot’, ‘solid’, ‘lgDashDotDot’, ‘sysDashDotDot’, ‘lgDash’, ‘dashDot’, ‘sysDot’, ‘sysDash’, ‘sysDashDot’ }

round

Values must be of type <class ‘bool’ >

solidFill

Values must be of type <class ‘openpyxl.drawing.colors.ColorChoice’ >

tagname = 'ln'

tailEnd

Values must be of type <class ‘openpyxl.drawing.line.LineEndProperties’ >

w

Values must be of type <class ‘float’ >

width

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

openpyxl.drawing.picture module

class openpyxl.drawing.picture.NonVisualPictureProperties(*preferRelativeResize=None, pi-*
cLocks=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*


```

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

picLocks
    Values must be of type <class 'openpyxl.drawing.picture.PictureLocking' >

preferRelativeResize
    Values must be of type <class 'bool' >

tagname = 'cNvPicPr'

class openpyxl.drawing.picture.PictureFrame(macro=None, fPublished=None, nvPicPr=None,
                                             blipFill=None, spPr=None, style=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

blipFill
    Values must be of type <class 'openpyxl.drawing.fill.BlipFillProperties' >

fPublished
    Values must be of type <class 'bool' >

graphicalProperties
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

macro
    Values must be of type <class 'str' >

nvPicPr
    Values must be of type <class 'openpyxl.drawing.picture.PictureNonVisual' >

spPr
    Values must be of type <class 'openpyxl.chart.shapes.GraphicalProperties' >

style
    Values must be of type <class 'openpyxl.drawing.geometry.ShapeStyle' >

tagname = 'pic'

class openpyxl.drawing.picture.PictureLocking(noCrop=None, noGrp=None, noSelect=None,
                                              noRot=None, noChangeAspect=None,
                                              noMove=None, noResize=None, noEditPoints=None,
                                              noAdjustHandles=None,
                                              noChangeArrowheads=None, noChange-
                                              ShapeType=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

```

noAdjustHandles

Values must be of type <class 'bool' >

noChangeArrowheads

Values must be of type <class 'bool' >

noChangeAspect

Values must be of type <class 'bool' >

noChangeShapeType

Values must be of type <class 'bool' >

noCrop

Values must be of type <class 'bool' >

noEditPoints

Values must be of type <class 'bool' >

noGrp

Values must be of type <class 'bool' >

noMove

Values must be of type <class 'bool' >

noResize

Values must be of type <class 'bool' >

noRot

Values must be of type <class 'bool' >

noSelect

Values must be of type <class 'bool' >

tagname = 'picLocks'

class openpyxl.drawing.picture.**PictureNonVisual**(cNvPr=None, cNvPicPr=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

cNvPicPr

Values must be of type <class 'openpyxl.drawing.picture.NonVisualPictureProperties' >

cNvPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualDrawingProps' >

tagname = 'nvPicPr'

openpyxl.drawing.properties module

```
class openpyxl.drawing.properties.GroupLocking(noGrp=None, noUngrp=None, noSelect=None, noRot=None, noChangeAspect=None, noChangeArrowheads=None, noMove=None, noResize=None, noEditPoints=None, noAdjustHandles=None, noChangeShapeType=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

noAdjustHandles

Values must be of type <class 'bool' >

noChangeArrowheads

Values must be of type <class 'bool' >

noChangeAspect

Values must be of type <class 'bool' >

noChangeShapeType

Values must be of type <class 'bool' >

noEditPoints

Values must be of type <class 'bool' >

noGrp

Values must be of type <class 'bool' >

noMove

Values must be of type <class 'bool' >

noResize

Values must be of type <class 'bool' >

noRot

Values must be of type <class 'bool' >

noSelect

Values must be of type <class 'bool' >

noUngrp

Values must be of type <class 'bool' >

tagname = 'grpSpLocks'

```
class openpyxl.drawing.properties.GroupShapeProperties(bwMode=None, xfrm=None,
                                                    scene3d=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    bwMode
        Value must be one of { 'gray', 'hidden', 'clr', 'auto', 'grayWhite', 'invGray', 'black',
        , 'blackGray', 'white', 'blackWhite', 'ltGray' }

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    scene3d
        Values must be of type <class 'openpyxl.drawing.geometry.Scene3D' >

    tagname = 'grpSpPr'

    xfrm
        Values must be of type <class 'openpyxl.drawing.geometry.GroupTransform2D' >

class openpyxl.drawing.properties.NonVisualDrawingProps(id=None, name=None, de-
                                                    scr=None, hidden=None, ti-
                                                    tle=None, hlinkClick=None,
                                                    hlinkHover=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    descr
        Values must be of type <class 'str' >

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    hidden
        Values must be of type <class 'bool' >

    hlinkClick
        Values must be of type <class 'openpyxl.drawing.text.Hyperlink' >

    hlinkHover
        Values must be of type <class 'openpyxl.drawing.text.Hyperlink' >

    id
        Values must be of type <class 'int' >

    name
        Values must be of type <class 'str' >

    tagname = 'cNvPr'

    title
        Values must be of type <class 'str' >
```

```
class openpyxl.drawing.properties.NonVisualDrawingShapeProps(spLocks=None,
                                                             txBox=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

spLocks

Values must be of type <class 'openpyxl.drawing.properties.GroupLocking' >

tagname = 'cNvSpPr'

txBox

Values must be of type <class 'bool' >

```
class openpyxl.drawing.properties.NonVisualGroupDrawingShapeProps(grpSpLocks=None,
                                                                    extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

grpSpLocks

Values must be of type <class 'openpyxl.drawing.properties.GroupLocking' >

tagname = 'cNvGrpSpPr'

```
class openpyxl.drawing.properties.NonVisualGroupShape(cNvPr=None, cNvGrpSpPr=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

cNvGrpSpPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualGroupDrawingShapeProps' >

cNvPr

Values must be of type <class 'openpyxl.drawing.properties.NonVisualDrawingProps' >

tagname = 'nvGrpSpPr'

openpyxl.drawing.relation module

```
class openpyxl.drawing.relation.ChartRelation(id)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

id

Values must be of type <class 'str' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/chart'

tagname = 'chart'

openpyxl.drawing.spreadsheet_drawing module

```
class openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor(pos=None, ext=None, **kw)
```

基类: `openpyxl.drawing.spreadsheet_drawing._AnchorBase`

clientData

Values must be of type <class 'openpyxl.drawing.spreadsheet_drawing.AnchorClientData' >

contentPart

Values must be of type <class 'str' >

cxnSp

Values must be of type <class 'openpyxl.drawing.connector.Shape' >

ext

Values must be of type <class 'openpyxl.drawing.xdr.XDRPositiveSize2D' >

graphicFrame

Values must be of type <class 'openpyxl.drawing.graphic.GraphicFrame' >

grpSp

Values must be of type <class 'openpyxl.drawing.graphic.GroupShape' >

pic

Values must be of type <class 'openpyxl.drawing.picture.PictureFrame' >

pos

Values must be of type <class 'openpyxl.drawing.xdr.XDRPoint2D' >

sp

Values must be of type <class 'openpyxl.drawing.connector.Shape' >

tagname = 'absoluteAnchor'

```
class openpyxl.drawing.spreadsheet_drawing.AnchorClientData(fLocksWithSheet=None, fPrintsWithSheet=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

fLocksWithSheet

Values must be of type <class 'bool' >

fPrintsWithSheet

Values must be of type <class 'bool' >

```
class openpyxl.drawing.spreadsheet_drawing.AnchorMarker(col=0, colOff=0, row=0, rowOff=0)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

col

Values must be of type <class 'int' >

```

colOff
    Values must be of type <class 'int' >

row
    Values must be of type <class 'int' >

rowOff
    Values must be of type <class 'int' >

tagname = 'marker'

class openpyxl.drawing.spreadsheet_drawing.OneCellAnchor(_from=None, ext=None, **kw)
    基类: openpyxl.drawing.spreadsheet_drawing._AnchorBase

clientData
    Values must be of type <class 'openpyxl.drawing.spreadsheet_drawing.AnchorClientData' >

contentPart
    Values must be of type <class 'str' >

cxnSp
    Values must be of type <class 'openpyxl.drawing.connector.Shape' >

ext
    Values must be of type <class 'openpyxl.drawing.xdr.XDRPositiveSize2D' >

graphicFrame
    Values must be of type <class 'openpyxl.drawing.graphic.GraphicFrame' >

grpSp
    Values must be of type <class 'openpyxl.drawing.graphic.GroupShape' >

pic
    Values must be of type <class 'openpyxl.drawing.picture.PictureFrame' >

sp
    Values must be of type <class 'openpyxl.drawing.connector.Shape' >

tagname = 'oneCellAnchor'

class openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing(twoCellAnchor=(), oneCellAnchor=(), absoluteAnchor=())
    基类: openpyxl.descriptors.serialisable.Serialisable

    PartName = '/xl/drawings/drawing{0}.xml'

    absoluteAnchor
        A sequence (list or tuple) that may only contain objects of the declared type

    mime_type = 'application/vnd.openxmlformats-officedocument.drawing+xml'

```

oneCellAnchor

A sequence (list or tuple) that may only contain objects of the declared type

path

tagname = 'wsDr'

twoCellAnchor

A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor(editAs=None, __from=None,
                                                         to=None, **kw)
```

基类: openpyxl.drawing.spreadsheet_drawing._AnchorBase

clientData

Values must be of type <class 'openpyxl.drawing.spreadsheet_drawing.AnchorClientData' >

contentPart

Values must be of type <class 'str' >

cxnSp

Values must be of type <class 'openpyxl.drawing.connector.Shape' >

editAs

Value must be one of { 'absolute' , 'oneCell' , 'twoCell' }

graphicFrame

Values must be of type <class 'openpyxl.drawing.graphic.GraphicFrame' >

grpSp

Values must be of type <class 'openpyxl.drawing.graphic.GroupShape' >

pic

Values must be of type <class 'openpyxl.drawing.picture.PictureFrame' >

sp

Values must be of type <class 'openpyxl.drawing.connector.Shape' >

tagname = 'twoCellAnchor'

to

Values must be of type <class 'openpyxl.drawing.spreadsheet_drawing.AnchorMarker' >

openpyxl.drawing.text module

```
class openpyxl.drawing.text.AutnumberBullet(type=None, startAt=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

startAt

Values must be of type <class 'int' >

type

Value must be one of { 'arabic2Minus', 'ea1ChsPeriod', 'alphaLcParenBoth', 'circleNumWdBlackPlain', 'hindiNumPeriod', 'ea1JpnKorPeriod', 'alphaUcParenBoth', 'arabic1Minus', 'arabicParenR', 'hindiAlpha1Period', 'alphaLcParenR', 'romanUcPeriod', 'alphaLcPeriod', 'arabicPeriod', 'hebrew2Minus', 'hindiNumParenR', 'romanLcParenBoth', 'ea1JpnChsDbPeriod', 'circleNumWdWhitePlain', 'arabicPlain', 'thaiAlphaParenR', 'arabicParenBoth', 'thaiNumParenBoth', 'romanUcParenBoth', 'arabicDbPeriod', 'ea1ChsPlain', 'thaiNumParenR', 'ea1ChtPeriod', 'thaiAlphaParenBoth', 'thaiAlphaPeriod', 'romanUcParenR', 'hindiAlphaPeriod', 'alphaUcParenR', 'romanLcParenR', 'romanLcPeriod', 'ea1ChtPlain', 'ea1JpnKorPlain', 'thaiNumPeriod', 'arabicDbPlain', 'alphaUcPeriod', 'circleNumDbPlain' }

```
class openpyxl.drawing.text.CharacterProperties(kumimoji=None, lang=None, alt-
                                             Lang=None, sz=None, b=None, i=None,
                                             u=None, strike=None, kern=None,
                                             cap=None, spc=None, normal-
                                             izeH=None, baseline=None, noProof=None,
                                             dirty=None, err=None, smtClean=None,
                                             smtId=None, bmk=None, ln=None,
                                             highlight=None, latin=None, ea=None,
                                             cs=None, sym=None, hlinkClick=None,
                                             hlinkMouseOver=None, rtl=None,
                                             extLst=None, noFill=None, solidFill=None,
                                             gradFill=None, blipFill=None, pat-
                                             tFill=None, grpFill=None, effectLst=None,
                                             effectDag=None, uLnTx=None, uLn=None,
                                             uFillTx=None, uFill=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

altLang

Values must be of type <class 'str' >

b

Values must be of type <class 'bool' >

baseline

Values must be of type <class 'int' >

blipFill

Values must be of type <class 'openpyxl.drawing.fill.BlipFillProperties' >

bmk

Values must be of type <class 'str' >

cap

Value must be one of { 'small', 'all' }

cs
 Values must be of type <class 'openpyxl.drawing.text.Font' >

dirty
 Values must be of type <class 'bool' >

ea
 Values must be of type <class 'openpyxl.drawing.text.Font' >

effectDag
 Values must be of type <class 'openpyxl.drawing.effect.EffectContainer' >

effectLst
 Values must be of type <class 'openpyxl.drawing.effect.EffectList' >

err
 Values must be of type <class 'bool' >

extLst
 Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gradFill
 Values must be of type <class 'openpyxl.drawing.fill.GradientFillProperties' >

grpFill
 Values must be of type <class 'bool' >

highlight
 Values must be of type <class 'openpyxl.styles.colors.Color' >

hlinkClick
 Values must be of type <class 'openpyxl.drawing.text.Hyperlink' >

hlinkMouseOver
 Values must be of type <class 'openpyxl.drawing.text.Hyperlink' >

i
 Values must be of type <class 'bool' >

kern
 Values must be of type <class 'int' >

kumimoji
 Values must be of type <class 'bool' >

lang
 Values must be of type <class 'str' >

latin
 Values must be of type <class 'openpyxl.drawing.text.Font' >

ln
 Values must be of type <class 'openpyxl.drawing.line.LineProperties' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

noFill
 Values must be of type <class 'bool' >

noProof
 Values must be of type <class 'bool' >

normalizeH
 Values must be of type <class 'bool' >

pattFill
 Values must be of type <class 'openpyxl.drawing.fill.PatternFillProperties' >

rtl
 Values must be of type <class 'bool' >

smtClean
 Values must be of type <class 'bool' >

smtId
 Values must be of type <class 'int' >

solidFill
 Values must be of type <class 'openpyxl.drawing.colors.ColorChoice' >

spc
 Values must be of type <class 'int' >

strike
 Value must be one of { 'sngStrike' , 'dblStrike' , 'noStrike' }

sym
 Values must be of type <class 'openpyxl.drawing.text.Font' >

sz
 Values must be of type <class 'float' >

tagname = 'defRPr'

u
 Value must be one of { 'heavy' , 'dotDotDashHeavy' , 'dash' , 'dotted' , 'dotDash' , 'dotDotDash' , 'sng' , 'dashLong' , 'dotDashHeavy' , 'dottedHeavy' , 'words' , 'dashLongHeavy' , 'wavy' , 'wavyDbl' , 'wavyHeavy' , 'dashHeavy' , 'dbl' }

uFill
 Values must be of type <class 'bool' >

uFillTx

Values must be of type <class 'bool' >

uLn

Values must be of type <class 'openpyxl.drawing.line.LineProperties' >

uLnTx

Values must be of type <class 'bool' >

class openpyxl.drawing.text.EmbeddedWAVAudioFile(name=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

class openpyxl.drawing.text.Font(typeface=None, panose=None, pitchFamily=None, charset=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

charset

Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

panose

pitchFamily

Values must be of type <class 'float' >

tagname = 'latin'

typeface

Values must be of type <class 'str' >

class openpyxl.drawing.text.GeomGuide(name=None, fmla=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fmla

Values must be of type <class 'str' >

name

Values must be of type <class 'str' >

class openpyxl.drawing.text.GeomGuideList(gd=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

gd

A sequence (list or tuple) that may only contain objects of the declared type

class openpyxl.drawing.text.Hyperlink(invalidUrl=None, action=None, tgtFrame=None, tooltip=None, history=None, highlightClick=None, endSnd=None, snd=None, extLst=None, id=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

```

action
    Values must be of type <class 'str' >

endSnd
    Values must be of type <class 'bool' >

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

highlightClick
    Values must be of type <class 'bool' >

history
    Values must be of type <class 'bool' >

id
    Values must be of type <class 'str' >

invalidUrl
    Values must be of type <class 'str' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

snd
    Values must be of type <class 'openpyxl.drawing.text.EmbeddedWAVAudioFile' >

tagname = 'hlinkClick'

tgtFrame
    Values must be of type <class 'str' >

tooltip
    Values must be of type <class 'str' >

class openpyxl.drawing.text.LineBreak(rPr=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

    rPr
        Values must be of type <class 'openpyxl.drawing.text.CharacterProperties' >

    tagname = 'br'

class openpyxl.drawing.text.ListStyle(defPPr=None,          lvl1pPr=None,          lvl2pPr=None,
                                     lvl3pPr=None,          lvl4pPr=None,          lvl5pPr=None,
                                     lvl6pPr=None,          lvl7pPr=None,          lvl8pPr=None,
                                     lvl9pPr=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    defPPr
        Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

```

```

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

lv11pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv12pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv13pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv14pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv15pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv16pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv17pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv18pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

lv19pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

tagname = 'lstStyle'

class openpyxl.drawing.text.Paragraph(pPr=None, endParaRPr=None, r=None, br=None,
                                       fld=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

br
    Values must be of type <class 'openpyxl.drawing.text.LineBreak' >

endParaRPr
    Values must be of type <class 'openpyxl.drawing.text.CharacterProperties' >

fld
    Values must be of type <class 'openpyxl.drawing.text.TextField' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

pPr
    Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

```

properties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

r

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'p'

text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
class openpyxl.drawing.text.ParagraphProperties(marL=None, marR=None, lvl=None, indent=None, algn=None, defTabSz=None, rtl=None, eaLnBrk=None, fontAlgn=None, latinLnBrk=None, hangingPunct=None, lnSpc=None, spcBef=None, spcAft=None, tabLst=None, defRPr=None, extLst=None, buClrTx=None, buClr=None, buSzTx=None, buSzPct=None, buSzPts=None, buFontTx=None, buFont=None, buNone=None, buAutoNum=None, buChar=None, buBlip=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

algn

Value must be one of { ‘dist’ , ‘thaiDist’ , ‘l’ , ‘ctr’ , ‘r’ , ‘just’ , ‘justLow’ }

buAutoNum

Values must be of type <class ‘bool’ >

buBlip

Values must be of type <class ‘openpyxl.drawing.fill.Blip’ >

buChar

Values must be of type <class ‘str’ >

buClr

Values must be of type <class ‘openpyxl.styles.colors.Color’ >

buClrTx

Values must be of type <class ‘bool’ >

buFont

Values must be of type <class ‘openpyxl.drawing.text.Font’ >

buFontTx

Values must be of type <class 'bool' >

buNone

Values must be of type <class 'bool' >

buSzPct

Values must be of type <class 'int' >

buSzPts

Values must be of type <class 'int' >

buSzTx

Values must be of type <class 'bool' >

defRPr

Values must be of type <class 'openpyxl.drawing.text.CharacterProperties' >

defTabSz

Values must be of type <class 'int' >

eaLnBrk

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fontAlgn

Value must be one of { 'base' , 'b' , 't' , 'ctr' , 'auto' }

hangingPunct

Values must be of type <class 'bool' >

indent

Values must be of type <class 'int' >

latinLnBrk

Values must be of type <class 'bool' >

lnSpc

Values must be of type <class 'openpyxl.drawing.text.Spacing' >

lvl

Values must be of type <class 'int' >

marL

Values must be of type <class 'int' >

marR

Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'


```

rtl
    Values must be of type <class 'bool' >

spcAft
    Values must be of type <class 'openpyxl.drawing.text.Spacing' >

spcBef
    Values must be of type <class 'openpyxl.drawing.text.Spacing' >

tabLst
    Values must be of type <class 'openpyxl.drawing.text.TabStopList' >

tagname = 'pPr'

class openpyxl.drawing.text.PresetTextShape(prst=None, avLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

avLst
    Values must be of type <class 'openpyxl.drawing.text.GeomGuideList' >

prst
    Values must be of type <openpyxl.descriptors.base.Set object at 0x7f3966b4e9e8>

class openpyxl.drawing.text.RegularTextRun(rPr=None, t="")
    基类: openpyxl.descriptors.serialisable.Serialisable

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

properties
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

rPr
    Values must be of type <class 'openpyxl.drawing.text.CharacterProperties' >

t
    Values must be of type <class 'str' >

tagname = 'r'

value
    Aliases can be used when either the desired attribute name is not allowed or confusing in Python
    (eg. "type" ) or a more descriptive name is desired (eg. "underline" for "u" )

```

```
class openpyxl.drawing.text.RichTextProperties(rot=None, spcFirstLastPara=None, ver-
                                                tOverflow=None, horzOverflow=None,
                                                vert=None, wrap=None, lIns=None,
                                                tIns=None, rIns=None, bIns=None, num-
                                                Col=None, spcCol=None, rtlCol=None,
                                                fromWordArt=None, anchor=None,
                                                anchorCtr=None, forceAA=None,
                                                upright=None, compatLnSpc=None,
                                                prstTxWarp=None, scene3d=None,
                                                extLst=None, noAutofit=None, normAut-
                                                ofit=None, spAutoFit=None, flatTx=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

anchor

Value must be one of { 'b' , 'dist' , 't' , 'ctr' , 'just' }

anchorCtr

Values must be of type <class 'bool' >

bIns

Values must be of type <class 'int' >

compatLnSpc

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

flatTx

Values must be of type <class 'int' >

forceAA

Values must be of type <class 'bool' >

fromWordArt

Values must be of type <class 'bool' >

horzOverflow

Value must be one of { 'clip' , 'overflow' }

lIns

Values must be of type <class 'int' >

namespace = 'http://schemas.openxmlformats.org/drawingml/2006/main'

noAutofit

Values must be of type <class 'bool' >

normAutofit

Values must be of type <class 'bool' >

```

numCol
    Values must be of type <class 'int' >

prstTxWarp
    Values must be of type <class 'openpyxl.drawing.text.PresetTextShape' >

rIns
    Values must be of type <class 'int' >

rot
    Values must be of type <class 'int' >

rtlCol
    Values must be of type <class 'bool' >

scene3d
    Values must be of type <class 'openpyxl.drawing.geometry.Scene3D' >

spAutoFit
    Values must be of type <class 'bool' >

spcCol
    Values must be of type <class 'int' >

spcFirstLastPara
    Values must be of type <class 'bool' >

tIns
    Values must be of type <class 'int' >

tagname = 'bodyPr'

upright
    Values must be of type <class 'bool' >

vert
    Value must be one of { 'wordArtVertRtl', 'horz', 'mongolianVert', 'wordArtVert', 'vert',
    'vert270', 'eaVert' }

vertOverflow
    Value must be one of { 'clip', 'ellipsis', 'overflow' }

wrap
    Value must be one of { 'square', 'none' }

class openpyxl.drawing.text.Spacing(spcPct=None, spcPts=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    spcPct
        Values must be of type <class 'int' >

```

spcPts

Values must be of type <class 'int' >

class openpyxl.drawing.text.TabStop(pos=None, algn=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

algn

Values must be of type <openpyxl.descriptors.base.Set object at 0x7f3966b46828>

pos

Values must be of type <class 'openpyxl.descriptors.base.Integer' >

class openpyxl.drawing.text.TabStopList(tab=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

tab

Values must be of type <class 'openpyxl.drawing.text.TabStop' >

class openpyxl.drawing.text.TextField(id=None, type=None, rPr=None, pPr=None, t=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

id

Values must be of type <class 'str' >

pPr

Values must be of type <class 'openpyxl.drawing.text.ParagraphProperties' >

rPr

Values must be of type <class 'openpyxl.drawing.text.CharacterProperties' >

t

Values must be of type <class 'str' >

type

Values must be of type <class 'str' >

class openpyxl.drawing.text.TextNormalAutofit(fontScale=None, lnSpcReduction=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

fontScale

Values must be of type <class 'int' >

lnSpcReduction

Values must be of type <class 'int' >

openpyxl.drawing.xdr module

Spreadsheet Drawing has some copies of Drawing ML elements

class openpyxl.drawing.xdr.XDRPoint2D(x=None, y=None)

基类: *openpyxl.drawing.geometry.Point2D*

```

namespace = None

x
    Values must be of type <class 'int' >

y
    Values must be of type <class 'int' >

class openpyxl.drawing.xdr.XDRPositiveSize2D(cx=None, cy=None)
    基类: openpyxl.drawing.geometry.PositiveSize2D

    cx
        Values must be of type <class 'int' >

    cy
        Values must be of type <class 'int' >

    namespace = None

class openpyxl.drawing.xdr.XDRTransform2D(rot=None, flipH=None, flipV=None, off=None,
                                           ext=None, chOff=None, chExt=None)
    基类: openpyxl.drawing.geometry.Transform2D

    chExt
        Values must be of type <class 'openpyxl.drawing.geometry.PositiveSize2D' >

    chOff
        Values must be of type <class 'openpyxl.drawing.geometry.Point2D' >

    ext
        Values must be of type <class 'openpyxl.drawing.geometry.PositiveSize2D' >

    flipH
        Values must be of type <class 'bool' >

    flipV
        Values must be of type <class 'bool' >

    namespace = None

    off
        Values must be of type <class 'openpyxl.drawing.geometry.Point2D' >

    rot
        Values must be of type <class 'int' >

```

openpyxl.formatting package

Submodules

openpyxl.formatting.formatting module

```
class openpyxl.formatting.formatting.ConditionalFormatting(sqref=(), pivot=None,  
                                                         cfRule=(), extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

cells

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

cfRule

A sequence (list or tuple) that may only contain objects of the declared type

pivot

Values must be of type <class ‘bool’ >

rules

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

sqref

Values must be of type <class ‘openpyxl.worksheet.cell_range.MultiCellRange’ >

tagname = 'conditionalFormatting'

```
class openpyxl.formatting.formatting.ConditionalFormattingList
```

基类: *object*

Conditional formatting rules.

```
add(range_string, cfRule)
```

Add a rule such as ColorScaleRule, FormulaRule or CellIsRule

The priority will be added automatically.

openpyxl.formatting.rule module

```
openpyxl.formatting.rule.CellIsRule(operator=None, formula=None, stopIfTrue=None,  
                                     font=None, border=None, fill=None)
```

Conditional formatting rule based on cell contents.

```
class openpyxl.formatting.rule.ColorScale(cfvo=None, color=None)
```

基类: *openpyxl.formatting.rule.RuleType*

color

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'colorScale'

```
openpyxl.formatting.rule.ColorScaleRule(start_type=None, start_value=None,
                                         start_color=None, mid_type=None,
                                         mid_value=None, mid_color=None,
                                         end_type=None, end_value=None,
                                         end_color=None)
```

Backwards compatibility

```
class openpyxl.formatting.rule.DataBar(minLength=None, maxLength=None, show-
                                       Value=None, cfvo=None, color=None)
```

基类: `openpyxl.formatting.rule.RuleType`

color

Values must be of type <class 'openpyxl.styles.colors.Color' >

maxLength

Values must be of type <class 'int' >

minLength

Values must be of type <class 'int' >

showValue

Values must be of type <class 'bool' >

tagname = 'dataBar'

```
openpyxl.formatting.rule.DataBarRule(start_type=None, start_value=None, end_type=None,
                                       end_value=None, color=None, showValue=None, min-
                                       Length=None, maxLength=None)
```

```
class openpyxl.formatting.rule.FormatObject(type, val=None, gte=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

gte

Values must be of type <class 'bool' >

tagname = 'cfvo'

type

Value must be one of { 'percent' , 'min' , 'max' , 'num' , 'percentile' , 'formula' }

val

Values must be of type <class 'float' >

```
openpyxl.formatting.rule.FormulaRule(formula=None, stopIfTrue=None, font=None, bor-
                                      der=None, fill=None)
```

Conditional formatting with custom differential style

```
class openpyxl.formatting.rule.IconSet(iconSet=None, showValue=None, percent=None, re-
                                       verse=None, cfvo=None)
```

基类: `openpyxl.formatting.rule.RuleType`

iconSet

Value must be one of { '5Quarters', '4RedToBlack', '5Arrows', '3ArrowsGray', '4ArrowsGray', '3Arrows', '5ArrowsGray', '3Symbols', '4TrafficLights', '3Signs', '5Rating', '3TrafficLights2', '3Flags', '3TrafficLights1', '4Rating', '4Arrows', '3Symbols2' }

percent

Values must be of type <class 'bool' >

reverse

Values must be of type <class 'bool' >

showValue

Values must be of type <class 'bool' >

tagname = 'iconSet'

`openpyxl.formatting.rule.IconSetRule(icon_style=None, type=None, values=None, show-Value=None, percent=None, reverse=None)`

Convenience function for creating icon set rules

class openpyxl.formatting.rule.Rule(*type, dxfId=None, priority=0, stopIfTrue=None, aboveAverage=None, percent=None, bottom=None, operator=None, text=None, timePeriod=None, rank=None, stdDev=None, equalAverage=None, formula=(), colorScale=None, dataBar=None, iconSet=None, extLst=None, dxf=None*)

基类: `openpyxl.descriptors.serialisable.Serialisable`

aboveAverage

Values must be of type <class 'bool' >

bottom

Values must be of type <class 'bool' >

colorScale

Values must be of type <class 'openpyxl.formatting.rule.ColorScale' >

dataBar

Values must be of type <class 'openpyxl.formatting.rule.DataBar' >

dxf

Values must be of type <class 'openpyxl.styles.differential.DifferentialStyle' >

dxfId

Values must be of type <class 'int' >

equalAverage

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

formula

A sequence (list or tuple) that may only contain objects of the declared type

iconSet

Values must be of type <class 'openpyxl.formatting.rule.IconSet' >

operator

Value must be one of { 'lessThanOrEqual' , 'greaterThan' , 'notEqual' , 'notContains' , 'notBetween' , 'containsText' , 'between' , 'equal' , 'lessThan' , 'endsWith' , 'greaterThanOrEqual' , 'beginsWith' }

percent

Values must be of type <class 'bool' >

priority

Values must be of type <class 'int' >

rank

Values must be of type <class 'int' >

stdDev

Values must be of type <class 'int' >

stopIfTrue

Values must be of type <class 'bool' >

tagname = 'cfRule'**text**

Values must be of type <class 'str' >

timePeriod

Value must be one of { 'tomorrow' , 'lastMonth' , 'nextWeek' , 'today' , 'last7Days' , 'lastWeek' , 'thisWeek' , 'yesterday' , 'thisMonth' , 'nextMonth' }

type

Value must be one of { 'aboveAverage' , 'notContainsText' , 'duplicateValues' , 'expression' , 'colorScale' , 'timePeriod' , 'uniqueValues' , 'containsText' , 'notContainsErrors' , 'top10' , 'cellIs' , 'containsErrors' , 'dataBar' , 'containsBlanks' , 'notContainsBlanks' , 'endsWith' , 'iconSet' , 'beginsWith' }

class openpyxl.formatting.rule.RuleType

基类: *openpyxl.descriptors.serialisable.Serialisable*

cfvo

A sequence (list or tuple) that may only contain objects of the declared type

class openpyxl.formatting.rule.ValueDescriptor(*args, **kw)

基类: *openpyxl.descriptors.base.Float*

Expected type depends upon type attribute of parent :- (

Most values should be numeric BUT they can also be cell references

openpyxl.formula package

Submodules

openpyxl.formula.tokenizer module

This module contains a tokenizer for Excel formulae.

The tokenizer is based on the Javascript tokenizer found at http://ewbi.blogs.com/develops/2004/12/excel_formula_p.html written by Eric Bachtal

```
class openpyxl.formula.tokenizer.Token(value, type_, subtype="")
```

基类: object

A token in an Excel formula.

Tokens have three attributes:

- *value*: The string value parsed that led to this token
- *type*: A string identifying the type of token
- *subtype*: A string identifying subtype of the token (optional, and defaults to "")

```
ARG = 'ARG'
```

```
ARRAY = 'ARRAY'
```

```
CLOSE = 'CLOSE'
```

```
ERROR = 'ERROR'
```

```
FUNC = 'FUNC'
```

```
LITERAL = 'LITERAL'
```

```
LOGICAL = 'LOGICAL'
```

```
NUMBER = 'NUMBER'
```

```
OPEN = 'OPEN'
```

```
OPERAND = 'OPERAND'
```

```
OP_IN = 'OPERATOR-INFIX'
```

```
OP_POST = 'OPERATOR-POSTFIX'
```

```
OP_PRE = 'OPERATOR-PREFIX'
```

```
PAREN = 'PAREN'
```

```
RANGE = 'RANGE'
```

`ROW = 'ROW'`

`SEP = 'SEP'`

`TEXT = 'TEXT'`

`WSPACE = 'WHITE-SPACE'`

`get_closer()`

Return a closing token that matches this token's type.

`classmethod make_operand(value)`

Create an operand token.

`classmethod make_separator(value)`

Create a separator token

`classmethod make_subexp(value, func=False)`

Create a subexpression token.

value: The value of the token *func*: If True, force the token to be of type FUNC

subtype

type

value

`class openpyxl.formula.tokenizer.Tokenizer(formula)`

基类: object

A tokenizer for Excel worksheet formulae.

Converts a str string representing an Excel formula (in A1 notation) into a sequence of *Token* objects.

formula: The str string to tokenize

Tokenizer defines a method `._parse()` to parse the formula into tokens, which can then be accessed through the `.items` attribute.

`ERROR_CODES = ('#NULL!', '#DIV/0!', '#VALUE!', '#REF!', '#NAME?', '#NUM!', '#N/A', '#GETTING_DATA')`

`SN_RE = re.compile('[1-9](\\.[0-9]+)?[Ee]$')`

`STRING_REGEXES = {'': re.compile('"(?:[^\"]*)"*(?!"')'), ''': re.compile("'(?:[^\']*')*(?!'")')}`

`TOKEN_ENDERS = ',;}) +-*/^&=><%'`

`WSPACE_RE = re.compile('[\\n]+')`

`assert_empty_token(can_follow=())`

Ensure that there's no token currently being parsed.

Or if there is a token being parsed, it must end with a character in `can_follow`.

If there are unconsumed token contents, it means we hit an unexpected token transition. In this case, we raise a `TokenizerError`

check_scientific_notation()

Consumes a `+` or `-` character if part of a number in sci. notation.

Returns `True` if the character was consumed and `self.offset` was updated, `False` otherwise.

render()

Convert the parsed tokens back to a string.

save_token()

If there's a token being parsed, add it to the item list.

exception openpyxl.formula.tokenizer.TokenizerError

基类: `Exception`

Base class for all Tokenizer errors.

openpyxl.formula.translate module

This module contains code to translate formulae across cells in a worksheet.

The idea is that if A1 has formula “=B1+C1”, then translating it to cell A2 results in formula “=B2+C2”. The algorithm relies on the formula tokenizer to identify the parts of the formula that need to change.

class openpyxl.formula.translate.Translator(*formula*, *origin*)

基类: `object`

Modifies a formula so that it can be translated from one cell to another.

***formula*:** The str string to translate. Must include the leading ‘=’ character.

***origin*:** The cell address (in A1 notation) where this formula was defined (excluding the worksheet name).

`CELL_REF_RE = re.compile('(\$\?[A-Za-z]{1,3})(\$\?[1-9][0-9]{0,6})$')`

`COL_RANGE_RE = re.compile('(\$\?[A-Za-z]{1,3}):(\$\?[A-Za-z]{1,3})$')`

`ROW_RANGE_RE = re.compile('(\$\?[1-9][0-9]{0,6}):(\$\?[1-9][0-9]{0,6})$')`

get_tokens()

Returns a list with the tokens comprising the formula.

static strip_ws_name(*range_str*)

Splits out the worksheet reference, if any, from a range reference.

static translate_col(*col_str*, *cdelta*)

Translate a range col-snippet by the given number of columns

translate_formula(*dest=None, row_delta=0, col_delta=0*)

Convert the formula into A1 notation, or as row and column coordinates

The formula is converted into A1 assuming it is assigned to the cell whose address is *dest* (no worksheet name).

classmethod translate_range(*range_str, rdelta, cdelta*)

Translate an A1-style range reference to the destination cell.

rdelta: the row offset to add to the range *cdelta*: the column offset to add to the range *range_str*: an A1-style reference to a range. Potentially includes

the worksheet reference. Could also be a named range.

static translate_row(*row_str, rdelta*)

Translate a range row-snippet by the given number of rows.

exception openpyxl.formula.translate.TranslatorError

基类: Exception

Raised when a formula can't be translated across cells.

This error arises when a formula's references would be translated outside the worksheet's bounds on the top or left. Excel represents these situations with a #REF! literal error. E.g., if the formula at B2 is '=A1', attempting to translate the formula to B1 raises TranslatorError, since there's no cell above A1. Similarly, translating the same formula from B2 to A2 raises TranslatorError, since there's no cell to the left of A1.

openpyxl.packaging package

Stuff related to Office OpenXML packaging: relationships, archive, content types.

Submodules

openpyxl.packaging.core module

```
class openpyxl.packaging.core.DocumentProperties(category=None,          contentSta-
                                                tus=None, keywords=None, lastMod-
                                                ifiedBy=None,      lastPrinted=None,
                                                revision=None,      version=None,
                                                created=datetime.datetime(2020,
9, 17, 7, 20, 40, 57644), cre-
ator='openpyxl',      description=None,
identifier=None, language=None, modi-
fied=datetime.datetime(2020, 9, 17, 7, 20,
40, 57654), subject=None, title=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

High-level properties of the document. Defined in ECMA-376 Par2 Annex D

category

Values must be of type <class 'str' >

contentStatus

Values must be of type <class 'str' >

created

Values must be of type <class 'datetime.datetime' >

creator

Values must be of type <class 'str' >

description

Values must be of type <class 'str' >

identifier

Values must be of type <class 'str' >

keywords

Values must be of type <class 'str' >

language

Values must be of type <class 'str' >

lastModifiedBy

Values must be of type <class 'str' >

lastPrinted

Values must be of type <class 'datetime.datetime' >

last_modified_by

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

modified

Values must be of type <class 'datetime.datetime' >

namespace = 'http://schemas.openxmlformats.org/package/2006/metadata/core-properties'

revision

Values must be of type <class 'str' >

subject

Values must be of type <class 'str' >

tagname = 'coreProperties'

title

Values must be of type <class 'str' >

version

Values must be of type <class 'str' >

class openpyxl.packaging.core.NestedDateTime(*args, **kw)

基类: *openpyxl.descriptors.base.DateTime*, *openpyxl.descriptors.nested.NestedText*

expected_type

datetime.datetime 的别名

to_tree(tagname=None, value=None, namespace=None)

class openpyxl.packaging.core.QualifiedDateTime(*args, **kw)

基类: *openpyxl.packaging.core.NestedDateTime*

In certain situations Excel will complain if the additional type attribute isn't set

to_tree(tagname=None, value=None, namespace=None)

openpyxl.packaging.core.tostring(element, *, encoding='utf-8', method=None, short_empty_elements=True)

Generate string representation of XML element.

All subelements are included. If encoding is "unicode", a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of "xml" (default), "html", "text" or "c14n".

Returns an (optionally) encoded string containing the XML data.

openpyxl.packaging.extended module

class openpyxl.packaging.extended.DigSigBlob

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
class openpyxl.packaging.extended.ExtendedProperties(Template=None, Manager=None,
                                                    Company=None, Pages=None,
                                                    Words=None, Characters=None,
                                                    PresentationFormat=None,
                                                    Lines=None, Paragraphs=None,
                                                    Slides=None, Notes=None, Total-
                                                    Time=None, HiddenSlides=None,
                                                    MMClips=None, ScaleCrop=None,
                                                    HeadingPairs=None, Title-
                                                    sOfParts=None, LinksUpTo-
                                                    Date=None, CharactersWith-
                                                    Spaces=None, SharedDoc=None,
                                                    HyperlinkBase=None, HLinks=None,
                                                    HyperlinksChanged=None,
                                                    DigSig=None, Application='Microsoft
                                                    Excel', AppVersion=None, DocSecu-
                                                    city=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

See 22.2

Most of this is irrelevant

AppVersion

Values must be of type <class 'str' >

Application

Values must be of type <class 'str' >

Characters

Values must be of type <class 'int' >

CharactersWithSpaces

Values must be of type <class 'int' >

Company

Values must be of type <class 'str' >

DigSig

Values must be of type <class 'openpyxl.packaging.extended.DigSigBlob' >

DocSecurity

Values must be of type <class 'int' >

HLinks

Values must be of type <class 'openpyxl.packaging.extended.VectorVariant' >

HeadingPairs

Values must be of type <class 'openpyxl.packaging.extended.VectorVariant' >

HiddenSlides

Values must be of type <class 'int' >

HyperlinkBase

Values must be of type <class 'str' >

HyperlinksChanged

Values must be of type <class 'bool' >

Lines

Values must be of type <class 'int' >

LinksUpToDate

Values must be of type <class 'bool' >

MMClips

Values must be of type <class 'int' >

Manager

Values must be of type <class 'str' >

Notes

Values must be of type <class 'int' >

Pages

Values must be of type <class 'int' >

Paragraphs

Values must be of type <class 'int' >

PresentationFormat

Values must be of type <class 'str' >

ScaleCrop

Values must be of type <class 'bool' >

SharedDoc

Values must be of type <class 'bool' >

Slides

Values must be of type <class 'int' >

Template

Values must be of type <class 'str' >

TitlesOfParts

Values must be of type <class 'openpyxl.packaging.extended.VectorLpstr' >

TotalTime

Values must be of type <class 'int' >

Words

Values must be of type <class 'int' >

tagname = 'Properties'

to_tree()

class openpyxl.packaging.extended.VectorLpstr

基类: *openpyxl.descriptors.serialisable.Serialisable*

class openpyxl.packaging.extended.VectorVariant

基类: *openpyxl.descriptors.serialisable.Serialisable*

openpyxl.packaging.extended.get_version()

openpyxl.packaging.interface module

class openpyxl.packaging.interface.ISerialisableFile

基类: abc.ABC

Interface for Serialisable classes that represent files in the archive

id

Object id making it unique

openpyxl.packaging.manifest module

File manifest

class openpyxl.packaging.manifest.FileExtension(*Extension, ContentType*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

ContentType

Values must be of type <class 'str' >

Extension

Values must be of type <class 'str' >

tagname = 'Default'

class openpyxl.packaging.manifest.Manifest(*Default=(), Override=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

Default

A sequence (list or tuple) that may only contain objects of the declared type

Override

A sequence (list or tuple) that may only contain objects of the declared type

append(*obj*)

Add content object to the package manifest # needs a contract...

extensions

Map content types to file extensions Skip parts without extensions

filenames

find(*content_type*)

Find specific content-type

findall(*content_type*)

Find all elements of a specific content-type

path = '[Content_Types].xml'

tagname = 'Types'

to_tree()

Custom serialisation method to allow setting a default namespace

class openpyxl.packaging.manifest.Override(*PartName*, *ContentType*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

ContentType

Values must be of type <class 'str' >

PartName

Values must be of type <class 'str' >

tagname = 'Override'

openpyxl.packaging.manifest.tostring(*element*, *, *encoding*='utf-8', *method*=None, *short_empty_elements*=True)

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.packaging.relationship module

class openpyxl.packaging.relationship.Relationship(*Id*=None, *Type*=None, *type*=None, *Target*=None, *get*=None, *TargetMode*=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

Represents many kinds of relationships.

Id

Values must be of type <class 'str' >

Target

Values must be of type <class 'str' >

TargetMode

Values must be of type <class 'str' >

Type

Values must be of type <class 'str' >

id

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

tagname = 'Relationship'

target

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

class openpyxl.packaging.relationship.RelationshipList(*Relationship*=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

Relationship

A sequence (list or tuple) that may only contain objects of the declared type

append(*value*)

find(*content_type*)

Find relationships by content-type NB. these content-types namespaced objects and different to the MIME-types in the package manifest :-)

tagname = 'Relationships'

to_tree()

openpyxl.packaging.relationship.get_dependents(*archive*, *filename*)

Normalise dependency file paths to absolute ones

Relative paths are relative to parent object

openpyxl.packaging.relationship.get_rel(*archive*, *deps*, *id=None*, *cls=None*)

Get related object based on id or rel_type

openpyxl.packaging.relationship.get_rels_path(*path*)

Convert relative path to absolutes that can be loaded from a zip archive. The path to be passed in is that of containing object (workbook, worksheet, etc.)

```
openpyxl.packaging.relationship.tostring(element, *, encoding='utf-8', method=None,
                                         short_empty_elements=True)
```

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.packaging.workbook module

```
class openpyxl.packaging.workbook.ChildSheet(name=None, sheetId=None, state='visible',
                                              id=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Represents a reference to a worksheet or chartsheet in workbook.xml

It contains the title, order and state but only an indirect reference to the objects themselves.

id

Values must be of type <class 'str' >

name

Values must be of type <class 'str' >

sheetId

Values must be of type <class 'int' >

state

Value must be one of { 'visible' , 'hidden' , 'veryHidden' }

tagname = 'sheet'

```
class openpyxl.packaging.workbook.FileRecoveryProperties(autoRecover=None, crash-
                                                         Save=None, dataExtract-
                                                         Load=None, repairLoad=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

autoRecover

Values must be of type <class 'bool' >

crashSave

Values must be of type <class 'bool' >

dataExtractLoad

Values must be of type <class 'bool' >

repairLoad

Values must be of type <class 'bool' >

```
tagname = 'fileRecoveryPr'
```

```
class openpyxl.packaging.workbook.PivotCache(cacheId=None, id=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

cacheId

Values must be of type <class 'int' >

id

Values must be of type <class 'str' >

```
tagname = 'pivotCache'
```

```
class openpyxl.packaging.workbook.WorkbookPackage(conformance=None, fileVersion=None,
                                                    fileSharing=None, workbookPr=None,
                                                    workbookProtection=None, bookViews=(),
                                                    sheets=(), functionGroups=None, externalReferences=(),
                                                    definedNames=None, calcPr=None, oleSize=None,
                                                    customWorkbookViews=(), pivotCaches=(),
                                                    smartTagPr=None, smartTagTypes=None,
                                                    webPublishing=None, fileRecoveryPr=None,
                                                    webPublishObjects=None, extLst=None, Ignorable=None)
                                                    able=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Represent the workbook file in the archive

Ignorable

Values must be of type <class 'str' >

active

bookViews

Wrap a sequence in an containing object

calcPr

Values must be of type <class 'openpyxl.workbook.properties.CalcProperties' >

conformance

Value must be one of { 'transitional' , 'strict' }

customWorkbookViews

Wrap a sequence in an containing object

definedNames

Values must be of type <class 'openpyxl.workbook.defined_name.DefinedNameList' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

externalReferences

Wrap a sequence in an containing object

fileRecoveryPr

Values must be of type <class 'openpyxl.packaging.workbook.FileRecoveryProperties' >

fileSharing

Values must be of type <class 'openpyxl.workbook.protection.FileSharing' >

fileVersion

Values must be of type <class 'openpyxl.workbook.properties.FileVersion' >

functionGroups

Values must be of type <class 'openpyxl.workbook.function_group.FunctionGroupList' >

oleSize

Values must be of type <class 'str' >

pivotCaches

Wrap a sequence in an containing object

pivot_caches

Get PivotCache objects

properties

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

sheets

Wrap a sequence in an containing object

smartTagPr

Values must be of type <class 'openpyxl.workbook.smart_tags.SmartTagProperties' >

smartTagTypes

Values must be of type <class 'openpyxl.workbook.smart_tags.SmartTagList' >

tagname = 'workbook'**to_tree()****webPublishObjects**

Values must be of type <class 'openpyxl.workbook.web.WebPublishObjectList' >

webPublishing

Values must be of type <class 'openpyxl.workbook.web.WebPublishing' >

workbookPr

Values must be of type <class 'openpyxl.workbook.properties.WorkbookProperties' >

workbookProtection

Values must be of type <class 'openpyxl.workbook.protection.WorkbookProtection' >

openpyxl.pivot package

Submodules

openpyxl.pivot.cache module

```
class openpyxl.pivot.cache.CacheDefinition(invalid=None, saveData=None, refreshOn-  
Load=None, optimizeMemory=None, enableRe-  
fresh=None, refreshedBy=None, refreshed-  
Date=None, refreshedDateIso=None, background-  
Query=None, missingItemsLimit=None, creat-  
edVersion=None, refreshedVersion=None, min-  
RefreshableVersion=None, recordCount=None,  
upgradeOnRefresh=None, tupleCache=None, sup-  
portSubquery=None, supportAdvancedDrill=None,  
cacheSource=None, cacheFields=(), cacheHierar-  
chies=(), kpis=(), calculatedItems=(), calculated-  
Members=(), dimensions=(), measureGroups=(),  
maps=(), extLst=None, id=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

backgroundQuery

Values must be of type <class 'bool' >

cacheFields

Wrap a sequence in an containing object

cacheHierarchies

Wrap a sequence in an containing object

cacheSource

Values must be of type <class 'openpyxl.pivot.cache.CacheSource' >

calculatedItems

Wrap a sequence in an containing object

calculatedMembers

Wrap a sequence in an containing object

createdVersion

Values must be of type <class 'int' >

dimensions

Wrap a sequence in an containing object

enableRefresh

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

id

Values must be of type <class 'str' >

invalid

Values must be of type <class 'bool' >

kpis

Wrap a sequence in an containing object

maps

Wrap a sequence in an containing object

measureGroups

Wrap a sequence in an containing object

mime_type = 'application/vnd.openxmlformats-officedocument.spreadsheetml.pivotCacheDefinition+xml'

minRefreshableVersion

Values must be of type <class 'int' >

missingItemsLimit

Values must be of type <class 'int' >

optimizeMemory

Values must be of type <class 'bool' >

path**recordCount**

Values must be of type <class 'int' >

records = None**refreshOnLoad**

Values must be of type <class 'bool' >

refreshedBy

Values must be of type <class 'str' >

refreshedDate

Values must be of type <class 'float' >

refreshedDateIso

Values must be of type <class 'datetime.datetime' >

refreshedVersion

Values must be of type <class 'int' >

rel_type = 'http://schemas.openxmlformats.org/officeDocument/2006/relationships/pivotCacheDefinition'

saveData

Values must be of type <class 'bool' >

supportAdvancedDrill

Values must be of type <class 'bool' >

supportSubquery

Values must be of type <class 'bool' >

tagname = 'pivotCacheDefinition'

to_tree()

tupleCache

Values must be of type <class 'openpyxl.pivot.cache.TupleCache' >

upgradeOnRefresh

Values must be of type <class 'bool' >

```
class openpyxl.pivot.cache.CacheField(sharedItems=None, fieldGroup=None, mpMap=None,
                                       extLst=None, name=None, caption=None, proper-
                                       tyName=None, serverField=None, uniqueList=True,
                                       numFmtId=None, formula=None, sqlType=0, hi-
                                       erarchy=0, level=0, databaseField=True, mapping-
                                       Count=None, memberPropertyField=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

caption

Values must be of type <class 'str' >

databaseField

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fieldGroup

Values must be of type <class 'openpyxl.pivot.cache.FieldGroup' >

formula

Values must be of type <class 'str' >

hierarchy

Values must be of type <class 'int' >

level

Values must be of type <class 'int' >

mappingCount

Values must be of type <class 'int' >

memberPropertyField

Values must be of type <class 'bool' >

mpMap

Values must be of type <class 'int' >

name

Values must be of type <class 'str' >

numFmtId

Values must be of type <class 'int' >

propertyName

Values must be of type <class 'str' >

serverField

Values must be of type <class 'bool' >

sharedItems

Values must be of type <class 'openpyxl.pivot.cache.SharedItems' >

sqlType

Values must be of type <class 'int' >

tagname = 'cacheField'

uniqueList

Values must be of type <class 'bool' >

```
class openpyxl.pivot.cache.CacheHierarchy(uniqueName="", caption=None, measure=None,
                                          set=None, parentSet=None, iconSet=0, at-
                                          tribute=None, time=None, keyAttribute=None,
                                          defaultMemberUniqueName=None, allUnique-
                                          Name=None, allCaption=None, dimensionUnique-
                                          Name=None, displayFolder=None, measure-
                                          Group=None, measures=None, count=None,
                                          oneField=None, memberValueDatatype=None,
                                          unbalanced=None, unbalancedGroup=None, hid-
                                          den=None, fieldsUsage=None, groupLevels=None,
                                          extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

allCaption

Values must be of type <class 'str' >

allUniqueName

Values must be of type <class 'str' >

attribute

Values must be of type <class 'bool' >

caption

Values must be of type <class 'str' >

count

Values must be of type <class 'int' >

defaultMemberUniqueName

Values must be of type <class 'str' >

dimensionUniqueName

Values must be of type <class 'str' >

displayFolder

Values must be of type <class 'str' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fieldsUsage

Values must be of type <class 'openpyxl.pivot.cache.FieldsUsage' >

groupLevels

Values must be of type <class 'openpyxl.pivot.cache.GroupLevels' >

hidden

Values must be of type <class 'bool' >

iconSet

Values must be of type <class 'int' >

keyAttribute

Values must be of type <class 'bool' >

measure

Values must be of type <class 'bool' >

measureGroup

Values must be of type <class 'str' >

measures

Values must be of type <class 'bool' >

memberValueDatatype

Values must be of type <class 'int' >

oneField

Values must be of type <class 'bool' >

parentSet

Values must be of type <class 'int' >

```

set
    Values must be of type <class 'bool' >

tagname = 'cacheHierarchy'

time
    Values must be of type <class 'bool' >

unbalanced
    Values must be of type <class 'bool' >

unbalancedGroup
    Values must be of type <class 'bool' >

uniqueName
    Values must be of type <class 'str' >

class openpyxl.pivot.cache.CacheSource(type=None, connectionId=None, worksheet-
                                       Source=None, consolidation=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

connectionId
    Values must be of type <class 'int' >

consolidation
    Values must be of type <class 'openpyxl.pivot.cache.Consolidation' >

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

tagname = 'cacheSource'

type
    Value must be one of { 'consolidation' , 'scenario' , 'worksheet' , 'external' }

worksheetSource
    Values must be of type <class 'openpyxl.pivot.cache.WorksheetSource' >

class openpyxl.pivot.cache.CalculatedItem(field=None, formula=None, pivotArea=None,
                                          extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

field
    Values must be of type <class 'int' >

formula
    Values must be of type <class 'str' >

pivotArea
    Values must be of type <class 'openpyxl.pivot.table.PivotArea' >

```

```
    tagname = 'calculatedItem'
```

class openpyxl.pivot.cache.CalculatedMember(*name=None, mdx=None, memberName=None, hierarchy=None, parent=None, solve-*
Order=None, set=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst
Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

hierarchy
Values must be of type <class 'str' >

mdx
Values must be of type <class 'str' >

memberName
Values must be of type <class 'str' >

name
Values must be of type <class 'str' >

parent
Values must be of type <class 'str' >

set
Values must be of type <class 'bool' >

solveOrder
Values must be of type <class 'int' >

```
    tagname = 'calculatedMember'
```

class openpyxl.pivot.cache.Consolidation(*autoPage=None, pages=(), rangeSets=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

autoPage
Values must be of type <class 'bool' >

pages
Wrap a sequence in an containing object

rangeSets
Wrap a sequence in an containing object

```
    tagname = 'consolidation'
```

class openpyxl.pivot.cache.DiscretePr(*count=None, x=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

count
Values must be of type <class 'int' >

```

    tagname = 'discretePr'

    x
        Values must be of type <class 'int' >

class openpyxl.pivot.cache.FieldGroup(par=None, base=None, rangePr=None, dis-
                                     createPr=None, groupItems=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    base
        Values must be of type <class 'int' >

    discretePr
        Values must be of type <class 'openpyxl.pivot.cache.DiscretePr' >

    groupItems
        Values must be of type <class 'openpyxl.pivot.cache.GroupItems' >

    par
        Values must be of type <class 'int' >

    rangePr
        Values must be of type <class 'openpyxl.pivot.cache.RangePr' >

    tagname = 'fieldGroup'

class openpyxl.pivot.cache.FieldUsage(x=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    tagname = 'fieldUsage'

    x
        Values must be of type <class 'int' >

class openpyxl.pivot.cache.FieldsUsage(count=None, fieldUsage=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    count
        Values must be of type <class 'int' >

    fieldUsage
        Values must be of type <class 'openpyxl.pivot.cache.FieldUsage' >

class openpyxl.pivot.cache.GroupItems(count=None, m=(), n=(), b=(), e=(), s=(), d=())
    基类: openpyxl.descriptors.serialisable.Serialisable

    b
        A sequence (list or tuple) that may only contain objects of the declared type

    count

    d
        A sequence (list or tuple) that may only contain objects of the declared type

```

e
A sequence (list or tuple) that may only contain objects of the declared type

m
A sequence (list or tuple) that may only contain objects of the declared type

n
A sequence (list or tuple) that may only contain objects of the declared type

s
A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'groupItems'

class openpyxl.pivot.cache.GroupLevel(*uniqueName=None, caption=None, user=None, customRollUp=None, groups=None, extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

caption
Values must be of type <class 'str' >

customRollUp
Values must be of type <class 'bool' >

extLst
Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

groups
Values must be of type <class 'openpyxl.pivot.cache.Groups' >

tagname = 'groupLevel'

uniqueName
Values must be of type <class 'str' >

user
Values must be of type <class 'bool' >

class openpyxl.pivot.cache.GroupLevels(*count=None, groupLevel=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

count
Values must be of type <class 'int' >

groupLevel
Values must be of type <class 'openpyxl.pivot.cache.GroupLevel' >

class openpyxl.pivot.cache.GroupMember(*uniqueName=None, group=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

group
Values must be of type <class 'bool' >


```

    tagname = 'groupMember'

    uniqueName
        Values must be of type <class 'str' >

class openpyxl.pivot.cache.GroupMembers(count=None, groupMember=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    count
        Values must be of type <class 'int' >

    groupMember
        Values must be of type <class 'openpyxl.pivot.cache.GroupMember' >

class openpyxl.pivot.cache.Groups(count=None, group=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    count
        Values must be of type <class 'int' >

    group
        Values must be of type <class 'openpyxl.pivot.cache.LevelGroup' >

    tagname = 'groups'

class openpyxl.pivot.cache.LevelGroup(name=None, uniqueName=None, caption=None,
                                       uniqueParent=None, id=None, groupMembers=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    caption
        Values must be of type <class 'str' >

    groupMembers
        Values must be of type <class 'openpyxl.pivot.cache.GroupMembers' >

    id
        Values must be of type <class 'int' >

    name
        Values must be of type <class 'str' >

    tagname = 'levelGroup'

    uniqueName
        Values must be of type <class 'str' >

    uniqueParent
        Values must be of type <class 'str' >

class openpyxl.pivot.cache.MeasureDimensionMap(measureGroup=None, dimension=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

```

dimension

Values must be of type <class 'int' >

measureGroup

Values must be of type <class 'int' >

tagname = 'map'

class openpyxl.pivot.cache.MeasureGroup(name=None, caption=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

caption

Values must be of type <class 'str' >

name

Values must be of type <class 'str' >

tagname = 'measureGroup'

class openpyxl.pivot.cache.OLAPSet(count=None, maxRank=None, setDefinition=None, sortType=None, queryFailed=None, tpls=None, sortByTuple=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

Values must be of type <class 'int' >

maxRank

Values must be of type <class 'int' >

queryFailed

Values must be of type <class 'bool' >

setDefinition

Values must be of type <class 'str' >

sortByTuple

Values must be of type <class 'openpyxl.pivot.fields.TupleList' >

sortType

Value must be one of { 'ascending', 'descendingAlpha', 'descending', 'descendingNatural', 'ascendingAlpha', 'ascendingNatural' }

tagname = 'set'

tpls

Values must be of type <class 'openpyxl.pivot.fields.TupleList' >

class openpyxl.pivot.cache.OLAPSets(count=None, set=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

Values must be of type <class 'int' >

set

Values must be of type <class 'openpyxl.pivot.cache.OLAPSet' >

```
class openpyxl.pivot.cache.PCDKPI(uniqueName=None, caption=None, displayFolder=None,
                                   measureGroup=None, parent=None, value=None,
                                   goal=None, status=None, trend=None, weight=None,
                                   time=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

caption

Values must be of type <class 'str' >

displayFolder

Values must be of type <class 'str' >

goal

Values must be of type <class 'str' >

measureGroup

Values must be of type <class 'str' >

parent

Values must be of type <class 'str' >

status

Values must be of type <class 'str' >

tagname = 'pCDKPI'

time

Values must be of type <class 'str' >

trend

Values must be of type <class 'str' >

uniqueName

Values must be of type <class 'str' >

value

Values must be of type <class 'str' >

weight

Values must be of type <class 'str' >

```
class openpyxl.pivot.cache.PCSDTCEntries(count=None, m=None, n=None, e=None,
                                           s=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

```
count
    Values must be of type <class 'int' >

e
    Values must be of type <class 'openpyxl.pivot.fields.Error' >

m
    Values must be of type <class 'openpyxl.pivot.fields.Missing' >

n
    Values must be of type <class 'openpyxl.pivot.fields.Number' >

s
    Values must be of type <class 'openpyxl.pivot.fields.Text' >

tagname = 'pCDSDTCEntries'

class openpyxl.pivot.cache.Page(count=None, pageItem=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    count

    pageItem
        A sequence (list or tuple) that may only contain objects of the declared type

    tagname = 'PCDSCPage'

class openpyxl.pivot.cache.PageItem(name=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    name
        Values must be of type <class 'str' >

    tagname = 'pageItem'

class openpyxl.pivot.cache.PivotDimension(measure=None, name=None, uniqueName=None,
                                           caption=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    caption
        Values must be of type <class 'str' >

    measure
        Values must be of type <class 'bool' >

    name
        Values must be of type <class 'str' >

    tagname = 'dimension'

    uniqueName
        Values must be of type <class 'str' >
```

```

class openpyxl.pivot.cache.Query(mdx=None, tpls=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    mdx
        Values must be of type <class 'str' >

    tagname = 'query'

    tpls
        Values must be of type <class 'openpyxl.pivot.fields.TupleList' >

class openpyxl.pivot.cache.QueryCache(count=None, query=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    count
        Values must be of type <class 'int' >

    query
        Values must be of type <class 'openpyxl.pivot.cache.Query' >

    tagname = 'queryCache'

class openpyxl.pivot.cache.RangePr(autoStart=True, autoEnd=True, groupBy=<class 'range'>,
                                     startNum=None, endNum=None, startDate=None, end-
                                     Date=None, groupInterval=1)
    基类: openpyxl.descriptors.serialisable.Serialisable

    autoEnd
        Values must be of type <class 'bool' >

    autoStart
        Values must be of type <class 'bool' >

    endDate
        Values must be of type <class 'datetime.datetime' >

    endNum
        Values must be of type <class 'float' >

    groupBy
        Value must be one of { 'hours' , 'seconds' , 'years' , 'minutes' , 'range' , 'months' ,
        'days' , 'quarters' }

    groupInterval
        Values must be of type <class 'float' >

    startDate
        Values must be of type <class 'datetime.datetime' >

    startNum
        Values must be of type <class 'float' >

```

```
    tagname = 'rangePr'

class openpyxl.pivot.cache.RangeSet(i1=None, i2=None, i3=None, i4=None, ref=None,
                                     name=None, sheet=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    i1
        Values must be of type <class 'int' >

    i2
        Values must be of type <class 'int' >

    i3
        Values must be of type <class 'int' >

    i4
        Values must be of type <class 'int' >

    name
        Values must be of type <class 'str' >

    ref
        Values must be of type <class 'str' >

    sheet
        Values must be of type <class 'str' >

    tagname = 'rangeSet'

class openpyxl.pivot.cache.ServerFormat(culture=None, format=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    culture
        Values must be of type <class 'str' >

    format
        Values must be of type <class 'str' >

    tagname = 'serverFormat'

class openpyxl.pivot.cache.ServerFormatList(count=None, serverFormat=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    count

    serverFormat
        A sequence (list or tuple) that may only contain objects of the declared type

    tagname = 'serverFormats'
```

```
class openpyxl.pivot.cache.SharedItems(_fields=(), containsSemiMixedTypes=None, containsNonDate=None, containsDate=None, containsString=None, containsBlank=None, containsMixedTypes=None, containsNumber=None, containsInteger=None, min Value=None, max Value=None, min Date=None, max Date=None, count=None, longText=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

b

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

containsBlank

Values must be of type <class 'bool' >

containsDate

Values must be of type <class 'bool' >

containsInteger

Values must be of type <class 'bool' >

containsMixedTypes

Values must be of type <class 'bool' >

containsNonDate

Values must be of type <class 'bool' >

containsNumber

Values must be of type <class 'bool' >

containsSemiMixedTypes

Values must be of type <class 'bool' >

containsString

Values must be of type <class 'bool' >

count

d

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

e

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

longText

Values must be of type <class 'bool' >

m

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

maxDate

Values must be of type `<class 'datetime.datetime' >`

maxValue

Values must be of type `<class 'float' >`

minDate

Values must be of type `<class 'datetime.datetime' >`

minValue

Values must be of type `<class 'float' >`

n

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

s

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

tagname = 'sharedItems'

class openpyxl.pivot.cache.TupleCache(*entries=None, sets=None, queryCache=None, server-*
Formats=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

entries

Values must be of type `<class 'openpyxl.pivot.cache.PCDSDTCEntries' >`

extLst

Values must be of type `<class 'openpyxl.descriptors.excel.ExtensionList' >`

queryCache

Values must be of type `<class 'openpyxl.pivot.cache.QueryCache' >`

serverFormats

Values must be of type `<class 'openpyxl.pivot.cache.ServerFormatList' >`

sets

Values must be of type `<class 'openpyxl.pivot.cache.OLAPSets' >`

tagname = 'tupleCache'

class openpyxl.pivot.cache.WorksheetSource(*ref=None, name=None, sheet=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

ref

Values must be of type <class 'str' >

sheet

Values must be of type <class 'str' >

tagname = 'worksheetSource'

```
openpyxl.pivot.cache.tostring(element, *, encoding='utf-8', method=None,
                               short_empty_elements=True)
```

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.pivot.fields module

```
class openpyxl.pivot.fields.Boolean(x=(), v=None, u=None, f=None, c=None, cp=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

c

Values must be of type <class 'str' >

cp

Values must be of type <class 'int' >

f

Values must be of type <class 'bool' >

tagname = 'b'**u**

Values must be of type <class 'bool' >

v

Values must be of type <class 'bool' >

x

A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.pivot.fields.DateTimeField(x=(), v=None, u=None, f=None, c=None,
                                           cp=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

c
Values must be of type <class 'str' >

cp
Values must be of type <class 'int' >

f
Values must be of type <class 'bool' >

tagname = 'd'

u
Values must be of type <class 'bool' >

v
Values must be of type <class 'datetime.datetime' >

x
A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.pivot.fields.Error(tpls=None, x=(), v=None, u=None, f=None, c=None,
                                  cp=None, __in=None, bc=None, fc=None, i=None,
                                  un=None, st=None, b=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

b
Values must be of type <class 'bool' >

bc

c
Values must be of type <class 'str' >

cp
Values must be of type <class 'int' >

f
Values must be of type <class 'bool' >

fc

i
Values must be of type <class 'bool' >

st
Values must be of type <class 'bool' >

tagname = 'e'

tpls
Values must be of type <class 'openpyxl.pivot.fields.TupleList' >

u
Values must be of type <class 'bool' >

un
Values must be of type <class 'bool' >

v
Values must be of type <class 'str' >

x
A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.pivot.fields.Index(v=0)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

tagname = 'x'

v
Values must be of type <class 'int' >

```
class openpyxl.pivot.fields.Missing(tpls=(), x=(), u=None, f=None, c=None, cp=None,
                                   _in=None, bc=None, fc=None, i=None, un=None,
                                   st=None, b=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

b
Values must be of type <class 'bool' >

bc

c
Values must be of type <class 'str' >

cp
Values must be of type <class 'int' >

f
Values must be of type <class 'bool' >

fc

i
Values must be of type <class 'bool' >

st
Values must be of type <class 'bool' >

tagname = 'm'

tpls
A sequence (list or tuple) that may only contain objects of the declared type

u
Values must be of type <class 'bool' >

un
Values must be of type <class 'bool' >

x
A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.pivot.fields.Number(tpls=(), x=(), v=None, u=None, f=None, c=None,
                                   cp=None, _in=None, bc=None, fc=None, i=None,
                                   un=None, st=None, b=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

b
Values must be of type <class 'bool' >

bc

c
Values must be of type <class 'str' >

cp
Values must be of type <class 'int' >

f
Values must be of type <class 'bool' >

fc

i
Values must be of type <class 'bool' >

st
Values must be of type <class 'bool' >

tagname = 'n'

tpls
A sequence (list or tuple) that may only contain objects of the declared type

u
Values must be of type <class 'bool' >

un
Values must be of type <class 'bool' >

v
Values must be of type <class 'float' >

x
A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.pivot.fields.Text(tpls=(), x=(), v=None, u=None, f=None, c=None, cp=None,
                                _in=None, bc=None, fc=None, i=None, un=None, st=None,
                                b=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

b

Values must be of type <class 'bool' >

bc

c

Values must be of type <class 'str' >

cp

Values must be of type <class 'int' >

f

Values must be of type <class 'bool' >

fc

i

Values must be of type <class 'bool' >

st

Values must be of type <class 'bool' >

tagname = 's'

tpls

A sequence (list or tuple) that may only contain objects of the declared type

u

Values must be of type <class 'bool' >

un

Values must be of type <class 'bool' >

v

Values must be of type <class 'str' >

x

A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.pivot.fields.Tuple(fld=None, hier=None, item=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

fld

Values must be of type <class 'int' >

hier

Values must be of type <class 'int' >

item

Values must be of type <class 'int' >

class openpyxl.pivot.fields.TupleList(*c=None, tpl=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

c

Values must be of type <class 'int' >

tpl

Values must be of type <class 'openpyxl.pivot.fields.Tuple' >

openpyxl.pivot.record module

class openpyxl.pivot.record.Record(*_fields=(), m=None, n=None, b=None, e=None, s=None, d=None, x=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

b

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

d

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

e

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

m

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

n

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

s

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

tagname = 'r'

x

Allow a multisequence to be built up from parts

Excluded from the instance `__elements__` or `__attrs__` as is effectively an Alias

```
class openpyxl.pivot.record.RecordList(count=None, r=(), extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

count

extLst

Values must be of type `<class 'openpyxl.descriptors.excel.ExtensionList' >`

mime_type = `'application/vnd.openxmlformats-officedocument.spreadsheetml.pivotCacheRecords+xml'`

path

r

A sequence (list or tuple) that may only contain objects of the declared type

rel_type = `'http://schemas.openxmlformats.org/officeDocument/2006/relationships/pivotCacheRecords'`

tagname = `'pivotCacheRecords'`

to_tree()

```
openpyxl.pivot.record.tostring(element, *, encoding='utf-8', method=None,
                                short_empty_elements=True)
```

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.pivot.table module

```
class openpyxl.pivot.table.AutoSortScope(pivotArea=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

pivotArea

Values must be of type `<class 'openpyxl.pivot.table.PivotArea' >`

```
class openpyxl.pivot.table.ChartFormat(chart=None, format=None, series=None, pivotArea=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

chart

Values must be of type `<class 'int' >`

format

Values must be of type `<class 'int' >`

pivotArea

Values must be of type <class 'openpyxl.pivot.table.PivotArea' >

series

Values must be of type <class 'bool' >

tagname = 'chartFormat'

class openpyxl.pivot.table.ColHierarchiesUsage(count=None, colHierarchyUsage=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

colHierarchyUsage

A sequence (list or tuple) that may only contain objects of the declared type

count

tagname = 'colHierarchiesUsage'

class openpyxl.pivot.table.ConditionalFormat(scope=None, type=None, priority=None, pivotAreas=(), extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

pivotAreas

Wrap a sequence in an containing object

priority

Values must be of type <class 'int' >

scope

Value must be one of { 'selection' , 'field' , 'data' }

tagname = 'conditionalFormat'

type

Value must be one of { 'column' , 'row' , 'all' }

class openpyxl.pivot.table.DataField(name=None, fld=None, subtotal='sum', showDataAs='normal', baseField=-1, baseItem=1048832, numFmtId=None, extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

baseField

Values must be of type <class 'int' >

baseItem

Values must be of type <class 'int' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fld

Values must be of type <class 'int' >

name

Values must be of type <class 'str' >

numFmtId

Values must be of type <class 'int' >

showDataAs

Value must be one of { 'percent' , 'difference' , 'runTotal' , 'percentOfRow' , 'index' , 'percentOfTotal' , 'normal' , 'percentDiff' , 'percentOfCol' }

subtotal

Value must be one of { 'sum' , 'stdDevp' , 'min' , 'average' , 'countNums' , 'var' , 'max' , 'varp' , 'stdDev' , 'product' , 'count' }

tagname = 'dataField'

```
class openpyxl.pivot.table.FieldItem(n=None, t='data', h=None, s=None, sd=True, f=None,
                                     m=None, c=None, x=None, d=None, e=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable***c**

Values must be of type <class 'bool' >

d

Values must be of type <class 'bool' >

e

Values must be of type <class 'bool' >

f

Values must be of type <class 'bool' >

h

Values must be of type <class 'bool' >

m

Values must be of type <class 'bool' >

n

Values must be of type <class 'str' >

s

Values must be of type <class 'bool' >

sd

Values must be of type <class 'bool' >

t

Value must be one of { 'stdDevP' , 'sum' , 'blank' , 'data' , 'min' , 'countA' , 'var' }

```
        , 'max' , 'grand' , 'varP' , 'stdDev' , 'product' , 'default' , 'avg' , 'count' }

    tagname = 'item'

x
    Values must be of type <class 'int' >

class openpyxl.pivot.table.Format(action='formatting',      dxfId=None,      pivotArea=None,
                                   extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    action
        Value must be one of { 'blank' , 'drill' , 'formatting' , 'formula' }

    dxfId
        Values must be of type <class 'int' >

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    pivotArea
        Values must be of type <class 'openpyxl.pivot.table.PivotArea' >

    tagname = 'format'

class openpyxl.pivot.table.HierarchyUsage(hierarchyUsage=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    hierarchyUsage
        Values must be of type <class 'int' >

    tagname = 'hierarchyUsage'

class openpyxl.pivot.table.Location(ref=None, firstHeaderRow=None, firstDataRow=None,
                                     firstDataCol=None, rowPageCount=None, colPage-
                                     Count=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    colPageCount
        Values must be of type <class 'int' >

    firstDataCol
        Values must be of type <class 'int' >

    firstDataRow
        Values must be of type <class 'int' >

    firstHeaderRow
        Values must be of type <class 'int' >

    ref
        Values must be of type <class 'str' >
```

```

rowPageCount
    Values must be of type <class 'int' >

tagname = 'location'

class openpyxl.pivot.table.MemberList(count=None, level=None, member=())
    基类: openpyxl.descriptors.serialisable.Serialisable

    count

    level
        Values must be of type <class 'int' >

    member
        Wrap a sequence in an containing object

    tagname = 'members'

class openpyxl.pivot.table.MemberProperty(name=None, showCell=None, showTip=None,
                                           showAsCaption=None, nameLen=None,
                                           pPos=None, pLen=None, level=None, field=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    field
        Values must be of type <class 'int' >

    level
        Values must be of type <class 'int' >

    name
        Values must be of type <class 'str' >

    nameLen
        Values must be of type <class 'int' >

    pLen
        Values must be of type <class 'int' >

    pPos
        Values must be of type <class 'int' >

    showAsCaption
        Values must be of type <class 'bool' >

    showCell
        Values must be of type <class 'bool' >

    showTip
        Values must be of type <class 'bool' >

    tagname = 'mps'

```

```
class openpyxl.pivot.table.PageField(fld=None, item=None, hier=None, name=None,
                                     cap=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    cap
        Values must be of type <class 'str' >

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    fld
        Values must be of type <class 'int' >

    hier
        Values must be of type <class 'int' >

    item
        Values must be of type <class 'int' >

    name
        Values must be of type <class 'str' >

    tagname = 'pageField'

class openpyxl.pivot.table.PivotArea(references=(), extLst=None, field=None, type='normal',
                                     dataOnly=True, labelOnly=None, grandRow=None,
                                     grandCol=None, cacheIndex=None, outline=True,
                                     offset=None, collapsedLevelsAreSubtotals=None,
                                     axis=None, fieldPosition=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    axis
        Value must be one of { 'axisValues' , 'axisCol' , 'axisRow' , 'axisPage' }

    cacheIndex
        Values must be of type <class 'bool' >

    collapsedLevelsAreSubtotals
        Values must be of type <class 'bool' >

    dataOnly
        Values must be of type <class 'bool' >

    extLst
        Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

    field
        Values must be of type <class 'int' >

    fieldPosition
        Values must be of type <class 'int' >
```

grandCol

Values must be of type <class 'bool' >

grandRow

Values must be of type <class 'bool' >

labelOnly

Values must be of type <class 'bool' >

offset

Values must be of type <class 'str' >

outline

Values must be of type <class 'bool' >

references

Wrap a sequence in an containing object

tagname = 'pivotArea'

type

Value must be one of { 'topEnd' , 'data' , 'topRight' , 'normal' , 'all' , 'button' , 'origin' }

```
class openpyxl.pivot.table.PivotField(items=(),      autoSortScope=None,      name=None,
                                       axis=None, dataField=None, subtotalCaption=None,
                                       showDropDowns=True,      hiddenLevel=None,
                                       uniqueMemberProperty=None,      compact=True,
                                       allDrilled=None, numFmtId=None, outline=True,
                                       subtotalTop=True, dragToRow=True, dragToCol=True,
                                       multipleItemSelectionAllowed=None, dragToPage=True,
                                       dragToData=True, dragOff=True, showAll=True,
                                       insertBlankRow=None, serverField=None, insertPage-
                                       Break=None, autoShow=None, topAutoShow=True,
                                       hideNewItems=None, measureFilter=None, include-
                                       NewItemsInFilter=None, itemPageCount=10, sort-
                                       Type='manual', dataSourceSort=None, nonAutoSort-
                                       Default=None, rankBy=None, defaultSubtotal=True,
                                       sumSubtotal=None, countASubtotal=None, avgSubto-
                                       tal=None, maxSubtotal=None, minSubtotal=None,
                                       productSubtotal=None, countSubtotal=None, stdDe-
                                       vSubtotal=None, stdDevPSubtotal=None, varSubto-
                                       tal=None, varPSubtotal=None, showPropCell=None,
                                       showPropTip=None, showPropAsCaption=None, de-
                                       faultAttributeDrillState=None, extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

allDrilled

Values must be of type <class 'bool' >

autoShow

Values must be of type <class 'bool' >

autoSortScope

Values must be of type <class 'openpyxl.pivot.table.AutoSortScope' >

avgSubtotal

Values must be of type <class 'bool' >

axis

Value must be one of { 'axisValues' , 'axisCol' , 'axisRow' , 'axisPage' }

compact

Values must be of type <class 'bool' >

countASubtotal

Values must be of type <class 'bool' >

countSubtotal

Values must be of type <class 'bool' >

dataField

Values must be of type <class 'bool' >

dataSourceSort

Values must be of type <class 'bool' >

defaultAttributeDrillState

Values must be of type <class 'bool' >

defaultSubtotal

Values must be of type <class 'bool' >

dragOff

Values must be of type <class 'bool' >

dragToCol

Values must be of type <class 'bool' >

dragToData

Values must be of type <class 'bool' >

dragToPage

Values must be of type <class 'bool' >

dragToRow

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

hiddenLevel

Values must be of type <class 'bool' >

hideNewItems

Values must be of type <class 'bool' >

includeNewItemsInFilter

Values must be of type <class 'bool' >

insertBlankRow

Values must be of type <class 'bool' >

insertPageBreak

Values must be of type <class 'bool' >

itemPageCount

Values must be of type <class 'int' >

items

Wrap a sequence in an containing object

maxSubtotal

Values must be of type <class 'bool' >

measureFilter

Values must be of type <class 'bool' >

minSubtotal

Values must be of type <class 'bool' >

multipleItemSelectionAllowed

Values must be of type <class 'bool' >

name

Values must be of type <class 'str' >

nonAutoSortDefault

Values must be of type <class 'bool' >

numFmtId

Values must be of type <class 'int' >

outline

Values must be of type <class 'bool' >

productSubtotal

Values must be of type <class 'bool' >

rankBy

Values must be of type <class 'int' >

serverField

Values must be of type <class 'bool' >

showAll

Values must be of type <class 'bool' >

showDropDowns

Values must be of type <class 'bool' >

showPropAsCaption

Values must be of type <class 'bool' >

showPropCell

Values must be of type <class 'bool' >

showPropTip

Values must be of type <class 'bool' >

sortType

Value must be one of { 'ascending' , 'manual' , 'descending' }

stdDevPSubtotal

Values must be of type <class 'bool' >

stdDevSubtotal

Values must be of type <class 'bool' >

subtotalCaption

Values must be of type <class 'str' >

subtotalTop

Values must be of type <class 'bool' >

sumSubtotal

Values must be of type <class 'bool' >

tagname = 'pivotField'**topAutoShow**

Values must be of type <class 'bool' >

uniqueMemberProperty

Values must be of type <class 'str' >

varPSubtotal

Values must be of type <class 'bool' >

varSubtotal

Values must be of type <class 'bool' >


```
class openpyxl.pivot.table.PivotFilter(fld=None, mpFld=None, type=None, evalOrder=None,
                                       id=None, iMeasureHier=None, iMeasureFld=None,
                                       name=None, description=None, stringValue1=None,
                                       stringValue2=None, autoFilter=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

autoFilter

Values must be of type <class 'openpyxl.worksheet.filters.AutoFilter' >

description

Values must be of type <class 'str' >

evalOrder

Values must be of type <class 'int' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fld

Values must be of type <class 'int' >

iMeasureFld

Values must be of type <class 'int' >

iMeasureHier

Values must be of type <class 'int' >

id

Values must be of type <class 'int' >

mpFld

Values must be of type <class 'int' >

name

Values must be of type <class 'str' >

stringValue1

Values must be of type <class 'str' >

stringValue2

Values must be of type <class 'str' >

tagname = 'filter'

type

Value must be one of { 'Q3', 'sum', 'captionLessThan', 'valueNotEqual', 'lastMonth', 'lastYear', 'M5', 'valueEqual', 'lastQuarter', 'dateNewerThan', 'yesterday', 'Q4', 'dateOlderThanOrEqual', 'unknown', 'tomorrow', 'valueNotBetween', 'captionEndsWith', 'M3', 'M10', 'captionNotContains', 'nextQuarter', 'M12', 'captionGreaterThan', 'today', 'thisWeek', 'thisYear', 'captionBeginsWith', 'captionContains', 'count',

```
‘valueGreaterThanOrEqual’, ‘lastWeek’, ‘percent’, ‘yearToDate’, ‘captionNotEqual’,  
‘Q1’, ‘captionLessThanOrEqual’, ‘valueGreaterThan’, ‘captionNotBetween’, ‘M7’,  
‘M2’, ‘captionEqual’, ‘nextYear’, ‘captionNotEndsWith’, ‘M8’, ‘captionBetween’,  
‘valueBetween’, ‘M11’, ‘thisMonth’, ‘M4’, ‘captionNotBeginsWith’, ‘dateBetween’, ‘M6’,  
‘dateEqual’, ‘nextWeek’, ‘dateNotBetween’, ‘thisQuarter’, ‘captionGreaterThanOrEqual’,  
‘valueLessThan’, ‘Q2’, ‘dateNotEqual’, ‘M1’, ‘dateNewerThanOrEqual’, ‘M9’,  
‘valueLessThanOrEqual’, ‘dateOlderThan’, ‘nextMonth’ }
```

```
class openpyxl.pivot.table.PivotFilters(count=None, filter=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

Values must be of type <class ‘int’ >

filter

Values must be of type <class ‘openpyxl.pivot.table.PivotFilter’ >

```
class openpyxl.pivot.table.PivotHierarchy(outline=None, multipleItemSelectionAl-  
lowed=None, subtotalTop=None, showIn-  
FieldList=None, dragToRow=None, dragTo-  
Col=None, dragToPage=None, dragToData=None,  
dragOff=None, includeNewItemsInFilter=None,  
caption=None, mps=(), members=None,  
extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

caption

Values must be of type <class ‘str’ >

dragOff

Values must be of type <class ‘bool’ >

dragToCol

Values must be of type <class ‘bool’ >

dragToData

Values must be of type <class ‘bool’ >

dragToPage

Values must be of type <class ‘bool’ >

dragToRow

Values must be of type <class ‘bool’ >

extLst

Values must be of type <class ‘openpyxl.descriptors.excel.ExtensionList’ >

includeNewItemsInFilter

Values must be of type <class ‘bool’ >

members

Values must be of type <class 'openpyxl.pivot.table.MemberList' >

mps

Wrap a sequence in an containing object

multipleItemSelectionAllowed

Values must be of type <class 'bool' >

outline

Values must be of type <class 'bool' >

showInFieldList

Values must be of type <class 'bool' >

subtotalTop

Values must be of type <class 'bool' >

tagname = 'pivotHierarchy'

```
class openpyxl.pivot.table.PivotTableStyle(name=None, showRowHeaders=None, showCol-
                                           Headers=None, showRowStripes=None, showCol-
                                           Stripes=None, showLastColumn=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

showColHeaders

Values must be of type <class 'bool' >

showColStripes

Values must be of type <class 'bool' >

showLastColumn

Values must be of type <class 'bool' >

showRowHeaders

Values must be of type <class 'bool' >

showRowStripes

Values must be of type <class 'bool' >

tagname = 'pivotTableStyleInfo'

```
class openpyxl.pivot.table.Reference(field=None, count=None, selected=None, byPosition=None, relative=None, defaultSubtotal=None, sumSubtotal=None, countASubtotal=None, avgSubtotal=None, maxSubtotal=None, minSubtotal=None, productSubtotal=None, countSubtotal=None, stdDevSubtotal=None, stdDevPSubtotal=None, varSubtotal=None, varPSubtotal=None, x=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

avgSubtotal

Values must be of type <class 'bool' >

byPosition

Values must be of type <class 'bool' >

count

countASubtotal

Values must be of type <class 'bool' >

countSubtotal

Values must be of type <class 'bool' >

defaultSubtotal

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

field

Values must be of type <class 'int' >

maxSubtotal

Values must be of type <class 'bool' >

minSubtotal

Values must be of type <class 'bool' >

productSubtotal

Values must be of type <class 'bool' >

relative

Values must be of type <class 'bool' >

selected

Values must be of type <class 'bool' >

stdDevPSubtotal

Values must be of type <class 'bool' >

```

stdDevSubtotal
    Values must be of type <class 'bool' >

sumSubtotal
    Values must be of type <class 'bool' >

tagname = 'reference'

varPSubtotal
    Values must be of type <class 'bool' >

varSubtotal
    Values must be of type <class 'bool' >

x
    Values must be of type <class 'int' >

class openpyxl.pivot.table.RowColField(x=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    tagname = 'field'

x
    Values must be of type <class 'int' >

class openpyxl.pivot.table.RowColItem(t='data', r=0, i=0, x=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    i
        Values must be of type <class 'int' >

    r
        Values must be of type <class 'int' >

    t
        Value must be one of { 'stdDevP', 'sum', 'blank', 'data', 'min', 'countA', 'var',
        , 'max', 'grand', 'varP', 'stdDev', 'product', 'default', 'avg', 'count' }

    tagname = 'i'

x
    A sequence (list or tuple) that may only contain objects of the declared type

class openpyxl.pivot.table.RowHierarchiesUsage(count=None, rowHierarchyUsage=())
    基类: openpyxl.descriptors.serialisable.Serialisable

    count

    rowHierarchyUsage
        A sequence (list or tuple) that may only contain objects of the declared type

    tagname = 'rowHierarchiesUsage'

```

```
class openpyxl.pivot.table.TableDefinition(name=None, cacheId=None, dataOnRows=False,
                                           dataPosition=None, dataCaption=None, grand-
                                           TotalCaption=None, errorCaption=None,
                                           showError=False, missingCaption=None,
                                           showMissing=True, pageStyle=None, pivotTa-
                                           bleStyle=None, vacatedStyle=None, tag=None,
                                           updatedVersion=0, minRefreshableVersion=0,
                                           asteriskTotals=False, showItems=True, edit-
                                           Data=False, disableFieldList=False, showCal-
                                           cMbrs=True, visualTotals=True, showMul-
                                           tipleLabel=True, showDataDropDown=True,
                                           showDrill=True, printDrill=False, showMember-
                                           PropertyTips=True, showDataTips=True, en-
                                           ableWizard=True, enableDrill=True, enableField-
                                           Properties=True, preserveFormatting=True, use-
                                           AutoFormatting=False, pageWrap=0, pageOver-
                                           ThenDown=False, subtotalHiddenItems=False,
                                           rowGrandTotals=True, colGrandTotals=True,
                                           fieldPrintTitles=False, itemPrintTitles=False,
                                           mergeItem=False, showDropZones=True, creat-
                                           edVersion=0, indent=1, showEmptyRow=False,
                                           showEmptyCol=False, showHeaders=True, com-
                                           pact=True, outline=False, outlineData=False,
                                           compactData=True, published=False, gridDrop-
                                           Zones=False, immersive=True, multipleField-
                                           Filters=None, chartFormat=0, rowHeaderCap-
                                           tion=None, colHeaderCaption=None, fieldListSor-
                                           tAscending=None, mdxSubqueries=None, custom-
                                           ListSort=None, autoFormatId=None, applyNum-
                                           berFormats=False, applyBorderFormats=False,
                                           applyFontFormats=False, applyPatternFor-
                                           mats=False, applyAlignmentFormats=False,
                                           applyWidthHeightFormats=False, location=None,
                                           pivotFields=(), rowFields=(), rowItems=(),
                                           colFields=(), colItems=(), pageFields=(),
                                           dataFields=(), formats=(), conditionalFor-
                                           mats=(), chartFormats=(), pivotHierarchies=(),
                                           pivotTableStyleInfo=None, filters=(), rowHier-
                                           archiesUsage=None, colHierarchiesUsage=None,
                                           extLst=None, id=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

applyAlignmentFormats

Values must be of type <class 'bool' >

applyBorderFormats

Values must be of type <class 'bool' >

applyFontFormats

Values must be of type <class 'bool' >

applyNumberFormats

Values must be of type <class 'bool' >

applyPatternFormats

Values must be of type <class 'bool' >

applyWidthHeightFormats

Values must be of type <class 'bool' >

asteriskTotals

Values must be of type <class 'bool' >

autoFormatId

Values must be of type <class 'int' >

cache = None**cacheId**

Values must be of type <class 'int' >

chartFormat

Values must be of type <class 'int' >

chartFormats

Wrap a sequence in an containing object

colFields

Wrap a sequence in an containing object

colGrandTotals

Values must be of type <class 'bool' >

colHeaderCaption

Values must be of type <class 'str' >

colHierarchiesUsage

Values must be of type <class 'openpyxl.pivot.table.ColHierarchiesUsage' >

colItems

Wrap a sequence in an containing object

compact

Values must be of type <class 'bool' >

compactData

Values must be of type <class 'bool' >

conditionalFormats

Wrap a sequence in an containing object

createdVersion

Values must be of type <class 'int' >

customListSort

Values must be of type <class 'bool' >

dataCaption

Values must be of type <class 'str' >

dataFields

Wrap a sequence in an containing object

dataOnRows

Values must be of type <class 'bool' >

dataPosition

Values must be of type <class 'int' >

disableFieldList

Values must be of type <class 'bool' >

editData

Values must be of type <class 'bool' >

enableDrill

Values must be of type <class 'bool' >

enableFieldProperties

Values must be of type <class 'bool' >

enableWizard

Values must be of type <class 'bool' >

errorCaption

Values must be of type <class 'str' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fieldListSortAscending

Values must be of type <class 'bool' >

fieldPrintTitles

Values must be of type <class 'bool' >

filters

Wrap a sequence in an containing object

formats

Wrap a sequence in an containing object

grandTotalCaption

Values must be of type <class 'str' >

gridDropZones

Values must be of type <class 'bool' >

id

Values must be of type <class 'str' >

immersive

Values must be of type <class 'bool' >

indent

Values must be of type <class 'int' >

itemPrintTitles

Values must be of type <class 'bool' >

location

Values must be of type <class 'openpyxl.pivot.table.Location' >

mdxSubqueries

Values must be of type <class 'bool' >

mergeItem

Values must be of type <class 'bool' >

mime_type = 'application/vnd.openxmlformats-officedocument.spreadsheetml.pivotTable+xml'

minRefreshableVersion

Values must be of type <class 'int' >

missingCaption

Values must be of type <class 'str' >

multipleFieldFilters

Values must be of type <class 'bool' >

name

Values must be of type <class 'str' >

outline

Values must be of type <class 'bool' >

outlineData

Values must be of type <class 'bool' >

pageFields

Wrap a sequence in an containing object

pageOverThenDown

Values must be of type <class 'bool' >

pageStyle

Values must be of type <class 'str' >

pageWrap

Values must be of type <class 'int' >

path**pivotFields**

Wrap a sequence in an containing object

pivotHierarchies

Wrap a sequence in an containing object

pivotTableStyle

Values must be of type <class 'str' >

pivotTableStyleInfo

Values must be of type <class 'openpyxl.pivot.table.PivotTableStyle' >

preserveFormatting

Values must be of type <class 'bool' >

printDrill

Values must be of type <class 'bool' >

published

Values must be of type <class 'bool' >

rel_type = 'http://schemas.openxmlformats.org/officeDocument/2006/relationships/pivotTable'

rowFields

Wrap a sequence in an containing object

rowGrandTotals

Values must be of type <class 'bool' >

rowHeaderCaption

Values must be of type <class 'str' >

rowHierarchiesUsage

Values must be of type <class 'openpyxl.pivot.table.RowHierarchiesUsage' >

rowItems

Wrap a sequence in an containing object

showCalcMbrs
Values must be of type <class 'bool' >

showDataDropDown
Values must be of type <class 'bool' >

showDataTips
Values must be of type <class 'bool' >

showDrill
Values must be of type <class 'bool' >

showDropZones
Values must be of type <class 'bool' >

showEmptyCol
Values must be of type <class 'bool' >

showEmptyRow
Values must be of type <class 'bool' >

showError
Values must be of type <class 'bool' >

showHeaders
Values must be of type <class 'bool' >

showItems
Values must be of type <class 'bool' >

showMemberPropertyTips
Values must be of type <class 'bool' >

showMissing
Values must be of type <class 'bool' >

showMultipleLabel
Values must be of type <class 'bool' >

subtotalHiddenItems
Values must be of type <class 'bool' >

tag
Values must be of type <class 'str' >

tagname = 'pivotTableDefinition'

to_tree()

updatedVersion
Values must be of type <class 'int' >

useAutoFormatting

Values must be of type <class 'bool' >

vacatedStyle

Values must be of type <class 'str' >

visualTotals

Values must be of type <class 'bool' >

`openpyxl.pivot.table.tostring(element, *, encoding='utf-8', method=None, short_empty_elements=True)`
Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.reader package**Submodules****openpyxl.reader.drawings module**

`openpyxl.reader.drawings.find_images(archive, path)`
Given the path to a drawing file extract charts and images
Ignore errors due to unsupported parts of DrawingML

openpyxl.reader.excel module

Read an xlsx file into Python

`class openpyxl.reader.excel.ExcelReader(fn, read_only=False, keep_vba=False, data_only=False, keep_links=True)`

基类: object

Read an Excel package and dispatch the contents to the relevant modules

`read()`

`read_chartsheet(sheet, rel)`

`read_manifest()`

`read_properties()`

`read_strings()``read_theme()``read_workbook()``read_worksheets()`

`openpyxl.reader.excel.load_workbook(filename, read_only=False, keep_vba=False, data_only=False, keep_links=True)`

Open the given filename and return the workbook

参数

- **filename** (string or a file-like object open in binary mode c.f., `zipfile.ZipFile`) – the path to open or a file-like object
- **read_only** (*bool*) – optimised for reading, content cannot be edited
- **keep_vba** (*bool*) – preserve vba content (this does NOT mean you can use it)
- **data_only** (*bool*) – controls whether cells with formulae have either the formula (default) or the value stored the last time Excel read the sheet
- **keep_links** (*bool*) – whether links to external workbooks should be preserved. The default is True

返回类型 `openpyxl.workbook.Workbook`

注解: When using lazy load, all worksheets will be `openpyxl.worksheet.iter_worksheet.IterableWorksheet` and the returned workbook will be read-only.

openpyxl.reader.strings module

`openpyxl.reader.strings.read_string_table(xml_source)`

Read in all shared strings in the table

openpyxl.reader.workbook module

`class openpyxl.reader.workbook.WorkbookParser(archive, workbook_part_name, keep_links=True)`

基类: `object`

`assign_names()`

Bind reserved names to parsed worksheets

`find_sheets()`

Find all sheets in the workbook and return the link to the source file.

Older XLSM files sometimes contain invalid sheet elements. Warn user when these are removed.

`parse()`

`pivot_caches`

Get PivotCache objects

`rels`

openpyxl.styles package

Submodules

openpyxl.styles.alignment module

```
class openpyxl.styles.alignment.Alignment(horizontal=None, vertical=None, textRotation=0,
                                         wrapText=None, shrinkToFit=None, indent=0,
                                         relativeIndent=0, justifyLastLine=None, readingOrder=0, text_rotation=None, wrap_text=None,
                                         shrink_to_fit=None, mergeCell=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Alignment options for use in styles.

horizontal

Value must be one of { 'fill', 'distributed', 'general', 'left', 'centerContinuous', 'center', 'justify', 'right' }

indent

Values must be of type <class 'float' >

justifyLastLine

Values must be of type <class 'bool' >

readingOrder

Values must be of type <class 'float' >

relativeIndent

Values must be of type <class 'float' >

shrinkToFit

Values must be of type <class 'bool' >

shrink_to_fit

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

tagname = 'alignment'

textRotation

Value must be one of {0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180}

text_rotation

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

vertical

Value must be one of { ‘justify’ , ‘distributed’ , ‘center’ , ‘bottom’ , ‘top’ }

wrapText

Values must be of type <class ‘bool’ >

wrap_text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

openpyxl.styles.borders module

```
class openpyxl.styles.borders.Border(left=<openpyxl.styles.borders.Side      object>
                                     Parameters:      style=None,      color=None,
                                     right=<openpyxl.styles.borders.Side      object>
                                     Parameters:      style=None,      color=None,
                                     top=<openpyxl.styles.borders.Side      object>      Pa-
                                     rameters:      style=None,      color=None,      bot-
                                     tom=<openpyxl.styles.borders.Side      object>      Pa-
                                     rameters:      style=None,      color=None,      diago-
                                     nal=<openpyxl.styles.borders.Side      object>      Parameters:
                                     style=None, color=None, diagonal_direction=None, ver-
                                     tical=None, horizontal=None, diagonalUp=False, diago-
                                     nalDown=False, outline=True, start=None, end=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Border positioning for use in styles.

bottom

Values must be of type <class ‘openpyxl.styles.borders.Side’ >

diagonal

Values must be of type <class 'openpyxl.styles.borders.Side' >

diagonalDown

Values must be of type <class 'bool' >

diagonalUp

Values must be of type <class 'bool' >

end

Values must be of type <class 'openpyxl.styles.borders.Side' >

horizontal

Values must be of type <class 'openpyxl.styles.borders.Side' >

left

Values must be of type <class 'openpyxl.styles.borders.Side' >

outline

Values must be of type <class 'bool' >

right

Values must be of type <class 'openpyxl.styles.borders.Side' >

start

Values must be of type <class 'openpyxl.styles.borders.Side' >

tagname = 'border'

top

Values must be of type <class 'openpyxl.styles.borders.Side' >

vertical

Values must be of type <class 'openpyxl.styles.borders.Side' >

class openpyxl.styles.borders.Side(*style=None, color=None, border_style=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

Border options for use in styles. Caution: if you do not specify a `border_style`, other attributes will have no effect !

border_style

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

color

Values must be of type <class 'openpyxl.styles.colors.Color' >

style

Value must be one of { ‘medium’ , ‘thick’ , ‘dashDotDot’ , ‘dotted’ , ‘double’ ,


```

    'mediumDashDotDot', 'hair', 'slantDashDot', 'dashDot', 'mediumDashed', 'dashed'
    , 'mediumDashDot', 'thin' }

```

openpyxl.styles.builtins module

openpyxl.styles.cell_style module

```
class openpyxl.styles.cell_style.ArrayDescriptor(key)
```

基类: object

```
class openpyxl.styles.cell_style.CellStyle(numFmtId=0, fontId=0, fillId=0, borderId=0,
                                           xfId=None, quotePrefix=None, pivotBut-
                                           ton=None, applyNumberFormat=None, ap-
                                           plyFont=None, applyFill=None, applyBor-
                                           der=None, applyAlignment=None, apply Protec-
                                           tion=None, alignment=None, protection=None,
                                           extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

alignment

Values must be of type <class 'openpyxl.styles.alignment.Alignment' >

applyAlignment

applyBorder

Values must be of type <class 'bool' >

applyFill

Values must be of type <class 'bool' >

applyFont

Values must be of type <class 'bool' >

applyNumberFormat

Values must be of type <class 'bool' >

applyProtection

borderId

Values must be of type <class 'int' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fillId

Values must be of type <class 'int' >

fontId

Values must be of type <class 'int' >

classmethod from_array(*style*)

Convert from StyleArray

numFmtId

Values must be of type <class 'int' >

pivotButton

Values must be of type <class 'bool' >

protection

Values must be of type <class 'openpyxl.styles.protection.Protection' >

quotePrefix

Values must be of type <class 'bool' >

tagname = 'xf'

to_array()

Convert to StyleArray

xfId

Values must be of type <class 'int' >

class openpyxl.styles.cell_style.CellStyleList(count=None, xf=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

alignment

A sequence (list or tuple) that may only contain objects of the declared type

count

protection

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'cellXfs'

xf

A sequence (list or tuple) that may only contain objects of the declared type

class openpyxl.styles.cell_style.StyleArray

基类: *array.array*

Simplified named tuple with an array

alignmentId

borderId

fillId

fontId

numFmtId

```

pivotButton
protectionId
quotePrefix
tagname = 'xf'
xfId

```

openpyxl.styles.colors module

```

class openpyxl.styles.colors.Color(
    rgb='00000000', indexed=None, auto=None, theme=None,
    tint=0.0, index=None, type='rgb')

```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Named colors for use in styles.

auto

Values must be of type <class 'bool' >

index

indexed

Values must be of type <class 'int' >

rgb

Values must be of type <class 'str' >

tagname = 'color'

theme

Values must be of type <class 'int' >

tint

Values must be of type <class 'float' >

type

Values must be of type <class 'str' >

value

```

class openpyxl.styles.colors.ColorDescriptor(*args, **kw)

```

基类: *openpyxl.descriptors.base.Typed*

expected_type

Color 的别名

```

class openpyxl.styles.colors.ColorList(indexedColors=(), mruColors=())

```

基类: *openpyxl.descriptors.serialisable.Serialisable*

index

indexedColors

Wrap a sequence in an containing object

mruColors

Wrap a sequence in an containing object

tagname = 'colors'

class openpyxl.styles.colors.RGB(*args, **kw)

基类: *openpyxl.descriptors.base.Typed*

Descriptor for aRGB values If not supplied alpha is 00

expected_type

builtins.str 的别名

class openpyxl.styles.colors.RgbColor(rgb=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

rgb

Values must be of type <class 'str' >

tagname = 'rgbColor'

openpyxl.styles.differential module

class openpyxl.styles.differential.DifferentialStyle(font=None, numFmt=None,
fill=None, alignment=None, bor-
der=None, protection=None,
extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

alignment

Values must be of type <class 'openpyxl.styles.alignment.Alignment' >

border

Values must be of type <class 'openpyxl.styles.borders.Border' >

fill

Values must be of type <class 'openpyxl.styles.fills.Fill' >

font

Values must be of type <class 'openpyxl.styles.fonts.Font' >

numFmt

Values must be of type <class 'openpyxl.styles.numbers.NumberFormat' >

protection

Values must be of type <class 'openpyxl.styles.protection.Protection' >

tagname = 'dxf'

```
class openpyxl.styles.differential.DifferentialStyleList(dxfs=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Deduping container for differential styles.

```
add(dxfs)
```

Add a differential style and return its index

```
append(dxfs)
```

Check to see whether style already exists and append it if does not.

dxfs

A sequence (list or tuple) that may only contain objects of the declared type

styles

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
tagname = 'dxfs'
```

openpyxl.styles.fills module

```
class openpyxl.styles.fills.Fill
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Base class

```
classmethod from_tree(el)
```

Create object from XML

```
tagname = 'fill'
```

```
class openpyxl.styles.fills.GradientFill(type='linear', degree=0, left=0, right=0, top=0, bottom=0, stop=())
```

基类: *openpyxl.styles.fills.Fill*

Fill areas with gradient

Two types of gradient fill are supported:

- A type=’ linear’ gradient interpolates colours between a set of specified Stops, across the length of an area. The gradient is left-to-right by default, but this orientation can be modified with the degree attribute. A list of Colors can be provided instead and they will be positioned with equal distance between them.
- A type=’ path’ gradient applies a linear gradient from each edge of the area. Attributes top, right, bottom, left specify the extent of fill from the respective borders. Thus top=’ 0.2’ will fill the top 20% of the cell.

bottom

Values must be of type <class ‘float’ >

degree

Values must be of type <class 'float' >

fill_type

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

left

Values must be of type <class 'float' >

right

Values must be of type <class 'float' >

stop

tagname = 'gradientFill'

to_tree(tagname=None, namespace=None, idx=None)

top

Values must be of type <class 'float' >

type

Value must be one of { 'linear' , 'path' }

```
class openpyxl.styles.fills.PatternFill(patternType=None,                                fg-
                                         Color=<openpyxl.styles.colors.Color          object>
                                         Parameters:      rgb='00000000', indexed=None,
                                         auto=None, theme=None, tint=0.0, type='rgb', bg-
                                         Color=<openpyxl.styles.colors.Color          object> Param-
                                         eters:      rgb='00000000', indexed=None, auto=None,
                                         theme=None, tint=0.0, type='rgb', fill_type=None,
                                         start_color=None, end_color=None)
```

基类: *openpyxl.styles.fills.Fill*

Area fill patterns for use in styles. Caution: if you do not specify a fill_type, other attributes will have no effect !

bgColor

Values must be of type <class 'openpyxl.styles.colors.Color' >

end_color

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

fgColor

Values must be of type <class 'openpyxl.styles.colors.Color' >

fill_type

Aliases can be used when either the desired attribute name is not allowed or confusing in Python

(eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

patternType

Value must be one of { ‘lightHorizontal’ , ‘darkHorizontal’ , ‘lightGray’ , ‘gray0625’ , ‘darkGray’ , ‘lightGrid’ , ‘gray125’ , ‘solid’ , ‘darkDown’ , ‘darkVertical’ , ‘lightTrellis’ , ‘lightUp’ , ‘darkTrellis’ , ‘lightDown’ , ‘lightVertical’ , ‘mediumGray’ , ‘darkGrid’ , ‘darkUp’ }

start_color

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

tagname = 'patternFill'

to_tree(tagname=None, idx=None)

class openpyxl.styles.fills.Stop(color, position)

基类: *openpyxl.descriptors.serialisable.Serialisable*

color

Values must be of type <class ‘openpyxl.styles.colors.Color’ >

position

Values must be of type <class ‘float’ >

tagname = 'stop'

class openpyxl.styles.fills.StopList(name=None, **kw)

基类: *openpyxl.descriptors.sequence.Sequence*

expected_type

Stop 的别名

openpyxl.styles.fonts module

class openpyxl.styles.fonts.Font(name=None, sz=None, b=None, i=None, charset=None, u=None, strike=None, color=None, scheme=None, family=None, size=None, bold=None, italic=None, strikethrough=None, underline=None, vertAlign=None, outline=None, shadow=None, condense=None, extend=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

Font options used in styles.

UNDERLINE_DOUBLE = 'double'

UNDERLINE_DOUBLE_ACCOUNTING = 'doubleAccounting'

UNDERLINE_SINGLE = 'single'

UNDERLINE_SINGLE_ACCOUNTING = 'singleAccounting'

b

Values must be of type <class 'bool' >

bold

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

charset

Values must be of type <class 'int' >

color

Values must be of type <class 'openpyxl.styles.colors.Color' >

condense

Values must be of type <class 'bool' >

extend

Values must be of type <class 'bool' >

family

Values must be of type <class 'float' >

classmethod from_tree(*node*)

Set default value for underline if child element is present

i

Values must be of type <class 'bool' >

italic

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

name

Values must be of type <class 'str' >

outline

Values must be of type <class 'bool' >

scheme

Value must be one of { 'major' , 'minor' }

shadow

Values must be of type <class 'bool' >

size

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

strike

Values must be of type <class 'bool' >

strikethrough

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

sz

Values must be of type <class ‘float’ >

tagname = 'font'

u

Value must be one of { ‘singleAccounting’ , ‘single’ , ‘double’ , ‘doubleAccounting’ }

underline

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

vertAlign

Value must be one of { ‘baseline’ , ‘superscript’ , ‘subscript’ }

openpyxl.styles.named_styles module

```
class openpyxl.styles.named_styles.NamedStyle(name='Normal', font=<openpyxl.styles.fonts.Font
    object> Parameters: name=None,
    charset=None, family=None, b=False,
    i=False, strike=None, outline=None,
    shadow=None, condense=None,
    color=None, extend=None, sz=None,
    u=None, vertAlign=None, scheme=None,
    fill=<openpyxl.styles.fills.PatternFill ob-
    ject> Parameters: patternType=None,
    fgColor=<openpyxl.styles.colors.Color
    object> Parameters: rgb='00000000',
    indexed=None, auto=None,
    theme=None, tint=0.0, type='rgb', bg-
    Color=<openpyxl.styles.colors.Color ob-
    ject> Parameters: rgb='00000000',
    indexed=None, auto=None,
    theme=None, tint=0.0, type='rgb', bor-
    der=<openpyxl.styles.borders.Border object>
    Parameters: outline=True, diagonalUp=False,
    diagonalDown=False, start=None, end=None,
    left=<openpyxl.styles.borders.Side object>
    Parameters: style=None, color=None,
    right=<openpyxl.styles.borders.Side object>
    Parameters: style=None, color=None,
    top=<openpyxl.styles.borders.Side object>
    Parameters: style=None, color=None, bot-
    tom=<openpyxl.styles.borders.Side object>
    Parameters: style=None, color=None, diag-
    onal=<openpyxl.styles.borders.Side object>
    Parameters: style=None, color=None,
    vertical=None, horizontal=None, align-
    ment=<openpyxl.styles.alignment.Alignment
    object> Parameters: horizontal=None, verti-
    cal=None, textRotation=0, wrapText=None,
    shrinkToFit=None, indent=0.0, relativeIn-
    dent=0.0, justifyLastLine=None, readin-
    gOrder=0.0, number_format=None, protec-
    tion=<openpyxl.styles.protection.Protection
    object> Parameters: locked=True, hid-
    den=False, builtinId=None, hidden=False,
    xfId=None)
```

Named and editable styles

alignment

Values must be of type <class 'openpyxl.styles.alignment.Alignment' >

as_name()

Return relevant named style

as_tuple()

Return a style array representing the current style

as_xf()

Return equivalent XfStyle

bind(*wb*)

Bind a named style to a workbook

border

Values must be of type <class 'openpyxl.styles.borders.Border' >

builtinId

Values must be of type <class 'int' >

fill

Values must be of type <class 'openpyxl.styles.fills.Fill' >

font

Values must be of type <class 'openpyxl.styles.fonts.Font' >

hidden

Values must be of type <class 'bool' >

name

Values must be of type <class 'str' >

number_format

Values must be of type <class 'str' >

protection

Values must be of type <class 'openpyxl.styles.protection.Protection' >

xfId

Index of the style in the list of named styles

class openpyxl.styles.named_styles.NamedStyleList

基类: list

Named styles are editable and can be applied to multiple objects

As only the index is stored in referencing objects the order must be preserved.

append(*style*)

Append object to the end of the list.

names

openpyxl.styles.numbers module

class openpyxl.styles.numbers.NumberFormat(*numFmtId=None, formatCode=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

formatCode

Values must be of type <class 'str' >

numFmtId

Values must be of type <class 'int' >

class openpyxl.styles.numbers.NumberFormatDescriptor(*args, **kw)

基类: *openpyxl.descriptors.base.String*

class openpyxl.styles.numbers.NumberFormatList(count=None, numFmt=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

numFmt

A sequence (list or tuple) that may only contain objects of the declared type

openpyxl.styles.numbers.builtin_format_code(*index*)

Return one of the standard format codes by index.

openpyxl.styles.numbers.builtin_format_id(*fmt*)

Return the id of a standard style.

openpyxl.styles.numbers.is_builtin(*fmt*)

openpyxl.styles.numbers.is_date_format(*fmt*)

openpyxl.styles.numbers.is_datetime(*fmt*)

Return date, time or datetime

openpyxl.styles.protection module

class openpyxl.styles.protection.Protection(*locked=True, hidden=False*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

Protection options for use in styles.

hidden

Values must be of type <class 'bool' >

locked

Values must be of type <class 'bool' >

```
tagname = 'protection'
```

openpyxl.styles.proxy module

```
class openpyxl.styles.proxy.StyleProxy(target)
```

基类: object

Proxy formatting objects so that they cannot be altered

```
copy(**kw)
```

Return a copy of the proxied object. Keyword args will be passed through

注解: Deprecated: Use copy(obj) or cell.obj = cell.obj + other

openpyxl.styles.styleable module

```
class openpyxl.styles.styleable.NamedStyleDescriptor
```

基类: object

```
collection = '_named_styles'
```

```
key = 'xfId'
```

```
class openpyxl.styles.styleable.NumberFormatDescriptor
```

基类: object

```
collection = '_number_formats'
```

```
key = 'numFmtId'
```

```
class openpyxl.styles.styleable.StyleArrayDescriptor(key)
```

基类: object

```
class openpyxl.styles.styleable.StyleDescriptor(collection, key)
```

基类: object

```
class openpyxl.styles.styleable.StyleableObject(sheet, style_array=None)
```

基类: object

Base class for styleble objects implementing proxy and lookup functions

```
alignment
```

```
border
```

```
fill
```

```
font
```

`has_style`
`number_format`
`parent`
`pivotButton`
`protection`
`quotePrefix`
`style`
`style_id`

openpyxl.styles.stylesheet module

```
class openpyxl.styles.stylesheet.StyleSheet(numFmts=None, fonts=(), fills=(), borders=(), cellStyleXfs=None, cellXfs=None, cellStyles=None, dxfs=(), tableStyles=None, colors=None, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

borders

Wrap a sequence in an containing object

cellStyleXfs

Values must be of type <class 'openpyxl.styles.cell_style.CellStyleList' >

cellStyles

Values must be of type <class 'openpyxl.styles.named_styles.__NamedCellStyleList' >

cellXfs

Values must be of type <class 'openpyxl.styles.cell_style.CellStyleList' >

colors

Values must be of type <class 'openpyxl.styles.colors.ColorList' >

custom_formats

dxfs

Wrap a sequence in an containing object

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

fills

Wrap a sequence in an containing object

fonts

Wrap a sequence in an containing object

```

classmethod from_tree(node)
    Create object from XML

numFmts
    Values must be of type <class 'openpyxl.styles.numbers.NumberFormatList' >

tableStyles
    Values must be of type <class 'openpyxl.styles.table.TableStyleList' >

tagname = 'styleSheet'

to_tree(tagname=None, idx=None, namespace=None)

openpyxl.styles.stylesheet.apply_stylesheets(archive, wb)
    Add styles to workbook if present

openpyxl.styles.stylesheet.write_stylesheets(wb)

```

openpyxl.styles.table module

```

class openpyxl.styles.table.TableStyle(name=None, pivot=None, table=None, count=None,
                                       tableStyleElement=())
    基类: openpyxl.descriptors.serialisable.Serialisable

    count
        Values must be of type <class 'int' >

    name
        Values must be of type <class 'str' >

    pivot
        Values must be of type <class 'bool' >

    table
        Values must be of type <class 'bool' >

    tableStyleElement
        A sequence (list or tuple) that may only contain objects of the declared type

    tagname = 'tableStyle'

class openpyxl.styles.table.TableStyleElement(type=None, size=None, dxfId=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    dxfId
        Values must be of type <class 'int' >

    size
        Values must be of type <class 'int' >

    tagname = 'tableStyleElement'

```

type

Value must be one of { 'pageFieldValues', 'totalRow', 'thirdSubtotalRow', 'blankRow', 'firstTotalCell', 'lastHeaderCell', 'headerRow', 'firstColumnSubheading', 'firstHeaderCell', 'thirdRowSubheading', 'secondRowSubheading', 'thirdSubtotalColumn', 'lastColumn', 'secondColumnStripe', 'secondSubtotalColumn', 'firstColumn', 'firstRowStripe', 'wholeTable', 'thirdColumnSubheading', 'firstRowSubheading', 'firstColumnStripe', 'pageFieldLabels', 'lastTotalCell', 'secondRowStripe', 'firstSubtotalColumn', 'secondColumnSubheading', 'firstSubtotalRow', 'secondSubtotalRow' }

```
class openpyxl.styles.table.TableStyleList(count=None, defaultTa-
                                          bleStyle='TableStyleMedium9', defaultPivot-
                                          Style='PivotStyleLight16', tableStyle=())
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

count

defaultPivotStyle

Values must be of type <class 'str' >

defaultTableStyle

Values must be of type <class 'str' >

tableStyle

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'tableStyles'

openpyxl.utils package

Submodules

openpyxl.utils.bound_dictionary module

```
class openpyxl.utils.bound_dictionary.BoundDictionary(reference=None, *args, **kw)
```

基类: `collections.defaultdict`

A default dictionary where elements are tightly coupled.

The factory method is responsible for binding the parent object to the child.

If a reference attribute is assigned then child objects will have the key assigned to this.

Otherwise it's just a defaultdict.

openpyxl.utils.cell module

Collection of utilities used within the package and also available for client code

`openpyxl.utils.cell.absolute_coordinate(coord_string)`

Convert a coordinate to an absolute coordinate string (B12 -> \$B\$12)

`openpyxl.utils.cell.cols_from_range(range_string)`

Get individual addresses for every cell in a range. Yields one row at a time.

`openpyxl.utils.cell.column_index_from_string(str_col)`

Convert a column name into a numerical index ('A' -> 1)

`openpyxl.utils.cell.coordinate_from_string(coord_string)`

Convert a coordinate string like 'B12' to a tuple ('B' , 12)

`openpyxl.utils.cell.coordinate_to_tuple(coordinate)`

Convert an Excel style coordinate to (row, column) tuple

`openpyxl.utils.cell.get_column_interval(start, end)`

Given the start and end columns, return all the columns in the series.

The start and end columns can be either column letters or 1-based indexes.

`openpyxl.utils.cell.get_column_letter(idx)`

Convert a column index into a column letter (3 -> 'C')

`openpyxl.utils.cell.quote_sheetname(sheetname)`

Add quotes around sheetnames if they contain spaces.

`openpyxl.utils.cell.range_boundaries(range_string)`

Convert a range string into a tuple of boundaries: (min_col, min_row, max_col, max_row) Cell coordinates will be converted into a range with the cell at both end

`openpyxl.utils.cell.range_to_tuple(range_string)`

Convert a worksheet range to the sheetname and maximum and minimum coordinate indices

`openpyxl.utils.cell.rows_from_range(range_string)`

Get individual addresses for every cell in a range. Yields one row at a time.

openpyxl.utils.dataframe module

`openpyxl.utils.dataframe.dataframe_to_rows(df, index=True, header=True)`

Convert a Pandas dataframe into something suitable for passing into a worksheet. If index is True then the index will be included, starting one row below the header. If header is True then column headers will be included starting one column to the right. Formatting should be done by client code.

`openpyxl.utils.dataframe.expand_levels(levels, labels)`

Multiindexes need expanding so that subtitles repeat

openpyxl.utils.datetime module

`class openpyxl.utils.datetime.GMT`

基类: `datetime.tzinfo`

`dst(dt)`

datetime -> DST offset as timedelta positive east of UTC.

`tzname(dt)`

datetime -> string name of time zone.

`utcoffset(dt)`

datetime -> timedelta showing offset from UTC, negative values indicating West of UTC

`openpyxl.utils.datetime.days_to_time(value)`

`openpyxl.utils.datetime.from_ISO8601(formatted_string)`

Convert from a timestamp string to a datetime object. According to 18.17.4 in the specification the following ISO 8601 formats are supported.

Dates B.1.1 and B.2.1 Times B.1.2 and B.2.2 Datetimes B.1.3 and B.2.3

There is no concept of timedeltas

`openpyxl.utils.datetime.from_excel(value, offset=2415018.5)`

`openpyxl.utils.datetime.time_to_days(value)`

Convert a time value to fractions of day

`openpyxl.utils.datetime.timedelta_to_days(value)`

Convert a timedelta value to fractions of a day

`openpyxl.utils.datetime.to_ISO8601(dt)`

Convert from a datetime to a timestamp string.

`openpyxl.utils.datetime.to_excel(dt, offset=2415018.5)`

openpyxl.utils.escape module

OOXML has non-standard escaping for characters <

`openpyxl.utils.escape.escape(value)`

Convert ASCII < 31 to OOXML: `n == __x + hex(ord(n)) + __`

`openpyxl.utils.escape.unescape(value)`

Convert escaped strings to ASCII: `__x000a__ == n`

openpyxl.utils.exceptions module

Definitions for openpyxl shared exception classes.

exception openpyxl.utils.exceptions.CellCoordinatesException

基类: Exception

Error for converting between numeric and A1-style cell references.

exception openpyxl.utils.exceptions.IllegalCharacterError

基类: Exception

The data submitted which cannot be used directly in Excel files. It must be removed or escaped.

exception openpyxl.utils.exceptions.InvalidFileException

基类: Exception

Error for trying to open a non-ooxml file.

exception openpyxl.utils.exceptions.NamedRangeException

基类: Exception

Error for badly formatted named ranges.

exception openpyxl.utils.exceptions.ReadOnlyWorkbookException

基类: Exception

Error for trying to modify a read-only workbook

exception openpyxl.utils.exceptions.SheetTitleException

基类: Exception

Error for bad sheet names.

exception openpyxl.utils.exceptions.WorkbookAlreadySaved

基类: Exception

Error when attempting to perform operations on a dump workbook while it has already been dumped once

openpyxl.utils.formulas module

List of builtin formulae

openpyxl.utils.indexed_list module

class openpyxl.utils.indexed_list.IndexedList(*iterable=None*)

基类: list

List with optimised access by value Based on Alex Martelli' s recipe

<http://code.activestate.com/recipes/52303-the-auxiliary-dictionary-idiom-for-sequences-with-/>

add(*value*)

append(*value*)

Append object to the end of the list.

index(*value*)

Return first index of value.

Raises ValueError if the value is not present.

openpyxl.utils.inference module

Type inference functions

openpyxl.utils.inference.cast_numeric(*value*)

Explicitly convert a string to a numeric value

openpyxl.utils.inference.cast_percentage(*value*)

Explicitly convert a string to numeric value and format as a percentage

openpyxl.utils.inference.cast_time(*value*)

Explicitly convert a string to a number and format as datetime or time

openpyxl.utils.protection module

openpyxl.utils.protection.hash_password(*plaintext_password*=")

Create a password hash from a given string for protecting a worksheet only. This will not work for encrypting a workbook.

This method is based on the algorithm provided by Daniel Rentz of OpenOffice and the PEAR package Spreadsheet_Excel_Writer by Xavier Noguer <xnoguer@rezebra.com>. See also <http://blogs.msdn.com/b/ericwhite/archive/2008/02/23/the-legacy-hashing-algorithm-in-open-xml.aspx>

openpyxl.utils.units module

openpyxl.utils.units.DEFAULT_HEADER = 0.3

From the ECMA Spec (4th Edition part 1) Page setup: “Left Page Margin in inches” p. 1647

Docs from <http://startbigthinksmall.wordpress.com/2010/01/04/points-inches-and-emus-measuring-units-in-office-openxml/>

See also [http://msdn.microsoft.com/en-us/library/dd560821\(v=office.12\).aspx](http://msdn.microsoft.com/en-us/library/dd560821(v=office.12).aspx)

dxa: The main unit in OOXML is a twentieth of a point. Also called twips. pt: point. In Excel there are 72 points to an inch hp: half-points are used to specify font sizes. A font-size of 12pt equals 24 half points pct: Half-points are used to specify font sizes. A font-size of 12pt equals 24 half points

EMU: English Metric Unit, EMUs are used for coordinates in vector-based drawings and embedded pictures. One inch equates to 914400 EMUs and a centimeter is 360000. For bitmaps the default resolution is 96 dpi (known as PixelsPerInch in Excel). Spec p. 1122

For radial geometry Excel uses integert units of 1/60000th of a degree.

```
openpyxl.utils.units.EMU_to_cm(value)
openpyxl.utils.units.EMU_to_inch(value)
openpyxl.utils.units.EMU_to_pixels(value)
openpyxl.utils.units.angle_to_degrees(value)
openpyxl.utils.units.cm_to_EMU(value)
    1 cm = 360000 EMUs
openpyxl.utils.units.cm_to_dxa(value)
openpyxl.utils.units.degrees_to_angle(value)
    1 degree = 60000 angles
openpyxl.utils.units.dxa_to_cm(value)
openpyxl.utils.units.dxa_to_inch(value)
openpyxl.utils.units.inch_to_EMU(value)
    1 inch = 914400 EMUs
openpyxl.utils.units.inch_to_dxa(value)
    1 inch = 72 * 20 dxa
openpyxl.utils.units.pixels_to_EMU(value)
    1 pixel = 9525 EMUs
openpyxl.utils.units.pixels_to_points(value, dpi=96)
    96 dpi, 72i
openpyxl.utils.units.points_to_pixels(value, dpi=96)
openpyxl.utils.units.short_color(color)
    format a color to its short size
```

openpyxl.workbook package

Subpackages

openpyxl.workbook.external_link package

Submodules

openpyxl.workbook.external_link.external module

```
class openpyxl.workbook.external_link.external.ExternalBook(sheetNames=None,      de-
                                                             finedNames=(),      sheet-
                                                             DataSet=None, id=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

definedNames

Wrap a sequence in an containing object

id

Values must be of type <class 'str' >

sheetDataSet

Values must be of type <class 'openpyxl.workbook.external_link.external.ExternalSheetDataSet'
>

sheetNames

Values must be of type <class 'openpyxl.workbook.external_link.external.ExternalSheetNames'
>

tagname = 'externalBook'

```
class openpyxl.workbook.external_link.external.ExternalCell(r=None, t=None, vm=None,
                                                             v=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

r

Values must be of type <class 'str' >

t

Value must be one of { 'b' , 'inlineStr' , 'str' , 'n' , 'e' , 'd' , 's' }

v

Values must be of type <class 'str' >

vm

Values must be of type <class 'int' >

```
class openpyxl.workbook.external_link.external.ExternalDefinedName(name=None,
                                                                      refersTo=None,
                                                                      sheetId=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

refersTo

Values must be of type <class 'str' >

```

sheetId
    Values must be of type <class 'int' >

tagname = 'definedName'

class openpyxl.workbook.external_link.external.ExternalLink(externalBook=None,
                                                            ddeLink=None,
                                                            oleLink=None, extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

externalBook
    Values must be of type <class 'openpyxl.workbook.external_link.external.ExternalBook' >

file_link
    Values must be of type <class 'openpyxl.packaging.relationship.Relationship' >

mime_type = 'application/vnd.openxmlformats-officedocument.spreadsheetml.externalLink+xml'

path

tagname = 'externalLink'

to_tree()

class openpyxl.workbook.external_link.external.ExternalRow(r=(), cell=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

cell
    A sequence (list or tuple) that may only contain objects of the declared type

r
    Values must be of type <class 'int' >

class openpyxl.workbook.external_link.external.ExternalSheetData(sheetId=None, refresh-
                                                                Error=None, row=())
    基类: openpyxl.descriptors.serialisable.Serialisable

refreshError
    Values must be of type <class 'bool' >

row
    A sequence (list or tuple) that may only contain objects of the declared type

sheetId
    Values must be of type <class 'int' >

class openpyxl.workbook.external_link.external.ExternalSheetDataSet(sheetData=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

sheetData
    A sequence (list or tuple) that may only contain objects of the declared type

```

```
class openpyxl.workbook.external_link.external.ExternalSheetNames(sheetName=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

sheetName

A sequence of primitive types that are stored as a single attribute. “val” is the default attribute

```
openpyxl.workbook.external_link.external.read_external_link(archive, book_path)
```

Submodules

openpyxl.workbook.child module

```
openpyxl.workbook.child.avoid_duplicate_name(names, value)
```

Naive check to see whether name already exists. If name does exist suggest a name using an incrementer

Duplicates are case insensitive

openpyxl.workbook.defined_name module

```
class openpyxl.workbook.defined_name.DefinedName(name=None, comment=None, customMenu=None, description=None, help=None, statusBar=None, localSheetId=None, hidden=None, function=None, vbProcedure=None, xlm=None, functionGroupId=None, shortcutKey=None, publishToServer=None, workbookParameter=None, attr_text=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

attr_text

comment

Values must be of type <class ‘str’ >

customMenu

Values must be of type <class ‘str’ >

description

Values must be of type <class ‘str’ >

destinations

function

Values must be of type <class ‘bool’ >

functionGroupId

Values must be of type <class ‘int’ >

help

Values must be of type <class 'str' >

hidden

Values must be of type <class 'bool' >

is_external**is_reserved****localSheetId**

Values must be of type <class 'int' >

name

Values must be of type <class 'str' >

publishToServer

Values must be of type <class 'bool' >

shortcutKey

Values must be of type <class 'str' >

statusBar

Values must be of type <class 'str' >

tagname = 'definedName'

type**value**

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

vbProcedure

Values must be of type <class 'bool' >

workbookParameter

Values must be of type <class 'bool' >

xlm

Values must be of type <class 'bool' >

class openpyxl.workbook.defined_name.**DefinedNameList**(*definedName=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

append(*defn*)

definedName

A sequence (list or tuple) that may only contain objects of the declared type

delete(*name, scope=None*)

Delete a name assigned to a specific or global

`get(name, scope=None)`

Get the name assigned to a specific sheet or global

`localnames(scope)`

Provide a list of all names for a particular worksheet

`tagname = 'definedNames'`

openpyxl.workbook.external_reference module

`class openpyxl.workbook.external_reference.ExternalReference(id)`

基类: *openpyxl.descriptors.serialisable.Serialisable*

`id`

Values must be of type <class 'str' >

`tagname = 'externalReference'`

openpyxl.workbook.function_group module

`class openpyxl.workbook.function_group.FunctionGroup(name=None)`

基类: *openpyxl.descriptors.serialisable.Serialisable*

`name`

Values must be of type <class 'str' >

`tagname = 'functionGroup'`

`class openpyxl.workbook.function_group.FunctionGroupList(builtInGroupCount=16, function-
Group=())`

基类: *openpyxl.descriptors.serialisable.Serialisable*

`builtInGroupCount`

Values must be of type <class 'int' >

`functionGroup`

A sequence (list or tuple) that may only contain objects of the declared type

`tagname = 'functionGroups'`

openpyxl.workbook.properties module

```
class openpyxl.workbook.properties.CalcProperties(calcId=124519, calcMode=None, full-
CalcOnLoad=True, refMode=None,
iterate=None, iterateCount=None, it-
erateDelta=None, fullPrecision=None,
calcCompleted=None, calcOnSave=None,
concurrentCalc=None, concurrentManu-
alCount=None, forceFullCalc=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

calcCompleted

Values must be of type <class 'bool' >

calcId

Values must be of type <class 'int' >

calcMode

Value must be one of { 'manual' , 'autoNoTable' , 'auto' }

calcOnSave

Values must be of type <class 'bool' >

concurrentCalc

Values must be of type <class 'bool' >

concurrentManualCount

Values must be of type <class 'int' >

forceFullCalc

Values must be of type <class 'bool' >

fullCalcOnLoad

Values must be of type <class 'bool' >

fullPrecision

Values must be of type <class 'bool' >

iterate

Values must be of type <class 'bool' >

iterateCount

Values must be of type <class 'int' >

iterateDelta

Values must be of type <class 'float' >

refMode

Value must be one of { 'A1' , 'R1C1' }

```
    tagname = 'calcPr'
```

class openpyxl.workbook.properties.**FileVersion**(*appName=None, lastEdited=None, lowestEdited=None, rupBuild=None, codeName=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

appName
Values must be of type <class 'str' >

codeName

lastEdited
Values must be of type <class 'str' >

lowestEdited
Values must be of type <class 'str' >

rupBuild
Values must be of type <class 'str' >

tagname = 'fileVersion'

class openpyxl.workbook.properties.**WorkbookProperties**(*date1904=None, dateCompatibility=None, showObjects=None, showBorderUnselectedTables=None, filterPrivacy=None, promptedSolutions=None, showInkAnnotation=None, backupFile=None, saveExternalLinkValues=None, updateLinks=None, codeName=None, hidePivotFieldList=None, showPivotChartFilter=None, allowRefreshQuery=None, publishItems=None, checkCompatibility=None, autoCompressPictures=None, refreshAllConnections=None, defaultThemeVersion=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

allowRefreshQuery
Values must be of type <class 'bool' >

autoCompressPictures
Values must be of type <class 'bool' >

backupFile
Values must be of type <class 'bool' >

checkCompatibility

Values must be of type <class 'bool' >

codeName

Values must be of type <class 'str' >

date1904

Values must be of type <class 'bool' >

dateCompatibility

Values must be of type <class 'bool' >

defaultThemeVersion

Values must be of type <class 'int' >

filterPrivacy

Values must be of type <class 'bool' >

hidePivotFieldList

Values must be of type <class 'bool' >

promptedSolutions

Values must be of type <class 'bool' >

publishItems

Values must be of type <class 'bool' >

refreshAllConnections

Values must be of type <class 'bool' >

saveExternalLinkValues

Values must be of type <class 'bool' >

showBorderUnselectedTables

Values must be of type <class 'bool' >

showInkAnnotation

Values must be of type <class 'bool' >

showObjects

Value must be one of { 'placeholders' , 'all' }

showPivotChartFilter

Values must be of type <class 'bool' >

tagname = 'workbookPr'**updateLinks**

Value must be one of { 'never' , 'userSet' , 'always' }

openpyxl.workbook.protection module

openpyxl.workbook.protection.DocumentSecurity

openpyxl.workbook.protection.WorkbookProtection 的别名

```
class openpyxl.workbook.protection.FileSharing(readonlyRecommended=None,      user-
                                              Name=None,    reservationPassword=None,
                                              algorithmName=None,    hashValue=None,
                                              saltValue=None, spinCount=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

algorithmName

Values must be of type <class 'str' >

hashValue

readonlyRecommended

Values must be of type <class 'bool' >

reservationPassword

saltValue

spinCount

Values must be of type <class 'int' >

tagname = 'fileSharing'

userName

Values must be of type <class 'str' >

```
class openpyxl.workbook.protection.WorkbookProtection(workbookPassword=None,      work-
                                              bookPasswordCharacterSet=None,
                                              revisionsPassword=None,      revi-
                                              sionsPasswordCharacterSet=None,
                                              lockStructure=None,      lockWin-
                                              dows=None,    lockRevision=None,
                                              revisionsAlgorithmName=None,
                                              revisionsHashValue=None,      re-
                                              visionsSaltValue=None,      revi-
                                              sionsSpinCount=None,      work-
                                              bookAlgorithmName=None,      work-
                                              bookHashValue=None,      workbook-
                                              SaltValue=None,      workbookSpin-
                                              Count=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

classmethod from_tree(node)

Don't hash passwords when deserialising from XML

lockRevision

Values must be of type <class 'bool' >

lockStructure

Values must be of type <class 'bool' >

lockWindows

Values must be of type <class 'bool' >

lock_revision

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

lock_structure

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

lock_windows

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

revision_password

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

revisionsAlgorithmName

Values must be of type <class 'str' >

revisionsHashValue

revisionsPassword

Return the revisions password value, regardless of hash.

revisionsPasswordCharacterSet

Values must be of type <class 'str' >

revisionsSaltValue

revisionsSpinCount

Values must be of type <class 'int' >

set_revisions_password(value="", already_hashed=False)

Set a revision password on this workbook.

set_workbook_password(value="", already_hashed=False)

Set a password on this workbook.

tagname = 'workbookPr'

workbookAlgorithmName

Values must be of type <class 'str' >

workbookHashValue

workbookPassword

Return the workbook password value, regardless of hash.

workbookPasswordCharacterSet

Values must be of type <class 'str' >

workbookSaltValue

workbookSpinCount

Values must be of type <class 'int' >

workbook_password

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

openpyxl.workbook.smart_tags module

```
class openpyxl.workbook.smart_tags.SmartTag(namespaceUri=None, name=None, url=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

namespaceUri

Values must be of type <class 'str' >

tagname = 'smartTagType'

url

Values must be of type <class 'str' >

```
class openpyxl.workbook.smart_tags.SmartTagList(smartTagType=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

smartTagType

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'smartTagTypes'

```
class openpyxl.workbook.smart_tags.SmartTagProperties(embed=None, show=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

embed

Values must be of type <class 'bool' >

show

Value must be one of { 'all' , 'noIndicator' }

tagname = 'smartTagPr'

openpyxl.workbook.views module

```
class openpyxl.workbook.views.BookView(visibility='visible', minimized=False, showHorizontalScroll=True, showVerticalScroll=True, showSheetTabs=True, xWindow=None, yWindow=None, windowWidth=None, windowHeight=None, tabRatio=600, firstSheet=0, activeTab=0, autoFilterDateGrouping=True, extLst=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

activeTab

Values must be of type <class 'int' >

autoFilterDateGrouping

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

firstSheet

Values must be of type <class 'int' >

minimized

Values must be of type <class 'bool' >

showHorizontalScroll

Values must be of type <class 'bool' >

showSheetTabs

Values must be of type <class 'bool' >

showVerticalScroll

Values must be of type <class 'bool' >

tabRatio

Values must be of type <class 'int' >

tagname = 'workbookView'

visibility

Value must be one of { 'visible' , 'hidden' , 'veryHidden' }

windowHeight

Values must be of type <class 'int' >

windowWidth

Values must be of type <class 'int' >

xWindow

Values must be of type <class 'int' >

yWindow

Values must be of type <class 'int' >

```
class openpyxl.workbook.views.CustomWorkbookView(name=None, guid=None, autoUpdate=None, mergeInterval=None, changesSavedWin=None, onlySync=None, personalView=None, includePrintSettings=None, includeHiddenRowCol=None, maximized=None, minimized=None, showHorizontalScroll=None, showVerticalScroll=None, showSheetTabs=None, xWindow=None, yWindow=None, windowWidth=None, windowHeight=None, tabRatio=None, activeSheetId=None, showFormulaBar=None, showStatusbar=None, showComments='commIndicator', showObjects='all', extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

activeSheetId

Values must be of type <class 'int' >

autoUpdate

Values must be of type <class 'bool' >

changesSavedWin

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

guid

includeHiddenRowCol

Values must be of type <class 'bool' >

includePrintSettings

Values must be of type <class 'bool' >

maximized

Values must be of type <class 'bool' >

mergeInterval

Values must be of type <class 'int' >

minimized

Values must be of type <class 'bool' >

name

Values must be of type <class 'str' >

onlySync

Values must be of type <class 'bool' >

personalView

Values must be of type <class 'bool' >

showComments

Value must be one of { 'commIndicator' , 'commIndAndComment' , 'commNone' }

showFormulaBar

Values must be of type <class 'bool' >

showHorizontalScroll

Values must be of type <class 'bool' >

showObjects

Value must be one of { 'placeholders' , 'all' }

showSheetTabs

Values must be of type <class 'bool' >

showStatusbar

Values must be of type <class 'bool' >

showVerticalScroll

Values must be of type <class 'bool' >

tabRatio

Values must be of type <class 'int' >

tagname = 'customWorkbookView'**windowHeight**

Values must be of type <class 'int' >

windowWidth

Values must be of type <class 'int' >

xWindow

Values must be of type <class 'int' >

yWindow

Values must be of type <class 'int' >

openpyxl.workbook.web module

```
class openpyxl.workbook.web.WebPublishObject(id=None, divId=None, sourceObject=None,  
                                              destinationFile=None, title=None, autoRepub-  
                                              lish=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

autoRepublish

Values must be of type <class 'bool' >

destinationFile

Values must be of type <class 'str' >

divId

Values must be of type <class 'str' >

id

Values must be of type <class 'int' >

sourceObject

Values must be of type <class 'str' >

tagname = 'webPublishingObject'

title

Values must be of type <class 'str' >

```
class openpyxl.workbook.web.WebPublishObjectList(count=None, webPublishObject=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

tagname = 'webPublishingObjects'

webPublishObject

A sequence (list or tuple) that may only contain objects of the declared type

```
class openpyxl.workbook.web.WebPublishing(css=None, thicket=None, longFileNames=None,  
                                          vml=None, allowPng=None, targetScreen-  
                                          Size='800x600', dpi=None, codePage=None,  
                                          characterSet=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

allowPng

Values must be of type <class 'bool' >

characterSet

Values must be of type <class 'str' >

codePage

Values must be of type <class 'int' >

css

Values must be of type <class 'bool' >

dpi

Values must be of type <class 'int' >

longFileNames

Values must be of type <class 'bool' >

tagname = 'webPublishing'

targetScreenSize

Value must be one of { '1152x900' , '1280x1024' , '720x512' , '1024x768' , '544x376' , '1152x882' , '1600x1200' , '640x480' , '1920x1200' , '800x600' , '1800x1440' }

thicket

Values must be of type <class 'bool' >

vml

Values must be of type <class 'bool' >

openpyxl.workbook.workbook module

Workbook is the top-level container for all document information.

class openpyxl.workbook.workbook.**Workbook**(*write_only=False, iso_dates=False*)

基类: object

Workbook is the container for all other parts of the document.

active

Get the currently active sheet or None

Type *openpyxl.worksheet.worksheet.Worksheet*

add_named_range(*named_range*)

Add an existing named_range to the list of named_ranges.

注解: Deprecated: Use workbook.defined_names.append

add_named_style(*style*)

Add a named style

chartsheets

A list of Chartsheets in this workbook

Type list of *openpyxl.chartsheet.chartsheet.Chartsheet*

`close()`

Close workbook file if open. Only affects read-only and write-only modes.

`copy_worksheet(from_worksheet)`

Copy an existing worksheet in the current workbook

警告: This function cannot copy worksheets between workbooks. worksheets can only be copied within the workbook that they belong

参数 `from_worksheet` – the worksheet to be copied from

返回 copy of the initial worksheet

`create_chartsheet(title=None, index=None)`

`create_named_range(name, worksheet=None, value=None, scope=None)`

Create a new named_range on a worksheet

`create_sheet(title=None, index=None)`

Create a worksheet (at an optional index).

参数

- **title** (*str*) – optional title of the sheet
- **index** (*int*) – optional position at which the sheet will be inserted

`data_only`

`excel_base_date`

`get_index(worksheet)`

Return the index of the worksheet.

注解: Deprecated: Use `wb.index(worksheet)`

`get_named_range(name)`

Return the range specified by name.

注解: Deprecated: Use `workbook.defined_names[name]`

`get_named_ranges()`

Return all named ranges

注解: Deprecated: Use `workbook.defined_names.definedName`

get_sheet_by_name(*name*)

Returns a worksheet by its name.

param name the name of the worksheet to look for

type name string

注解: Deprecated: Use `wb[sheetname]`

get_sheet_names()

注解: Deprecated: Use `wb.sheetnames`

index(*worksheet*)

Return the index of a worksheet.

mime_type

The mime type is determined by whether a workbook is a template or not and whether it contains macros or not. Excel requires the file extension to match but openpyxl does not enforce this.

move_sheet(*sheet*, *offset=0*)

Move a sheet or sheetname

named_styles

List available named styles

path = `'/xl/workbook.xml'`

read_only

remove(*worksheet*)

Remove *worksheet* from this workbook.

remove_named_range(*named_range*)

Remove a `named_range` from this workbook.

注解: Deprecated: Use `del workbook.defined_names[name]`

remove_sheet(*worksheet*)

Remove *worksheet* from this workbook.

注解: Deprecated: Use `wb.remove(worksheet)` or `del wb[sheetname]`

save(*filename*)

Save the current workbook under the given *filename*. Use this function instead of using an *ExcelWriter*.

警告: When creating your workbook using *write_only* set to True, you will only be able to call this function once. Subsequents attempts to modify or save the file will raise an `openpyxl.shared.exc.WorkbookAlreadySaved` exception.

sheetnames

Returns the list of the names of worksheets in this workbook.

Names are returned in the worksheets order.

Type list of strings

style_names

List of named styles

template = False

worksheets

A list of sheets in this workbook

Type list of `openpyxl.worksheet.worksheet.Worksheet`

write_only

openpyxl.worksheet package

Submodules

openpyxl.worksheet.cell_range module

```
class openpyxl.worksheet.cell_range.CellRange(range_string=None, min_col=None, min_row=None, max_col=None, max_row=None, title=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Represents a range in a sheet: title and coordinates.

This object is used to perform operations on ranges, like:

- shift, expand or shrink

- union/intersection with another sheet range,

We can check whether a range is:

- equal or not equal to another,
- disjoint of another,
- contained in another.

We can get:

- the size of a range.
- the range bounds (vertices)
- the coordinates,
- the string representation,

bottom

A list of cell coordinates that comprise the bottom of the range

bounds

Vertices of the range as a tuple

cells

cols

Return cell coordinates as columns

coord

Excel-style representation of the range

expand(right=0, down=0, left=0, up=0)

Expand the range by the dimensions provided.

参数

- **right** (*int*) – expand range to the right by this number of cells
- **down** (*int*) – expand range down by this number of cells
- **left** (*int*) – expand range to the left by this number of cells
- **up** (*int*) – expand range up by this number of cells

intersection(*other*)

Return a new range with cells common to this range and *other*

参数 *other* (`openpyxl.worksheet.cell_range.CellRange`) – Other sheet range.

返回 the intersecting sheet range.

Raise `ValueError` if the *other* range doesn't intersect with this range.

isdisjoint(*other*)

Return **True** if this range has no cell in common with *other*. Ranges are disjoint if and only if their intersection is the empty range.

参数 *other* (`openpyxl.worksheet.cell_range.CellRange`) – Other sheet range.

返回 **True** if the range has no cells in common with *other*.

issubset(*other*)

Test whether every cell in this range is also in *other*.

参数 *other* (`openpyxl.worksheet.cell_range.CellRange`) – Other sheet range

返回 **True** if *range* \leq *other*.

issuperset(*other*)

Test whether every cell in *other* is in this range.

参数 *other* (`openpyxl.worksheet.cell_range.CellRange`) – Other sheet range

返回 **True** if *range* \geq *other* (or *other* in *range*).

left

A list of cell coordinates that comprise the left-side of the range

max_col

Values must be of type `<class 'int' >`

max_row

Values must be of type `<class 'int' >`

min_col

Values must be of type `<class 'int' >`

min_row

Values must be of type `<class 'int' >`

right

A list of cell coordinates that comprise the right-side of the range

rows

Return cell coordinates as rows

shift(*col_shift=0*, *row_shift=0*)

Shift the focus of the range according to the shift values (*col_shift*, *row_shift*).

参数

- **col_shift** (*int*) – number of columns to be moved by, can be negative
- **row_shift** (*int*) – number of rows to be moved by, can be negative

Raise `ValueError` if any row or column index < 1

shrink(*right=0, bottom=0, left=0, top=0*)

Shrink the range by the dimensions provided.

参数

- **right** (*int*) – shrink range from the right by this number of cells
- **down** (*int*) – shrink range from the top by this number of cells
- **left** (*int*) – shrink range from the left by this number of cells
- **up** (*int*) – shrink range from the bottown by this number of cells

size

Return the size of the range as a dictionary of rows and columns.

top

A list of cell coordinates that comprise the top of the range

union(*other*)

Return the minimal superset of this range and *other*. This new range will contain all cells from this range, *other*, and any additional cells required to form a rectangular `CellRange`.

参数 *other* (`openpyxl.worksheet.cell_range.CellRange`) – Other sheet range.

返回 a `CellRange` that is a superset of this and *other*.

class `openpyxl.worksheet.cell_range.MultiCellRange`(*ranges=()*)

基类: `openpyxl.descriptors.Strict`

add(*coord*)

Add a cell coordinate or `CellRange`

ranges

A sequence (list or tuple) that may only contain objects of the declared type

remove(*coord*)

openpyxl.worksheet.cell_watch module

class `openpyxl.worksheet.cell_watch.CellWatch`(*r=None*)

基类: `openpyxl.descriptors.serialisable.Serialisable`

r

Values must be of type <class 'str' >

tagname = 'cellWatch'

class `openpyxl.worksheet.cell_watch.CellWatches`(*cellWatch=()*)

基类: `openpyxl.descriptors.serialisable.Serialisable`

cellWatch

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'cellWatches'

openpyxl.worksheet.controls module

class openpyxl.worksheet.controls.Control(*controlPr=None, shapeId=None, name=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

controlPr

Values must be of type <class 'openpyxl.worksheet.controls.ControlProperty' >

name

Values must be of type <class 'str' >

shapeId

Values must be of type <class 'int' >

tagname = 'control'

class openpyxl.worksheet.controls.ControlProperty(*anchor=None, locked=True, default-Size=True, __print=True, disabled=False, recalcAlways=False, uiObject=False, autoFill=True, autoLine=True, autoPict=True, macro=None, alt-Text=None, linkedCell=None, list-FillRange=None, cf='pict', id=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

altText

Values must be of type <class 'str' >

anchor

Values must be of type <class 'openpyxl.worksheet.ole.ObjectAnchor' >

autoFill

Values must be of type <class 'bool' >

autoLine

Values must be of type <class 'bool' >

autoPict

Values must be of type <class 'bool' >

cf

Values must be of type <class 'str' >

defaultSize

Values must be of type <class 'bool' >

disabled

Values must be of type <class 'bool' >

id

Values must be of type <class 'str' >

linkedCell

Values must be of type <class 'str' >

listFillRange

Values must be of type <class 'str' >

locked

Values must be of type <class 'bool' >

macro

Values must be of type <class 'str' >

recalcAlways

Values must be of type <class 'bool' >

tagname = 'controlPr'

uiObject

Values must be of type <class 'bool' >

class openpyxl.worksheet.controls.**Controls**(*control=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

control

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'controls'

openpyxl.worksheet.copier module

class openpyxl.worksheet.copier.**WorksheetCopy**(*source_worksheet, target_worksheet*)

基类: object

Copy the values, styles, dimensions, merged cells, margins, and print/page setup from one worksheet to another within the same workbook.

copy_worksheet()

openpyxl.worksheet.custom module

class openpyxl.worksheet.custom.**CustomProperties**(*customPr=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

customPr

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'customProperties'

class openpyxl.worksheet.custom.CustomProperty(*name=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

tagname = 'customProperty'

openpyxl.worksheet.datavalidation module

class openpyxl.worksheet.datavalidation.DataValidation(*type=None, formula1=None, formula2=None, allow_blank=False, showErrorMessage=True, showInputMessage=True, showDropDown=None, allowBlank=None, sqref=(), promptTitle=None, errorStyle=None, error=None, prompt=None, errorTitle=None, imeMode=None, operator=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

add(*cell*)

Adds a cell or cell coordinate to this validator

allowBlank

Values must be of type <class 'bool' >

allow_blank

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

cells

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

error

Values must be of type <class 'str' >

errorStyle

Value must be one of { 'information' , 'stop' , 'warning' }

errorTitle

Values must be of type <class 'str' >

formula1

Values must be of type <class 'str' >

formula2

Values must be of type <class 'str' >

hide_drop_down

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

imeMode

Value must be one of { ‘fullAlpha’ , ‘fullKatakana’ , ‘noControl’ , ‘off’ , ‘fullHangul’ , ‘halfKatakana’ , ‘hiragana’ , ‘disabled’ , ‘halfAlpha’ , ‘halfHangul’ , ‘on’ }

operator

Value must be one of { ‘lessThanOrEqual’ , ‘greaterThan’ , ‘notEqual’ , ‘notBetween’ , ‘between’ , ‘equal’ , ‘lessThan’ , ‘greaterThanOrEqual’ }

prompt

Values must be of type <class 'str' >

promptTitle

Values must be of type <class 'str' >

ranges

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

showDropDown

Values must be of type <class 'bool' >

showErrorMessage

Values must be of type <class 'bool' >

showInputMessage

Values must be of type <class 'bool' >

sqref

Values must be of type <class 'openpyxl.worksheet.cell_range.MultiCellRange' >

tagname = 'dataValidation'**type**

Value must be one of { ‘whole’ , ‘textLength’ , ‘custom’ , ‘list’ , ‘decimal’ , ‘date’ , ‘time’ }

validation_type

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
class openpyxl.worksheet.datavalidation.DataValidationList(disablePrompts=None, xWin-  
dow=None, yWindow=None,  
count=None, dataValida-  
tion=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

append(*dv*)

count

dataValidation

A sequence (list or tuple) that may only contain objects of the declared type

disablePrompts

Values must be of type <class 'bool' >

tagname = 'dataValidations'

to_tree(*tagname=None*)

Need to skip validations that have no cell ranges

xWindow

Values must be of type <class 'int' >

yWindow

Values must be of type <class 'int' >

```
openpyxl.worksheet.datavalidation.collapse_cell_addresses(cells, input_ranges=())
```

Collapse a collection of cell co-ordinates down into an optimal range or collection of ranges.

E.g. Cells A1, A2, A3, B1, B2 and B3 should have the data-validation object applied, attempt to collapse down to a single range, A1:B3.

Currently only collapsing contiguous vertical ranges (i.e. above example results in A1:A3 B1:B3).

```
openpyxl.worksheet.datavalidation.expand_cell_ranges(range_string)
```

Expand cell ranges to a sequence of addresses. Reverse of collapse_cell_addresses Eg. converts "A1:A2 B1:B2" to (A1, A2, B1, B2)

openpyxl.worksheet.dimensions module

```
class openpyxl.worksheet.dimensions.ColumnDimension(worksheet, index='A', width=13,  
bestFit=False, hidden=False, out-  
lineLevel=0, outline_level=None, col-  
lapsed=False, style=None, min=None,  
max=None, customWidth=False,  
visible=None, auto_size=None)
```

基类: *openpyxl.worksheet.dimensions.Dimension*

Information about the display properties of a column.

auto_size

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

bestFit

Values must be of type <class ‘bool’ >

collapsed

Values must be of type <class ‘bool’ >

customWidth

Always true if there is a width for the column

index

Values must be of type <class ‘str’ >

max

Values must be of type <class ‘int’ >

min

Values must be of type <class ‘int’ >

reindex()

Set boundaries for column definition

to_tree()

width

Values must be of type <class ‘float’ >

class openpyxl.worksheet.dimensions.Dimension(*index, hidden, outlineLevel, collapsed, worksheet, visible=True, style=None*)

基类: *openpyxl.descriptors.Strict, openpyxl.styles.styleable.StyleableObject*

Information about the display properties of a row or column.

collapsed

Values must be of type <class ‘bool’ >

hidden

Values must be of type <class ‘bool’ >

index

Values must be of type <class ‘int’ >

outlineLevel

Values must be of type <class ‘int’ >

outline_level

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

style

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

```
class openpyxl.worksheet.dimensions.DimensionHolder(worksheet, reference='index', de-
                                                    fault_factory=None)
```

基类: *openpyxl.utils.bound_dictionary.BoundDictionary*

Allow columns to be grouped

```
group(start, end=None, outline_level=1, hidden=False)
```

allow grouping a range of consecutive rows or columns together

参数

- **start** – first row or column to be grouped (mandatory)
- **end** – last row or column to be grouped (optional, default to start)
- **outline_level** – outline level
- **hidden** – should the group be hidden on workbook open or not

```
to_tree()
```

```
class openpyxl.worksheet.dimensions.RowDimension(worksheet, index=0, ht=None, cus-
                                                    tomHeight=None, s=None, customFor-
                                                    mat=None, hidden=False, outlineLevel=0,
                                                    outline_level=None, collapsed=False,
                                                    visible=None, height=None, r=None,
                                                    spans=None, thickBot=None, thick-
                                                    Top=None, **kw)
```

基类: *openpyxl.worksheet.dimensions.Dimension*

Information about the display properties of a row.

customFormat

Always true if there is a style for the row

customHeight

Always true if there is a height for the row

height

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

ht

Values must be of type <class ‘float’ >

r

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

s

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

thickBot

Values must be of type <class ‘bool’ >

thickTop

Values must be of type <class ‘bool’ >

class openpyxl.worksheet.dimensions.SheetDimension(ref=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

boundaries

ref

Values must be of type <class ‘str’ >

tagname = 'dimension'

**class openpyxl.worksheet.dimensions.SheetFormatProperties(baseColWidth=8, default-
ColWidth=None, de-
faultRowHeight=15, cus-
tomHeight=None, zero-
Height=None, thickTop=None,
thickBottom=None, out-
lineLevelRow=None, out-
lineLevelCol=None)**

基类: *openpyxl.descriptors.serialisable.Serialisable*

baseColWidth

Values must be of type <class ‘int’ >

customHeight

Values must be of type <class ‘bool’ >

defaultColWidth

Values must be of type <class ‘float’ >

defaultRowHeight

Values must be of type <class ‘float’ >

outlineLevelCol

Values must be of type <class ‘int’ >

outlineLevelRow

Values must be of type <class ‘int’ >

tagname = 'sheetFormatPr'

thickBottom

Values must be of type <class 'bool' >

thickTop

Values must be of type <class 'bool' >

zeroHeight

Values must be of type <class 'bool' >

openpyxl.worksheet.drawing module

class openpyxl.worksheet.drawing.Drawing(id=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

id

Values must be of type <class 'str' >

tagname = 'drawing'

openpyxl.worksheet.errors module

class openpyxl.worksheet.errors.Extension(uri=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

tagname = 'extension'

uri

Values must be of type <class 'str' >

class openpyxl.worksheet.errors.ExtensionList(ext=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

ext

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'extensionList'

class openpyxl.worksheet.errors.IgnoredError(sqref=None, evalError=False, twoDigitTextYear=False, numberStoredAsText=False, formula=False, formulaRange=False, unlockedFormula=False, emptyCellReference=False, listDataValidation=False, calculatedColumnmn=False)

基类: *openpyxl.descriptors.serialisable.Serialisable*

calculatedColumn

Values must be of type <class 'bool' >

emptyCellReference

Values must be of type <class 'bool' >

evalError

Values must be of type <class 'bool' >

formula

Values must be of type <class 'bool' >

formulaRange

Values must be of type <class 'bool' >

listDataValidation

Values must be of type <class 'bool' >

numberStoredAsText

Values must be of type <class 'bool' >

sqref

openpyxl.descriptors.excel.CellRange 的别名

tagname = 'ignoredError'

twoDigitTextYear

Values must be of type <class 'bool' >

unlockedFormula

Values must be of type <class 'bool' >

class openpyxl.worksheet.errors.IgnoredErrors(*ignoredError=()*, *extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.worksheet.errors.ExtensionList' >

ignoredError

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'ignoredErrors'

openpyxl.worksheet.filters module

class openpyxl.worksheet.filters.AutoFilter(*ref=None*, *filterColumn=()*, *sortState=None*,
extLst=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

add_filter_column(*col_id*, *vals*, *blank=False*)

Add row filter for specified column.

参数

- **col_id** (*int*) – Zero-origin column id. 0 means first column.

- **vals** (*str*[]) – Value list to show.
- **blank** (*bool*) – Show rows that have blank cell if True (default=False)

add_sort_condition(*ref*, *descending*=False)

Add sort condition for specified range of cells.

参数

- **ref** (*string*) – range of the cells (e.g. 'A2:A150')
- **descending** (*bool*) – Descending sort order (default=False)

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

filterColumn

A sequence (list or tuple) that may only contain objects of the declared type

ref

sortState

Values must be of type <class 'openpyxl.worksheet.filters.SortState' >

tagname = 'autoFilter'

class openpyxl.worksheet.filters.ColorFilter(*dxflId*=None, *cellColor*=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

cellColor

Values must be of type <class 'bool' >

dxflId

Values must be of type <class 'int' >

tagname = 'colorFilter'

class openpyxl.worksheet.filters.CustomFilter(*operator*=None, *val*=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

operator

Value must be one of { 'lessThanOrEqual', 'greaterThan', 'notEqual', 'equal', 'lessThan', 'greaterThanOrEqual' }

tagname = 'customFilter'

val

Values must be of type <class 'str' >

class openpyxl.worksheet.filters.CustomFilters(*_and*=None, *customFilter*=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

customFilter

A sequence (list or tuple) that may only contain objects of the declared type

```

    tagname = 'customFilters'

class openpyxl.worksheet.filters.DateGroupItem(year=None, month=None, day=None,
                                                hour=None, minute=None, second=None,
                                                dateTimeGrouping=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    dateTimeGrouping
        Value must be one of { 'minute' , 'day' , 'hour' , 'month' , 'second' , 'year' }

    day
        Values must be of type <class 'float' >

    hour
        Values must be of type <class 'float' >

    minute
        Values must be of type <class 'float' >

    month
        Values must be of type <class 'float' >

    second
        Values must be of type <class 'int' >

    tagname = 'dateGroupItem'

    year
        Values must be of type <class 'int' >

class openpyxl.worksheet.filters.DynamicFilter(type=None, val=None, valIso=None, max-
                                                Val=None, maxValIso=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    maxVal
        Values must be of type <class 'float' >

    maxValIso
        Values must be of type <class 'datetime.datetime' >

    tagname = 'dynamicFilter'

    type
        Value must be one of { 'Q3' , 'lastMonth' , 'M5' , 'lastYear' , 'lastQuarter' , 'null' ,
        'Q4' , 'tomorrow' , 'M3' , 'nextQuarter' , 'M12' , 'today' , 'thisWeek' , 'thisYear'
        , 'yearToDate' , 'M10' , 'Q1' , 'M7' , 'M2' , 'belowAverage' , 'nextYear' , 'M8'
        , 'M11' , 'thisMonth' , 'M4' , 'M6' , 'nextWeek' , 'thisQuarter' , 'Q2' , 'M1' ,
        'lastWeek' , 'M9' , 'aboveAverage' , 'yesterday' , 'nextMonth' }

    val
        Values must be of type <class 'float' >

```

valIso

Values must be of type <class 'datetime.datetime' >

```
class openpyxl.worksheet.filters.FilterColumn(colId=None, hiddenButton=None, showBut-
                                             ton=None, filters=None, top10=None, cus-
                                             tomFilters=None, dynamicFilter=None, color-
                                             Filter=None, iconFilter=None, extLst=None,
                                             blank=None, vals=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

colId

Values must be of type <class 'int' >

col_id

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

colorFilter

Values must be of type <class 'openpyxl.worksheet.filters.ColorFilter' >

customFilters

Values must be of type <class 'openpyxl.worksheet.filters.CustomFilters' >

dynamicFilter

Values must be of type <class 'openpyxl.worksheet.filters.DynamicFilter' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

filters

Values must be of type <class 'openpyxl.worksheet.filters.Filters' >

hiddenButton

Values must be of type <class 'bool' >

iconFilter

Values must be of type <class 'openpyxl.worksheet.filters.IconFilter' >

showButton

Values must be of type <class 'bool' >

tagname = 'filterColumn'

top10

Values must be of type <class 'openpyxl.worksheet.filters.Top10' >

```
class openpyxl.worksheet.filters.Filters(blank=None, calendarType=None, filter=(), date-
                                         GroupItem=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

blank

Values must be of type <class 'bool' >

calendarType

Value must be one of { 'gregorianUs', 'thai', 'gregorianXlitFrench', 'gregorian', 'japan', 'gregorianMeFrench', 'hebrew', 'korea', 'hijri', 'saka', 'gregorianXlitEnglish', 'gregorianArabic', 'taiwan' }

dateGroupItem

A sequence (list or tuple) that may only contain objects of the declared type

filter

A sequence of primitive types that are stored as a single attribute. "val" is the default attribute

tagname = 'filters'

class openpyxl.worksheet.filters.IconFilter(iconSet=None, iconId=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

iconId

Values must be of type <class 'int' >

iconSet

Value must be one of { '5Quarters', '4RedToBlack', '5Arrows', '3ArrowsGray', '4ArrowsGray', '3Arrows', '5ArrowsGray', '3Symbols', '4TrafficLights', '3Signs', '5Rating', '3TrafficLights2', '3Flags', '3TrafficLights1', '4Rating', '4Arrows', '3Symbols2' }

tagname = 'iconFilter'

class openpyxl.worksheet.filters.SortCondition(ref=None, descending=None, sortBy=None, customList=None, dxId=None, iconSet=None, iconId=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

customList

Values must be of type <class 'str' >

descending

Values must be of type <class 'bool' >

dxId

Values must be of type <class 'int' >

iconId

Values must be of type <class 'int' >

iconSet

Value must be one of { '5Quarters', '4RedToBlack', '5Arrows', '3ArrowsGray', '4ArrowsGray', '3Arrows', '5ArrowsGray', '3Symbols', '4TrafficLights', '3Signs', '5Rating', '3TrafficLights2', '3Flags', '3TrafficLights1', '4Rating', '4Arrows', '3Symbols2' }

ref

sortBy

Value must be one of { 'value' , 'icon' , 'cellColor' , 'fontColor' }

tagname = 'sortCondition'

```
class openpyxl.worksheet.filters.SortState(columnSort=None, caseSensitive=None, sort-
                                          Method=None, ref=None, sortCondition=(),
                                          extLst=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

caseSensitive

Values must be of type <class 'bool' >

columnSort

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

ref

sortCondition

A sequence (list or tuple) that may only contain objects of the declared type

sortMethod

Value must be one of { 'stroke' , 'pinYin' }

tagname = 'sortState'

```
class openpyxl.worksheet.filters.Top10(top=None, percent=None, val=None, filterVal=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

filterVal

Values must be of type <class 'float' >

percent

Values must be of type <class 'bool' >

tagname = 'top10'

top

Values must be of type <class 'bool' >

val

Values must be of type <class 'float' >

openpyxl.worksheet.header_footer module

```
class openpyxl.worksheet.header_footer.HeaderFooter(differentOddEven=None, different-
                                                    First=None, scaleWithDoc=None,
                                                    alignWithMargins=None, odd-
                                                    Header=None, oddFooter=None,
                                                    evenHeader=None, evenFooter=None,
                                                    firstHeader=None, firstFooter=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

alignWithMargins

Values must be of type <class 'bool' >

differentFirst

Values must be of type <class 'bool' >

differentOddEven

Values must be of type <class 'bool' >

evenFooter

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooterItem' >

evenHeader

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooterItem' >

firstFooter

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooterItem' >

firstHeader

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooterItem' >

oddFooter

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooterItem' >

oddHeader

Values must be of type <class 'openpyxl.worksheet.header_footer.HeaderFooterItem' >

scaleWithDoc

Values must be of type <class 'bool' >

tagname = 'headerFooter'

```
class openpyxl.worksheet.header_footer.HeaderFooterItem(left=None, right=None, cen-
                                                         ter=None)
```

基类: *openpyxl.descriptors.Strict*

Header or footer item

center

Values must be of type <class 'openpyxl.worksheet.header_footer._HeaderFooterPart' >

centre

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

classmethod from_tree(*node*)
left

Values must be of type <class ‘openpyxl.worksheet.header_footer._HeaderFooterPart’ >

right

Values must be of type <class ‘openpyxl.worksheet.header_footer._HeaderFooterPart’ >

to_tree(*tagname*)

Return as XML node

openpyxl.worksheet.hyperlink module

class openpyxl.worksheet.hyperlink.Hyperlink(*ref=None, location=None, tooltip=None, display=None, id=None, target=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

display

Values must be of type <class ‘str’ >

id

Values must be of type <class ‘str’ >

location

Values must be of type <class ‘str’ >

ref

Values must be of type <class ‘str’ >

tagname = 'hyperlink'

target

Values must be of type <class ‘str’ >

tooltip

Values must be of type <class ‘str’ >

class openpyxl.worksheet.hyperlink.HyperlinkList(*hyperlink=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

append(*value*)

hyperlink

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'hyperlinks'

openpyxl.worksheet.merge module

```
class openpyxl.worksheet.merge.MergeCell(ref=None)
```

基类: *openpyxl.worksheet.cell_range.CellRange*

ref

Excel-style representation of the range

tagname = 'mergeCell'

```
class openpyxl.worksheet.merge.MergeCells(count=None, mergeCell=())
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

count

mergeCell

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'mergeCells'

```
class openpyxl.worksheet.merge.MergedCellRange(worksheet, coord)
```

基类: *openpyxl.worksheet.cell_range.CellRange*

MergedCellRange stores the border information of a merged cell in the top left cell of the merged cell. The remaining cells in the merged cell are stored as MergedCell objects and get their border information from the upper left cell.

format()

Each cell of the merged cell is created as MergedCell if it does not already exist.

The MergedCells at the edge of the merged cell gets its borders from the upper left cell.

- The top MergedCells get the top border from the top left cell.
- The bottom MergedCells get the bottom border from the top left cell.
- The left MergedCells get the left border from the top left cell.
- The right MergedCells get the right border from the top left cell.

openpyxl.worksheet.ole module

```
class openpyxl.worksheet.ole.ObjectAnchor(_from=None, to=None, moveWithCells=False,
                                           sizeWithCells=False, z_order=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

moveWithCells

Values must be of type <class 'bool' >

sizeWithCells

Values must be of type <class 'bool' >

tagname = 'anchor'

to

Values must be of type <class 'openpyxl.drawing.spreadsheet__drawing.AnchorMarker' >

z_order

Values must be of type <class 'int' >

```
class openpyxl.worksheet.ole.ObjectPr(anchor=None,      locked=True,      defaultSize=True,
                                       __print=True,     disabled=False,    uiObject=False,
                                       autoFill=True,     autoLine=True,    autoPict=True,
                                       macro=None, altText=None, dde=False)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

altText

Values must be of type <class 'str' >

anchor

Values must be of type <class 'openpyxl.worksheet.ole.ObjectAnchor' >

autoFill

Values must be of type <class 'bool' >

autoLine

Values must be of type <class 'bool' >

autoPict

Values must be of type <class 'bool' >

dde

Values must be of type <class 'bool' >

defaultSize

Values must be of type <class 'bool' >

disabled

Values must be of type <class 'bool' >

locked

Values must be of type <class 'bool' >

macro

Values must be of type <class 'str' >

tagname = 'objectPr'

uiObject

Values must be of type <class 'bool' >

```
class openpyxl.worksheet.ole.OleObject(objectPr=None,      progId=None,
                                       dvAspect='DVASPECT_CONTENT', link=None,
                                       oleUpdate=None, autoLoad=False, shapeId=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

autoLoad

Values must be of type <class 'bool' >

dvAspect

Value must be one of { 'DVASPECT_ICON' , 'DVASPECT_CONTENT' }

link

Values must be of type <class 'str' >

objectPr

Values must be of type <class 'openpyxl.worksheet.ole.ObjectPr' >

oleUpdate

Value must be one of { 'OLEUPDATE_ONCALL' , 'OLEUPDATE_ALWAYS' }

progId

Values must be of type <class 'str' >

shapeId

Values must be of type <class 'int' >

tagname = 'oleObject'

class openpyxl.worksheet.ole.OleObjects(oleObject=())

基类: *openpyxl.descriptors.serialisable.Serialisable*

oleObject

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'oleObjects'

openpyxl.worksheet.page module

class openpyxl.worksheet.page.PageMargins(left=0.75, right=0.75, top=1, bottom=1, header=0.5, footer=0.5)

基类: *openpyxl.descriptors.serialisable.Serialisable*

Information about page margins for view/print layouts. Standard values (in inches) left, right = 0.75
top, bottom = 1 header, footer = 0.5

bottom

Values must be of type <class 'float' >

footer

Values must be of type <class 'float' >

header

Values must be of type <class 'float' >

left

Values must be of type <class 'float' >

right

Values must be of type <class 'float' >

tagname = 'pageMargins'

top

Values must be of type <class 'float' >

```
class openpyxl.worksheet.page.PrintOptions(horizontalCentered=None, verticalCentered=None, headings=None, gridLines=None, gridLinesSet=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Worksheet print options

gridLines

Values must be of type <class 'bool' >

gridLinesSet

Values must be of type <class 'bool' >

headings

Values must be of type <class 'bool' >

horizontalCentered

Values must be of type <class 'bool' >

tagname = 'printOptions'

verticalCentered

Values must be of type <class 'bool' >

```
class openpyxl.worksheet.page.PrintPageSetup(worksheet=None, orientation=None, paperSize=None, scale=None, fitToHeight=None, fitToWidth=None, firstPageNumber=None, useFirstPageNumber=None, paperHeight=None, paperWidth=None, pageOrder=None, usePrinterDefaults=None, blackAndWhite=None, draft=None, cellComments=None, errors=None, horizontalDpi=None, verticalDpi=None, copies=None, id=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

Worksheet print page setup

autoPageBreaks

blackAndWhite

Values must be of type <class 'bool' >

cellComments

Value must be one of { 'asDisplayed' , 'atEnd' }

copies

Values must be of type <class 'int' >

draft

Values must be of type <class 'bool' >

errors

Value must be one of { 'NA' , 'blank' , 'dash' , 'displayed' }

firstPageNumber

Values must be of type <class 'int' >

fitToHeight

Values must be of type <class 'int' >

fitToPage**fitToWidth**

Values must be of type <class 'int' >

classmethod from_tree(*node*)

Create object from XML

horizontalDpi

Values must be of type <class 'int' >

id

Values must be of type <class 'str' >

orientation

Value must be one of { 'default' , 'portrait' , 'landscape' }

pageOrder

Value must be one of { 'overThenDown' , 'downThenOver' }

paperHeight**paperSize**

Values must be of type <class 'int' >

paperWidth**scale**

Values must be of type <class 'int' >

sheet_properties

Proxy property

```

tagname = 'pageSetup'

useFirstPageNumber
    Values must be of type <class 'bool' >

usePrinterDefaults
    Values must be of type <class 'bool' >

verticalDpi
    Values must be of type <class 'int' >

```

openpyxl.worksheet.pagebreak module

```

class openpyxl.worksheet.pagebreak.Break(id=0, min=0, max=16383, man=True, pt=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    id
        Values must be of type <class 'int' >

    man
        Values must be of type <class 'bool' >

    max
        Values must be of type <class 'int' >

    min
        Values must be of type <class 'int' >

    pt
        Values must be of type <class 'bool' >

    tagname = 'brk'

class openpyxl.worksheet.pagebreak.ColBreak(count=None, manualBreakCount=None, brk=())
    基类: openpyxl.worksheet.pagebreak.RowBreak

    brk
        A sequence (list or tuple) that may only contain objects of the declared type

    count

    manualBreakCount

    tagname = 'colBreaks'

openpyxl.worksheet.pagebreak.PageBreak
    openpyxl.worksheet.pagebreak.RowBreak 的别名

class openpyxl.worksheet.pagebreak.RowBreak(count=None, manualBreakCount=None, brk=())
    基类: openpyxl.descriptors.serialisable.Serialisable

```

```

append(brk=None)
    Add a page break

brk
    A sequence (list or tuple) that may only contain objects of the declared type

count

manualBreakCount

tagname = 'rowBreaks'

```

openpyxl.worksheet.picture module

```

class openpyxl.worksheet.picture.SheetBackgroundPicture
    基类: openpyxl.descriptors.serialisable.Serialisable

    tagname = 'sheetBackgroundPicture'

```

openpyxl.worksheet.properties module

Worksheet Properties

```

class openpyxl.worksheet.properties.Outline(applyStyles=None, summaryBelow=None, summaryRight=None, showOutlineSymbols=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    applyStyles
        Values must be of type <class 'bool' >

    showOutlineSymbols
        Values must be of type <class 'bool' >

    summaryBelow
        Values must be of type <class 'bool' >

    summaryRight
        Values must be of type <class 'bool' >

    tagname = 'outlinePr'

class openpyxl.worksheet.properties.PageSetupProperties(autoPageBreaks=None, fitToPage=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    autoPageBreaks
        Values must be of type <class 'bool' >

    fitToPage
        Values must be of type <class 'bool' >

```

```
tagname = 'pageSetUpPr'
```

```
class openpyxl.worksheet.properties.WorksheetProperties(codeName=None, enableFormat-
ConditionsCalculation=None, filterMode=None, published=None,
syncHorizontal=None, syncRef=None, syncVertical=None,
transitionEvaluation=None, transitionEntry=None, tab-
Color=None, outlinePr=None, pageSetUpPr=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

codeName

Values must be of type <class 'str' >

enableFormatConditionsCalculation

Values must be of type <class 'bool' >

filterMode

Values must be of type <class 'bool' >

outlinePr

Values must be of type <class 'openpyxl.worksheet.properties.Outline' >

pageSetUpPr

Values must be of type <class 'openpyxl.worksheet.properties.PageSetupProperties' >

published

Values must be of type <class 'bool' >

syncHorizontal

Values must be of type <class 'bool' >

syncRef

Values must be of type <class 'str' >

syncVertical

Values must be of type <class 'bool' >

tabColor

Values must be of type <class 'openpyxl.styles.colors.Color' >

```
tagname = 'sheetPr'
```

transitionEntry

Elements

transitionEvaluation

Values must be of type <class 'bool' >

openpyxl.worksheet.protection module

```
class openpyxl.worksheet.protection.SheetProtection(sheet=False, objects=False, scenarios=False, formatCells=True, formatRows=True, formatColumns=True, insertColumns=True, insertRows=True, insertHyperlinks=True, deleteColumns=True, deleteRows=True, selectLockedCells=False, selectUnlockedCells=False, sort=True, autoFilter=True, pivotTables=True, password=None, algorithmName=None, saltValue=None, spinCount=None, hashValue=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`, `openpyxl.worksheet.protection._Protected`

Information about protection of various aspects of a sheet. True values mean that protection for the object or action is active This is the **default** when protection is active, ie. users cannot do something

algorithmName

Values must be of type <class 'str' >

autoFilter

Values must be of type <class 'bool' >

deleteColumns

Values must be of type <class 'bool' >

deleteRows

Values must be of type <class 'bool' >

disable()**enable()****enabled**

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. “type”) or a more descriptive name is desired (eg. “underline” for “u”)

formatCells

Values must be of type <class 'bool' >

formatColumns

Values must be of type <class 'bool' >

formatRows

Values must be of type <class 'bool' >

hashValue

insertColumns

Values must be of type <class 'bool' >

insertHyperlinks

Values must be of type <class 'bool' >

insertRows

Values must be of type <class 'bool' >

objects

Values must be of type <class 'bool' >

pivotTables

Values must be of type <class 'bool' >

saltValue

scenarios

Values must be of type <class 'bool' >

selectLockedCells

Values must be of type <class 'bool' >

selectUnlockedCells

Values must be of type <class 'bool' >

set_password(*value*=", *already_hashed*=False)

Set a password on this sheet.

sheet

Values must be of type <class 'bool' >

sort

Values must be of type <class 'bool' >

spinCount

Values must be of type <class 'int' >

tagname = 'sheetProtection'

openpyxl.worksheet.related module

class openpyxl.worksheet.related.Related(*id*=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

id

Values must be of type <class 'str' >

to_tree(*tagname*, *idx*=None)

openpyxl.worksheet.scenario module

```
class openpyxl.worksheet.scenario.InputCells(r=None, deleted=False, undone=False,
                                              val=None, numFmtId=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

deleted

Values must be of type <class 'bool' >

numFmtId

Values must be of type <class 'int' >

r

Values must be of type <class 'str' >

tagname = 'inputCells'

undone

Values must be of type <class 'bool' >

val

Values must be of type <class 'str' >

```
class openpyxl.worksheet.scenario.Scenario(inputCells=(), name=None, locked=False, hid-
                                           den=False, count=None, user=None, com-
                                           ment=None)
```

基类: *openpyxl.descriptors.serialisable.Serialisable*

comment

Values must be of type <class 'str' >

count

hidden

Values must be of type <class 'bool' >

inputCells

A sequence (list or tuple) that may only contain objects of the declared type

locked

Values must be of type <class 'bool' >

name

Values must be of type <class 'str' >

tagname = 'scenario'

user

Values must be of type <class 'str' >

```
class openpyxl.worksheet.scenario.ScenarioList(scenario=(), current=None, show=None,
                                              sqref=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    append(scenario)

    current
        Values must be of type <class 'int' >

    scenario
        A sequence (list or tuple) that may only contain objects of the declared type

    show
        Values must be of type <class 'int' >

    sqref
        Values must be of type <class 'openpyxl.worksheet.cell_range.MultiCellRange' >

    tagname = 'scenarios'
```

openpyxl.worksheet.smart_tag module

```
class openpyxl.worksheet.smart_tag.CellSmartTag(cellSmartTagPr=(), type=None,
                                              deleted=False, xmlBased=False)
    基类: openpyxl.descriptors.serialisable.Serialisable

    cellSmartTagPr
        A sequence (list or tuple) that may only contain objects of the declared type

    deleted
        Values must be of type <class 'bool' >

    tagname = 'cellSmartTag'

    type
        Values must be of type <class 'int' >

    xmlBased
        Values must be of type <class 'bool' >

class openpyxl.worksheet.smart_tag.CellSmartTagPr(key=None, val=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    key
        Values must be of type <class 'str' >

    tagname = 'cellSmartTagPr'

    val
        Values must be of type <class 'str' >
```



```
class openpyxl.worksheet.smart_tag.CellSmartTags(cellSmartTag=(), r=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    cellSmartTag
        A sequence (list or tuple) that may only contain objects of the declared type

    r
        Values must be of type <class 'str' >

    tagname = 'cellSmartTags'
```

```
class openpyxl.worksheet.smart_tag.SmartTags(cellSmartTags=())
    基类: openpyxl.descriptors.serialisable.Serialisable

    cellSmartTags
        A sequence (list or tuple) that may only contain objects of the declared type

    tagname = 'smartTags'
```

openpyxl.worksheet.table module

```
class openpyxl.worksheet.table.Table(id=1, displayName=None, ref=None, name=None,
                                     comment=None, tableType=None, headerRowCount=1,
                                     insertRow=None, insertRowShift=None, totalsRow-
                                     Count=None, totalsRowShown=None, published=None,
                                     headerRowDxfId=None, dataDxfId=None, totalsRowDx-
                                     fId=None, headerRowBorderDxfId=None, tableBor-
                                     derDxfId=None, totalsRowBorderDxfId=None, header-
                                     RowCellStyle=None, dataCellStyle=None, totalsRow-
                                     CellStyle=None, connectionId=None, autoFilter=None,
                                     sortState=None, tableColumns=(), tableStyleInfo=None,
                                     extLst=None)
    基类: openpyxl.descriptors.serialisable.Serialisable

    autoFilter
        Values must be of type <class 'openpyxl.worksheet.filters.AutoFilter' >

    comment
        Values must be of type <class 'str' >

    connectionId
        Values must be of type <class 'int' >

    dataCellStyle
        Values must be of type <class 'str' >

    dataDxfId
        Values must be of type <class 'int' >
```

displayName

Values must be of type <class 'str' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

headerRowBorderDxfId

Values must be of type <class 'int' >

headerRowCellStyle

Values must be of type <class 'str' >

headerRowCount

Values must be of type <class 'int' >

headerRowDxfId

Values must be of type <class 'int' >

id

Values must be of type <class 'int' >

insertRow

Values must be of type <class 'bool' >

insertRowShift

Values must be of type <class 'bool' >

mime_type = 'application/vnd.openxmlformats-officedocument.spreadsheetml.table+xml'

name

Values must be of type <class 'str' >

path

Return path within the archive

published

Values must be of type <class 'bool' >

ref**sortState**

Values must be of type <class 'openpyxl.worksheet.filters.SortState' >

tableBorderDxfId

Values must be of type <class 'int' >

tableColumns

Wrap a sequence in an containing object

tableStyleInfo

Values must be of type <class 'openpyxl.worksheet.table.TableStyleInfo' >

```

tableType
    Value must be one of { 'queryTable' , 'xml' , 'worksheet' }

tagname = 'table'

to_tree()

totalsRowBorderDxfId
    Values must be of type <class 'int' >

totalsRowCellStyle
    Values must be of type <class 'str' >

totalsRowCount
    Values must be of type <class 'int' >

totalsRowDxfId
    Values must be of type <class 'int' >

totalsRowShown
    Values must be of type <class 'bool' >

class openpyxl.worksheet.table.TableColumn(id=None, uniqueName=None, name=None, totalsRowFunction=None, totalsRowLabel=None, queryTableFieldId=None, headerRowDxfId=None, dataDxfId=None, totalsRowDxfId=None, headerRowCellStyle=None, dataCellStyle=None, totalsRowCellStyle=None, calculatedColumnFormula=None, totalsRowFormula=None, xmlColumnPr=None, extLst=None)

基类: openpyxl.descriptors.serialisable.Serialisable

calculatedColumnFormula
    Values must be of type <class 'openpyxl.worksheet.table.TableFormula' >

dataCellStyle
    Values must be of type <class 'str' >

dataDxfId
    Values must be of type <class 'int' >

extLst
    Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

classmethod from_tree(node)
    Create object from XML

headerRowCellStyle
    Values must be of type <class 'str' >

```

headerRowDxfId

Values must be of type <class 'int' >

id

Values must be of type <class 'int' >

name

Values must be of type <class 'str' >

queryTableFieldId

Values must be of type <class 'int' >

tagname = 'tableColumn'

totalsRowCellStyle

Values must be of type <class 'str' >

totalsRowDxfId

Values must be of type <class 'int' >

totalsRowFormula

Values must be of type <class 'openpyxl.worksheet.table.TableFormula' >

totalsRowFunction

Value must be one of { 'sum', 'min', 'average', 'countNums', 'var', 'custom', 'max',
, 'stdDev', 'count' }

totalsRowLabel

Values must be of type <class 'str' >

uniqueName

Values must be of type <class 'str' >

xmlColumnPr

Values must be of type <class 'openpyxl.worksheet.table.XMLColumnProps' >

class openpyxl.worksheet.table.TableFormula(array=None, attr_text=None)

基类: *openpyxl.descriptors.serialisable.Serialisable*

array

Values must be of type <class 'bool' >

attr_text

tagname = 'tableFormula'

text

Aliases can be used when either the desired attribute name is not allowed or confusing in Python (eg. "type") or a more descriptive name is desired (eg. "underline" for "u")

class openpyxl.worksheet.table.TableList

基类: dict

add(*table*)

get(*name=None, table_range=None*)

Return the value for key if key is in the dictionary, else default.

items() → a set-like object providing a view on D's items

class openpyxl.worksheet.table.TableNameDescriptor(**args, **kw*)

基类: *openpyxl.descriptors.base.String*

Table names cannot have spaces in them

class openpyxl.worksheet.table.TablePartList(*count=None, tablePart=()*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

append(*part*)

count

tablePart

A sequence (list or tuple) that may only contain objects of the declared type

tagname = 'tableParts'

class openpyxl.worksheet.table.TableStyleInfo(*name=None, showFirstColumn=None, showLastColumn=None, showRowStripes=None, showColumnStripes=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

name

Values must be of type <class 'str' >

showColumnStripes

Values must be of type <class 'bool' >

showFirstColumn

Values must be of type <class 'bool' >

showLastColumn

Values must be of type <class 'bool' >

showRowStripes

Values must be of type <class 'bool' >

tagname = 'tableStyleInfo'

class openpyxl.worksheet.table.XMLColumnProps(*mapId=None, xpath=None, denormalized=None, xmlDataType=None, extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

denormalized

Values must be of type <class 'bool' >

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

mapId

Values must be of type <class 'int' >

tagname = 'xmlColumnPr'

xmlDataType

Values must be of type <class 'str' >

xpath

Values must be of type <class 'str' >

`openpyxl.worksheet.table.tostring(element, *, encoding='utf-8', method=None, short_empty_elements=True)`

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.worksheet.views module

`class openpyxl.worksheet.views.Pane(xSplit=None, ySplit=None, topLeftCell=None, activePane='topLeft', state='split')`

基类: `openpyxl.descriptors.serialisable.Serialisable`

activePane

Value must be one of { 'topLeft' , 'topRight' , 'bottomRight' , 'bottomLeft' }

state

Value must be one of { 'split' , 'frozenSplit' , 'frozen' }

topLeftCell

Values must be of type <class 'str' >

xSplit

Values must be of type <class 'float' >

ySplit

Values must be of type <class 'float' >

`class openpyxl.worksheet.views.Selection(pane=None, activeCell='A1', activeCellId=None, sqref='A1')`

基类: `openpyxl.descriptors.serialisable.Serialisable`

activeCell

Values must be of type <class 'str' >

activeCellId

Values must be of type <class 'int' >

pane

Value must be one of { 'topLeft' , 'topRight' , 'bottomRight' , 'bottomLeft' }

sqref

Values must be of type <class 'str' >

```
class openpyxl.worksheet.views.SheetView(windowProtection=None,      showFormulas=None,
                                           showGridLines=None, showRowColHeaders=None,
                                           showZeros=None,      rightToLeft=None,      tabS-
                                           elected=None,      showRuler=None,      showOut-
                                           lineSymbols=None,      defaultGridColor=None,
                                           showWhiteSpace=None,      view=None,      topLeft-
                                           Cell=None,      colorId=None,      zoomScale=None,
                                           zoomScaleNormal=None,      zoomScaleSheetLay-
                                           outView=None,      zoomScalePageLayoutView=None,
                                           zoomToFit=None,      workbookViewId=0,      selec-
                                           tion=None, pane=None)
```

基类: `openpyxl.descriptors.serialisable.Serialisable`

Information about the visible portions of this sheet.

colorId

Values must be of type <class 'int' >

defaultGridColor

Values must be of type <class 'bool' >

pane

Values must be of type <class 'openpyxl.worksheet.views.Pane' >

rightToLeft

Values must be of type <class 'bool' >

selection

A sequence (list or tuple) that may only contain objects of the declared type

showFormulas

Values must be of type <class 'bool' >

showGridLines

Values must be of type <class 'bool' >

showOutlineSymbols

Values must be of type <class 'bool' >

showRowColHeaders

Values must be of type <class 'bool' >

showRuler

Values must be of type <class 'bool' >

showWhiteSpace

Values must be of type <class 'bool' >

showZeros

Values must be of type <class 'bool' >

tabSelected

Values must be of type <class 'bool' >

tagname = 'sheetView'

topLeftCell

Values must be of type <class 'str' >

view

Value must be one of { 'pageBreakPreview' , 'normal' , 'pageLayout' }

windowProtection

Values must be of type <class 'bool' >

workbookViewId

Values must be of type <class 'int' >

zoomScale

Values must be of type <class 'int' >

zoomScaleNormal

Values must be of type <class 'int' >

zoomScalePageLayoutView

Values must be of type <class 'int' >

zoomScaleSheetLayoutView

Values must be of type <class 'int' >

zoomToFit

Values must be of type <class 'bool' >

class openpyxl.worksheet.views.**SheetViewList**(*sheetView=None, extLst=None*)

基类: *openpyxl.descriptors.serialisable.Serialisable*

extLst

Values must be of type <class 'openpyxl.descriptors.excel.ExtensionList' >

sheetView

A sequence (list or tuple) that may only contain objects of the declared type


```
tagname = 'sheetViews'
```

openpyxl.worksheet.worksheet module

Worksheet is the 2nd-level container in Excel.

```
class openpyxl.worksheet.worksheet.Worksheet(parent, title=None)
```

基类: openpyxl.workbook.child._WorkbookChild

Represents a worksheet.

Do not create worksheets yourself, use openpyxl.workbook.Workbook.create_sheet() instead

```
BREAK_COLUMN = 2
```

```
BREAK_NONE = 0
```

```
BREAK_ROW = 1
```

```
ORIENTATION_LANDSCAPE = 'landscape'
```

```
ORIENTATION_PORTRAIT = 'portrait'
```

```
PAPERSIZE_A3 = '8'
```

```
PAPERSIZE_A4 = '9'
```

```
PAPERSIZE_A4_SMALL = '10'
```

```
PAPERSIZE_A5 = '11'
```

```
PAPERSIZE_EXECUTIVE = '7'
```

```
PAPERSIZE_LEDGER = '4'
```

```
PAPERSIZE_LEGAL = '5'
```

```
PAPERSIZE_LETTER = '1'
```

```
PAPERSIZE_LETTER_SMALL = '2'
```

```
PAPERSIZE_STATEMENT = '6'
```

```
PAPERSIZE_TABLOID = '3'
```

```
SHEETSTATE_HIDDEN = 'hidden'
```

```
SHEETSTATE_VERYHIDDEN = 'veryHidden'
```

```
SHEETSTATE_VISIBLE = 'visible'
```

```
active_cell
```

```
add_chart(chart, anchor=None)
```

Add a chart to the sheet Optionally provide a cell for the top-left anchor

add_data_validation(*data_validation*)

Add a data-validation object to the sheet. The data-validation object defines the type of data-validation to be applied and the cell or range of cells it should apply to.

add_image(*img*, *anchor=None*)

Add an image to the sheet. Optionally provide a cell for the top-left anchor

add_pivot(*pivot*)

add_table(*table*)

Check for duplicate name in definedNames and other worksheet tables before adding table.

append(*iterable*)

Appends a group of values at the bottom of the current sheet.

- If it's a list: all values are added in order, starting from the first column
- If it's a dict: values are assigned to the columns indicated by the keys (numbers or letters)

参数 *iterable* (*list/tuple/range/generator or dict*) – list, range or generator, or dict containing values to append

Usage:

- `append(['This is A1' , 'This is B1' , 'This is C1'])`
- `or append({ 'A' : 'This is A1' , 'C' : 'This is C1' })`
- `or append({1 : 'This is A1' , 3 : 'This is C1' })`

Raise `TypeError` when *iterable* is neither a list/tuple nor a dict

calculate_dimension()

Return the minimum bounding range for all cells containing data (ex. 'A1:M24')

返回类型 `string`

cell(*row*, *column*, *value=None*)

Returns a cell object based on the given coordinates.

Usage: `cell(row=15, column=1, value=5)`

Calling *cell* creates cells in memory when they are first accessed.

参数

- **row** (*int*) – row index of the cell (e.g. 4)
- **column** (*int*) – column index of the cell (e.g. 3)
- **value** (*numeric or time or string or bool or none*) – value of the cell (e.g. 5)

返回类型 `openpyxl.cell.cell.Cell`

columns

Produces all cells in the worksheet, by column (see `iter_cols()`)

delete_cols(*idx*, *amount*=1)

Delete column or columns from `col==idx`

delete_rows(*idx*, *amount*=1)

Delete row or rows from `row==idx`

dimensions

Returns the result of `calculate_dimension()`

freeze_panes**insert_cols(*idx*, *amount*=1)**

Insert column or columns before `col==idx`

insert_rows(*idx*, *amount*=1)

Insert row or rows before `row==idx`

iter_cols(*min_col*=None, *max_col*=None, *min_row*=None, *max_row*=None, *values_only*=False)

Produces cells from the worksheet, by column. Specify the iteration range using indices of rows and columns.

If no indices are specified the range starts at A1.

If no cells are in the worksheet an empty tuple will be returned.

参数

- **min_col** (*int*) – smallest column index (1-based index)
- **min_row** (*int*) – smallest row index (1-based index)
- **max_col** (*int*) – largest column index (1-based index)
- **max_row** (*int*) – largest row index (1-based index)
- **values_only** (*bool*) – whether only cell values should be returned

返回类型 generator**iter_rows(*min_row*=None, *max_row*=None, *min_col*=None, *max_col*=None, *values_only*=False)**

Produces cells from the worksheet, by row. Specify the iteration range using indices of rows and columns.

If no indices are specified the range starts at A1.

If no cells are in the worksheet an empty tuple will be returned.

参数

- **min_col** (*int*) – smallest column index (1-based index)

- `min_row` (*int*) – smallest row index (1-based index)
- `max_col` (*int*) – largest column index (1-based index)
- `max_row` (*int*) – largest row index (1-based index)
- `values_only` (*bool*) – whether only cell values should be returned

返回类型 `generator`

max_column

The maximum column index containing data (1-based)

Type `int`

max_row

The maximum row index containing data (1-based)

Type `int`

merge_cells(*range_string=None, start_row=None, start_column=None, end_row=None, end_column=None*)

Set merge on a cell range. Range is a cell range (e.g. A1:E1)

merged_cell_ranges

Return a copy of cell ranges

注解: Deprecated: Use `ws.merged_cells.ranges`

mime_type = `'application/vnd.openxmlformats-officedocument.spreadsheetml.worksheet+xml'`

min_column

The minimum column index containing data (1-based)

Type `int`

min_row

The minimum row index containing data (1-based)

Type `int`

move_range(*cell_range, rows=0, cols=0, translate=False*)

Move a cell range by the number of rows and/or columns: down if `rows > 0` and up if `rows < 0` right if `cols > 0` and left if `cols < 0` Existing cells will be overwritten. Formulae and references will not be updated.

page_breaks

print_area

The print area for the worksheet, or `None` if not set. To set, supply a range like `'A1:D4'` or a list of ranges.

print_title_cols

Columns to be printed at the left side of every page (ex: 'A:C')

print_title_rows

Rows to be printed at the top of every page (ex: '1:3')

print_titles**rows**

Produces all cells in the worksheet, by row (see *iter_rows()*)

Type generator

selected_cell**set_printer_settings**(*paper_size, orientation*)

Set printer settings

sheet_view**show_gridlines****show_summary_below****show_summary_right****tables****unmerge_cells**(*range_string=None, start_row=None, start_column=None, end_row=None, end_column=None*)

Remove merge on a cell range. Range is a cell range (e.g. A1:E1)

values

Produces all cell values in the worksheet, by row

Type generator

openpyxl.writer package**Submodules****openpyxl.writer.excel module**

Write a .xlsx file.

class openpyxl.writer.excel.ExcelWriter(*workbook, archive*)

基类: object

Write a workbook object to an Excel file.

save()

Write data into the archive.

`write_data()`

Write the various xml files into the zip archive.

`write_worksheet(ws)`

`openpyxl.writer.excel.save_virtual_workbook(workbook)`

Return an in-memory workbook, suitable for a Django response.

注解: Deprecated: Use a NamedTemporaryFile

`openpyxl.writer.excel.save_workbook(workbook, filename)`

Save the given workbook on the filesystem under the name filename.

参数

- **workbook** (`openpyxl.workbook.Workbook`) – the workbook to save
- **filename** (*string*) – the path to which save the workbook

返回类型 bool

`openpyxl.writer.excel.tostring(element, *, encoding='utf-8', method=None, short_empty_elements=True)`

Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an `Element` instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

openpyxl.writer.theme module

Write the theme xml based on a fixed string.

`openpyxl.writer.theme.write_theme()`

Write the theme xml.

openpyxl.xml package

Collection of XML resources compatible across different Python versions

`openpyxl.xml.defusedxml_available()`

`openpyxl.xml.defusedxml_env_set()`

`openpyxl.xml.lxml_available()`

`openpyxl.xml.xml_env_set()`

Submodules

openpyxl.xml.constants module

Constants for fixed paths in a file and xml namespace urls.

openpyxl.xml.functions module

XML compatability functions

`openpyxl.xml.functions.localname(node)`

`openpyxl.xml.functions.tostring(element, *, encoding='utf-8', method=None, short_empty_elements=True)`
Generate string representation of XML element.

All subelements are included. If encoding is “unicode” , a string is returned. Otherwise a bytestring is returned.

element is an Element instance, *encoding* is an optional output encoding defaulting to US-ASCII, *method* is an optional output which can be one of “xml” (default), “html” , “text” or “c14n” .

Returns an (optionally) encoded string containing the XML data.

`openpyxl.xml.functions.whitespace(node)`

CHAPTER 9

Indices and tables

- `genindex`
- `modindex`
- `search`

10.1 3.0.4 (2020-06-24)

10.1.1 Bugfixes

- [#844](#) Find tables by name
- [#1414](#) Worksheet protection missing in existing files
- [#1439](#) Exception when reading files with external images
- [#1452](#) Reading lots of merged cells is very slow.
- [#1455](#) Read support for Bubble Charts.
- [#1458](#) Preserve any indexed colours
- [#1473](#) Reading many thousand of merged cells is really slow.
- [#1474](#) Adding tables in write-only mode raises an exception.

10.1.2 Pull Requests

- [PR377](#) Add support for finding tables by name or range.

10.2 3.0.3 (2020-01-20)

10.2.1 Bugfixes

- #1260 Exception when handling merged cells with hyperlinks
- #1373 Problems when both lxml and defusedxml are installed
- #1385 CFVO with incorrect values cannot be processed

10.3 3.0.2 (2019-11-25)

10.3.1 Bug fixes

- #1267 DeprecationError if both defusedxml and lxml are installed
- #1345 ws.__current__row is higher than ws.max__row
- #1365 Border bottom style is not optional when it should be
- #1367 Empty cells in read-only, values-only mode are sometimes returned as ReadOnlyCells
- #1368 Cannot add page breaks to existing worksheets if none exist already

10.3.2 Pull Requests

- PR359 Improvements to the documentation

10.4 3.0.1 (2019-11-14)

10.4.1 Bugfixes

- #1250 Cannot read empty charts.

10.4.2 Pull Requests

- PR354 Fix for #1250
- PR352 TableStyleElement is a sequence

10.5 3.0.0 (2019-09-25)

10.5.1 Python 3.6+ only release

10.6 2.6.4 (2019-09-25)

10.6.1 Final release for Python 2.7 and 3.5

10.6.2 Bugfixes

- ‘ #1330 <<https://bitbucket.org/openpyxl/openpyxl/issues/1330>>‘_ Cannot save workbooks with comments more than once.

10.7 2.6.3 (2019-08-19)

10.7.1 Bugfixes

- #1237 Fix 3D charts.
- #1290 Minimum for holeSize in Doughnut charts too high
- #1291 Warning for MergedCells with comments
- #1296 Pagebreaks duplicated
- #1309 Workbook has no default CellStyle
- #1330 Workbooks with comments cannot be saved multiple times

10.7.2 Pull Requests

- PR344 Make sure NamedStyles number formats are correctly handled

10.8 2.6.2 (2019-03-29)

10.8.1 Bugfixes

- #1173 Workbook has no __date__formats attribute
- #1190 Cannot create charts for worksheets with quotes in the title
- #1228 MergedCells not removed when range is unmerged

- #1232 Link to pivot table lost from charts
- #1233 Chart colours change after saving
- #1236 Cannot use ws.cell in read-only mode with Python 2.7

10.9 2.6.1 (2019-03-04)

10.9.1 Bugfixes

- #1174 ReadOnlyCell.is_date does not work properly
- #1175 Cannot read Google Docs spreadsheet with a Pivot Table
- #1180 Charts created with openpyxl cannot be styled
- #1181 Cannot handle some numpy number types
- #1182 Exception when reading unknowable number formats
- #1186 Only last formatting rule for a range loaded
- #1191 Give MergedCell a *value* attribute
- #1193 Cannot process worksheets with comments
- #1197 Cannot process worksheets with both row and page breaks
- #1204 Cannot reset dimensions in ReadOnlyWorksheets
- #1211 Incorrect descriptor in ParagraphProperties
- #1213 Missing *hier* attribute in PageField raises an exception

10.10 2.6.0 (2019-02-06)

10.10.1 Bugfixes

- #1162 Exception on tables with names containing spaces.
- #1170 Cannot save files with existing images.

10.11 2.6.-b1 (2019-01-08)

10.11.1 Bugfixes

- #1141 Cannot use read-only mode with stream

- [#1143](#) Hyperlinks always set on A1
- [#1151](#) Internal row counter not initialised when reading files
- [#1152](#) Exception raised on out of bounds date

10.12 2.6-a1 (2018-11-21)

10.12.1 Major changes

- Implement robust for merged cells so that these can be formatted the way Excel does without confusion. Thanks to Magnus Schieder.

10.12.2 Minor changes

- Add support for worksheet scenarios
- Add read support for chartsheets
- Add method for moving ranges of cells on a worksheet
- Drop support for Python 3.4
- Last version to support Python 2.7

10.12.3 Deprecations

- Type inference and coercion for cell values

10.13 2.5.14 (2019-01-23)

10.13.1 Bugfixes

- [#1150](#) Correct typo in LineProperties
- [#1142](#) Exception raised for unsupported image files
- [#1159](#) Exception raised when cannot find source for non-local cache object

10.13.2 Pull Requests

- [PR301](#) Add support for nested brackets to the tokeniser
- [PR303](#) Improvements on handling nested brackets in the tokeniser

10.14 2.5.13 (brown bag)

10.15 2.5.12 (2018-11-29)

10.15.1 Bugfixes

- [#1130](#) Overwriting default font in Normal style affects library default
- [#1133](#) Images not added to anchors.
- [#1134](#) Cannot read pivot table formats without dxId
- [#1138](#) Repeated registration of simple filter could lead to memory leaks

10.15.2 Pull Requests

- [PR300](#) Use defusedxml if available

10.16 2.5.11 (2018-11-21)

10.16.1 Pull Requests

- [PR295](#) Improved handling of missing rows
- [PR296](#) Add support for defined names to tokeniser

10.17 2.5.10 (2018-11-13)

10.17.1 Bugfixes

- [#1114](#) Empty column dimensions should not be saved.

10.17.2 Pull Requests

- [PR285](#) Tokenizer failure for quoted sheet name in second half of range
- [PR289](#) Improved error detection in ranges.

10.18 2.5.9 (2018-10-19)

10.18.1 Bugfixes

- [#1000](#) Clean AutoFilter name definitions
- [#1106](#) Attribute missing from Shape object
- [#1109](#) Failure to read all DrawingML means workbook can't be read

10.18.2 Pull Requests

- [PR281](#) Allow newlines in formulae
- [PR284](#) Fix whitespace in front of infix operator in formulae

10.19 2.5.8 (2018-09-25)

- [#877](#) Cannot control how missing values are displayed in charts.
- [#948](#) Cell references can't be used for chart titles
- [#1095](#) Params in iter_cols and iter_rows methods are slightly wrong.

10.20 2.5.7 (2018-09-13)

- [#954](#) Sheet title containing % need quoting in references
- [#1047](#) Cannot set quote prefix
- [#1093](#) Pandas timestamps raise KeyError

10.21 2.5.6 (2018-08-30)

- [#832](#) Read-only mode can leave find-handles open when reading dimensions
- [#933](#) Set a worksheet directly as active
- [#1086](#) Internal row counter not adjusted when rows are deleted or inserted

10.22 2.5.5 (2018-08-04)

10.22.1 Bugfixes

- #1049 Files with Mac epoch are read incorrectly
- #1058 Cannot copy merged cells
- #1066 Cannot access ws.active_cell

10.22.2 Pull Requests

- PR267 Introduce read-support for images

10.23 2.5.4 (2018-06-07)

10.23.1 Bugfixes

- #1025 Cannot read files with 3D charts.
- #1030 Merged cells take a long time to parse

10.23.2 Minor changes

- Improve read support for pivot tables and don't always create a Filters child for filterColumn objects.
- *Support folding rows* <<https://bitbucket.org/openpyxl/openpyxl/pull-requests/259/fold-rows>>‘_

10.24 2.5.3 (2018-04-18)

10.24.1 Bugfixes

- #983 Warning level too aggressive.
- #1015 Alignment and protection values not saved for named styles.
- #1017 Deleting elements from a legend doesn't work.
- #1018 Index names repeated for every row in dataframe.
- #1020 Worksheet protection not being stored.
- #1023 Exception raised when reading a tooltip.

10.25 2.5.2 (2018-04-06)

10.25.1 Bugfixes

- [#949](#) High memory use when reading text-heavy files.
- [#970](#) Copying merged cells copies references.
- [#978](#) Cannot set comment size.
- [#985](#) Exception when trying to save workbooks with no views.
- [#995](#) Cannot delete last row or column.
- [#1002](#) Cannot read Drawings containing embedded images.

10.25.2 Minor changes

- Support for dataframes with multiple columns and multiple indices.

10.26 2.5.1 (2018-03-12)

10.26.1 Bugfixes

- [#934](#) Headers and footers not included in write-only mode.
- [#960](#) Deprecation warning raised when using ad-hoc access in read-only mode.
- [#964](#) Not all cells removed when deleting multiple rows.
- [#966](#) Cannot read 3d bar chart correctly.
- [#967](#) Problems reading some charts.
- [#968](#) Worksheets with SHA protection become corrupted after saving.
- [#974](#) Problem when deleting ragged rows or columns.
- [#976](#) GroupTransforms and GroupShapeProperties have incorrect descriptors
- Make sure that headers and footers in chartsheets are included in the file

10.27 2.5.0 (2018-01-24)

10.27.1 Minor changes

- Correct definition for Connection Shapes. Related to [# 958](#)

10.28 2.5.0-b2 (2018-01-19)

10.28.1 Bugfixes

- #915 TableStyleInfo has no required attributes
- #925 Cannot read files with 3D drawings
- #926 Incorrect version check in installer
- Cell merging uses transposed parameters
- #928 ExtLst missing keyword for PivotFields
- #932 Inf causes problems for Excel
- #952 Cannot load table styles with custom names

10.28.2 Major Changes

- You can now insert and delete rows and columns in worksheets

10.28.3 Minor Changes

- pip now handles which Python versions can be used.

10.29 2.5.0-b1 (2017-10-19)

10.29.1 Bugfixes

- #812 Explicitly support for multiple cell ranges in conditonal formatting
- #827 Non-contiguous cell ranges in validators get merged
- #837 Empty data validators create invalid Excel files
- #860 Large validation ranges use lots of memory
- #876 Unicode in chart axes not handled correctly in Python 2
- #882 ScatterCharts have defective axes
- #885 Charts with empty numVal elements cannot be read
- #894 Scaling options from existing files ignored
- #895 Charts with PivotSource cannot be read
- #903 Cannot read gradient fills

- [#904](#) Quotes in number formats could be treated as datetimes

10.29.2 Major Changes

`worksheet.cell()` no longer accepts a *coordinate* parameter. The syntax is now `ws.cell(row, column, value=None)`

10.29.3 Minor Changes

Added `CellRange` and `MultiCellRange` types (thanks to Laurent LaPorte for the suggestion) as a utility type for things like data validations, conditional formatting and merged cells.

10.29.4 Deprecations

`ws.merged_cell_ranges` has been deprecated because `MultiCellRange` provides sufficient functionality

10.30 2.5.0-a3 (2017-08-14)

10.30.1 Bugfixes

- [#848](#) Reading workbooks with Pie Charts raises an exception
- [#857](#) Pivot Tables without Worksheet Sources raise an exception

10.31 2.5.0-a2 (2017-06-25)

10.31.1 Major Changes

- Read support for charts

10.31.2 Bugfixes

- [#833](#) Cannot access chartsheets by title
- [#834](#) Preserve workbook views
- [#841](#) Incorrect classification of a datetime

10.32 2.5.0-a1 (2017-05-30)

10.32.1 Compatibility

- Dropped support for Python 2.6 and 3.3. openpyxl will not run with Python 2.6

10.32.2 Major Changes

- Read/write support for pivot tables

10.32.3 Deprecations

- Dropped the anchor method from images and additional constructor arguments

10.32.4 Bugfixes

- #779 Fails to recognise Chinese date format‘
- #828 Include hidden cells in charts‘

10.32.5 Pull requests

- 163 Improved GradientFill

10.32.6 Minor changes

- Remove deprecated methods from Cell
- Remove deprecated methods from Worksheet
- Added read/write support for the datetime type for cells

10.33 2.4.11 (2018-01-24)

- #957 <https://bitbucket.org/openpyxl/openpyxl/issues/957> Relationship type for tables is borked

10.34 2.4.10 (2018-01-19)

10.34.1 Bugfixes

- #912 <https://bitbucket.org/openpyxl/openpyxl/issues/912> Copying objects uses shallow copy
- #921 <https://bitbucket.org/openpyxl/openpyxl/issues/921> API documentation not generated automatically
- #927 <https://bitbucket.org/openpyxl/openpyxl/issues/927> Exception raised when adding coloured borders together
- #931 <https://bitbucket.org/openpyxl/openpyxl/issues/931> Number formats not correctly deduplicated

10.34.2 Pull requests

- 203 <https://bitbucket.org/openpyxl/openpyxl/pull-requests/203/> Correction to worksheet protection description
- 210 <https://bitbucket.org/openpyxl/openpyxl/pull-requests/210/> Some improvements to the API docs
- 211 <https://bitbucket.org/openpyxl/openpyxl/pull-requests/211/> Improved deprecation decorator
- 218 <https://bitbucket.org/openpyxl/openpyxl/pull-requests/218/> Fix problems with deepcopy

10.35 2.4.9 (2017-10-19)

10.35.1 Bugfixes

- #809 Incomplete documentation of *copy_worksheet* method
- #811 Scoped definedNames not removed when worksheet is deleted
- #824 Raise an exception if a chart is used in multiple sheets
- #842 Non-ASCII table column headings cause an exception in Python 2
- #846 Conditional formats not supported in write-only mode
- #849 Conditional formats with no sqref cause an exception
- #859 Headers that start with a number conflict with font size
- #902 TableStyleElements don't always have a conditional format
- #908 Read-only mode sometimes returns too many cells

10.35.2 Pull requests

- #179 Cells kept in a set
- #180 Support for Workbook protection
- #182 Read support for page breaks
- #183 Improve documentation of *copy_worksheet* method
- #198 Fix for #908

10.36 2.4.8 (2017-05-30)

10.36.1 Bugfixes

- AutoFilter.sortState being assignd to the ws.sortState
- #766 Sheetnames with apostrophes need additional escaping
- #729 Cannot open files created by Microsoft Dynamics
- #819 Negative percents not case correctly
- #821 Runtime imports can cause deadlock
- #855 Print area containing only columns leads to corrupt file

10.36.2 Minor changes

- Preserve any table styles

10.37 2.4.7 (2017-04-24)

10.37.1 Bugfixes

- #807 Sample files being included by mistake in sdist

10.38 2.4.6 (2017-04-14)

10.38.1 Bugfixes

- #776 Cannot apply formatting to plot area
- #780 Exception when element attributes are Python keywords

- #781 Exception raised when saving files with styled columns
- #785 Number formats for data labels are incorrect
- #788 Worksheet titles not quoted in defined names
- #800 Font underlines not read correctly

10.39 2.4.5 (2017-03-07)

10.39.1 Bugfixes

- #750 Adding images keeps file handles open
- #772 Exception for column-only ranges
- #773 Cannot copy worksheets with non-ascii titles on Python 2

10.39.2 Pull requests

- 161 Support for non-standard names for Workbook part.
- 162 Documentation correction

10.40 2.4.4 (2017-02-23)

10.40.1 Bugfixes

- #673 Add close method to workbooks
- #762 openpyxl can create files with invalid style indices
- #729 Allow images in write-only mode
- #744 Rounded corners for charts
- #747 Use repr when handling non-convertible objects
- #764 Hashing function is incorrect
- #765 Named styles share underlying array

10.40.2 Minor Changes

- Add roundtrip support for worksheet tables.

10.40.3 Pull requests

- 160 Don't init mimetypes more than once.

10.41 2.4.3 (unreleased)

bad release

10.42 2.4.2 (2017-01-31)

10.42.1 Bug fixes

- #727 DeprecationWarning is incorrect
- #734 Exception raised if userName is missing
- #739 Always provide a date1904 attribute
- #740 Hashes should be stored as Base64
- #743 Print titles broken on sheetnames with spaces
- #748 Workbook breaks when active sheet is removed
- #754 Incorrect descriptor for Filter values
- #756 Potential XXE vulnerability
- #758 Cannot create files with page breaks and charts
- #759 Problems with worksheets with commas in their titles

10.42.2 Minor Changes

- Add unicode support for sheet name incrementation.

10.43 2.4.1 (2016-11-23)

10.43.1 Bug fixes

- #643 Make checking for duplicate sheet titles case insensitive
- #647 Trouble handling LibreOffice files with named styles
- #687 Directly assigned new named styles always refer to "Normal"

- #690 Cannot parse print titles with multiple sheet names
- #691 Cannot work with macro files created by LibreOffice
- Prevent duplicate differential styles
- #694 Allow sheet titles longer than 31 characters
- #697 Cannot unset hyperlinks
- #699 Exception raised when format objects use cell references
- #703 Copy height and width when copying comments
- #705 Incorrect content type for VBA macros
- #707 IndexError raised in read-only mode when accessing individual cells
- #711 Files with external links become corrupted
- #715 Cannot read files containing macro sheets
- #717 Details from named styles not preserved when reading files
- #722 Remove broken Print Title and Print Area definitions

10.43.2 Minor changes

- Add support for Python 3.6
- Correct documentation for headers and footers

10.43.3 Deprecations

Worksheet methods *get_named_range()* and *get_sqaured_range()*

10.43.4 Bug fixes

10.44 2.4.0 (2016-09-15)

10.44.1 Bug fixes

- #652 Exception raised when epoch is 1904
- #642 Cannot handle unicode in headers and footers in Python 2
- #646 Cannot handle unicode sheetnames in Python 2
- #658 Chart styles, and axis units should not be 0
- #663 Strings in external workbooks not unicode

10.44.2 Major changes

- Add support for builtin styles and include one for Pandas

10.44.3 Minor changes

- Add a *keep_links* option to *load_workbook*. External links contain cached copies of the external workbooks. If these are big it can be advantageous to be able to disable them.
- Provide an example for using cell ranges in DataValidation.
- PR 138 - add copy support to comments.

10.45 2.4.0-b1 (2016-06-08)

10.45.1 Minor changes

- Add an the alias *hide_drop_down* to DataValidation for *showDropDown* because that is how Excel works.

10.45.2 Bug fixes

- #625 Exception raises when inspecting EmptyCells in read-only mode
- #547 Functions for handling OOXML “escaped” ST_XStrings
- #629 Row Dimensions not supported in write-only mode
- #530 Problems when removing worksheets with charts
- #630 Cannot use SheetProtection in write-only mode

10.45.3 Features

- Add write support for worksheet tables

10.46 2.4.0-a1 (2016-04-11)

10.46.1 Minor changes

- Remove deprecated methods from DataValidation
- Remove deprecated methods from PrintPageSetup

- Convert AutoFilter to Serialisable and extend support for filters
- Add support for SortState
- Removed *use_iterators* keyword when loading workbooks. Use *read_only* instead.
- Removed *optimized_write* keyword for new workbooks. Use *write_only* instead.
- Improve print title support
- Add print area support
- New implementation of defined names
- New implementation of page headers and footers
- Add support for Python's NaN
- Added *iter_cols* method for worksheets
- *ws.rows* and *ws.columns* now always return generators and start at the top of the worksheet
- Add a *values* property for worksheets
- Default column width changed to 8 as per the specification

10.46.2 Deprecations

- Cell anchor method
- Worksheet *point_pos* method
- Worksheet *add_print_title* method
- Worksheet HeaderFooter attribute, replaced by individual ones
- Flatten function for cells
- Workbook *get_named_range*, *add_named_range*, *remove_named_range*, *get_sheet_names*, *get_sheet_by_name*
- Comment text attribute
- Use of range strings deprecated for *ws.iter_rows()*
- Use of coordinates deprecated for *ws.cell()*
- Deprecate *.copy()* method for StyleProxy objects

10.46.3 Bug fixes

- [#152](#) Hyperlinks lost when reading files
- [#171](#) Add function for copying worksheets

- #386 Cells with inline strings considered empty
- #397 Add support for ranges of rows and columns
- #446 Workbook with definedNames corrupted by openpyxl
- #481 “safe” reserved ranges are not read from workbooks
- #501 Discarding named ranges can lead to corrupt files
- #574 Exception raised when using the class method to parse Relationships
- #579 Crashes when reading defined names with no content
- #597 Cannot read worksheets without coordinates
- #617 Customised named styles not correctly preserved

10.47 2.3.5 (2016-04-11)

10.47.1 Bug fixes

- #618 Comments not written in write-only mode

10.48 2.3.4 (2016-03-16)

10.48.1 Bug fixes

- #594 Content types might be missing when keeping VBA
- #599 Cells with only one cell look empty
- #607 Serialise NaN as `''`

10.48.2 Minor changes

- Preserve the order of external references because formulae use numerical indices.
- Typo corrected in cell unit tests (PR 118)

10.49 2.3.3 (2016-01-18)

10.49.1 Bug fixes

- #540 Cannot read merged cells in read-only mode

- [#565](#) Empty styled text blocks cannot be parsed
- [#569](#) Issue warning rather than raise Exception raised for unparsable definedNames
- [#575](#) Cannot open workbooks with embedded OLE files
- [#584](#) Exception when saving borders with attributes

10.49.2 Minor changes

- [PR 103](#) Documentation about chart scaling and axis limits
- Raise an exception when trying to copy cells from other workbooks.

10.50 2.3.2 (2015-12-07)

10.50.1 Bug fixes

- [#554](#) Cannot add comments to a worksheet when preserving VBA
- [#561](#) Exception when reading phonetic text
- [#562](#) DARKBLUE is the same as RED
- [#563](#) Minimum for row and column indexes not enforced

10.50.2 Minor changes

- [PR 97](#) One VML file per worksheet.
- [PR 96](#) Correct descriptor for CharacterProperties.rtl
- [#498](#) Metadata is not essential to use the package.

10.51 2.3.1 (2015-11-20)

10.51.1 Bug fixes

- [#534](#) Exception when using columns property in read-only mode.
- [#536](#) Incorrectly handle comments from Google Docs files.
- [#539](#) Flexible value types for conditional formatting.
- [#542](#) Missing content types for images.
- [#543](#) Make sure images fit containers on all OSes.

- [#544](#) Gracefully handle missing cell styles.
- [#546](#) ExternalLink duplicated when editing a file with macros.
- [#548](#) Exception with non-ASCII worksheet titles
- [#551](#) Combine multiple LineCharts

10.51.2 Minor changes

- [PR 88](#) Fix page margins in parser.

10.52 2.3.0 (2015-10-20)

10.52.1 Major changes

- Support the creation of chartsheets

10.52.2 Bug fixes

- [#532](#) Problems when cells have no style in read-only mode.

10.52.3 Minor changes

- [PR 79](#) Make PlotArea editable in charts
- Use graphicalProperties as the alias for spPr

10.53 2.3.0-b2 (2015-09-04)

10.53.1 Bug fixes

- [#488](#) Support hashValue attribute for sheetProtection
- [#493](#) Warn that unsupported extensions will be dropped
- [#494](#) Cells with exponentials causes a ValueError
- [#497](#) Scatter charts are broken
- [#499](#) Inconsistent conversion of localised datetimes
- [#500](#) Adding images leads to unreadable files
- [#509](#) Improve handling of sheet names

- [#515](#) Non-ascii titles have bad repr
- [#516](#) Ignore unassigned worksheets

10.53.2 Minor changes

- Worksheets are now iterable by row.
- Assign individual cell styles only if they are explicitly set.

10.54 2.3.0-b1 (2015-06-29)

10.54.1 Major changes

- Shift to using (row, column) indexing for cells. Cells will at some point *lose* coordinates.
- New implementation of conditional formatting. Databars now partially preserved.
- `et_xmlfile` is now a standalone library.
- Complete rewrite of chart package
- Include a tokenizer for fomulae to be able to adjust cell references in them. PR 63

10.54.2 Minor changes

- Read-only and write-only worksheets renamed.
- Write-only workbooks support charts and images.
- [PR76](#) Prevent comment images from conflicting with VBA

10.54.3 Bug fixes

- [#81](#) Support stacked bar charts
- [#88](#) Charts break hyperlinks
- [#97](#) Pie and combination charts
- [#99](#) Quote worksheet names in chart references
- [#150](#) Support additional chart options
- [#172](#) Support surface charts
- [#381](#) Preserve named styles

- #470 Adding more than 10 worksheets with the same name leads to duplicates sheet names and an invalid file

10.55 2.2.6 (unreleased)

10.55.1 Bug fixes

- #502 Unexpected keyword “mergeCell”
- #503 tostring missing in dump_worksheet
- #506 Non-ASCII formulae cannot be parsed
- #508 Cannot save files with coloured tabs
- Regex for ignoring named ranges is wrong (character class instead of prefix)

10.56 2.2.5 (2015-06-29)

10.56.1 Bug fixes

- #463 Unexpected keyword “mergeCell”
- #484 Unusual dimensions breaks read-only mode
- #485 Move return out of loop

10.57 2.2.4 (2015-06-17)

10.57.1 Bug fixes

- #464 Cannot use images when preserving macros
- #465 ws.cell() returns an empty cell on read-only workbooks
- #467 Cannot edit a file with ActiveX components
- #471 Sheet properties elements must be in order
- #475 Do not redefine class `__slots__` in subclasses
- #477 Write-only support for SheetProtection
- #478 Write-only support for DataValidation
- Improved regex when checking for datetime formats

10.58 2.2.3 (2015-05-26)

10.58.1 Bug fixes

- [#451](#) fitToPage setting ignored
- [#458](#) Trailing spaces lost when saving files.
- [#459](#) setup.py install fails with Python 3
- [#462](#) Vestigial rId conflicts when adding charts, images or comments
- [#455](#) Enable Zip64 extensions for all versions of Python

10.59 2.2.2 (2015-04-28)

10.59.1 Bug fixes

- [#447](#) Uppercase datetime number formats not recognised.
- [#453](#) Borders broken in shared_styles.

10.60 2.2.1 (2015-03-31)

10.60.1 Minor changes

- [PR54](#) Improved precision on times near midnight.
- [PR55](#) Preserve macro buttons

10.60.2 Bug fixes

- [#429](#) Workbook fails to load because header and footers cannot be parsed.
- [#433](#) File-like object with encoding=None
- [#434](#) SyntaxError when writing page breaks.
- [#436](#) Read-only mode duplicates empty rows.
- [#437](#) Cell.offset raises an exception
- [#438](#) Cells with pivotButton and quotePrefix styles cannot be read
- [#440](#) Error when customised versions of builtin formats
- [#442](#) Exception raised when a fill element contains no children

- [#444](#) Styles cannot be copied

10.61 2.2.0 (2015-03-11)

10.61.1 Bug fixes

- [#415](#) Improved exception when passing in invalid in memory files.

10.62 2.2.0-b1 (2015-02-18)

10.62.1 Major changes

- Cell styles deprecated, use formatting objects (fonts, fills, borders, etc.) directly instead
- Charts will no longer try and calculate axes by default
- Support for template file types - PR21
- Moved ancillary functions and classes into utils package - single place of reference
- [PR 34](#) Fully support page setup
- Removed SAX-based XML Generator. Special thanks to Elias Rabel for implementing xmlfile for xml.etree
- Preserve sheet view definitions in existing files (frozen panes, zoom, etc.)

10.62.2 Bug fixes

- [#103](#) Set the zoom of a sheet
- [#199](#) Hide gridlines
- [#215](#) Preserve sheet view settings
- [#262](#) Set the zoom of a sheet
- [#392](#) Worksheet header not read
- [#387](#) Cannot read files without styles.xml
- [#410](#) Exception when preserving whitespace in strings
- [#417](#) Cannot create print titles
- [#420](#) Rename confusing constants
- [#422](#) Preserve color index in a workbook if it differs from the standard

10.62.3 Minor changes

- Use a 2-way cache for column index lookups
- Clean up tests in cells
- PR 40 Support frozen panes and autofilter in write-only mode
- Use `ws.calculate_dimension(force=True)` in read-only mode for unsized worksheets

10.63 2.1.5 (2015-02-18)

10.63.1 Bug fixes

- #403 Cannot add comments in write-only mode
- #401 Creating cells in an empty row raises an exception
- #408 `from_excel` adjustment for Julian dates $1 < x < 60$
- #409 `refersTo` is an optional attribute

10.63.2 Minor changes

- Allow cells to be appended to standard worksheets for code compatibility with write-only mode.

10.64 2.1.4 (2014-12-16)

10.64.1 Bug fixes

- #393 `IterableWorksheet` skips empty cells in rows
- #394 Date format is applied to all columns (while only first column contains dates)
- #395 temporary files not cleaned properly
- #396 Cannot write “=” in Excel file
- #398 Cannot write empty rows in write-only mode with LXML installed

10.64.2 Minor changes

- Add relation namespace to root element for compatibility with iWork
- Serialize comments relation in LXML-backend

10.65 2.1.3 (2014-12-09)

10.65.1 Minor changes

- [PR 31](#) Correct tutorial
- [PR 32](#) See [#380](#)
- [PR 37](#) Bind worksheet to ColumnDimension objects

10.65.2 Bug fixes

- [#379](#) `ws.append()` doesn't set RowDimension Correctly
- [#380](#) empty cells formatted as datetimes raise exceptions

10.66 2.1.2 (2014-10-23)

10.66.1 Minor changes

- [PR 30](#) Fix regex for positive exponentials
- [PR 28](#) Fix for [#328](#)

10.66.2 Bug fixes

- [#120](#), [#168](#) defined names with formulae raise exceptions, [#292](#)
- [#328](#) ValueError when reading cells with hyperlinks
- [#369](#) IndexError when reading definedNames
- [#372](#) `number_format` not consistently applied from styles

10.67 2.1.1 (2014-10-08)

10.67.1 Minor changes

- [PR 20](#) Support different workbook code names
- Allow `auto_axis` keyword for ScatterCharts

10.67.2 Bug fixes

- #332 Fills lost in ConditionalFormatting
- #360 Support value=" none" in attributes
- #363 Support undocumented value for textRotation
- #364 Preserve integers in read-only mode
- #366 Complete read support for DataValidation
- #367 Iterate over unsized worksheets

10.68 2.1.0 (2014-09-21)

10.68.1 Major changes

- "read_only" and "write_only" new flags for workbooks
- Support for reading and writing worksheet protection
- Support for reading hidden rows
- Cells now manage their styles directly
- ColumnDimension and RowDimension object manage their styles directly
- Use xmlfile for writing worksheets if available - around 3 times faster
- Datavalidation now part of the worksheet package

10.68.2 Minor changes

- Number formats are now just strings
- Strings can be used for RGB and aRGB colours for Fonts, Fills and Borders
- Create all style tags in a single pass
- Performance improvement when appending rows
- Cleaner conversion of Python to Excel values
- PR6 reserve formatting for empty rows
- standard worksheets can append from ranges and generators

10.68.3 Bug fixes

- #153 Cannot read visibility of sheets and rows
- #181 No content type for worksheets
- 241 Cannot read sheets with inline strings
- 322 1-indexing for merged cells
- 339 Correctly handle removal of cell protection
- 341 Cells with formulae do not round-trip
- 347 Read DataValidations
- 353 Support Defined Named Ranges to external workbooks

10.69 2.0.5 (2014-08-08)

10.69.1 Bug fixes

- #348 incorrect casting of boolean strings
- #349 roundtripping cells with formulae

10.70 2.0.4 (2014-06-25)

10.70.1 Minor changes

- Add a sample file illustrating colours

10.70.2 Bug fixes

- #331 DARKYELLOW was incorrect
- Correctly handle extend attribute for fonts

10.71 2.0.3 (2014-05-22)

10.71.1 Minor changes

- Updated docs

10.71.2 Bug fixes

- #319 Cannot load Workbooks with vertAlign styling for fonts

10.72 2.0.2 (2014-05-13)

10.73 2.0.1 (2014-05-13) brown bag

10.74 2.0.0 (2014-05-13) brown bag

10.74.1 Major changes

- This is last release that will support Python 3.2
- Cells are referenced with 1-indexing: `A1 == cell(row=1, column=1)`
- Use `jdcal` for more efficient and reliable conversion of datetimes
- Significant speed up when reading files
- Merged immutable styles
- Type inference is disabled by default
- `RawCell` renamed `ReadOnlyCell`
- `ReadOnlyCell.internal_value` and `ReadOnlyCell.value` now behave the same as `Cell`
- Provide no size information on unsized worksheets
- Lower memory footprint when reading files

10.74.2 Minor changes

- All tests converted to `pytest`
- `Pyflakes` used for static code analysis
- Sample code in the documentation is automatically run
- Support `GradientFills`
- `BaseColWidth` set

10.74.3 Pull requests

- #70 Add filterColumn, sortCondition support to AutoFilter
- #80 Reorder worksheets parts
- #82 Update API for conditional formatting
- #87 Add support for writing Protection styles, others
- #89 Better handling of content types when preserving macros

10.74.4 Bug fixes

- #46 ColumnDimension style error
- #86 reader.worksheet.fast_parse sets booleans to integers
- #98 Auto sizing column widths does not work
- #137 Workbooks with chartsheets
- #185 Invalid PageMargins
- #230 Using v in cells creates invalid files
- #243 - IndexError when loading workbook
- #263 - Forced conversion of line breaks
- #267 - Raise exceptions when passed invalid types
- #270 - Cannot open files which use non-standard sheet names or reference Ids
- #269 - Handling unsized worksheets in IterableWorksheet
- #270 - Handling Workbooks with non-standard references
- #275 - Handling auto filters where there are only custom filters
- #277 - Harmonise chart and cell coordinates
- #280- Explicit exception raising for invalid characters
- #286 - Optimized writer can not handle a datetime.time value
- #296 - Cell coordinates not consistent with documentation
- #300 - Missing column width causes load_workbook() exception
- #304 - Handling Workbooks with absolute paths for worksheets (from Sharepoint)

10.75 1.8.6 (2014-05-05)

10.75.1 Minor changes

Fixed typo for import Elementtree

10.75.2 Bugfixes

- #279 Incorrect path for comments files on Windows

10.76 1.8.5 (2014-03-25)

10.76.1 Minor changes

- The '=' string is no longer interpreted as a formula
- When a client writes empty xml tags for cells (e.g. <c r=' A1' ></c>), reader will not crash

10.77 1.8.4 (2014-02-25)

10.77.1 Bugfixes

- #260 better handling of undimensioned worksheets
- #268 non-ascii in formulae
- #282 correct implementation of register_namespace for Python 2.6

10.78 1.8.3 (2014-02-09)

10.78.1 Major changes

Always parse using cElementTree

10.78.2 Minor changes

Slight improvements in memory use when parsing

- #256 - error when trying to read comments with optimised reader
- #260 - unsized worksheets

- #264 - only numeric cells can be dates

10.79 1.8.2 (2014-01-17)

- #247 - iterable worksheets open too many files
- #252 - improved handling of lxml
- #253 - better handling of unique sheetnames

10.80 1.8.1 (2014-01-14)

- #246

10.81 1.8.0 (2014-01-08)

10.81.1 Compatibility

Support for Python 2.5 dropped.

10.81.2 Major changes

- Support conditional formatting
- Support lxml as backend
- Support reading and writing comments
- pytest as testrunner now required
- Improvements in charts: new types, more reliable

10.81.3 Minor changes

- load_workbook now accepts data_only to allow extracting values only from formulae. Default is false.
- Images can now be anchored to cells
- Docs updated
- Provisional benchmarking
- Added convenience methods for accessing worksheets and cells by key

10.82 1.7.0 (2013-10-31)

10.82.1 Major changes

Drops support for Python < 2.5 and last version to support Python 2.5

10.82.2 Compatibility

Tests run on Python 2.5, 2.6, 2.7, 3.2, 3.3

10.82.3 Merged pull requests

- 27 Include more metadata
- 41 Able to read files with chart sheets
- 45 Configurable Worksheet classes
- 3 Correct serialisation of Decimal
- 36 Preserve VBA macros when reading files
- 44 Handle empty oddheader and oddFooter tags
- 43 Fixed issue that the reader never set the active sheet
- 33 Reader set value and type explicitly and TYPE_ERROR checking
- 22 added page breaks, fixed formula serialization
- 39 Fix Python 2.6 compatibility
- 47 Improvements in styling

10.82.4 Known bugfixes

- [#109](#)
- [#165](#)
- [#209](#)
- [#112](#)
- [#166](#)
- [#109](#)
- [#223](#)
- [#124](#)

- [#157](#)

10.82.5 Miscellaneous

Performance improvements in optimised writer

Docs updated

O

`openpyxl`, 119
`openpyxl.cell`, 119
`openpyxl.cell.cell`, 119
`openpyxl.cell.read_only`, 121
`openpyxl.cell.text`, 122
`openpyxl.chart`, 125
`openpyxl.chart.area_chart`, 125
`openpyxl.chart.axis`, 127
`openpyxl.chart.bar_chart`, 134
`openpyxl.chart.bubble_chart`, 136
`openpyxl.chart.chartspace`, 137
`openpyxl.chart.data_source`, 139
`openpyxl.chart.descriptors`, 143
`openpyxl.chart.error_bar`, 143
`openpyxl.chart.label`, 144
`openpyxl.chart.layout`, 146
`openpyxl.chart.legend`, 147
`openpyxl.chart.line_chart`, 149
`openpyxl.chart.marker`, 150
`openpyxl.chart.picture`, 152
`openpyxl.chart.pie_chart`, 152
`openpyxl.chart.pivot`, 155
`openpyxl.chart.plotarea`, 156
`openpyxl.chart.print_settings`, 159
`openpyxl.chart.radar_chart`, 160
`openpyxl.chart.reader`, 160
`openpyxl.chart.reference`, 161
`openpyxl.chart.scatter_chart`, 161
`openpyxl.chart.series`, 162
`openpyxl.chart.series_factory`, 165
`openpyxl.chart.shapes`, 166
`openpyxl.chart.stock_chart`, 167
`openpyxl.chart.surface_chart`, 168
`openpyxl.chart.text`, 169
`openpyxl.chart.title`, 170
`openpyxl.chart.trendline`, 171
`openpyxl.chart.updown_bars`, 172
`openpyxl.chartsheet`, 173
`openpyxl.chartsheet.chartsheet`, 173
`openpyxl.chartsheet.custom`, 174
`openpyxl.chartsheet.properties`, 175
`openpyxl.chartsheet.protection`, 175
`openpyxl.chartsheet.publish`, 176
`openpyxl.chartsheet.relation`, 177
`openpyxl.chartsheet.views`, 180
`openpyxl.comments`, 180
`openpyxl.comments.author`, 180
`openpyxl.comments.comment_sheet`, 181
`openpyxl.comments.comments`, 183
`openpyxl.comments.shape_writer`, 184
`openpyxl.compat`, 184
`openpyxl.compat.abc`, 184
`openpyxl.compat.accumulate`, 184
`openpyxl.compat.numbers`, 185
`openpyxl.compat.singleton`, 185
`openpyxl.compat.strings`, 185
`openpyxl.descriptors`, 185
`openpyxl.descriptors.base`, 185
`openpyxl.descriptors.excel`, 188

- openpyxl.descriptors.namespace, 189
- openpyxl.descriptors.nested, 189
- openpyxl.descriptors.sequence, 190
- openpyxl.descriptors.serialisable, 191
- openpyxl.descriptors.slots, 192
- openpyxl.drawing, 192
 - openpyxl.drawing.colors, 192
 - openpyxl.drawing.connector, 200
 - openpyxl.drawing.drawing, 202
 - openpyxl.drawing.effect, 203
 - openpyxl.drawing.fill, 212
 - openpyxl.drawing.geometry, 221
 - openpyxl.drawing.graphic, 230
 - openpyxl.drawing.image, 232
 - openpyxl.drawing.line, 232
 - openpyxl.drawing.picture, 234
 - openpyxl.drawing.properties, 237
 - openpyxl.drawing.relation, 239
 - openpyxl.drawing.spreadsheet_drawing, 240
 - openpyxl.drawing.text, 242
 - openpyxl.drawing.xdr, 254
- openpyxl.formatting, 255
 - openpyxl.formatting.formatting, 256
 - openpyxl.formatting.rule, 256
- openpyxl.formula, 260
 - openpyxl.formula.tokenizer, 260
 - openpyxl.formula.translate, 262
- openpyxl.packaging, 263
 - openpyxl.packaging.core, 264
 - openpyxl.packaging.extended, 265
 - openpyxl.packaging.interface, 268
 - openpyxl.packaging.manifest, 268
 - openpyxl.packaging.relationship, 269
 - openpyxl.packaging.workbook, 271
- openpyxl.pivot, 274
 - openpyxl.pivot.cache, 274
 - openpyxl.pivot.fields, 291
 - openpyxl.pivot.record, 296
 - openpyxl.pivot.table, 297
- openpyxl.reader, 318
 - openpyxl.reader.drawings, 318
 - openpyxl.reader.excel, 318
 - openpyxl.reader.strings, 319
 - openpyxl.reader.workbook, 319
- openpyxl.styles, 320
 - openpyxl.styles.alignment, 320
 - openpyxl.styles.borders, 321
 - openpyxl.styles.builtins, 323
 - openpyxl.styles.cell_style, 323
 - openpyxl.styles.colors, 325
 - openpyxl.styles.differential, 326
 - openpyxl.styles.fills, 327
 - openpyxl.styles.fonts, 329
 - openpyxl.styles.named_styles, 332
 - openpyxl.styles.numbers, 334
 - openpyxl.styles.protection, 334
 - openpyxl.styles.proxy, 335
 - openpyxl.styles.styleable, 335
 - openpyxl.styles.stylesheet, 336
 - openpyxl.styles.table, 337
- openpyxl.utils, 338
 - openpyxl.utils.bind_dictionary, 338
 - openpyxl.utils.cell, 338
 - openpyxl.utils.dataframe, 339
 - openpyxl.utils.datetime, 340
 - openpyxl.utils.escape, 340
 - openpyxl.utils.exceptions, 340
 - openpyxl.utils.formulas, 341
 - openpyxl.utils.indexed_list, 341
 - openpyxl.utils.inference, 342
 - openpyxl.utils.protection, 342
 - openpyxl.utils.units, 342
- openpyxl.workbook, 343
 - openpyxl.workbook.child, 346
 - openpyxl.workbook.defined_name, 346
 - openpyxl.workbook.external_link, 343
 - openpyxl.workbook.external_link.external, 344
 - openpyxl.workbook.external_reference, 348
 - openpyxl.workbook.function_group, 348
 - openpyxl.workbook.properties, 349
 - openpyxl.workbook.protection, 352
 - openpyxl.workbook.smart_tags, 354
 - openpyxl.workbook.views, 355

- openpyxl.workbook.web, 358
- openpyxl.workbook.workbook, 359
- openpyxl.worksheet, 362
- openpyxl.worksheet.cell_range, 362
- openpyxl.worksheet.cell_watch, 365
- openpyxl.worksheet.controls, 366
- openpyxl.worksheet.copier, 367
- openpyxl.worksheet.custom, 367
- openpyxl.worksheet.datavalidation, 368
- openpyxl.worksheet.dimensions, 370
- openpyxl.worksheet.drawing, 374
- openpyxl.worksheet.errors, 374
- openpyxl.worksheet.filters, 375
- openpyxl.worksheet.header_footer, 381
- openpyxl.worksheet.hyperlink, 382
- openpyxl.worksheet.merge, 383
- openpyxl.worksheet.ole, 383
- openpyxl.worksheet.page, 385
- openpyxl.worksheet.pagebreak, 388
- openpyxl.worksheet.picture, 389
- openpyxl.worksheet.properties, 389
- openpyxl.worksheet.protection, 391
- openpyxl.worksheet.related, 392
- openpyxl.worksheet.scenario, 393
- openpyxl.worksheet.smart_tag, 394
- openpyxl.worksheet.table, 395
- openpyxl.worksheet.views, 400
- openpyxl.worksheet.worksheet, 403
- openpyxl.writer, 407
- openpyxl.writer.excel, 407
- openpyxl.writer.theme, 408
- openpyxl.xml, 408
- openpyxl.xml.constants, 409
- openpyxl.xml.functions, 409

A

- `a` (`openpyxl.drawing.effect.AlphaReplaceEffect` 属性), 203
- `aboveAverage` (`openpyxl.formatting.rule.Rule` 属性), 258
- `absolute_coordinate()` (在 `openpyxl.utils.cell` 模块中), 338
- `AbsoluteAnchor` (`openpyxl.drawing.spreadsheet_drawing` 中的类), 240
- `absoluteAnchor` (`openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing` 属性), 241
- `accent1` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `accent2` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `accent3` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `accent4` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `accent5` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `accent6` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `accumulate()` (在 `openpyxl.compat.accumulate` 模块中), 184
- `action` (`openpyxl.drawing.text.Hyperlink` 属性), 246
- `action` (`openpyxl.pivot.table.Format` 属性), 300
- `active` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 272
- `active` (`openpyxl.workbook.workbook.Workbook` 属性), 359
- `active_cell` (`openpyxl.worksheet.worksheet.Worksheet` 属性), 403
- `activeCell` (`openpyxl.worksheet.views.Selection` 属性), 400
- `activeCellId` (`openpyxl.worksheet.views.Selection` 属性), 401
- `activePane` (`openpyxl.worksheet.views.Pane` 属性), 400
- `activeSheetId` (`openpyxl.workbook.views.CustomWorkbookView` 属性), 356
- `activeTab` (`openpyxl.workbook.views.BookView` 属性), 355
- `add()` (`openpyxl.formatting.formatting.ConditionalFormattingList` 方法), 256
- `add()` (`openpyxl.styles.differential.DifferentialStyleList` 方法), 327
- `add()` (`openpyxl.utils.indexed_list.IndexedList` 方法), 341
- `add()` (`openpyxl.worksheet.cell_range.MultiCellRange` 方法), 365
- `add()` (`openpyxl.worksheet.datavalidation.DataValidation` 方法), 368
- `add()` (`openpyxl.worksheet.table.TableList` 方法), 398
- `add_chart()` (`openpyxl.chartsheet.chartsheet.Chartsheet` 方法), 173
- `add_chart()` (`openpyxl.worksheet.worksheet.Worksheet`

方法), 403		<code>align</code> (<code>openpyxl.drawing.text.ParagraphProperties</code> 属性), 249
<code>add_comment_shape()</code> (<code>openpyxl.comments.shape_writer.ShapeWriter</code> 方法), 184		<code>align</code> (<code>openpyxl.drawing.text.TabStop</code> 属性), 254
<code>add_comment_shapetype()</code> (<code>openpyxl.comments.shape_writer.ShapeWriter</code> 方法), 184		<code>algorithmName</code> (<code>openpyxl.chartsheet.protection.ChartsheetProtection</code> 属性), 175
<code>add_data_validation()</code> (<code>openpyxl.worksheet.worksheet.Worksheet</code> 方法), 403		<code>algorithmName</code> (<code>openpyxl.workbook.protection.FileSharing</code> 属性), 352
<code>add_filter_column()</code> (<code>openpyxl.worksheet.filters.AutoFilter</code> 方法), 375		<code>algorithmName</code> (<code>openpyxl.worksheet.protection.SheetProtection</code> 属性), 391
<code>add_image()</code> (<code>openpyxl.worksheet.worksheet.Worksheet</code> 方法), 404		<code>Alias</code> (<code>openpyxl.descriptors.base</code> 中的类), 185
<code>add_named_range()</code> (<code>openpyxl.workbook.workbook.Workbook</code> 方法), 359		<code>alignment</code> (<code>openpyxl.cell.read_only.EmptyCell</code> 属性), 121
<code>add_named_style()</code> (<code>openpyxl.workbook.workbook.Workbook</code> 方法), 359		<code>alignment</code> (<code>openpyxl.cell.read_only.ReadOnlyCell</code> 属性), 122
<code>add_pivot()</code> (<code>openpyxl.worksheet.worksheet.Worksheet</code> 方法), 404		<code>alignment</code> (<code>openpyxl.cell.text.PhoneticProperties</code> 属性), 123
<code>add_sort_condition()</code> (<code>openpyxl.worksheet.filters.AutoFilter</code> 方法), 376		<code>Alignment</code> (<code>openpyxl.styles.alignment</code> 中的类), 320
<code>add_table()</code> (<code>openpyxl.worksheet.worksheet.Worksheet</code> 方法), 404		<code>alignment</code> (<code>openpyxl.styles.cell_style.CellStyle</code> 属性), 323
<code>AdjPoint2D</code> (<code>openpyxl.drawing.geometry</code> 中的类), 221		<code>alignment</code> (<code>openpyxl.styles.cell_style.CellStyleList</code> 属性), 324
<code>AdjustHandleList</code> (<code>openpyxl.drawing.geometry</code> 中的类), 221		<code>alignment</code> (<code>openpyxl.styles.differential.DifferentialStyle</code> 属性), 326
<code>ahLst</code> (<code>openpyxl.drawing.geometry.CustomGeometry2D</code> 属性), 223		<code>alignment</code> (<code>openpyxl.styles.named_styles.NamedStyle</code> 属性), 333
<code>align</code> (<code>openpyxl.drawing.effect.OuterShadow</code> 属性), 208		<code>alignment</code> (<code>openpyxl.styles.styleable.StyleableObject</code> 属性), 335
<code>align</code> (<code>openpyxl.drawing.effect.ReflectionEffect</code> 属性), 211		<code>alignmentId</code> (<code>openpyxl.styles.cell_style.StyleArray</code> 属性), 324
<code>align</code> (<code>openpyxl.drawing.fill.TileInfoProperties</code> 属性), 220		<code>DalignWithMargins</code> (<code>openpyxl.worksheet.header_footer.HeaderFooter</code> 属性), 381
<code>align</code> (<code>openpyxl.drawing.line.LineProperties</code> 属性), 233		<code>allCaption</code> (<code>openpyxl.pivot.cache.CacheHierarchy</code> 属性), 277
		<code>allDrilled</code> (<code>openpyxl.pivot.table.PivotField</code> 属性), 303
		<code>allow_blank</code> (<code>openpyxl.worksheet.datavalidation.DataValidation</code> 属性), 368
		<code>allow_none</code> (<code>openpyxl.chart.data_source.NumberValueDescriptor</code>

- 属性), 142
- `allow_none` (`openpyxl.chart.descriptors.NestedGapAmount` 属性), 143
- `allow_none` (`openpyxl.chart.descriptors.NestedOverlap` 属性), 143
- `allow_none` (`openpyxl.chart.descriptors.NumberFormat` 属性), 143
- `allow_none` (`openpyxl.chart.title.TitleDescriptor` 属性), 171
- `allow_none` (`openpyxl.descriptors.base.MatchPattern` 属性), 186
- `allow_none` (`openpyxl.descriptors.base.Max` 属性), 187
- `allow_none` (`openpyxl.descriptors.base.Min` 属性), 187
- `allow_none` (`openpyxl.descriptors.base.Typed` 属性), 187
- `allow_none` (`openpyxl.descriptors.excel.CellRange` 属性), 188
- `allow_none` (`openpyxl.descriptors.excel.Relation` 属性), 189
- `allow_none` (`openpyxl.drawing.colors.ColorChoiceDescriptor` 属性), 193
- `allowBlank` (`openpyxl.worksheet.datavalidation.DataValidation` 类), 203
- 属性), 368
- `allowPng` (`openpyxl.workbook.web.WebPublishing` 属性), 358
- `allowRefreshQuery` (`openpyxl.workbook.properties.WorkbookProperties` 属性), 350
- `allUniqueName` (`openpyxl.pivot.cache.CacheHierarchy` 属性), 277
- `alpha` (`openpyxl.drawing.colors.SchemeColor` 属性), 195
- `alpha` (`openpyxl.drawing.colors.SystemColor` 属性), 198
- `alphaBiLevel` (`openpyxl.drawing.fill.Blip` 属性), 212
- `AlphaBiLevelEffect` (`openpyxl.drawing.effect` 中的类), 203
- `alphaCeiling` (`openpyxl.drawing.fill.Blip` 属性), 212
- `AlphaCeilingEffect` (`openpyxl.drawing.effect` 中的类), 203
- `alphaFloor` (`openpyxl.drawing.fill.Blip` 属性), 212
- `AlphaFloorEffect` (`openpyxl.drawing.effect` 中的类), 203
- `alphaInv` (`openpyxl.drawing.fill.Blip` 属性), 212
- `AlphaInverseEffect` (`openpyxl.drawing.effect` 中的类), 203
- `alphaMod` (`openpyxl.drawing.colors.SchemeColor` 属性), 196
- `alphaMod` (`openpyxl.drawing.colors.SystemColor` 属性), 198
- `alphaMod` (`openpyxl.drawing.fill.Blip` 属性), 213
- `alphaModFix` (`openpyxl.drawing.fill.Blip` 属性), 213
- `AlphaModulateEffect` (`openpyxl.drawing.effect` 中的类), 203
- `AlphaModulateFixedEffect` (`openpyxl.drawing.effect` 中的类), 203
- `alphaOff` (`openpyxl.drawing.colors.SchemeColor` 属性), 196
- `alphaOff` (`openpyxl.drawing.colors.SystemColor` 属性), 198
- `alphaRepl` (`openpyxl.drawing.fill.Blip` 属性), 213
- `AlphaReplaceEffect` (`openpyxl.drawing.effect` 中的类), 203
- `altLang` (`openpyxl.drawing.text.CharacterProperties` 属性), 243
- `altText` (`openpyxl.comments.comment_sheet.Properties` 属性), 182
- `altText` (`openpyxl.worksheet.controls.ControlProperty` 属性), 366
- `altText` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384
- `amt` (`openpyxl.drawing.effect.AlphaModulateFixedEffect` 属性), 203
- `amt` (`openpyxl.drawing.effect.TintEffect` 属性), 212
- `anchor` (`openpyxl.drawing.drawing.Drawing` 属性), 202
- `anchor` (`openpyxl.drawing.geometry.Backdrop` 属性), 221
- `anchor` (`openpyxl.drawing.image.Image` 属性), 232
- `anchor` (`openpyxl.drawing.text.RichTextProperties` 属性), 252
- `anchor` (`openpyxl.worksheet.controls.ControlProperty`

- 属性), 366
- `anchor` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384
- `AnchorClientData` (`openpyxl.drawing.spreadsheet_drawing` 中的类), 240
- `anchorCtr` (`openpyxl.drawing.text.RichTextProperties` 属性), 252
- `AnchorMarker` (`openpyxl.drawing.spreadsheet_drawing` 中的类), 240
- `ang` (`openpyxl.drawing.fill.LinearShadeProperties` 属性), 217
- `ang` (`openpyxl.drawing.geometry.ConnectionSite` 属性), 222
- `angle_to_degrees()` (在 `openpyxl.utils.units` 模块中), 343
- `append()` (`openpyxl.packaging.manifest.Manifest` 方法), 268
- `append()` (`openpyxl.packaging.relationship.RelationshipList` 方法), 270
- `append()` (`openpyxl.styles.differential.DifferentialStyleList` 方法), 327
- `append()` (`openpyxl.styles.named_styles.NamedStyleList` 方法), 333
- `append()` (`openpyxl.utils.indexed_list.IndexedList` 方法), 341
- `append()` (`openpyxl.workbook.defined_name.DefinedNameList` 方法), 347
- `append()` (`openpyxl.worksheet.datavalidation.DataValidation` 方法), 370
- `append()` (`openpyxl.worksheet.hyperlink.HyperlinkList` 方法), 382
- `append()` (`openpyxl.worksheet.pagebreak.RowBreak` 方法), 388
- `append()` (`openpyxl.worksheet.scenario.ScenarioList` 方法), 394
- `append()` (`openpyxl.worksheet.table.TablePartList` 方法), 399
- `append()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 404
- `Application` (`openpyxl.packaging.extended.ExtendedProperties` 属性), 266
- `apply_stylesheet()` (在 `openpyxl.styles.stylesheet` 模块中), 337
- `applyAlignment` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `applyAlignmentFormats` (`openpyxl.pivot.table.TableDefinition` 属性), 312
- `applyBorder` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `applyBorderFormats` (`openpyxl.pivot.table.TableDefinition` 属性), 313
- `applyFill` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `applyFont` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `applyFontFormats` (`openpyxl.pivot.table.TableDefinition` 属性), 313
- `applyNumberFormat` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `applyNumberFormats` (`openpyxl.pivot.table.TableDefinition` 属性), 313
- `applyPatternFormats` (`openpyxl.pivot.table.TableDefinition` 属性), 313
- `applyProtection` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `applyStyles` (`openpyxl.worksheet.properties.Outline` 属性), 389
- `applyToEnd` (`openpyxl.chart.picture.PictureOptions` 属性), 152
- `applyToFront` (`openpyxl.chart.picture.PictureOptions` 属性), 152
- `applyToSides` (`openpyxl.chart.picture.PictureOptions` 属性), 152
- `applyWidthHeightFormats` (`openpyxl.pivot.table.TableDefinition` 属性), 313

`pyxl.pivot.table.TableDefinition` 属性), 313

`appName` (`openpyxl.workbook.properties.FileVersion` 属性), 350

`AppVersion` (`openpyxl.packaging.extended.ExtendedProperties` 属性), 266

`area3DChart` (`openpyxl.chart.plotarea.PlotArea` 属性), 156

`AreaChart` (`openpyxl.chart.area_chart` 中的类), 125

`areaChart` (`openpyxl.chart.plotarea.PlotArea` 属性), 156

`AreaChart3D` (`openpyxl.chart.area_chart` 中的类), 126

`ARG` (`openpyxl.formula.tokenizer.Token` 属性), 260

`ARRAY` (`openpyxl.formula.tokenizer.Token` 属性), 260

`array` (`openpyxl.worksheet.table.TableFormula` 属性), 398

`ArrayDescriptor` (`openpyxl.styles.cell_style` 中的类), 323

`as_name()` (`openpyxl.styles.named_styles.NamedStyle` 方法), 333

`as_tuple()` (`openpyxl.styles.named_styles.NamedStyle` 方法), 333

`as_xf()` (`openpyxl.styles.named_styles.NamedStyle` 方法), 333

`ASCII` (`openpyxl.descriptors.base` 中的类), 185

`assert_empty_token()` (`openpyxl.formula.tokenizer.Tokenizer` 方法), 261

`assign_names()` (`openpyxl.reader.workbook.WorkbookParser` 方法), 319

`asteriskTotals` (`openpyxl.pivot.table.TableDefinition` 属性), 313

`attr_text` (`openpyxl.workbook.defined_name.DefinedName` 属性), 346

`attr_text` (`openpyxl.worksheet.table.TableFormula` 属性), 398

`attribute` (`openpyxl.descriptors.nested.Nested` 属性), 189

`attribute` (`openpyxl.descriptors.sequence.ValueSequence` 属性), 191

`attribute` (`openpyxl.pivot.cache.CacheHierarchy` 属性), 277

`author` (`openpyxl.comments.author.AuthorList` 属性), 180

`author` (`openpyxl.comments.comment_sheet.CommentRecord` 属性), 181

`authorId` (`openpyxl.comments.comment_sheet.CommentRecord` 属性), 181

`AuthorList` (`openpyxl.comments.author` 中的类), 180

`authors` (`openpyxl.comments.author.AuthorList` 属性), 181

`authors` (`openpyxl.comments.comment_sheet.CommentSheet` 属性), 181

`auto` (`openpyxl.chart.axis.DateAxis` 属性), 127

`auto` (`openpyxl.chart.axis.TextAxis` 属性), 132

`auto` (`openpyxl.styles.colors.Color` 属性), 325

`auto_size` (`openpyxl.worksheet.dimensions.ColumnDimension` 属性), 370

`autoCompressPictures` (`openpyxl.workbook.properties.WorkbookProperties` 属性), 350

`autoEnd` (`openpyxl.pivot.cache.RangePr` 属性), 287

`autoFill` (`openpyxl.comments.comment_sheet.Properties` 属性), 182

`autoFill` (`openpyxl.worksheet.controls.ControlProperty` 属性), 366

`autoFill` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384

`autoFilter` (`openpyxl.pivot.table.PivotFilter` 属性), 307

`AutoFilter` (`openpyxl.worksheet.filters` 中的类), 375

`autoFilter` (`openpyxl.worksheet.protection.SheetProtection` 属性), 391

`autoFilter` (`openpyxl.worksheet.table.Table` 属性), 395

`autoFilterDateGrouping` (`openpyxl.workbook.views.BookView` 属性), 355

`autoFormatId` (`openpyxl.pivot.table.TableDefinition` 属性), 313

`autoLine` (`openpyxl.comments.comment_sheet.Properties` 属性), 182

- 属性), 182
- `autoLine` (`openpyxl.worksheet.controls.ControlProperty` 属性), 366
- `autoLine` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384
- `autoLoad` (`openpyxl.worksheet.ole.OleObject` 属性), 385
- `AutonumberBullet` (`openpyxl.drawing.text` 中的类), 242
- `autoPage` (`openpyxl.pivot.cache.Consolidation` 属性), 280
- `autoPageBreaks` (`openpyxl.worksheet.page.PrintPageSetup` 属性), 386
- `autoPageBreaks` (`openpyxl.worksheet.properties.PageSetupProperties` 属性), 389
- `autoPict` (`openpyxl.worksheet.controls.ControlProperty` 属性), 366
- `autoPict` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384
- `autoRecover` (`openpyxl.packaging.workbook.FileRecoveryProperties` 属性), 271
- `autoRepublish` (`openpyxl.chartsheet.publish.WebPublishItem` 属性), 176
- `autoRepublish` (`openpyxl.workbook.web.WebPublishObject` 属性), 358
- `autoScale` (`openpyxl.comments.comment_sheet.Properties` 属性), 182
- `autoShow` (`openpyxl.pivot.table.PivotField` 属性), 304
- `AutoSlotProperties` (`openpyxl.descriptors.slots` 中的类), 192
- `AutoSortScope` (`openpyxl.pivot.table` 中的类), 297
- `autoSortScope` (`openpyxl.pivot.table.PivotField` 属性), 304
- `autoStart` (`openpyxl.pivot.cache.RangePr` 属性), 287
- `autoTitleDeleted` (`openpyxl.chart.chartspace.ChartContainer` 属性), 137
- `autoUpdate` (`openpyxl.chart.chartspace.ExternalData` 属性), 139
- `autoUpdate` (`openpyxl.workbook.views.CustomWorkbookView` 属性), 356
- `avgSubtotal` (`openpyxl.pivot.table.PivotField` 属性), 304
- `avgSubtotal` (`openpyxl.pivot.table.Reference` 属性), 310
- `avLst` (`openpyxl.drawing.geometry.CustomGeometry2D` 属性), 223
- `avLst` (`openpyxl.drawing.geometry.PresetGeometry2D` 属性), 226
- `avLst` (`openpyxl.drawing.text.PresetTextShape` 属性), 251
- `avoid_duplicate_name()` (在 `openpyxl.workbook.child` 模块中), 346
- `AxDataSource` (`openpyxl.chart.data_source` 中的类), 139
- `axId` (`openpyxl.chart.axis.DateAxis` 属性), 127
- `axId` (`openpyxl.chart.axis.NumericAxis` 属性), 129
- `axId` (`openpyxl.chart.axis.SeriesAxis` 属性), 131
- `axId` (`openpyxl.chart.axis.TextAxis` 属性), 132
- `axis` (`openpyxl.pivot.table.PivotArea` 属性), 302
- `axis` (`openpyxl.pivot.table.PivotField` 属性), 304
- `axPos` (`openpyxl.chart.axis.DateAxis` 属性), 127
- `axPos` (`openpyxl.chart.axis.NumericAxis` 属性), 129
- `axPos` (`openpyxl.chart.axis.SeriesAxis` 属性), 131
- `axPos` (`openpyxl.chart.axis.TextAxis` 属性), 132
- ## B
- `b` (`openpyxl.cell.text.InlineFont` 属性), 123
- `b` (`openpyxl.chart.print_settings.PageMargins` 属性), 159
- `b` (`openpyxl.drawing.colors.RGBPercent` 属性), 195
- `b` (`openpyxl.drawing.fill.RelativeRect` 属性), 218
- `b` (`openpyxl.drawing.geometry.GeomRect` 属性), 223
- `b` (`openpyxl.drawing.text.CharacterProperties` 属性), 243
- `b` (`openpyxl.pivot.cache.GroupItems` 属性), 281
- `b` (`openpyxl.pivot.cache.SharedItems` 属性), 289
- `b` (`openpyxl.pivot.fields.Error` 属性), 292
- `b` (`openpyxl.pivot.fields.Missing` 属性), 293
- `b` (`openpyxl.pivot.fields.Number` 属性), 294

- b (*openpyxl.pivot.fields.Text* 属性), 295
- b (*openpyxl.pivot.record.Record* 属性), 296
- b (*openpyxl.styles.fonts.Font* 属性), 329
- Backdrop (*openpyxl.drawing.geometry* 中的类), 221
- backdrop (*openpyxl.drawing.geometry.Scene3D* 属性), 227
- background (*openpyxl.drawing.fill.PatternFillProperties* 属性), 217
- backgroundQuery (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
- backupFile (*openpyxl.workbook.properties.WorkbookProperties* 属性), 350
- backWall (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- backWall (*openpyxl.chart.chartspace.ChartContainer* 属性), 137
- backward (*openpyxl.chart.trendline.Trendline* 属性), 171
- bandFmt (*openpyxl.chart.surface_chart.BandFormatList* 属性), 168
- bandFmts (*openpyxl.chart.surface_chart.SurfaceChart* 属性), 168
- bandFmts (*openpyxl.chart.surface_chart.SurfaceChart3D* 属性), 168
- BandFormat (*openpyxl.chart.surface_chart* 中的类), 168
- BandFormatList (*openpyxl.chart.surface_chart* 中的类), 168
- bar3DChart (*openpyxl.chart.plotarea.PlotArea* 属性), 156
- BarChart (*openpyxl.chart.bar_chart* 中的类), 134
- barChart (*openpyxl.chart.plotarea.PlotArea* 属性), 156
- BarChart3D (*openpyxl.chart.bar_chart* 中的类), 134
- barDir (*openpyxl.chart.bar_chart.BarChart* 属性), 134
- barDir (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- base (*openpyxl.pivot.cache.FieldGroup* 属性), 281
- Base64Binary (*openpyxl.descriptors.excel* 中的类), 188
- base_date (*openpyxl.cell.cell.Cell* 属性), 120
- baseColWidth (*openpyxl.worksheet.dimensions.SheetFormatProperties* 属性), 373
- baseField (*openpyxl.pivot.table.DataField* 属性), 298
- baseItem (*openpyxl.pivot.table.DataField* 属性), 298
- baseline (*openpyxl.drawing.text.CharacterProperties* 属性), 243
- baseTimeUnit (*openpyxl.chart.axis.DateAxis* 属性), 127
- bestFit (*openpyxl.pivot.fields.Error* 属性), 292
- bc (*openpyxl.pivot.fields.Missing* 属性), 293
- bc (*openpyxl.pivot.fields.Number* 属性), 294
- bc (*openpyxl.pivot.fields.Text* 属性), 295
- bestFit (*openpyxl.worksheet.dimensions.ColumnDimension* 属性), 371
- Bevel (*openpyxl.drawing.geometry* 中的类), 221
- bevel (*openpyxl.drawing.line.LineProperties* 属性), 233
- bevelB (*openpyxl.drawing.geometry.Shape3D* 属性), 227
- bevelT (*openpyxl.drawing.geometry.Shape3D* 属性), 228
- bg1 (*openpyxl.drawing.colors.ColorMapping* 属性), 194
- bg2 (*openpyxl.drawing.colors.ColorMapping* 属性), 194
- bgClr (*openpyxl.drawing.fill.PatternFillProperties* 属性), 217
- bgColor (*openpyxl.styles.fills.PatternFill* 属性), 328
- biLevel (*openpyxl.drawing.fill.Blip* 属性), 213
- BiLevelEffect (*openpyxl.drawing.effect* 中的类), 203
- bind() (*openpyxl.comments.comments.Comment* 方法), 183
- bind() (*openpyxl.styles.named_styles.NamedStyle* 方法), 333
- bIns (*openpyxl.drawing.text.RichTextProperties* 属性), 252
- blackAndWhite (*openpyxl.worksheet.page.PrintPageSetup* 属性), 373

- 性), 386
- blank (*openpyxl.worksheet.filters.Filters* 属性), 378
- blend (*openpyxl.drawing.effect.FillOverlayEffect* 属性), 205
- Blip (*openpyxl.drawing.fill* 中的类), 212
- blip (*openpyxl.drawing.fill.BlipFillProperties* 属性), 214
- blipFill (*openpyxl.drawing.picture.PictureFrame* 属性), 235
- blipFill (*openpyxl.drawing.text.CharacterProperties* 属性), 243
- BlipFillProperties (*openpyxl.drawing.fill* 中的类), 214
- blue (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- blue (*openpyxl.drawing.colors.SystemColor* 属性), 198
- blueMod (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- blueMod (*openpyxl.drawing.colors.SystemColor* 属性), 198
- blueOff (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- blueOff (*openpyxl.drawing.colors.SystemColor* 属性), 198
- blur (*openpyxl.drawing.effect.EffectList* 属性), 204
- blur (*openpyxl.drawing.fill.Blip* 属性), 213
- BlurEffect (*openpyxl.drawing.effect* 中的类), 203
- blurRad (*openpyxl.drawing.effect.InnerShadowEffect* 属性), 206
- blurRad (*openpyxl.drawing.effect.OuterShadow* 属性), 208
- blurRad (*openpyxl.drawing.effect.ReflectionEffect* 属性), 211
- bmK (*openpyxl.drawing.text.CharacterProperties* 属性), 243
- body (*openpyxl.chart.title.Title* 属性), 170
- bodyPr (*openpyxl.chart.text.RichText* 属性), 169
- bold (*openpyxl.styles.fonts.Font* 属性), 330
- BookView (*openpyxl.workbook.views* 中的类), 355
- bookViews (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 272
- Bool (*openpyxl.descriptors.base* 中的类), 186
- Boolean (*openpyxl.pivot.fields* 中的类), 291
- border (*openpyxl.cell.read_only.EmptyCell* 属性), 121
- border (*openpyxl.cell.read_only.ReadOnlyCell* 属性), 122
- Border (*openpyxl.styles.borders* 中的类), 321
- border (*openpyxl.styles.differential.DifferentialStyle* 属性), 326
- border (*openpyxl.styles.named_styles.NamedStyle* 属性), 333
- border (*openpyxl.styles.styleable.StyleableObject* 属性), 335
- border_style (*openpyxl.styles.borders.Side* 属性), 322
- borderId (*openpyxl.styles.cell_style.CellStyle* 属性), 323
- borderId (*openpyxl.styles.cell_style.StyleArray* 属性), 324
- borders (*openpyxl.styles.stylesheet.Stylesheet* 属性), 336
- bottom (*openpyxl.chart.print_settings.PageMargins* 属性), 159
- bottom (*openpyxl.drawing.fill.RelativeRect* 属性), 218
- bottom (*openpyxl.formatting.rule.Rule* 属性), 258
- bottom (*openpyxl.styles.borders.Border* 属性), 321
- bottom (*openpyxl.styles.fills.GradientFill* 属性), 327
- bottom (*openpyxl.worksheet.cell_range.CellRange* 属性), 363
- bottom (*openpyxl.worksheet.page.PageMargins* 属性), 385
- boundaries (*openpyxl.worksheet.dimensions.SheetDimension* 属性), 373
- BoundDictionary (*openpyxl.utils.bound_dictionary* 中的类), 338
- bounds (*openpyxl.worksheet.cell_range.CellRange* 属性), 363
- br (*openpyxl.drawing.text.Paragraph* 属性), 248
- Break (*openpyxl.worksheet.pagebreak* 中的类), 388
- BREAK_COLUMN (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403

- `BREAK_NONE` (`openpyxl.worksheet.worksheet.Worksheet` 属性), 403
- `BREAK_ROW` (`openpyxl.worksheet.worksheet.Worksheet` 属性), 403
- `bright` (`openpyxl.drawing.effect.LuminanceEffect` 属性), 208
- `brk` (`openpyxl.worksheet.pagebreak.ColBreak` 属性), 388
- `brk` (`openpyxl.worksheet.pagebreak.RowBreak` 属性), 389
- `buAutoNum` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `bubble3D` (`openpyxl.chart.bubble_chart.BubbleChart` 属性), 136
- `bubble3D` (`openpyxl.chart.marker.DataPoint` 属性), 150
- `bubble3D` (`openpyxl.chart.series.Series` 属性), 162
- `bubble3D` (`openpyxl.chart.series.XYSeries` 属性), 164
- `BubbleChart` (`openpyxl.chart.bubble_chart` 中的类), 136
- `bubbleChart` (`openpyxl.chart.plotarea.PlotArea` 属性), 157
- `bubbleScale` (`openpyxl.chart.bubble_chart.BubbleChart` 属性), 136
- `bubbleSize` (`openpyxl.chart.series.Series` 属性), 162
- `bubbleSize` (`openpyxl.chart.series.XYSeries` 属性), 165
- `buBlip` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `buChar` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `buClr` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `buClrTx` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `buFont` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `buFontTx` (`openpyxl.drawing.text.ParagraphProperties` 属性), 249
- `builtin_format_code()` (在 `openpyxl.styles.numbers` 模块中), 334
- `builtin_format_id()` (在 `openpyxl.styles.numbers` 模块中), 334
- `builtInGroupCount` (`openpyxl.workbook.function_group.FunctionGroupList` 属性), 348
- `builtinId` (`openpyxl.styles.named_styles.NamedStyle` 属性), 333
- `builtInUnit` (`openpyxl.chart.axis.DisplayUnitsLabelList` 属性), 129
- `buNone` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250
- `buSzPct` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250
- `buSzPts` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250
- `buSzTx` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250
- `bwMode` (`openpyxl.chart.shapes.GraphicalProperties` 属性), 166
- `bwMode` (`openpyxl.drawing.properties.GroupShapeProperties` 属性), 238
- `byPosition` (`openpyxl.pivot.table.Reference` 属性), 310
- ## C
- `c` (`openpyxl.pivot.fields.Boolean` 属性), 291
- `c` (`openpyxl.pivot.fields.DateTimeField` 属性), 291
- `c` (`openpyxl.pivot.fields.Error` 属性), 292
- `c` (`openpyxl.pivot.fields.Missing` 属性), 293
- `c` (`openpyxl.pivot.fields.Number` 属性), 294
- `c` (`openpyxl.pivot.fields.Text` 属性), 295
- `c` (`openpyxl.pivot.fields.TupleList` 属性), 296
- `c` (`openpyxl.pivot.table.FieldItem` 属性), 299
- `cache` (`openpyxl.pivot.table.TableDefinition` 属性), 313
- `Cached` (`openpyxl.compat.singleton` 中的类), 185
- `CacheDefinition` (`openpyxl.pivot.cache` 中的类), 274
- `CacheField` (`openpyxl.pivot.cache` 中的类), 276
- `cacheFields` (`openpyxl.pivot.cache.CacheDefinition` 属性), 274
- `cacheHierarchies` (`openpyxl.pivot.cache.CacheDefinition` 属性), 274

- CacheHierarchy (*openpyxl.pivot.cache* 中的类), 277
- cacheId (*openpyxl.packaging.workbook.PivotCache* 属性), 272
- cacheId (*openpyxl.pivot.table.TableDefinition* 属性), 313
- cacheIndex (*openpyxl.pivot.table.PivotArea* 属性), 302
- CacheSource (*openpyxl.pivot.cache* 中的类), 279
- cacheSource (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
- calcCompleted (*openpyxl.workbook.properties.CalcProperties* 属性), 349
- calcId (*openpyxl.workbook.properties.CalcProperties* 属性), 349
- calcMode (*openpyxl.workbook.properties.CalcProperties* 属性), 349
- calcOnSave (*openpyxl.workbook.properties.CalcProperties* 属性), 349
- calcPr (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 272
- CalcProperties (*openpyxl.workbook.properties* 中的类), 349
- calculate_dimension() (*openpyxl.worksheet.worksheet.Worksheet* 方法), 404
- calculatedColumn (*openpyxl.worksheet.errors.IgnoredError* 属性), 374
- calculatedColumnFormula (*openpyxl.worksheet.table.TableColumn* 属性), 397
- CalculatedItem (*openpyxl.pivot.cache* 中的类), 279
- calculatedItems (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
- CalculatedMember (*openpyxl.pivot.cache* 中的类), 280
- calculatedMembers (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
- calendarType (*openpyxl.worksheet.filters.Filters* 属性), 379
- Camera (*openpyxl.drawing.geometry* 中的类), 222
- camera (*openpyxl.drawing.geometry.Scene3D* 属性), 227
- cap (*openpyxl.drawing.line.LineProperties* 属性), 233
- cap (*openpyxl.drawing.text.CharacterProperties* 属性), 243
- cap (*openpyxl.pivot.table.PageField* 属性), 302
- caption (*openpyxl.pivot.cache.CacheField* 属性), 276
- caption (*openpyxl.pivot.cache.CacheHierarchy* 属性), 277
- caption (*openpyxl.pivot.cache.GroupLevel* 属性), 282
- caption (*openpyxl.pivot.cache.LevelGroup* 属性), 283
- caption (*openpyxl.pivot.cache.MeasureGroup* 属性), 284
- caption (*openpyxl.pivot.cache.PCDKPI* 属性), 285
- caption (*openpyxl.pivot.cache.PivotDimension* 属性), 286
- caption (*openpyxl.pivot.table.PivotHierarchy* 属性), 308
- caseSensitive (*openpyxl.worksheet.filters.SortState* 属性), 380
- cast_numeric() (在 *openpyxl.utils.inference* 模块中), 342
- cast_percentage() (在 *openpyxl.utils.inference* 模块中), 342
- cast_time() (在 *openpyxl.utils.inference* 模块中), 342
- cat (*openpyxl.chart.series.Series* 属性), 162
- catAx (*openpyxl.chart.plotarea.PlotArea* 属性), 157
- category (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- Cell (*openpyxl.cell.cell* 中的类), 120
- cell (*openpyxl.workbook.external_link.external.ExternalRow* 属性), 345
- cell() (*openpyxl.worksheet.worksheet.Worksheet* 方法), 404
- CELL_REF_RE (*openpyxl.formula.translate.Translator* 属性), 262
- cellColor (*openpyxl.worksheet.filters.ColorFilter* 属性), 376
- cellComments (*openpyxl.worksheet.filters.Filters* 属性), 376

- `pyxl.worksheet.page.PrintPageSetup` 属性), 387
- `CellCoordinatesException`, 340
- `CellIsRule()` (在 `openpyxl.formatting.rule` 模块中), 256
- `CellRange` (`openpyxl.descriptors.excel` 中的类), 188
- `CellRange` (`openpyxl.worksheet.cell_range` 中的类), 362
- `cells` (`openpyxl.formatting.formatting.ConditionalFormatting` 属性), 256
- `cells` (`openpyxl.worksheet.cell_range.CellRange` 属性), 363
- `cells` (`openpyxl.worksheet.datavalidation.DataValidation` 属性), 368
- `CellSmartTag` (`openpyxl.worksheet.smart_tag` 中的类), 394
- `cellSmartTag` (`openpyxl.worksheet.smart_tag.CellSmartTags` 属性), 395
- `CellSmartTagPr` (`openpyxl.worksheet.smart_tag` 中的类), 394
- `cellSmartTagPr` (`openpyxl.worksheet.smart_tag.CellSmartTag` 属性), 394
- `CellSmartTags` (`openpyxl.worksheet.smart_tag` 中的类), 394
- `cellSmartTags` (`openpyxl.worksheet.smart_tag.SmartTags` 属性), 395
- `CellStyle` (`openpyxl.styles.cell_style` 中的类), 323
- `CellStyleList` (`openpyxl.styles.cell_style` 中的类), 324
- `cellStyles` (`openpyxl.styles.stylesheet.Stylesheet` 属性), 336
- `cellStyleXfs` (`openpyxl.styles.stylesheet.Stylesheet` 属性), 336
- `CellWatch` (`openpyxl.worksheet.cell_watch` 中的类), 365
- `cellWatch` (`openpyxl.worksheet.cell_watch.CellWatches` 属性), 365
- `CellWatches` (`openpyxl.worksheet.cell_watch` 中的类), 365
- `cellXfs` (`openpyxl.styles.stylesheet.Stylesheet` 属性), 336
- `center` (`openpyxl.worksheet.header_footer.HeaderFooterItem` 属性), 381
- `centerFooterEvenPages` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `centerFooterFirstPage` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `centerFooterOddPages` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `centerHeaderEvenPages` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `centerHeaderFirstPage` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `centerHeaderOddPages` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `centre` (`openpyxl.worksheet.header_footer.HeaderFooterItem` 属性), 381
- `cf` (`openpyxl.worksheet.controls.ControlProperty` 属性), 366
- `cfe` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `cff` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `cfo` (`openpyxl.chartsheet.relation.DrawingHF` 属性), 177
- `cfRule` (`openpyxl.formatting.formatting.ConditionalFormatting` 属性), 256
- `cfvo` (`openpyxl.formatting.rule.RuleType` 属性), 259
- `changesSavedWin` (`openpyxl.workbook.views.CustomWorkbookView` 属性), 356
- `CharacterProperties` (`openpyxl.drawing.text` 中的类), 243
- `Characters` (`openpyxl.packaging.extended.ExtendedProperties` 属性), 266

- ul style="list-style-type: none; padding-left: 0;">
- `characterSet` (*openpyxl.workbook.web.WebPublishing* 属性), 358
- `CharactersWithSpaces` (*openpyxl.packaging.extended.ExtendedProperties* 属性), 266
- `charset` (*openpyxl.cell.text.InlineFont* 属性), 123
- `charset` (*openpyxl.drawing.text.Font* 属性), 246
- `charset` (*openpyxl.styles.fonts.Font* 属性), 330
- `chart` (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- `chart` (*openpyxl.drawing.graphic.GraphicData* 属性), 230
- `chart` (*openpyxl.pivot.table.ChartFormat* 属性), 297
- `ChartContainer` (*openpyxl.chart.chartspace* 中的类), 137
- `ChartFormat` (*openpyxl.pivot.table* 中的类), 297
- `chartFormat` (*openpyxl.pivot.table.TableDefinition* 属性), 313
- `chartFormats` (*openpyxl.pivot.table.TableDefinition* 属性), 313
- `ChartLines` (*openpyxl.chart.axis* 中的类), 127
- `chartObject` (*openpyxl.chart.chartspace.Protection* 属性), 139
- `ChartRelation` (*openpyxl.drawing.relation* 中的类), 239
- `Chartsheet` (*openpyxl.chartsheet.chartsheet* 中的类), 173
- `ChartsheetProperties` (*openpyxl.chartsheet.properties* 中的类), 175
- `ChartsheetProtection` (*openpyxl.chartsheet.protection* 中的类), 175
- `chartsheets` (*openpyxl.workbook.workbook.Workbook* 属性), 359
- `ChartsheetView` (*openpyxl.chartsheet.views* 中的类), 180
- `ChartsheetViewList` (*openpyxl.chartsheet.views* 中的类), 180
- `ChartSpace` (*openpyxl.chart.chartspace* 中的类), 137
- `che` (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- `check_error()` (*openpyxl.cell.cell.Cell* 方法), 120
- `check_scientific_notation()` (*openpyxl.formula.tokenizer.Tokenizer* 方法), 262
- `check_string()` (*openpyxl.cell.cell.Cell* 方法), 120
- `checkCompatibility` (*openpyxl.workbook.properties.WorkbookProperties* 属性), 350
- `chExt` (*openpyxl.drawing.geometry.GroupTransform2D* 属性), 224
- `chExt` (*openpyxl.drawing.geometry.Transform2D* 属性), 229
- `chExt` (*openpyxl.drawing.xdr.XDRTransform2D* 属性), 255
- `chf` (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- `ChildSheet` (*openpyxl.packaging.workbook* 中的类), 271
- `cho` (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- `chOff` (*openpyxl.drawing.geometry.GroupTransform2D* 属性), 224
- `chOff` (*openpyxl.drawing.geometry.Transform2D* 属性), 229
- `chOff` (*openpyxl.drawing.xdr.XDRTransform2D* 属性), 255
- `clientData` (*openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor* 属性), 240
- `clientData` (*openpyxl.drawing.spreadsheet_drawing.OneCellAnchor* 属性), 241
- `clientData` (*openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor* 属性), 242
- `CLOSE` (*openpyxl.formula.tokenizer.Token* 属性), 260
- `close()` (*openpyxl.workbook.workbook.Workbook* 方法), 359
- `clrChange` (*openpyxl.drawing.fill.Blip* 属性), 213
- `clrFrom` (*openpyxl.drawing.effect.ColorChangeEffect* 属性), 204
- `clrMapOvr` (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- `clrRepl` (*openpyxl.drawing.fill.Blip* 属性), 213
- `clrTo` (*openpyxl.drawing.effect.ColorChangeEffect* 属性), 204

<code>cm_to_dxa()</code> (在 <code>openpyxl.utils.units</code> 模块中), 343	262
<code>cm_to_EMU()</code> (在 <code>openpyxl.utils.units</code> 模块中), 343	<code>ColBreak</code> (<code>openpyxl.worksheet.pagebreak</code> 中的类), 388
<code>cmpd</code> (<code>openpyxl.drawing.line.LineProperties</code> 属性), 233	<code>colFields</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 313
<code>cNvCxnSpPr</code> (<code>openpyxl.drawing.connector.ConnectorNonVisual</code> 属性), 200	<code>colGrandTotals</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 313
<code>cNvGraphicFramePr</code> (<code>openpyxl.drawing.graphic.NonVisualGraphicFrame</code> 属性), 231	<code>colHeaderCaption</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 313
<code>cNvGrpSpPr</code> (<code>openpyxl.drawing.properties.NonVisualGroupShape</code> 属性), 239	<code>colHidden</code> (<code>openpyxl.comments.comment_sheet.Properties</code> 属性), 182
<code>cNvPicPr</code> (<code>openpyxl.drawing.picture.PictureNonVisual</code> 属性), 236	<code>colHierarchiesUsage</code> (<code>openpyxl.pivot.table</code> 中的类), 298
<code>cNvPr</code> (<code>openpyxl.drawing.connector.ConnectorNonVisual</code> 属性), 200	<code>colHierarchiesUsage</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 313
<code>cNvPr</code> (<code>openpyxl.drawing.connector.ShapeMeta</code> 属性), 202	<code>colHierarchyUsage</code> (<code>openpyxl.pivot.table.ColHierarchiesUsage</code> 属性), 298
<code>cNvPr</code> (<code>openpyxl.drawing.graphic.NonVisualGraphicFrame</code> 属性), 232	<code>colId</code> (<code>openpyxl.worksheet.filters.FilterColumn</code> 属性), 378
<code>cNvPr</code> (<code>openpyxl.drawing.picture.PictureNonVisual</code> 属性), 236	<code>colItems</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 313
<code>cNvPr</code> (<code>openpyxl.drawing.properties.NonVisualGroupShape</code> 属性), 239	<code>collapse_cell_addresses()</code> (在 <code>openpyxl.worksheet.datavalidation</code> 模块中), 370
<code>cNvSpPr</code> (<code>openpyxl.drawing.connector.ShapeMeta</code> 属性), 202	<code>collapsed</code> (<code>openpyxl.worksheet.dimensions.ColumnDimension</code> 属性), 371
<code>codeName</code> (<code>openpyxl.chartsheet.properties.ChartsheetProperties</code> 属性), 175	<code>collapsed</code> (<code>openpyxl.worksheet.dimensions.Dimension</code> 属性), 371
<code>codeName</code> (<code>openpyxl.workbook.properties.FileVersion</code> 属性), 350	<code>collapsedLevelsAreSubtotals</code> (<code>openpyxl.pivot.table.PivotArea</code> 属性), 302
<code>codeName</code> (<code>openpyxl.workbook.properties.WorkbookProperties</code> 属性), 351	<code>collection</code> (<code>openpyxl.styles.styleable.NamedStyleDescriptor</code> 属性), 335
<code>codeName</code> (<code>openpyxl.worksheet.properties.WorksheetProperties</code> 属性), 390	<code>collection</code> (<code>openpyxl.styles.styleable.NumberFormatDescriptor</code> 属性), 335
<code>codePage</code> (<code>openpyxl.workbook.web.WebPublishing</code> 属性), 358	<code>colOff</code> (<code>openpyxl.drawing.spreadsheet_drawing.AnchorMarker</code> 属性), 240
<code>col</code> (<code>openpyxl.drawing.spreadsheet_drawing.AnchorMarker</code> 属性), 240	<code>color</code> (<code>openpyxl.cell.text.InlineFont</code> 属性), 123
<code>col_id</code> (<code>openpyxl.worksheet.filters.FilterColumn</code> 属性), 378	<code>Color</code> (<code>openpyxl.drawing.effect</code> 中的类), 203
<code>col_idx</code> (<code>openpyxl.cell.cell.Cell</code> 属性), 120	
<code>COL_RANGE_RE</code> (<code>openpyxl.formula.translate.Translator</code> 属性), 262	

- color (*openpyxl.formatting.rule.ColorScale* 属性), 256
- color (*openpyxl.formatting.rule.DataBar* 属性), 257
- color (*openpyxl.styles.borders.Side* 属性), 322
- Color (*openpyxl.styles.colors* 中的类), 325
- color (*openpyxl.styles.fills.Stop* 属性), 329
- color (*openpyxl.styles.fonts.Font* 属性), 330
- ColorChangeEffect (*openpyxl.drawing.effect* 中的类), 204
- ColorChoice (*openpyxl.drawing.colors* 中的类), 192
- ColorChoiceDescriptor (*openpyxl.drawing.colors* 中的类), 193
- ColorDescriptor (*openpyxl.styles.colors* 中的类), 325
- ColorFilter (*openpyxl.worksheet.filters* 中的类), 376
- colorFilter (*openpyxl.worksheet.filters.FilterColumn* 属性), 378
- colorId (*openpyxl.worksheet.views.SheetView* 属性), 401
- ColorList (*openpyxl.styles.colors* 中的类), 325
- ColorMapping (*openpyxl.drawing.colors* 中的类), 193
- ColorReplaceEffect (*openpyxl.drawing.effect* 中的类), 204
- colors (*openpyxl.styles.stylesheet.Stylesheet* 属性), 336
- ColorScale (*openpyxl.formatting.rule* 中的类), 256
- colorScale (*openpyxl.formatting.rule.Rule* 属性), 258
- ColorScaleRule() (在 *openpyxl.formatting.rule* 模块中), 256
- colPageCount (*openpyxl.pivot.table.Location* 属性), 300
- cols (*openpyxl.chart.reference.Reference* 属性), 161
- cols (*openpyxl.worksheet.cell_range.CellRange* 属性), 363
- cols_from_range() (在 *openpyxl.utils.cell* 模块中), 339
- column (*openpyxl.cell.cell.Cell* 属性), 120
- column (*openpyxl.cell.cell.MergedCell* 属性), 121
- column (*openpyxl.cell.read_only.ReadOnlyCell* 属性), 122
- column_index_from_string() (在 *openpyxl.utils.cell* 模块中), 339
- column_letter (*openpyxl.cell.cell.Cell* 属性), 120
- column_letter (*openpyxl.cell.read_only.ReadOnlyCell* 属性), 122
- ColumnDimension (*openpyxl.worksheet.dimensions* 中的类), 370
- columns (*openpyxl.worksheet.worksheet.Worksheet* 属性), 405
- columnSort (*openpyxl.worksheet.filters.SortState* 属性), 380
- comment (*openpyxl.cell.cell.Cell* 属性), 120
- comment (*openpyxl.cell.cell.MergedCell* 属性), 121
- Comment (*openpyxl.comments.comments* 中的类), 183
- comment (*openpyxl.workbook.defined_name.DefinedName* 属性), 346
- comment (*openpyxl.worksheet.scenario.Scenario* 属性), 393
- comment (*openpyxl.worksheet.table.Table* 属性), 395
- commentList (*openpyxl.comments.comment_sheet.CommentSheet* 属性), 182
- commentPr (*openpyxl.comments.comment_sheet.CommentRecord* 属性), 181
- CommentRecord (*openpyxl.comments.comment_sheet* 中的类), 181
- comments (*openpyxl.comments.comment_sheet.CommentSheet* 属性), 182
- CommentSheet (*openpyxl.comments.comment_sheet* 中的类), 181
- comp (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- comp (*openpyxl.drawing.colors.SystemColor* 属性), 198
- compact (*openpyxl.pivot.table.PivotField* 属性), 304
- compact (*openpyxl.pivot.table.TableDefinition* 属性), 313
- compactData (*openpyxl.pivot.table.TableDefinition* 属性), 313
- Company (*openpyxl.packaging.extended.ExtendedProperties* 属性), 266
- compatLnSpc (*openpyxl.drawing.text.RichTextProperties* 属性), 252

<code>concurrentCalc</code> (<code>openpyxl.workbook.properties.CalcProperties</code> 属性), 349	<code>containsDate</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>concurrentManualCount</code> (<code>openpyxl.workbook.properties.CalcProperties</code> 属性), 349	<code>containsInteger</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>condense</code> (<code>openpyxl.cell.text.InlineFont</code> 属性), 123	<code>containsMixedTypes</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>condense</code> (<code>openpyxl.styles.fonts.Font</code> 属性), 330	<code>containsNonDate</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>ConditionalFormat</code> (<code>openpyxl.pivot.table</code> 中的类), 298	<code>containsNumber</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>conditionalFormats</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 314	<code>containsSemiMixedTypes</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>ConditionalFormatting</code> (<code>openpyxl.formatting.formatting</code> 中的类), 256	<code>containsString</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>ConditionalFormattingList</code> (<code>openpyxl.formatting.formatting</code> 中的类), 256	<code>content</code> (<code>openpyxl.cell.text.Text</code> 属性), 125
<code>conformance</code> (<code>openpyxl.packaging.workbook.WorkbookPackage</code> 属性), 272	<code>content</code> (<code>openpyxl.chartsheet.protection.ChartsheetProtection</code> 属性), 175
<code>Connection</code> (<code>openpyxl.drawing.connector</code> 中的类), 200	<code>content</code> (<code>openpyxl.comments.comment_sheet.CommentRecord</code> 属性), 181
<code>connectionId</code> (<code>openpyxl.pivot.cache.CacheSource</code> 属性), 279	<code>contentPart</code> (<code>openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor</code> 属性), 240
<code>connectionId</code> (<code>openpyxl.worksheet.table.Table</code> 属性), 395	<code>contentPart</code> (<code>openpyxl.drawing.spreadsheet_drawing.OneCellAnchor</code> 属性), 241
<code>ConnectionSite</code> (<code>openpyxl.drawing.geometry</code> 中的类), 222	<code>contentPart</code> (<code>openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor</code> 属性), 242
<code>ConnectionSiteList</code> (<code>openpyxl.drawing.geometry</code> 中的类), 223	<code>contentStatus</code> (<code>openpyxl.packaging.core.DocumentProperties</code> 属性), 264
<code>ConnectorLocking</code> (<code>openpyxl.drawing.connector</code> 中的类), 200	<code>ContentType</code> (<code>openpyxl.packaging.manifest.FileExtension</code> 属性), 268
<code>ConnectorNonVisual</code> (<code>openpyxl.drawing.connector</code> 中的类), 200	<code>ContentType</code> (<code>openpyxl.packaging.manifest.Override</code> 属性), 269
<code>ConnectorShape</code> (<code>openpyxl.drawing.connector</code> 中的类), 200	<code>contourClr</code> (<code>openpyxl.drawing.geometry.Shape3D</code> 属性), 228
<code>Consolidation</code> (<code>openpyxl.pivot.cache</code> 中的类), 280	<code>contourW</code> (<code>openpyxl.drawing.geometry.Shape3D</code> 属性), 228
<code>consolidation</code> (<code>openpyxl.pivot.cache.CacheSource</code> 属性), 279	<code>contrast</code> (<code>openpyxl.drawing.effect.LuminanceEffect</code> 属性), 208
<code>cont</code> (<code>openpyxl.drawing.effect.AlphaModulateEffect</code> 属性), 203	<code>Control</code> (<code>openpyxl.worksheet.controls</code> 中的类), 366
<code>containsBlank</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289	<code>control</code> (<code>openpyxl.worksheet.controls.Controls</code> 属性), 367
	<code>controlPr</code> (<code>openpyxl.worksheet.controls.Control</code> 属

- 性), 366
- `ControlProperty` (`openpyxl.worksheet.controls` 中的类), 366
- `Controls` (`openpyxl.worksheet.controls` 中的类), 367
- `Convertible` (`openpyxl.descriptors.base` 中的类), 186
- `coord` (`openpyxl.worksheet.cell_range.CellRange` 属性), 363
- `coordinate` (`openpyxl.cell.cell.Cell` 属性), 120
- `coordinate` (`openpyxl.cell.cell.MergedCell` 属性), 121
- `coordinate` (`openpyxl.cell.read_only.ReadOnlyCell` 属性), 122
- `coordinate_from_string()` (在 `openpyxl.utils.cell` 模块中), 339
- `coordinate_to_tuple()` (在 `openpyxl.utils.cell` 模块中), 339
- `copies` (`openpyxl.worksheet.page.PrintPageSetup` 属性), 387
- `copy()` (`openpyxl.styles.proxy.StyleProxy` 方法), 335
- `copy_worksheet()` (`openpyxl.workbook.workbook.Workbook` 方法), 360
- `copy_worksheet()` (`openpyxl.worksheet.copier.WorksheetCopy` 方法), 367
- `count` (`openpyxl.chartsheet.publish.WebPublishItems` 属性), 176
- `count` (`openpyxl.descriptors.sequence.NestedSequence` 属性), 191
- `count` (`openpyxl.drawing.drawing.Drawing` 属性), 202
- `count` (`openpyxl.pivot.cache.CacheHierarchy` 属性), 278
- `count` (`openpyxl.pivot.cache.DiscretePr` 属性), 280
- `count` (`openpyxl.pivot.cache.FieldsUsage` 属性), 281
- `count` (`openpyxl.pivot.cache.GroupItems` 属性), 281
- `count` (`openpyxl.pivot.cache.GroupLevels` 属性), 282
- `count` (`openpyxl.pivot.cache.GroupMembers` 属性), 283
- `count` (`openpyxl.pivot.cache.Groups` 属性), 283
- `count` (`openpyxl.pivot.cache.OLAPSet` 属性), 284
- `count` (`openpyxl.pivot.cache.OLAPSets` 属性), 284
- `count` (`openpyxl.pivot.cache.Page` 属性), 286
- `count` (`openpyxl.pivot.cache.PCSDSTCEntries` 属性), 285
- `count` (`openpyxl.pivot.cache.QueryCache` 属性), 287
- `count` (`openpyxl.pivot.cache.ServerFormatList` 属性), 288
- `count` (`openpyxl.pivot.cache.SharedItems` 属性), 289
- `count` (`openpyxl.pivot.record.RecordList` 属性), 297
- `count` (`openpyxl.pivot.table.ColHierarchiesUsage` 属性), 298
- `count` (`openpyxl.pivot.table.MemberList` 属性), 301
- `count` (`openpyxl.pivot.table.PivotFilters` 属性), 308
- `count` (`openpyxl.pivot.table.Reference` 属性), 310
- `count` (`openpyxl.pivot.table.RowHierarchiesUsage` 属性), 311
- `count` (`openpyxl.styles.cell_style.CellStyleList` 属性), 324
- `count` (`openpyxl.styles.numbers.NumberFormatList` 属性), 334
- `count` (`openpyxl.styles.table.TableStyle` 属性), 337
- `count` (`openpyxl.styles.table.TableStyleList` 属性), 338
- `count` (`openpyxl.workbook.web.WebPublishObjectList` 属性), 358
- `count` (`openpyxl.worksheet.datavalidation.DataValidationList` 属性), 370
- `count` (`openpyxl.worksheet.merge.MergeCells` 属性), 383
- `count` (`openpyxl.worksheet.pagebreak.ColBreak` 属性), 388
- `count` (`openpyxl.worksheet.pagebreak.RowBreak` 属性), 389
- `count` (`openpyxl.worksheet.scenario.Scenario` 属性), 393
- `count` (`openpyxl.worksheet.table.TablePartList` 属性), 399
- `countASubtotal` (`openpyxl.pivot.table.PivotField` 属性), 304
- `countASubtotal` (`openpyxl.pivot.table.Reference` 属性), 310
- `countSubtotal` (`openpyxl.pivot.table.PivotField` 属性), 304
- `countSubtotal` (`openpyxl.pivot.table.Reference` 属性), 310
- `cp` (`openpyxl.pivot.fields.Boolean` 属性), 291

- cp (*openpyxl.pivot.fields.DateTimeField* 属性), 292
- cp (*openpyxl.pivot.fields.Error* 属性), 292
- cp (*openpyxl.pivot.fields.Missing* 属性), 293
- cp (*openpyxl.pivot.fields.Number* 属性), 294
- cp (*openpyxl.pivot.fields.Text* 属性), 295
- crashSave (*openpyxl.packaging.workbook.FileRecoveryProperties* 属性), 271
- create_chartsheet() (*openpyxl.workbook.workbook.Workbook* 方法), 360
- create_named_range() (*openpyxl.workbook.workbook.Workbook* 方法), 360
- create_sheet() (*openpyxl.workbook.workbook.Workbook* 方法), 360
- created (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- createdVersion (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
- createdVersion (*openpyxl.pivot.table.TableDefinition* 属性), 314
- creator (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- crossAx (*openpyxl.chart.axis.DateAxis* 属性), 127
- crossAx (*openpyxl.chart.axis.NumericAxis* 属性), 129
- crossAx (*openpyxl.chart.axis.SeriesAxis* 属性), 131
- crossAx (*openpyxl.chart.axis.TextAxis* 属性), 132
- crossBetween (*openpyxl.chart.axis.NumericAxis* 属性), 129
- crosses (*openpyxl.chart.axis.DateAxis* 属性), 127
- crosses (*openpyxl.chart.axis.NumericAxis* 属性), 130
- crosses (*openpyxl.chart.axis.SeriesAxis* 属性), 131
- crosses (*openpyxl.chart.axis.TextAxis* 属性), 133
- crossesAt (*openpyxl.chart.axis.DateAxis* 属性), 127
- crossesAt (*openpyxl.chart.axis.NumericAxis* 属性), 130
- crossesAt (*openpyxl.chart.axis.SeriesAxis* 属性), 131
- crossesAt (*openpyxl.chart.axis.TextAxis* 属性), 133
- cs (*openpyxl.drawing.text.CharacterProperties* 属性), 243
- css (*openpyxl.workbook.web.WebPublishing* 属性), 358
- cstate (*openpyxl.drawing.fill.Blip* 属性), 213
- culture (*openpyxl.pivot.cache.ServerFormat* 属性), 288
- current (*openpyxl.worksheet.scenario.ScenarioList* 属性), 394
- custDash (*openpyxl.drawing.line.LineProperties* 属性), 233
- custGeom (*openpyxl.chart.shapes.GraphicalProperties* 属性), 166
- custom_formats (*openpyxl.styles.stylesheet.Stylesheet* 属性), 336
- CustomChartsheetView (*openpyxl.chartsheet.custom* 中的类), 174
- CustomChartsheetViews (*openpyxl.chartsheet.custom* 中的类), 175
- CustomFilter (*openpyxl.worksheet.filters* 中的类), 376
- customFilter (*openpyxl.worksheet.filters.CustomFilters* 属性), 376
- CustomFilters (*openpyxl.worksheet.filters* 中的类), 376
- customFilters (*openpyxl.worksheet.filters.FilterColumn* 属性), 378
- customFormat (*openpyxl.worksheet.dimensions.RowDimension* 属性), 372
- CustomGeometry2D (*openpyxl.drawing.geometry* 中的类), 223
- customHeight (*openpyxl.worksheet.dimensions.RowDimension* 属性), 372
- customHeight (*openpyxl.worksheet.dimensions.SheetFormatProperties* 属性), 372

- 属性), 373
- `customList` (`openpyxl.worksheet.filters.SortCondition` 属性), 379
- `customListSort` (`openpyxl.pivot.table.TableDefinition` 属性), 314
- `customMenu` (`openpyxl.workbook.defined_name.DefinedName` 属性), 346
- `customPr` (`openpyxl.worksheet.custom.CustomProperties` 属性), 367
- `CustomProperties` (`openpyxl.worksheet.custom` 中的类), 367
- `CustomProperty` (`openpyxl.worksheet.custom` 中的类), 368
- `customRollUp` (`openpyxl.pivot.cache.GroupLevel` 属性), 282
- `customSheetView` (`openpyxl.chartsheet.custom.CustomChartsheetView` 属性), 175
- `customSheetViews` (`openpyxl.chartsheet.chartsheet.Chartsheet` 属性), 173
- `CustomSplit` (`openpyxl.chart.pie_chart` 中的类), 152
- `customWidth` (`openpyxl.worksheet.dimensions.ColumnDimension` 属性), 371
- `CustomWorkbookView` (`openpyxl.workbook.views` 中的类), 356
- `customWorkbookViews` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 272
- `custSplit` (`openpyxl.chart.pie_chart.ProjectedPieChart` 属性), 154
- `custUnit` (`openpyxl.chart.axis.DisplayUnitsLabelList` 属性), 129
- `cx` (`openpyxl.drawing.geometry.PositiveSize2D` 属性), 226
- `cx` (`openpyxl.drawing.xdr.XDRPositiveSize2D` 属性), 255
- `cxn` (`openpyxl.drawing.geometry.ConnectionSiteList` 属性), 223
- `cxnLst` (`openpyxl.drawing.geometry.CustomGeometry2D` 属性), 223
- `cxnSp` (`openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor` 属性), 240
- `cxnSp` (`openpyxl.drawing.spreadsheet_drawing.OneCellAnchor` 属性), 241
- `cxnSp` (`openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor` 属性), 242
- `cxnSpLocks` (`openpyxl.drawing.connector.NonVisualConnectorProperties` 属性), 201
- `cy` (`openpyxl.drawing.geometry.PositiveSize2D` 属性), 226
- `cy` (`openpyxl.drawing.xdr.XDRPositiveSize2D` 属性), 255
- D**
 - `d` (`openpyxl.drawing.line.DashStop` 属性), 232
 - `d` (`openpyxl.pivot.cache.GroupItems` 属性), 281
 - `d` (`openpyxl.pivot.cache.SharedItems` 属性), 289
 - `d` (`openpyxl.pivot.record.Record` 属性), 296
 - `d` (`openpyxl.pivot.table.FieldItem` 属性), 299
 - `DashStop` (`openpyxl.drawing.line` 中的类), 232
 - `DashStopList` (`openpyxl.drawing.line` 中的类), 233
 - `dashStyle` (`openpyxl.drawing.line.LineProperties` 属性), 233
 - `data` (`openpyxl.chart.chartspace.Protection` 属性), 139
 - `data_only` (`openpyxl.workbook.workbook.Workbook` 属性), 360
 - `data_points` (`openpyxl.chart.series.Series` 属性), 163
 - `data_type` (`openpyxl.cell.cell.Cell` 属性), 120
 - `data_type` (`openpyxl.cell.cell.MergedCell` 属性), 121
 - `data_type` (`openpyxl.cell.read_only.EmptyCell` 属性), 121
 - `data_type` (`openpyxl.cell.read_only.ReadOnlyCell` 属性), 122
 - `DataBar` (`openpyxl.formatting.rule` 中的类), 257
 - `dataBar` (`openpyxl.formatting.rule.Rule` 属性), 258
 - `DataBarRule()` (在 `openpyxl.formatting.rule` 模块中), 257
 - `databaseField` (`openpyxl.pivot.cache.CacheField` 属性), 276
 - `dataCaption` (`openpyxl.pivot.table.TableDefinition`

- 属性), 314
- `dataCellStyle` (`openpyxl.worksheet.table.Table` 属性), 395
- `dataCellStyle` (`openpyxl.worksheet.table.TableColumn` 属性), 397
- `dataDxfId` (`openpyxl.worksheet.table.Table` 属性), 395
- `dataDxfId` (`openpyxl.worksheet.table.TableColumn` 属性), 397
- `dataExtractLoad` (`openpyxl.packaging.workbook.FileRecoveryProperties` 属性), 271
- `DataField` (`openpyxl.pivot.table` 中的类), 298
- `dataField` (`openpyxl.pivot.table.PivotField` 属性), 304
- `dataFields` (`openpyxl.pivot.table.TableDefinition` 属性), 314
- `dataframe_to_rows()` (在 `openpyxl.utils.dataframe` 模块中), 339
- `DataLabel` (`openpyxl.chart.label` 中的类), 144
- `DataLabel` (`openpyxl.chart.pivot.PivotFormat` 属性), 155
- `DataLabelList` (`openpyxl.chart.label` 中的类), 145
- `dataLabels` (`openpyxl.chart.bubble_chart.BubbleChart` 属性), 136
- `dataLabels` (`openpyxl.chart.radar_chart.RadarChart` 属性), 160
- `dataLabels` (`openpyxl.chart.scatter_chart.ScatterChart` 属性), 161
- `dataLabels` (`openpyxl.chart.stock_chart.StockChart` 属性), 167
- `dataOnly` (`openpyxl.pivot.table.PivotArea` 属性), 302
- `dataOnRows` (`openpyxl.pivot.table.TableDefinition` 属性), 314
- `DataPoint` (`openpyxl.chart.marker` 中的类), 150
- `dataPosition` (`openpyxl.pivot.table.TableDefinition` 属性), 314
- `dataSourceSort` (`openpyxl.pivot.table.PivotField` 属性), 304
- `DataTable` (`openpyxl.chart.plotarea` 中的类), 156
- `DataValidation` (`openpyxl.worksheet.datavalidation` 中的类), 368
- `dataValidation` (`openpyxl.worksheet.datavalidation.DataValidationList` 属性), 370
- `DataValidationList` (`openpyxl.worksheet.datavalidation` 中的类), 369
- `date1904` (`openpyxl.chart.chartspace.ChartSpace` 属性), 138
- `date1904` (`openpyxl.workbook.properties.WorkbookProperties` 属性), 351
- `dateAx` (`openpyxl.chart.plotarea.PlotArea` 属性), 157
- `DateAxis` (`openpyxl.chart.axis` 中的类), 127
- `dateCompatibility` (`openpyxl.workbook.properties.WorkbookProperties` 属性), 351
- `DateGroupItem` (`openpyxl.worksheet.filters` 中的类), 377
- `dateGroupItem` (`openpyxl.worksheet.filters.Filters` 属性), 379
- `DateTime` (`openpyxl.descriptors.base` 中的类), 186
- `DateTimeField` (`openpyxl.pivot.fields` 中的类), 291
- `dateTimeGrouping` (`openpyxl.worksheet.filters.DateGroupItem` 属性), 377
- `day` (`openpyxl.worksheet.filters.DateGroupItem` 属性), 377
- `days_to_time()` (在 `openpyxl.utils.datetime` 模块中), 340
- `dde` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384
- `Default` (`openpyxl.descriptors.base` 中的类), 186
- `Default` (`openpyxl.packaging.manifest.Manifest` 属性), 268
- `DEFAULT_HEADER()` (在 `openpyxl.utils.units` 模块中), 342
- `defaultAttributeDrillState` (`openpyxl.pivot.table.PivotField` 属性), 304
- `defaultColWidth` (`openpyxl.worksheet.dimensions.SheetFormatProperties` 属性), 373
- `defaultGridColor` (`openpyxl.worksheet.views.SheetView` 属性),

401	属性), 250
defaultMemberUniqueName (openpyxl.pivot.cache.CacheHierarchy 属性), 278	defusedxml_available() (在 openpyxl.xml 模块中), 408
defaultPivotStyle (openpyxl.styles.table.TableStyleList 属性), 338	defusedxml_env_set() (在 openpyxl.xml 模块中), 408
defaultRowHeight (openpyxl.worksheet.dimensions.SheetFormatProperties 属性), 373	degree (openpyxl.styles.fills.GradientFill 属性), 327
defaultSize (openpyxl.comments.comment_sheet.Properties 属性), 182	degrees_to_angle() (在 openpyxl.utils.units 模块中), 343
defaultSize (openpyxl.worksheet.controls.ControlProperties 属性), 366	delete (openpyxl.chart.axis.DateAxis 属性), 127
defaultSize (openpyxl.worksheet.ole.ObjectProperties 属性), 384	delete (openpyxl.chart.axis.NumericAxis 属性), 130
defaultSubtotal (openpyxl.pivot.table.PivotField 属性), 304	delete (openpyxl.chart.axis.SeriesAxis 属性), 131
defaultSubtotal (openpyxl.pivot.table.Reference 属性), 310	delete (openpyxl.chart.axis.TextAxis 属性), 133
defaultTableStyle (openpyxl.styles.table.TableStyleList 属性), 338	delete (openpyxl.chart.label.DataLabelList 属性), 145
defaultThemeVersion (openpyxl.workbook.properties.WorkbookProperties 属性), 351	delete (openpyxl.chart.legend.LegendEntry 属性), 148
DefinedName (openpyxl.workbook.defined_name 中的类), 346	delete() (openpyxl.workbook.defined_name.DefinedNameList 方法), 347
definedName (openpyxl.workbook.defined_name.DefinedNameList 属性), 347	delete_cols() (openpyxl.worksheet.worksheet.Worksheet 方法), 405
DefinedNameList (openpyxl.workbook.defined_name 中的类), 347	delete_rows() (openpyxl.worksheet.worksheet.Worksheet 方法), 405
definedNames (openpyxl.packaging.workbook.WorkbookPackage 属性), 272	deleteColumns (openpyxl.worksheet.protection.SheetProtection 属性), 391
definedNames (openpyxl.workbook.external_link.external.ExternalReferences 属性), 344	deleted (openpyxl.worksheet.scenario.InputCells 属性), 393
defPPr (openpyxl.drawing.text.ListStyle 属性), 247	deleted (openpyxl.worksheet.smart_tag.CellSmartTag 属性), 394
defRPr (openpyxl.drawing.text.ParagraphProperties 属性), 250	deleteRows (openpyxl.worksheet.protection.SheetProtection 属性), 391
defTabSz (openpyxl.drawing.text.ParagraphProperties 属性), 250	denormalized (openpyxl.worksheet.table.XMLColumnProps 属性), 399
	Deprecated() (在 openpyxl.compat 模块中), 184
	descending (openpyxl.worksheet.filters.SortCondition 属性), 379
	descr (openpyxl.drawing.properties.Non VisualDrawingProps 属性), 238
	description (openpyxl.packaging.core.DocumentProperties 属性), 250

属性), 264	dimensions (<i>openpyxl.worksheet.worksheet.Worksheet</i> 属性), 405
description (<i>openpyxl.pivot.table.PivotFilter</i> 属性), 307	dimensionUniqueName (<i>openpyxl.pivot.cache.CacheHierarchy</i> 属性), 278
description (<i>openpyxl.workbook.defined_name.DefinedName</i> 属性), 346	dir (<i>openpyxl.drawing.effect.InnerShadowEffect</i> 属性), 206
Descriptor (<i>openpyxl.descriptors.base</i> 中的类), 186	dir (<i>openpyxl.drawing.effect.OuterShadow</i> 属性), 208
destinationFile (<i>openpyxl.chartsheet.publish.WebPublishItem</i> 属性), 176	dir (<i>openpyxl.drawing.effect.PresetShadowEffect</i> 属性), 209
destinationFile (<i>openpyxl.workbook.web.WebPublishObject</i> 属性), 358	dir (<i>openpyxl.drawing.effect.ReflectionEffect</i> 属性), 211
destinations (<i>openpyxl.workbook.defined_name.DefinedName</i> 属性), 346	dir (<i>openpyxl.drawing.geometry.LightRig</i> 属性), 224
diagonal (<i>openpyxl.styles.borders.Border</i> 属性), 321	direction (<i>openpyxl.chart.error_bar.ErrorBars</i> 属性), 143
diagonalDown (<i>openpyxl.styles.borders.Border</i> 属性), 322	dirty (<i>openpyxl.drawing.text.CharacterProperties</i> 属性), 244
diagonalUp (<i>openpyxl.styles.borders.Border</i> 属性), 322	disable() (<i>openpyxl.worksheet.protection.SheetProtection</i> 方法), 391
differentFirst (<i>openpyxl.worksheet.header_footer.HeaderFooter</i> 属性), 381	disabled (<i>openpyxl.comments.comment_sheet.Properties</i> 属性), 182
DifferentialStyle (<i>openpyxl.styles.differential</i> 中的类), 326	disabled (<i>openpyxl.worksheet.controls.ControlProperty</i> 属性), 367
DifferentialStyleList (<i>openpyxl.styles.differential</i> 中的类), 326	disabled (<i>openpyxl.worksheet.ole.ObjectPr</i> 属性), 384
differentOddEven (<i>openpyxl.worksheet.header_footer.HeaderFooter</i> 属性), 381	disableFieldList (<i>openpyxl.pivot.table.TableDefinition</i> 属性), 314
DigSig (<i>openpyxl.packaging.extended.ExtendedProperties</i> 属性), 266	disablePrompts (<i>openpyxl.worksheet.datavalidation.DataValidationList</i> 属性), 370
DigSigBlob (<i>openpyxl.packaging.extended</i> 中的类), 265	DiscretePr (<i>openpyxl.pivot.cache</i> 中的类), 280
dimension (<i>openpyxl.pivot.cache.MeasureDimensionManager</i> 属性), 283	discretePr (<i>openpyxl.pivot.cache.FieldGroup</i> 属性), 281
Dimension (<i>openpyxl.worksheet.dimensions</i> 中的类), 371	dispBlanksAs (<i>openpyxl.chart.chartspace.ChartContainer</i> 属性), 137
DimensionHolder (<i>openpyxl.worksheet.dimensions</i> 中的类), 372	dispEq (<i>openpyxl.chart.trendline.Trendline</i> 属性), 171
dimensions (<i>openpyxl.pivot.cache.CacheDefinition</i> 属性), 274	display (<i>openpyxl.worksheet.hyperlink.Hyperlink</i> 属性), 382
	displayFolder (<i>openpyxl</i> 属性), 382

- [pyxl.pivot.cache.CacheHierarchy](#) 属性), 278
- [displayFolder](#) ([openpyxl.pivot.cache.PCDKPI](#) 属性), 285
- [displayName](#) ([openpyxl.worksheet.table.Table](#) 属性), 395
- [DisplayUnitsLabel](#) ([openpyxl.chart.axis](#) 中的类), 128
- [DisplayUnitsLabelList](#) ([openpyxl.chart.axis](#) 中的类), 129
- [dispRSqr](#) ([openpyxl.chart.trendline.Trendline](#) 属性), 171
- [dispUnits](#) ([openpyxl.chart.axis.NumericAxis](#) 属性), 130
- [dispUnitsLbl](#) ([openpyxl.chart.axis.DisplayUnitsLabelList](#) 属性), 129
- [dist](#) ([openpyxl.drawing.effect.InnerShadowEffect](#) 属性), 206
- [dist](#) ([openpyxl.drawing.effect.OuterShadow](#) 属性), 208
- [dist](#) ([openpyxl.drawing.effect.PresetShadowEffect](#) 属性), 209
- [dist](#) ([openpyxl.drawing.effect.ReflectionEffect](#) 属性), 211
- [divId](#) ([openpyxl.chartsheet.publish.WebPublishItem](#) 属性), 176
- [divId](#) ([openpyxl.workbook.web.WebPublishObject](#) 属性), 358
- [dLbl](#) ([openpyxl.chart.label.DataLabelList](#) 属性), 145
- [dLbl](#) ([openpyxl.chart.pivot.PivotFormat](#) 属性), 155
- [dLblPos](#) ([openpyxl.chart.label.DataLabel](#) 属性), 144
- [dLblPos](#) ([openpyxl.chart.label.DataLabelList](#) 属性), 145
- [dLbIs](#) ([openpyxl.chart.area_chart.AreaChart](#) 属性), 125
- [dLbIs](#) ([openpyxl.chart.area_chart.AreaChart3D](#) 属性), 126
- [dLbIs](#) ([openpyxl.chart.bar_chart.BarChart](#) 属性), 134
- [dLbIs](#) ([openpyxl.chart.bar_chart.BarChart3D](#) 属性), 135
- [dLbIs](#) ([openpyxl.chart.bubble_chart.BubbleChart](#) 属性), 136
- [dLbIs](#) ([openpyxl.chart.line_chart.LineChart](#) 属性), 149
- [dLbIs](#) ([openpyxl.chart.line_chart.LineChart3D](#) 属性), 149
- [dLbIs](#) ([openpyxl.chart.pie_chart.DoughnutChart](#) 属性), 152
- [dLbIs](#) ([openpyxl.chart.pie_chart.PieChart](#) 属性), 153
- [dLbIs](#) ([openpyxl.chart.pie_chart.PieChart3D](#) 属性), 153
- [dLbIs](#) ([openpyxl.chart.pie_chart.ProjecteDpieChart](#) 属性), 154
- [dLbIs](#) ([openpyxl.chart.radar_chart.RadarChart](#) 属性), 160
- [dLbIs](#) ([openpyxl.chart.scatter_chart.ScatterChart](#) 属性), 161
- [dLbIs](#) ([openpyxl.chart.series.Series](#) 属性), 162
- [dLbIs](#) ([openpyxl.chart.series.XYSeries](#) 属性), 165
- [dLbIs](#) ([openpyxl.chart.stock_chart.StockChart](#) 属性), 167
- [DocSecurity](#) ([openpyxl.packaging.extended.ExtendedProperties](#) 属性), 266
- [DocumentProperties](#) ([openpyxl.packaging.core](#) 中的类), 264
- [DocumentSecurity\(\)](#) (在 [openpyxl.workbook.protection](#) 模块中), 352
- [DoughnutChart](#) ([openpyxl.chart.pie_chart](#) 中的类), 152
- [doughnutChart](#) ([openpyxl.chart.plotarea.PlotArea](#) 属性), 157
- [downBars](#) ([openpyxl.chart.updown_bars.UpDownBars](#) 属性), 172
- [dpi](#) ([openpyxl.drawing.fill.BlipFillProperties](#) 属性), 214
- [dpi](#) ([openpyxl.workbook.web.WebPublishing](#) 属性), 359
- [dPt](#) ([openpyxl.chart.series.Series](#) 属性), 162
- [dPt](#) ([openpyxl.chart.series.XYSeries](#) 属性), 165
- [draft](#) ([openpyxl.worksheet.page.PrintPageSetup](#) 属性), 387
- [dragOff](#) ([openpyxl.pivot.table.PivotField](#) 属性), 304

- `dragOff` (`openpyxl.pivot.table.PivotHierarchy` 属性), 308
- `dragToCol` (`openpyxl.pivot.table.PivotField` 属性), 304
- `dragToCol` (`openpyxl.pivot.table.PivotHierarchy` 属性), 308
- `dragToData` (`openpyxl.pivot.table.PivotField` 属性), 304
- `dragToData` (`openpyxl.pivot.table.PivotHierarchy` 属性), 308
- `dragToPage` (`openpyxl.pivot.table.PivotField` 属性), 304
- `dragToPage` (`openpyxl.pivot.table.PivotHierarchy` 属性), 308
- `dragToRow` (`openpyxl.pivot.table.PivotField` 属性), 304
- `dragToRow` (`openpyxl.pivot.table.PivotHierarchy` 属性), 308
- `drawing` (`openpyxl.chartsheet.chartsheet.Chartsheet` 属性), 173
- `Drawing` (`openpyxl.drawing.drawing` 中的类), 202
- `Drawing` (`openpyxl.worksheet.drawing` 中的类), 374
- `drawingHF` (`openpyxl.chartsheet.chartsheet.Chartsheet` 属性), 173
- `DrawingHF` (`openpyxl.chartsheet.relation` 中的类), 177
- `dropLines` (`openpyxl.chart.area_chart.AreaChart` 属性), 125
- `dropLines` (`openpyxl.chart.area_chart.AreaChart3D` 属性), 126
- `dropLines` (`openpyxl.chart.line_chart.LineChart` 属性), 149
- `dropLines` (`openpyxl.chart.line_chart.LineChart3D` 属性), 150
- `dropLines` (`openpyxl.chart.stock_chart.StockChart` 属性), 167
- `ds` (`openpyxl.drawing.line.DashStopList` 属性), 233
- `dst()` (`openpyxl.utils.datetime.GMT` 方法), 340
- `dTable` (`openpyxl.chart.plotarea.PlotArea` 属性), 157
- `DummyCode` (`openpyxl.compat` 中的类), 184
- `DummyWorksheet` (`openpyxl.chart.reference` 中的类), 161
- `duotone` (`openpyxl.drawing.fill.Blip` 属性), 213
- `DuotoneEffect` (`openpyxl.drawing.effect` 中的类), 204
- `dvAspect` (`openpyxl.worksheet.ole.OleObject` 属性), 385
- `dx` (`openpyxl.drawing.geometry.Vector3D` 属性), 229
- `dxa_to_cm()` (在 `openpyxl.utils.units` 模块中), 343
- `dxa_to_inch()` (在 `openpyxl.utils.units` 模块中), 343
- `dxif` (`openpyxl.formatting.rule.Rule` 属性), 258
- `dxif` (`openpyxl.styles.differential.DifferentialStyleList` 属性), 327
- `dxifId` (`openpyxl.formatting.rule.Rule` 属性), 258
- `dxifId` (`openpyxl.pivot.table.Format` 属性), 300
- `dxifId` (`openpyxl.styles.table.TableStyleElement` 属性), 337
- `dxifId` (`openpyxl.worksheet.filters.ColorFilter` 属性), 376
- `dxifId` (`openpyxl.worksheet.filters.SortCondition` 属性), 379
- `dxifs` (`openpyxl.styles.stylesheet.Stylesheet` 属性), 336
- `dy` (`openpyxl.drawing.geometry.Vector3D` 属性), 229
- `DynamicFilter` (`openpyxl.worksheet.filters` 中的类), 377
- `dynamicFilter` (`openpyxl.worksheet.filters.FilterColumn` 属性), 378
- `dz` (`openpyxl.drawing.geometry.Vector3D` 属性), 229
- ## E
- `e` (`openpyxl.pivot.cache.GroupItems` 属性), 281
- `e` (`openpyxl.pivot.cache.PCDSDTCEntries` 属性), 286
- `e` (`openpyxl.pivot.cache.SharedItems` 属性), 289
- `e` (`openpyxl.pivot.record.Record` 属性), 296
- `e` (`openpyxl.pivot.table.FieldItem` 属性), 299
- `ea` (`openpyxl.drawing.text.CharacterProperties` 属性), 244
- `eaLnBrk` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250
- `eb` (`openpyxl.cell.text.PhoneticText` 属性), 124
- `editAs` (`openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor` 属性), 242
- `editData` (`openpyxl.pivot.table.TableDefinition` 属性), 314

- EffectContainer (*openpyxl.drawing.effect* 中的类), 204
- effectDag (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- EffectList (*openpyxl.drawing.effect* 中的类), 204
- effectLst (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- effectRef (*openpyxl.drawing.geometry.ShapeStyle* 属性), 228
- embed (*openpyxl.drawing.fill.Blip* 属性), 213
- embed (*openpyxl.workbook.smart_tags.SmartTagProperties* 属性), 354
- EmbeddedWAVAudioFile (*openpyxl.drawing.text* 中的类), 246
- EmptyCell (*openpyxl.cell.read_only* 中的类), 121
- emptyCellReference (*openpyxl.worksheet.errors.IgnoredError* 属性), 374
- EmptyTag (*openpyxl.descriptors.nested* 中的类), 189
- EMU_to_cm() (在 *openpyxl.utils.units* 模块中), 343
- EMU_to_inch() (在 *openpyxl.utils.units* 模块中), 343
- EMU_to_pixels() (在 *openpyxl.utils.units* 模块中), 343
- enable() (*openpyxl.worksheet.protection.SheetProtection* 方法), 391
- enabled (*openpyxl.worksheet.protection.SheetProtection* 属性), 391
- enableDrill (*openpyxl.pivot.table.TableDefinition* 属性), 314
- enableFieldProperties (*openpyxl.pivot.table.TableDefinition* 属性), 314
- enableFormatConditionsCalculation (*openpyxl.worksheet.properties.WorksheetProperties* 属性), 390
- enableRefresh (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
- enableWizard (*openpyxl.pivot.table.TableDefinition* 属性), 314
- encoding (*openpyxl.cell.cell.Cell* 属性), 120
- end (*openpyxl.styles.borders.Border* 属性), 322
- end_color (*openpyxl.styles.fills.PatternFill* 属性), 328
- endA (*openpyxl.drawing.effect.ReflectionEffect* 属性), 211
- endCxn (*openpyxl.drawing.connector.NonVisualConnectorProperties* 属性), 201
- endDate (*openpyxl.pivot.cache.RangePr* 属性), 287
- endNum (*openpyxl.pivot.cache.RangePr* 属性), 287
- endParaRPr (*openpyxl.drawing.text.Paragraph* 属性), 248
- endPos (*openpyxl.drawing.effect.ReflectionEffect* 属性), 211
- endSnd (*openpyxl.drawing.text.Hyperlink* 属性), 247
- entries (*openpyxl.pivot.cache.TupleCache* 属性), 290
- equalAverage (*openpyxl.formatting.rule.Rule* 属性), 258
- err (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- errBars (*openpyxl.chart.series.Series* 属性), 163
- errBars (*openpyxl.chart.series.XYSeries* 属性), 165
- errBarType (*openpyxl.chart.error_bar.ErrorBars* 属性), 143
- errDir (*openpyxl.chart.error_bar.ErrorBars* 属性), 143
- ERROR (*openpyxl.formula.tokenizer.Token* 属性), 260
- Error (*openpyxl.pivot.fields* 中的类), 292
- error (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 368
- ERROR_CODES (*openpyxl.formula.tokenizer.Tokenizer* 属性), 261
- ErrorBars (*openpyxl.chart.error_bar* 中的类), 143
- errorCaption (*openpyxl.pivot.table.TableDefinition* 属性), 314
- errors (*openpyxl.worksheet.page.PrintPageSetup* 属性), 387
- errorStyle (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 368
- errorTitle (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 368
- errValType (*openpyxl.chart.error_bar.ErrorBars* 属性), 143

- `escape()` (在 `openpyxl.utils.escape` 模块中), 340
- `evalError` (`openpyxl.worksheet.errors.IgnoredError` 属性), 375
- `evalOrder` (`openpyxl.pivot.table.PivotFilter` 属性), 307
- `evenFooter` (`openpyxl.worksheet.header_footer.HeaderFooter` 属性), 381
- `evenHeader` (`openpyxl.worksheet.header_footer.HeaderFooter` 属性), 381
- `excel_base_date` (`openpyxl.workbook.workbook.Workbook` 属性), 360
- `ExcelReader` (`openpyxl.reader.excel` 中的类), 318
- `ExcelWriter` (`openpyxl.writer.excel` 中的类), 407
- `expand()` (`openpyxl.worksheet.cell_range.CellRange` 方法), 363
- `expand_cell_ranges()` (在 `openpyxl.worksheet.datavalidation` 模块中), 370
- `expand_levels()` (在 `openpyxl.utils.dataframe` 模块中), 339
- `expected_type` (`openpyxl.chart.descriptors.NumberFormatDescriptor` 属性), 143
- `expected_type` (`openpyxl.chart.title.TitleDescriptor` 属性), 171
- `expected_type` (`openpyxl.descriptors.base.ASCII` 属性), 185
- `expected_type` (`openpyxl.descriptors.base.Bool` 属性), 186
- `expected_type` (`openpyxl.descriptors.base.DateTime` 属性), 186
- `expected_type` (`openpyxl.descriptors.base.Float` 属性), 186
- `expected_type` (`openpyxl.descriptors.base.Integer` 属性), 186
- `expected_type` (`openpyxl.descriptors.base.Max` 属性), 187
- `expected_type` (`openpyxl.descriptors.base.Min` 属性), 187
- `expected_type` (`openpyxl.descriptors.base.String` 属性), 187
- `expected_type` (`openpyxl.descriptors.base.Tuple` 属性), 187
- `expected_type` (`openpyxl.descriptors.base.Typed` 属性), 188
- `expected_type` (`openpyxl.descriptors.excel.TextPoint` 属性), 189
- `expected_type` (`openpyxl.descriptors.sequence.Sequence` 属性), 191
- `expected_type` (`openpyxl.drawing.colors.ColorChoiceDescriptor` 属性), 193
- `expected_type` (`openpyxl.packaging.core.NestedDateTime` 属性), 265
- `expected_type` (`openpyxl.styles.colors.ColorDescriptor` 属性), 325
- `expected_type` (`openpyxl.styles.colors.RGB` 属性), 326
- `expected_type` (`openpyxl.styles.fills.StopList` 属性), 329
- `explosion` (`openpyxl.chart.marker.DataPoint` 属性), 151
- `explosion` (`openpyxl.chart.series.Series` 属性), 163
- `ext` (`openpyxl.descriptors.excel.ExtensionList` 属性), 188
- `ext` (`openpyxl.drawing.geometry.GroupTransform2D` 属性), 224
- `ext` (`openpyxl.drawing.geometry.Transform2D` 属性), 229
- `ext` (`openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor` 属性), 240
- `ext` (`openpyxl.drawing.spreadsheet_drawing.OneCellAnchor` 属性), 241
- `ext` (`openpyxl.drawing.xdr.XDRTransform2D` 属性), 255
- `ext` (`openpyxl.worksheet.errors.ExtensionList` 属性), 374
- `extend` (`openpyxl.cell.text.InlineFont` 属性), 123
- `extend` (`openpyxl.styles.fonts.Font` 属性), 330

ExtendedProperties (<i>openpyxl.packaging.extended</i> 中的类), 265	的类), 345
Extension (<i>openpyxl.descriptors.excel</i> 中的类), 188	ExternalSheetDataSet (<i>openpyxl.workbook.external_link.external</i> 中的类), 345
Extension (<i>openpyxl.packaging.manifest.FileExtension</i> 属性), 268	ExternalSheetNames (<i>openpyxl.workbook.external_link.external</i> 中的类), 345
Extension (<i>openpyxl.worksheet.errors</i> 中的类), 374	extLst (<i>openpyxl.chart.area_chart.AreaChart</i> 属性), 125
ExtensionList (<i>openpyxl.descriptors.excel</i> 中的类), 188	extLst (<i>openpyxl.chart.axis.DateAxis</i> 属性), 127
ExtensionList (<i>openpyxl.worksheet.errors</i> 中的类), 374	extLst (<i>openpyxl.chart.axis.DisplayUnitsLabelList</i> 属性), 129
extensions (<i>openpyxl.packaging.manifest.Manifest</i> 属性), 269	extLst (<i>openpyxl.chart.axis.NumericAxis</i> 属性), 130
ExternalBook (<i>openpyxl.workbook.external_link.external</i> 中的类), 344	extLst (<i>openpyxl.chart.axis.Scaling</i> 属性), 131
externalBook (<i>openpyxl.workbook.external_link.external.ExternalBook</i> 属性), 345	extLst (<i>openpyxl.chart.axis.SeriesAxis</i> 属性), 131
ExternalCell (<i>openpyxl.workbook.external_link.external</i> 中的类), 344	extLst (<i>openpyxl.chart.axis.TextAxis</i> 属性), 133
ExternalData (<i>openpyxl.chart.chartspace</i> 中的类), 139	extLst (<i>openpyxl.chart.bar_chart.BarChart</i> 属性), 134
externalData (<i>openpyxl.chart.chartspace.ChartSpace</i> 属性), 138	extLst (<i>openpyxl.chart.bar_chart.BarChart3D</i> 属性), 135
ExternalDefinedName (<i>openpyxl.workbook.external_link.external</i> 中的类), 344	extLst (<i>openpyxl.chart.bubble_chart.BubbleChart</i> 属性), 136
ExternalLink (<i>openpyxl.workbook.external_link.external</i> 中的类), 345	extLst (<i>openpyxl.chart.chartspace.ChartContainer</i> 属性), 137
ExternalReference (<i>openpyxl.workbook.external_reference</i> 中的类), 348	extLst (<i>openpyxl.chart.chartspace.ChartSpace</i> 属性), 138
externalReferences (<i>openpyxl.packaging.workbook.WorkbookPackage</i> 属性), 273	extLst (<i>openpyxl.chart.data_source.MultiLevelStrData</i> 属性), 140
ExternalRow (<i>openpyxl.workbook.external_link.external</i> 中的类), 345	extLst (<i>openpyxl.chart.data_source.MultiLevelStrRef</i> 属性), 140
ExternalSheetData (<i>openpyxl.workbook.external_link.external</i> 中的类), 345	extLst (<i>openpyxl.chart.data_source.NumData</i> 属性), 141
	extLst (<i>openpyxl.chart.data_source.NumRef</i> 属性), 141
	extLst (<i>openpyxl.chart.data_source.StrData</i> 属性), 142
	extLst (<i>openpyxl.chart.data_source.StrRef</i> 属性), 142
	extLst (<i>openpyxl.chart.error_bar.ErrorBars</i> 属性), 144
	extLst (<i>openpyxl.chart.label.DataLabel</i> 属性), 144
	extLst (<i>openpyxl.chart.label.DataLabelList</i> 属性), 144

- 145
- `extLst` (`openpyxl.chart.layout.Layout` 属性), 146
- `extLst` (`openpyxl.chart.layout.ManualLayout` 属性), 147
- `extLst` (`openpyxl.chart.legend.Legend` 属性), 147
- `extLst` (`openpyxl.chart.legend.LegendEntry` 属性), 148
- `extLst` (`openpyxl.chart.line_chart.LineChart` 属性), 149
- `extLst` (`openpyxl.chart.line_chart.LineChart3D` 属性), 150
- `extLst` (`openpyxl.chart.marker.DataPoint` 属性), 151
- `extLst` (`openpyxl.chart.marker.Marker` 属性), 151
- `extLst` (`openpyxl.chart.pie_chart.DoughnutChart` 属性), 152
- `extLst` (`openpyxl.chart.pie_chart.PieChart` 属性), 153
- `extLst` (`openpyxl.chart.pie_chart.PieChart3D` 属性), 153
- `extLst` (`openpyxl.chart.pie_chart.ProjectedPieChart` 属性), 154
- `extLst` (`openpyxl.chart.pivot.PivotFormat` 属性), 155
- `extLst` (`openpyxl.chart.pivot.PivotSource` 属性), 155
- `extLst` (`openpyxl.chart.plotarea.DataTable` 属性), 156
- `extLst` (`openpyxl.chart.plotarea.PlotArea` 属性), 157
- `extLst` (`openpyxl.chart.radar_chart.RadarChart` 属性), 160
- `extLst` (`openpyxl.chart.scatter_chart.ScatterChart` 属性), 162
- `extLst` (`openpyxl.chart.series.Series` 属性), 163
- `extLst` (`openpyxl.chart.shapes.GraphicalProperties` 属性), 166
- `extLst` (`openpyxl.chart.stock_chart.StockChart` 属性), 167
- `extLst` (`openpyxl.chart.surface_chart.SurfaceChart` 属性), 168
- `extLst` (`openpyxl.chart.surface_chart.SurfaceChart3D` 属性), 168
- `extLst` (`openpyxl.chart.title.Title` 属性), 170
- `extLst` (`openpyxl.chart.trendline.Trendline` 属性), 171
- `extLst` (`openpyxl.chart.trendline.TrendlineLabel` 属性), 172
- `extLst` (`openpyxl.chart.updown_bars.UpDownBars` 属性), 173
- `extLst` (`openpyxl.chartsheet.chartsheet.Chartsheet` 属性), 173
- `extLst` (`openpyxl.chartsheet.views.ChartsheetView` 属性), 180
- `extLst` (`openpyxl.chartsheet.views.ChartsheetViewList` 属性), 180
- `extLst` (`openpyxl.comments.comment_sheet.CommentSheet` 属性), 182
- `extLst` (`openpyxl.drawing.colors.ColorMapping` 属性), 194
- `extLst` (`openpyxl.drawing.connector.ConnectorLocking` 属性), 200
- `extLst` (`openpyxl.drawing.connector.NonVisualConnectorProperties` 属性), 201
- `extLst` (`openpyxl.drawing.fill.Blip` 属性), 213
- `extLst` (`openpyxl.drawing.geometry.Backdrop` 属性), 221
- `extLst` (`openpyxl.drawing.geometry.Scene3D` 属性), 227
- `extLst` (`openpyxl.drawing.geometry.Shape3D` 属性), 228
- `extLst` (`openpyxl.drawing.graphic.GraphicFrameLocking` 属性), 230
- `extLst` (`openpyxl.drawing.graphic.NonVisualGraphicFrameProperties` 属性), 232
- `extLst` (`openpyxl.drawing.line.LineProperties` 属性), 234
- `extLst` (`openpyxl.drawing.picture.NonVisualPictureProperties` 属性), 234
- `extLst` (`openpyxl.drawing.picture.PictureLocking` 属性), 235
- `extLst` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `extLst` (`openpyxl.drawing.properties.GroupShapeProperties` 属性), 238
- `extLst` (`openpyxl.drawing.properties.NonVisualDrawingProps` 属性), 238
- `extLst` (`openpyxl.drawing.properties.NonVisualDrawingShapeProps` 属性), 238

- 属性), 239
 - extLst (*openpyxl.drawing.properties.NonVisualGroupDrawingProperties* 属性), 239
 - extLst (*openpyxl.drawing.text.CharacterProperties* 属性), 244
 - extLst (*openpyxl.drawing.text.Hyperlink* 属性), 247
 - extLst (*openpyxl.drawing.text.ListStyle* 属性), 247
 - extLst (*openpyxl.drawing.text.ParagraphProperties* 属性), 250
 - extLst (*openpyxl.drawing.text.RichTextProperties* 属性), 252
 - extLst (*openpyxl.formatting.rule.FormatObject* 属性), 257
 - extLst (*openpyxl.formatting.rule.Rule* 属性), 258
 - extLst (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 272
 - extLst (*openpyxl.pivot.cache.CacheDefinition* 属性), 274
 - extLst (*openpyxl.pivot.cache.CacheField* 属性), 276
 - extLst (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
 - extLst (*openpyxl.pivot.cache.CacheSource* 属性), 279
 - extLst (*openpyxl.pivot.cache.CalculatedItem* 属性), 279
 - extLst (*openpyxl.pivot.cache.CalculatedMember* 属性), 280
 - extLst (*openpyxl.pivot.cache.GroupLevel* 属性), 282
 - extLst (*openpyxl.pivot.cache.TupleCache* 属性), 290
 - extLst (*openpyxl.pivot.record.RecordList* 属性), 297
 - extLst (*openpyxl.pivot.table.ConditionalFormat* 属性), 298
 - extLst (*openpyxl.pivot.table.DataField* 属性), 298
 - extLst (*openpyxl.pivot.table.Format* 属性), 300
 - extLst (*openpyxl.pivot.table.PageField* 属性), 302
 - extLst (*openpyxl.pivot.table.PivotArea* 属性), 302
 - extLst (*openpyxl.pivot.table.PivotField* 属性), 304
 - extLst (*openpyxl.pivot.table.PivotFilter* 属性), 307
 - extLst (*openpyxl.pivot.table.PivotHierarchy* 属性), 308
 - extLst (*openpyxl.pivot.table.Reference* 属性), 310
 - extLst (*openpyxl.pivot.table.TableDefinition* 属性), 314
 - extLst (*openpyxl.styles.cell_style.CellStyle* 属性), 323
 - extLst (*openpyxl.styles.stylesheet.Stylesheet* 属性), 336
 - extLst (*openpyxl.workbook.views.BookView* 属性), 355
 - extLst (*openpyxl.workbook.views.CustomWorkbookView* 属性), 356
 - extLst (*openpyxl.worksheet.errors.IgnoredErrors* 属性), 375
 - extLst (*openpyxl.worksheet.filters.AutoFilter* 属性), 376
 - extLst (*openpyxl.worksheet.filters.FilterColumn* 属性), 378
 - extLst (*openpyxl.worksheet.filters.SortState* 属性), 380
 - extLst (*openpyxl.worksheet.table.Table* 属性), 396
 - extLst (*openpyxl.worksheet.table.TableColumn* 属性), 397
 - extLst (*openpyxl.worksheet.table.XMLColumnProps* 属性), 399
 - extLst (*openpyxl.worksheet.views.SheetViewList* 属性), 402
 - extrusionClr (*openpyxl.drawing.geometry.Shape3D* 属性), 228
 - extrusionH (*openpyxl.drawing.geometry.Shape3D* 属性), 228
 - extrusionOk (*openpyxl.drawing.geometry.Path2D* 属性), 225
- ## F
- f (*openpyxl.chart.data_source.MultiLevelStrRef* 属性), 140
 - f (*openpyxl.chart.data_source.NumRef* 属性), 141
 - f (*openpyxl.chart.data_source.StrRef* 属性), 142
 - f (*openpyxl.pivot.fields.Boolean* 属性), 291
 - f (*openpyxl.pivot.fields.DateTimeField* 属性), 292
 - f (*openpyxl.pivot.fields.Error* 属性), 292
 - f (*openpyxl.pivot.fields.Missing* 属性), 293
 - f (*openpyxl.pivot.fields.Number* 属性), 294
 - f (*openpyxl.pivot.fields.Text* 属性), 295

- `f` (`openpyxl.pivot.table.FieldItem` 属性), 299
- `fadeDir` (`openpyxl.drawing.effect.ReflectionEffect` 属性), 211
- `family` (`openpyxl.cell.text.InlineFont` 属性), 123
- `family` (`openpyxl.styles.fonts.Font` 属性), 330
- `fc` (`openpyxl.pivot.fields.Error` 属性), 292
- `fc` (`openpyxl.pivot.fields.Missing` 属性), 293
- `fc` (`openpyxl.pivot.fields.Number` 属性), 294
- `fc` (`openpyxl.pivot.fields.Text` 属性), 295
- `fgClr` (`openpyxl.drawing.fill.PatternFillProperties` 属性), 218
- `fgColor` (`openpyxl.styles.fills.PatternFill` 属性), 328
- `field` (`openpyxl.pivot.cache.CalculatedItem` 属性), 279
- `field` (`openpyxl.pivot.table.MemberProperty` 属性), 301
- `field` (`openpyxl.pivot.table.PivotArea` 属性), 302
- `field` (`openpyxl.pivot.table.Reference` 属性), 310
- `FieldGroup` (`openpyxl.pivot.cache` 中的类), 281
- `fieldGroup` (`openpyxl.pivot.cache.CacheField` 属性), 276
- `FieldItem` (`openpyxl.pivot.table` 中的类), 299
- `fieldListSortAscending` (`openpyxl.pivot.table.TableDefinition` 属性), 314
- `fieldPosition` (`openpyxl.pivot.table.PivotArea` 属性), 302
- `fieldPrintTitles` (`openpyxl.pivot.table.TableDefinition` 属性), 314
- `FieldsUsage` (`openpyxl.pivot.cache` 中的类), 281
- `fieldsUsage` (`openpyxl.pivot.cache.CacheHierarchy` 属性), 278
- `FieldUsage` (`openpyxl.pivot.cache` 中的类), 281
- `fieldUsage` (`openpyxl.pivot.cache.FieldsUsage` 属性), 281
- `file_link` (`openpyxl.workbook.external_link.external.ExternalLink` 属性), 205
- `FileExtension` (`openpyxl.packaging.manifest` 中的类), 268
- `filenames` (`openpyxl.packaging.manifest.Manifest` 属性), 269
- `fileRecoveryPr` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 273
- `FileRecoveryProperties` (`openpyxl.packaging.workbook` 中的类), 271
- `fileSharing` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 273
- `FileSharing` (`openpyxl.workbook.protection` 中的类), 352
- `fileVersion` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 273
- `FileVersion` (`openpyxl.workbook.properties` 中的类), 350
- `fill` (`openpyxl.cell.read_only.EmptyCell` 属性), 121
- `fill` (`openpyxl.cell.read_only.ReadOnlyCell` 属性), 122
- `fill` (`openpyxl.drawing.geometry.Path2D` 属性), 225
- `fill` (`openpyxl.styles.differential.DifferentialStyle` 属性), 326
- `Fill` (`openpyxl.styles.fills` 中的类), 327
- `fill` (`openpyxl.styles.named_styles.NamedStyle` 属性), 333
- `fill` (`openpyxl.styles.styleable.StyleableObject` 属性), 335
- `fill_type` (`openpyxl.styles.fills.GradientFill` 属性), 328
- `fill_type` (`openpyxl.styles.fills.PatternFill` 属性), 328
- `fillId` (`openpyxl.styles.cell_style.CellStyle` 属性), 323
- `fillId` (`openpyxl.styles.cell_style.StyleArray` 属性), 324
- `fillOverlay` (`openpyxl.drawing.effect.EffectList` 属性), 204
- `fillOverlay` (`openpyxl.drawing.fill.Blip` 属性), 213
- `FillOverlayEffect` (`openpyxl.drawing.effect` 中的类), 205
- `fillRect` (`openpyxl.drawing.fill.StretchInfoProperties` 属性), 220
- `fillRef` (`openpyxl.drawing.geometry.ShapeStyle` 属性), 228
- `fills` (`openpyxl.styles.stylesheet.Stylesheet` 属性),

336	firstPageNumber	(openpyxl.worksheet.page.PrintPageSetup 属性), 387
fillToRect (openpyxl.drawing.fill.PathShadeProperties 属性), 217	firstSheet (openpyxl.workbook.views.BookView 属性), 355	
filter (openpyxl.pivot.table.PivotFilters 属性), 308	firstSliceAng	(openpyxl.chart.pie_chart.DoughnutChart 属性), 152
filter (openpyxl.worksheet.filters.Filters 属性), 379	firstSliceAng (openpyxl.chart.pie_chart.PieChart 属性), 153	
FilterColumn (openpyxl.worksheet.filters 中的类), 378	fitToHeight (openpyxl.worksheet.page.PrintPageSetup 属性), 387	
filterColumn (openpyxl.worksheet.filters.AutoFilter 属性), 376	fitToPage (openpyxl.worksheet.page.PrintPageSetup 属性), 387	
filterMode (openpyxl.worksheet.properties.WorksheetProperties 属性), 390	fitToPage (openpyxl.worksheet.properties.PageSetupProperties 属性), 389	
filterPrivacy (openpyxl.workbook.properties.WorkbookProperties 属性), 351	fitToWidth (openpyxl.worksheet.page.PrintPageSetup 属性), 387	
filters (openpyxl.pivot.table.TableDefinition 属性), 314	flatTx (openpyxl.drawing.text.RichTextProperties 属性), 252	
Filters (openpyxl.worksheet.filters 中的类), 378	fld (openpyxl.drawing.text.Paragraph 属性), 248	
filters (openpyxl.worksheet.filters.FilterColumn 属性), 378	fld (openpyxl.pivot.fields.Tuple 属性), 295	
filterVal (openpyxl.worksheet.filters.Top10 属性), 380	fld (openpyxl.pivot.table.DataField 属性), 298	
find() (openpyxl.packaging.manifest.Manifest 方法), 269	fld (openpyxl.pivot.table.PageField 属性), 302	
find() (openpyxl.packaging.relationship.RelationshipList 方法), 270	fld (openpyxl.pivot.table.PivotFilter 属性), 307	
find_images() (在 openpyxl.reader.drawings 模块中), 318	flip (openpyxl.drawing.fill.GradientFillProperties 属性), 215	
find_sheets() (openpyxl.reader.workbook.WorkbookParser 方法), 319	flip (openpyxl.drawing.fill.TileInfoProperties 属性), 220	
findall() (openpyxl.packaging.manifest.Manifest 方法), 269	flipH (openpyxl.drawing.geometry.GroupTransform2D 属性), 224	
firstDataCol (openpyxl.pivot.table.Location 属性), 300	flipH (openpyxl.drawing.geometry.Transform2D 属性), 229	
firstDataRow (openpyxl.pivot.table.Location 属性), 300	flipH (openpyxl.drawing.xdr.XDRTransform2D 属性), 255	
firstFooter (openpyxl.worksheet.header_footer.HeaderFooter 属性), 381	flipV (openpyxl.drawing.geometry.GroupTransform2D 属性), 224	
firstHeader (openpyxl.worksheet.header_footer.HeaderFooter 属性), 381	flipV (openpyxl.drawing.geometry.Transform2D 属性), 229	
firstHeaderRow (openpyxl.pivot.table.Location 属性), 300	flipV (openpyxl.drawing.xdr.XDRTransform2D 属性), 255	
	Float (openpyxl.descriptors.base 中的类), 186	

- fLocksText (*openpyxl.drawing.connector.Shape* 属性), 201
- fLocksWithSheet (*openpyxl.drawing.spreadsheet_drawing.AnchorClient* 属性), 240
- floor (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- floor (*openpyxl.chart.chartspace.ChartContainer* 属性), 137
- fmla (*openpyxl.drawing.geometry.GeomGuide* 属性), 223
- fmla (*openpyxl.drawing.text.GeomGuide* 属性), 246
- fmtId (*openpyxl.chart.pivot.PivotSource* 属性), 155
- folHlink (*openpyxl.drawing.colors.ColorMapping* 属性), 194
- font (*openpyxl.cell.read_only.EmptyCell* 属性), 121
- font (*openpyxl.cell.read_only.ReadOnlyCell* 属性), 122
- font (*openpyxl.cell.text.RichText* 属性), 124
- Font (*openpyxl.drawing.text* 中的类), 246
- font (*openpyxl.styles.differential.DifferentialStyle* 属性), 326
- Font (*openpyxl.styles.fonts* 中的类), 329
- font (*openpyxl.styles.named_styles.NamedStyle* 属性), 333
- font (*openpyxl.styles.styleable.StyleableObject* 属性), 335
- fontAlign (*openpyxl.drawing.text.ParagraphProperties* 属性), 250
- fontId (*openpyxl.cell.text.PhoneticProperties* 属性), 124
- fontId (*openpyxl.styles.cell_style.CellStyle* 属性), 323
- fontId (*openpyxl.styles.cell_style.StyleArray* 属性), 324
- fontRef (*openpyxl.drawing.geometry.ShapeStyle* 属性), 228
- FontReference (*openpyxl.drawing.geometry* 中的类), 223
- fonts (*openpyxl.styles.stylesheet.Stylesheet* 属性), 336
- fontScale (*openpyxl.drawing.text.TextNormalAutofit* 属性), 254
- footer (*openpyxl.chart.print_settings.PageMargins* 属性), 159
- footer (*openpyxl.worksheet.page.PageMargins* 属性), 385
- forceAA (*openpyxl.drawing.text.RichTextProperties* 属性), 252
- forceFullCalc (*openpyxl.workbook.properties.CalcProperties* 属性), 349
- foreground (*openpyxl.drawing.fill.PatternFillProperties* 属性), 218
- format (*openpyxl.pivot.cache.ServerFormat* 属性), 288
- Format (*openpyxl.pivot.table* 中的类), 300
- format (*openpyxl.pivot.table.ChartFormat* 属性), 297
- format() (*openpyxl.worksheet.merge.MergedCellRange* 方法), 383
- formatCells (*openpyxl.worksheet.protection.SheetProtection* 属性), 391
- formatCode (*openpyxl.chart.data_source.NumData* 属性), 141
- formatCode (*openpyxl.chart.data_source.NumFmt* 属性), 141
- formatCode (*openpyxl.chart.data_source.NumVal* 属性), 141
- formatCode (*openpyxl.styles.numbers.NumberFormat* 属性), 334
- formatColumns (*openpyxl.worksheet.protection.SheetProtection* 属性), 391
- FormatObject (*openpyxl.formatting.rule* 中的类), 257
- formatRows (*openpyxl.worksheet.protection.SheetProtection* 属性), 391
- formats (*openpyxl.pivot.table.TableDefinition* 属性), 315
- formatted (*openpyxl.cell.text.Text* 属性), 125
- formatting (*openpyxl.chart.chartspace.Protection* 属性), 139
- formula (*openpyxl.formatting.rule.Rule* 属性), 258
- formula (*openpyxl.pivot.cache.CacheField* 属性), 276

- p>
- `formula` (`openpyxl.pivot.cache.CalculatedItem` 属性), 279
- `formula` (`openpyxl.worksheet.errors.IgnoredError` 属性), 375
- `formula1` (`openpyxl.worksheet.datavalidation.DataValidation` 属性), 368
- `formula2` (`openpyxl.worksheet.datavalidation.DataValidation` 属性), 369
- `formulaRange` (`openpyxl.worksheet.errors.IgnoredError` 属性), 375
- `FormulaRule()` (在 `openpyxl.formatting.rule` 模块中), 257
- `forward` (`openpyxl.chart.trendline.Trendline` 属性), 171
- `fov` (`openpyxl.drawing.geometry.Camera` 属性), 222
- `fPrintsWithSheet` (`openpyxl.drawing.spreadsheet_drawing.AnchorClient` 属性), 240
- `fPublished` (`openpyxl.drawing.connector.ConnectorShape` 属性), 200
- `fPublished` (`openpyxl.drawing.connector.Shape` 属性), 201
- `fPublished` (`openpyxl.drawing.graphic.GraphicFrame` 属性), 230
- `fPublished` (`openpyxl.drawing.picture.PictureFrame` 属性), 235
- `freeze_panes` (`openpyxl.worksheet.worksheet.Worksheet` 属性), 405
- `from_array()` (`openpyxl.styles.cell_style.CellStyle` 类方法), 323
- `from_cell()` (`openpyxl.comments.comment_sheet.CommentSheet` 类方法), 181
- `from_comments()` (`openpyxl.comments.comment_sheet.CommentSheet` 类方法), 182
- `from_excel()` (在 `openpyxl.utils.datetime` 模块中), 340
- `from_ISO8601()` (在 `openpyxl.utils.datetime` 模块中), 340
- `from_tree()` (`openpyxl.chart.axis.NumericAxis` 类方法), 130
- `from_tree()` (`openpyxl.chart.plotarea.PlotArea` 类方法), 157
- `from_tree()` (`openpyxl.descriptors.nested.EmptyTag` 类方法), 189
- `from_tree()` (`openpyxl.descriptors.nested.Nested` 类方法), 189
- `from_tree()` (`openpyxl.descriptors.nested.NestedBool` 类方法), 190
- `from_tree()` (`openpyxl.descriptors.nested.NestedText` 类方法), 190
- `from_tree()` (`openpyxl.descriptors.sequence.NestedSequence` 类方法), 191
- `from_tree()` (`openpyxl.descriptors.sequence.ValueSequence` 类方法), 191
- `from_tree()` (`openpyxl.descriptors.serialisable.Serialisable` 类方法), 191
- `from_tree()` (`openpyxl.styles.fills.Fill` 类方法), 327
- `from_tree()` (`openpyxl.styles.fonts.Font` 类方法), 330
- `from_tree()` (`openpyxl.styles.stylesheet.Stylesheet` 类方法), 336
- `from_tree()` (`openpyxl.workbook.protection.WorkbookProtection` 类方法), 352
- `from_tree()` (`openpyxl.worksheet.header_footer.HeaderFooterItem` 类方法), 382
- `from_tree()` (`openpyxl.worksheet.page.PrintPageSetup` 类方法), 387
- `from_tree()` (`openpyxl.worksheet.table.TableColumn` 类方法), 397
- `fromWordArt` (`openpyxl.drawing.text.RichTextProperties` 属性), 252
- `fullCalcLoad` (`openpyxl.workbook.properties.CalcProperties` 属性), 349
- `fullPrecision` (`openpyxl.workbook.properties.CalcProperties` 属性), 349
- `FUNC` (`openpyxl.formula.tokenizer.Token` 属性), 260
- `function` (`openpyxl.workbook.defined_name.DefinedName` 属性), 346
- `FunctionGroup` (`openpyxl.workbook.function_group`

- 中的类), 348
- `functionGroup` (`openpyxl.workbook.function_group.FunctionGroup` 属性), 348
- `functionGroupId` (`openpyxl.workbook.defined_name.DefinedName` 属性), 346
- `FunctionGroupList` (`openpyxl.workbook.function_group` 中的类), 348
- `functionGroups` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 273
- ## G
- `g` (`openpyxl.drawing.colors.RGBPercent` 属性), 195
- `gamma` (`openpyxl.drawing.colors.SchemeColor` 属性), 196
- `gamma` (`openpyxl.drawing.colors.SystemColor` 属性), 198
- `gapDepth` (`openpyxl.chart.area_chart.AreaChart3D` 属性), 126
- `gapDepth` (`openpyxl.chart.bar_chart.BarChart3D` 属性), 135
- `gapDepth` (`openpyxl.chart.line_chart.LineChart3D` 属性), 150
- `gapWidth` (`openpyxl.chart.bar_chart.BarChart` 属性), 134
- `gapWidth` (`openpyxl.chart.bar_chart.BarChart3D` 属性), 135
- `gapWidth` (`openpyxl.chart.pie_chart.ProjectedPieChart` 属性), 154
- `gapWidth` (`openpyxl.chart.updown_bars.UpDownBars` 属性), 173
- `gd` (`openpyxl.drawing.geometry.GeomGuideList` 属性), 223
- `gd` (`openpyxl.drawing.text.GeomGuideList` 属性), 246
- `gdLst` (`openpyxl.drawing.geometry.CustomGeometry2D` 属性), 223
- `GeomGuide` (`openpyxl.drawing.geometry` 中的类), 223
- `GeomGuide` (`openpyxl.drawing.text` 中的类), 246
- `GeomGuideList` (`openpyxl.drawing.geometry` 中的类), 223
- `GeomRect` (`openpyxl.drawing.geometry` 中的类), 223
- `get()` (`openpyxl.workbook.defined_name.DefinedNameList` 方法), 347
- `get()` (`openpyxl.worksheet.table.TableList` 方法), 399
- `get_closer()` (`openpyxl.formula.tokenizer.Token` 方法), 261
- `get_column_interval()` (在 `openpyxl.utils.cell` 模块中), 339
- `get_column_letter()` (在 `openpyxl.utils.cell` 模块中), 339
- `get_dependents()` (在 `openpyxl.packaging.relationship` 模块中), 270
- `get_emu_dimensions()` (`openpyxl.drawing.drawing.Drawing` 方法), 202
- `get_index()` (`openpyxl.workbook.workbook.Workbook` 方法), 360
- `get_named_range()` (`openpyxl.workbook.workbook.Workbook` 方法), 360
- `get_named_ranges()` (`openpyxl.workbook.workbook.Workbook` 方法), 360
- `get_rel()` (在 `openpyxl.packaging.relationship` 模块中), 270
- `get_rels_path()` (在 `openpyxl.packaging.relationship` 模块中), 270
- `get_sheet_by_name()` (`openpyxl.workbook.workbook.Workbook` 方法), 361
- `get_sheet_names()` (`openpyxl.workbook.workbook.Workbook` 方法), 361
- `get_tokens()` (`openpyxl.formula.translate.Translator` 方法), 262
- `get_type()` (在 `openpyxl.cell.cell` 模块中), 121
- `get_version()` (在 `openpyxl.packaging.extended` 模块中), 268
- `glow` (`openpyxl.drawing.effect.EffectList` 属性), 204

- GlowEffect (*openpyxl.drawing.effect* 中的类), 205
- GMT (*openpyxl.utils.datetime* 中的类), 340
- goal (*openpyxl.pivot.cache.PCDKPI* 属性), 285
- gradFill (*openpyxl.chart.shapes.GraphicalProperties* 属性), 166
- gradFill (*openpyxl.drawing.line.LineProperties* 属性), 234
- gradFill (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- GradientFill (*openpyxl.styles.fills* 中的类), 327
- GradientFillProperties (*openpyxl.drawing.fill* 中的类), 215
- GradientStop (*openpyxl.drawing.fill* 中的类), 215
- grandCol (*openpyxl.pivot.table.PivotArea* 属性), 302
- grandRow (*openpyxl.pivot.table.PivotArea* 属性), 303
- grandTotalCaption (*openpyxl.pivot.table.TableDefinition* 属性), 315
- graphic (*openpyxl.drawing.graphic.GraphicFrame* 属性), 230
- graphicalProperties (*openpyxl.chart.axis.ChartLines* 属性), 127
- graphicalProperties (*openpyxl.chart.axis.DisplayUnitsLabel* 属性), 128
- graphicalProperties (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- graphicalProperties (*openpyxl.chart.error_bar.ErrorBars* 属性), 144
- graphicalProperties (*openpyxl.chart.legend.Legend* 属性), 148
- graphicalProperties (*openpyxl.chart.marker.DataPoint* 属性), 151
- graphicalProperties (*openpyxl.chart.marker.Marker* 属性), 151
- graphicalProperties (*openpyxl.chart.pivot.PivotFormat* 属性), 155
- graphicalProperties (*openpyxl.chart.plotarea.DataTable* 属性), 156
- graphicalProperties (*openpyxl.chart.plotarea.PlotArea* 属性), 157
- graphicalProperties (*openpyxl.chart.series.Series* 属性), 163
- GraphicalProperties (*openpyxl.chart.shapes* 中的类), 166
- graphicalProperties (*openpyxl.chart.surface_chart.BandFormat* 属性), 168
- graphicalProperties (*openpyxl.chart.title.Title* 属性), 170
- graphicalProperties (*openpyxl.chart.trendline.Trendline* 属性), 171
- graphicalProperties (*openpyxl.chart.trendline.TrendlineLabel* 属性), 172
- graphicalProperties (*openpyxl.drawing.connector.Shape* 属性), 201
- graphicalProperties (*openpyxl.drawing.picture.PictureFrame* 属性), 235
- GraphicData (*openpyxl.drawing.graphic* 中的类), 230
- graphicData (*openpyxl.drawing.graphic.GraphicObject* 属性), 231
- GraphicFrame (*openpyxl.drawing.graphic* 中的类), 230
- graphicFrame (*openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor* 属性), 240
- graphicFrame (*openpyxl.drawing.spreadsheet_drawing.OneCellAnchor* 属性), 241
- graphicFrame (*openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor* 属性), 242
- GraphicFrameLocking (*openpyxl.drawing.graphic* 中的类), 230
- graphicFrameLocks (*openpyxl.drawing.graphic.Non VisualGraphicFrameProperties* 属性), 232
- GraphicObject (*openpyxl.drawing.graphic* 中的类), 231

- ul style="list-style-type: none; padding-left: 0;">
- gray (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- gray (*openpyxl.drawing.colors.SystemColor* 属性), 198
- GrayscaleEffect (*openpyxl.drawing.effect* 中的类), 206
- grayscale (*openpyxl.drawing.fill.Blip* 属性), 213
- green (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- green (*openpyxl.drawing.colors.SystemColor* 属性), 198
- greenMod (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- greenMod (*openpyxl.drawing.colors.SystemColor* 属性), 198
- greenOff (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- greenOff (*openpyxl.drawing.colors.SystemColor* 属性), 198
- gridDropZones (*openpyxl.pivot.table.TableDefinition* 属性), 315
- gridLines (*openpyxl.worksheet.page.PrintOptions* 属性), 386
- gridLinesSet (*openpyxl.worksheet.page.PrintOptions* 属性), 386
- group (*openpyxl.pivot.cache.GroupMember* 属性), 282
- group (*openpyxl.pivot.cache.Groups* 属性), 283
- group() (*openpyxl.worksheet.dimensions.DimensionHolder* 方法), 372
- groupBy (*openpyxl.pivot.cache.RangePr* 属性), 287
- grouping (*openpyxl.chart.area_chart.AreaChart* 属性), 126
- grouping (*openpyxl.chart.area_chart.AreaChart3D* 属性), 126
- grouping (*openpyxl.chart.bar_chart.BarChart* 属性), 134
- grouping (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- grouping (*openpyxl.chart.line_chart.LineChart* 属性), 149
- grouping (*openpyxl.chart.line_chart.LineChart3D* 属性), 150
- groupInterval (*openpyxl.pivot.cache.RangePr* 属性), 287
- GroupItems (*openpyxl.pivot.cache* 中的类), 281
- groupItems (*openpyxl.pivot.cache.FieldGroup* 属性), 281
- GroupLevel (*openpyxl.pivot.cache* 中的类), 282
- groupLevel (*openpyxl.pivot.cache.GroupLevels* 属性), 282
- GroupLevels (*openpyxl.pivot.cache* 中的类), 282
- groupLevels (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
- GroupLocking (*openpyxl.drawing.properties* 中的类), 237
- GroupMember (*openpyxl.pivot.cache* 中的类), 282
- groupMember (*openpyxl.pivot.cache.GroupMembers* 属性), 283
- GroupMembers (*openpyxl.pivot.cache* 中的类), 283
- groupMembers (*openpyxl.pivot.cache.LevelGroup* 属性), 283
- Groups (*openpyxl.pivot.cache* 中的类), 283
- groups (*openpyxl.pivot.cache.GroupLevel* 属性), 282
- GroupShape (*openpyxl.drawing.graphic* 中的类), 231
- GroupShapeProperties (*openpyxl.drawing.properties* 中的类), 237
- GroupTransform2D (*openpyxl.drawing.geometry* 中的类), 224
- grow (*openpyxl.drawing.effect.BlurEffect* 属性), 203
- groupFill (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- grpSp (*openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor* 属性), 240
- grpSp (*openpyxl.drawing.spreadsheet_drawing.OneCellAnchor* 属性), 241
- grpSp (*openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor* 属性), 242
- grpSpLocks (*openpyxl.drawing.properties.NonVisualGroupDrawingShapeProperties* 属性), 239
- grpSpPr (*openpyxl.drawing.graphic.GroupShape* 属性), 231
- gsLst (*openpyxl.drawing.fill.GradientFillProperties*

属性), 215	<i>pyxl.chartsheet.chartsheet.Chartsheet</i> 属
<i>gte</i> (<i>openpyxl.formatting.rule.FormatObject</i> 属性), 257	性), 173
<i>guid</i> (<i>openpyxl.chartsheet.custom.CustomChartsheetView</i> 属性), 174	<i>headerFooter</i> (<i>openpyxl.chartsheet.custom.CustomChartsheetView</i> 属性), 174
<i>guid</i> (<i>openpyxl.comments.comment_sheet.CommentRange</i> 属性), 181	<i>HeaderFooter</i> (<i>openpyxl.worksheet.header_footer</i> 中的类), 381
<i>Guid</i> (<i>openpyxl.descriptors.excel</i> 中的类), 188	<i>HeaderFooterItem</i> (<i>openpyxl.worksheet.header_footer</i> 中的类), 381
<i>guid</i> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属性), 356	<i>headerRowBorderDxfId</i> (<i>openpyxl.worksheet.table.Table</i> 属性), 396
H	<i>headerRowCellStyle</i> (<i>openpyxl.worksheet.table.Table</i> 属性), 396
<i>h</i> (<i>openpyxl.chart.layout.ManualLayout</i> 属性), 147	<i>headerRowCellStyle</i> (<i>openpyxl.worksheet.table.TableColumn</i> 属性), 397
<i>h</i> (<i>openpyxl.drawing.geometry.Bevel</i> 属性), 221	<i>headerRowCount</i> (<i>openpyxl.worksheet.table.Table</i> 属性), 396
<i>h</i> (<i>openpyxl.drawing.geometry.Path2D</i> 属性), 225	<i>headerRowDxfId</i> (<i>openpyxl.worksheet.table.Table</i> 属性), 396
<i>h</i> (<i>openpyxl.pivot.table.FieldItem</i> 属性), 299	<i>headerRowDxfId</i> (<i>openpyxl.worksheet.table.TableColumn</i> 属性), 397
<i>hangingPunct</i> (<i>openpyxl.drawing.text.ParagraphProperties</i> 属性), 250	<i>HeadingPairs</i> (<i>openpyxl.packaging.extended.ExtendedProperties</i> 属性), 266
<i>has_style</i> (<i>openpyxl.styles.styleable.StyleableObject</i> 属性), 335	<i>headings</i> (<i>openpyxl.worksheet.page.PrintOptions</i> 属性), 386
<i>hash_password()</i> (在 <i>openpyxl.utils.protection</i> 模块中), 342	<i>height</i> (<i>openpyxl.chart.layout.ManualLayout</i> 属性), 147
<i>hashValue</i> (<i>openpyxl.chartsheet.protection.ChartsheetProtection</i> 属性), 175	<i>height</i> (<i>openpyxl.drawing.drawing.Drawing</i> 属性), 202
<i>hashValue</i> (<i>openpyxl.workbook.protection.FileSharing</i> 属性), 352	<i>height</i> (<i>openpyxl.drawing.geometry.PositiveSize2D</i> 属性), 226
<i>hashValue</i> (<i>openpyxl.worksheet.protection.SheetProtection</i> 属性), 392	<i>height</i> (<i>openpyxl.worksheet.dimensions.RowDimension</i> 属性), 372
<i>headEnd</i> (<i>openpyxl.drawing.line.LineProperties</i> 属性), 234	<i>help</i> (<i>openpyxl.workbook.defined_name.DefinedName</i> 属性), 346
<i>header</i> (<i>openpyxl.chart.print_settings.PageMargins</i> 属性), 159	<i>HexBinary</i> (<i>openpyxl.descriptors.excel</i> 中的类), 188
<i>header</i> (<i>openpyxl.worksheet.page.PageMargins</i> 属性), 385	<i>hidden</i> (<i>openpyxl.drawing.properties.NonVisualDrawingProps</i> 属性), 238
<i>headerFooter</i> (<i>openpyxl.chart.print_settings.PrintSettings</i> 属性), 159	
<i>HeaderFooter</i> (<i>openpyxl.chartsheet.chartsheet.Chartsheet</i> 属性), 173	
<i>headerFooter</i> (<i>openpyxl.worksheet.header_footer</i> 中的类), 381	

<code>hidden</code> (<code>openpyxl.pivot.cache.CacheHierarchy</code> 属性), 278	<code>hiLowLines</code> (<code>openpyxl.chart.line_chart.LineChart</code> 属性), 149
<code>hidden</code> (<code>openpyxl.styles.named_styles.NamedStyle</code> 属性), 333	<code>hiLowLines</code> (<code>openpyxl.chart.line_chart.LineChart3D</code> 属性), 150
<code>hidden</code> (<code>openpyxl.styles.protection.Protection</code> 属性), 334	<code>hiLowLines</code> (<code>openpyxl.chart.stock_chart.StockChart</code> 属性), 167
<code>hidden</code> (<code>openpyxl.workbook.defined_name.DefinedName</code> 属性), 347	<code>history</code> (<code>openpyxl.drawing.text.Hyperlink</code> 属性), 247
<code>hidden</code> (<code>openpyxl.worksheet.dimensions.Dimension</code> 属性), 371	<code>hlink</code> (<code>openpyxl.drawing.colors.ColorMapping</code> 属性), 194
<code>hidden</code> (<code>openpyxl.worksheet.scenario.Scenario</code> 属性), 393	<code>hlinkClick</code> (<code>openpyxl.drawing.properties.NonVisualDrawingProps</code> 属性), 238
<code>hiddenButton</code> (<code>openpyxl.worksheet.filters.FilterColumn</code> 属性), 378	<code>hlinkClick</code> (<code>openpyxl.drawing.text.CharacterProperties</code> 属性), 244
<code>hiddenLevel</code> (<code>openpyxl.pivot.table.PivotField</code> 属性), 305	<code>hlinkHover</code> (<code>openpyxl.drawing.properties.NonVisualDrawingProps</code> 属性), 238
<code>HiddenSlides</code> (<code>openpyxl.packaging.extended.ExtendedProperties</code> 属性), 267	<code>hlinkMouseOver</code> (<code>openpyxl.drawing.text.CharacterProperties</code> 属性), 244
<code>hide_drop_down</code> (<code>openpyxl.worksheet.datavalidation.DataValidation</code> 属性), 369	<code>HLinks</code> (<code>openpyxl.packaging.extended.ExtendedProperties</code> 属性), 266
<code>hideNewItems</code> (<code>openpyxl.pivot.table.PivotField</code> 属性), 305	<code>hMode</code> (<code>openpyxl.chart.layout.ManualLayout</code> 属性), 147
<code>hidePivotFieldList</code> (<code>openpyxl.workbook.properties.WorkbookProperties</code> 属性), 351	<code>holeSize</code> (<code>openpyxl.chart.pie_chart.DoughnutChart</code> 属性), 152
<code>hier</code> (<code>openpyxl.pivot.fields.Tuple</code> 属性), 295	<code>horizontal</code> (<code>openpyxl.styles.alignment.Alignment</code> 属性), 320
<code>hier</code> (<code>openpyxl.pivot.table.PageField</code> 属性), 302	<code>horizontal</code> (<code>openpyxl.styles.borders.Border</code> 属性), 322
<code>hierarchy</code> (<code>openpyxl.pivot.cache.CacheField</code> 属性), 276	<code>horizontalCentered</code> (<code>openpyxl.worksheet.page.PrintOptions</code> 属性), 386
<code>hierarchy</code> (<code>openpyxl.pivot.cache.CalculatedMember</code> 属性), 280	<code>horizontalDpi</code> (<code>openpyxl.worksheet.page.PrintPageSetup</code> 属性), 387
<code>HierarchyUsage</code> (<code>openpyxl.pivot.table</code> 中的类), 300	<code>horzOverflow</code> (<code>openpyxl.drawing.text.RichTextProperties</code> 属性), 252
<code>hierarchyUsage</code> (<code>openpyxl.pivot.table.HierarchyUsage</code> 属性), 300	<code>hour</code> (<code>openpyxl.worksheet.filters.DateGroupItem</code> 属性), 377
<code>highlight</code> (<code>openpyxl.drawing.text.CharacterProperties</code> 属性), 244	<code>hsl</code> (<code>openpyxl.drawing.fill.Blip</code> 属性), 213
<code>highlightClick</code> (<code>openpyxl.drawing.text.Hyperlink</code> 属性), 247	<code>hslClr</code> (<code>openpyxl.drawing.colors.ColorChoice</code> 属性), 192

- ul style="list-style-type: none; padding-left: 0;">
- hslClr (*openpyxl.drawing.effect.GlowEffect* 属性), 205
- hslClr (*openpyxl.drawing.effect.InnerShadowEffect* 属性), 206
- hslClr (*openpyxl.drawing.effect.OuterShadow* 属性), 208
- hslClr (*openpyxl.drawing.effect.PresetShadowEffect* 属性), 210
- hslClr (*openpyxl.drawing.fill.GradientStop* 属性), 216
- hslClr (*openpyxl.drawing.fill.SolidColorFillProperties* 属性), 219
- HSLColor (*openpyxl.drawing.colors* 中的类), 195
- HSLEffect (*openpyxl.drawing.effect* 中的类), 206
- ht (*openpyxl.worksheet.dimensions.RowDimension* 属性), 372
- hue (*openpyxl.drawing.colors.HSLColor* 属性), 195
- hue (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- hue (*openpyxl.drawing.colors.SystemColor* 属性), 198
- hue (*openpyxl.drawing.effect.HSLEffect* 属性), 206
- hue (*openpyxl.drawing.effect.TintEffect* 属性), 212
- hueMod (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- hueMod (*openpyxl.drawing.colors.SystemColor* 属性), 198
- hueOff (*openpyxl.drawing.colors.SchemeColor* 属性), 196
- hueOff (*openpyxl.drawing.colors.SystemColor* 属性), 199
- hyperlink (*openpyxl.cell.cell.Cell* 属性), 120
- hyperlink (*openpyxl.cell.cell.MergedCell* 属性), 121
- Hyperlink (*openpyxl.drawing.text* 中的类), 246
- Hyperlink (*openpyxl.worksheet.hyperlink* 中的类), 382
- hyperlink (*openpyxl.worksheet.hyperlink.HyperlinkList* 属性), 382
- HyperlinkBase (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
- HyperlinkList (*openpyxl.worksheet.hyperlink* 中的类), 382
- HyperlinksChanged (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
- I
 - i (*openpyxl.cell.text.InlineFont* 属性), 123
 - i (*openpyxl.drawing.text.CharacterProperties* 属性), 244
 - i (*openpyxl.pivot.fields.Error* 属性), 292
 - i (*openpyxl.pivot.fields.Missing* 属性), 293
 - i (*openpyxl.pivot.fields.Number* 属性), 294
 - i (*openpyxl.pivot.fields.Text* 属性), 295
 - i (*openpyxl.pivot.table.RowColItem* 属性), 311
 - i (*openpyxl.styles.fonts.Font* 属性), 330
 - i1 (*openpyxl.pivot.cache.RangeSet* 属性), 288
 - i2 (*openpyxl.pivot.cache.RangeSet* 属性), 288
 - i3 (*openpyxl.pivot.cache.RangeSet* 属性), 288
 - i4 (*openpyxl.pivot.cache.RangeSet* 属性), 288
- IconFilter (*openpyxl.worksheet.filters* 中的类), 379
- iconFilter (*openpyxl.worksheet.filters.FilterColumn* 属性), 378
- iconId (*openpyxl.worksheet.filters.IconFilter* 属性), 379
- iconId (*openpyxl.worksheet.filters.SortCondition* 属性), 379
- IconSet (*openpyxl.formatting.rule* 中的类), 257
- iconSet (*openpyxl.formatting.rule.IconSet* 属性), 257
- iconSet (*openpyxl.formatting.rule.Rule* 属性), 259
- iconSet (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
- iconSet (*openpyxl.worksheet.filters.IconFilter* 属性), 379
- iconSet (*openpyxl.worksheet.filters.SortCondition* 属性), 379
- IconSetRule() (在 *openpyxl.formatting.rule* 模块中), 258
- id (*openpyxl.chart.chartspace.ExternalData* 属性), 139
- id (*openpyxl.chartsheet.publish.WebPublishItem* 属性), 176
- id (*openpyxl.chartsheet.relation.DrawingHF* 属性),

- 178
- `id` (`openpyxl.chartsheet.relation.SheetBackgroundPicture` 属性), 264
- 属性), 179
- `id` (`openpyxl.drawing.connector.Connection` 属性), 200
- `id` (`openpyxl.drawing.properties.NonVisualDrawingProperties` 属性), 238
- `id` (`openpyxl.drawing.relation.ChartRelation` 属性), 239
- `id` (`openpyxl.drawing.text.Hyperlink` 属性), 247
- `id` (`openpyxl.drawing.text.TextField` 属性), 254
- `id` (`openpyxl.packaging.interface.ISerialisableFile` 属性), 268
- `Id` (`openpyxl.packaging.relationship.Relationship` 属性), 269
- `id` (`openpyxl.packaging.relationship.Relationship` 属性), 270
- `id` (`openpyxl.packaging.workbook.ChildSheet` 属性), 271
- `id` (`openpyxl.packaging.workbook.PivotCache` 属性), 272
- `id` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275
- `id` (`openpyxl.pivot.cache.LevelGroup` 属性), 283
- `id` (`openpyxl.pivot.table.PivotFilter` 属性), 307
- `id` (`openpyxl.pivot.table.TableDefinition` 属性), 315
- `id` (`openpyxl.workbook.external_link.external.ExternalBook` 属性), 344
- `id` (`openpyxl.workbook.external_reference.ExternalReference` 属性), 348
- `id` (`openpyxl.workbook.web.WebPublishObject` 属性), 358
- `id` (`openpyxl.worksheet.controls.ControlProperty` 属性), 367
- `id` (`openpyxl.worksheet.drawing.Drawing` 属性), 374
- `id` (`openpyxl.worksheet.hyperlink.Hyperlink` 属性), 382
- `id` (`openpyxl.worksheet.page.PrintPageSetup` 属性), 387
- `id` (`openpyxl.worksheet.pagebreak.Break` 属性), 388
- `id` (`openpyxl.worksheet.related.Related` 属性), 392
- `id` (`openpyxl.worksheet.table.Table` 属性), 396
- `id` (`openpyxl.worksheet.table.TableColumn` 属性), 398
- `identifier` (`openpyxl.packaging.core.DocumentProperties` 属性), 264
- `identifiers` (`openpyxl.chart.series.Series` 属性), 163
- `idx` (`openpyxl.chart.data_source.NumVal` 属性), 142
- `idx` (`openpyxl.chart.data_source.StrVal` 属性), 142
- `idx` (`openpyxl.chart.label.DataLabel` 属性), 144
- `idx` (`openpyxl.chart.legend.LegendEntry` 属性), 148
- `idx` (`openpyxl.chart.marker.DataPoint` 属性), 151
- `idx` (`openpyxl.chart.pivot.PivotFormat` 属性), 155
- `idx` (`openpyxl.chart.series.Series` 属性), 163
- `idx` (`openpyxl.chart.series.XYSeries` 属性), 165
- `idx` (`openpyxl.chart.surface_chart.BandFormat` 属性), 168
- `idx` (`openpyxl.drawing.connector.Connection` 属性), 200
- `idx` (`openpyxl.drawing.geometry.FontReference` 属性), 223
- `idx` (`openpyxl.drawing.geometry.StyleMatrixReference` 属性), 229
- `idx_base` (`openpyxl.descriptors.sequence.Sequence` 属性), 191
- `idx_base` (`openpyxl.descriptors.serialisable.Serialisable` 属性), 192
- `Ignorable` (`openpyxl.packaging.workbook.WorkbookPackage` 属性), 272
- `IgnoredError` (`openpyxl.worksheet.errors` 中的类), 374
- `ignoredError` (`openpyxl.worksheet.errors.IgnoredErrors` 属性), 375
- `IgnoredErrors` (`openpyxl.worksheet.errors` 中的类), 375
- `IllegalCharacterError`, 341
- `Image` (`openpyxl.drawing.image` 中的类), 232
- `iMeasureFld` (`openpyxl.pivot.table.PivotFilter` 属性), 307
- `iMeasureHier` (`openpyxl.pivot.table.PivotFilter` 属性), 307
- `imeMode` (`openpyxl.worksheet.datavalidation.DataValidation` 属性), 369
- `immersive` (`openpyxl.pivot.table.TableDefinition` 属

- 性), 315
- `inch_to_dxa()` (在 `openpyxl.utils.units` 模块中), 343
- `inch_to_EMU()` (在 `openpyxl.utils.units` 模块中), 343
- `includeHiddenRowCol` (`openpyxl.workbook.views.CustomWorkbookView` 属性), 356
- `includeNewItemInFilter` (`openpyxl.pivot.table.PivotField` 属性), 305
- `includeNewItemInFilter` (`openpyxl.pivot.table.PivotHierarchy` 属性), 308
- `includePrintSettings` (`openpyxl.workbook.views.CustomWorkbookView` 属性), 356
- `indent` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250
- `indent` (`openpyxl.pivot.table.TableDefinition` 属性), 315
- `indent` (`openpyxl.styles.alignment.Alignment` 属性), 320
- `Index` (`openpyxl.pivot.fields` 中的类), 293
- `index` (`openpyxl.styles.colors.Color` 属性), 325
- `index` (`openpyxl.styles.colors.ColorList` 属性), 325
- `index` (`openpyxl.worksheet.dimensions.ColumnDimension` 属性), 371
- `index` (`openpyxl.worksheet.dimensions.Dimension` 属性), 371
- `index()` (`openpyxl.utils.indexed_list.IndexedList` 方法), 342
- `index()` (`openpyxl.workbook.workbook.Workbook` 方法), 361
- `indexed` (`openpyxl.styles.colors.Color` 属性), 325
- `indexedColors` (`openpyxl.styles.colors.ColorList` 属性), 325
- `IndexedList` (`openpyxl.utils.indexed_list` 中的类), 341
- `InlineFont` (`openpyxl.cell.text` 中的类), 122
- `InnerShadowEffect` (`openpyxl.drawing.effect` 中的类), 206
- `innerShdw` (`openpyxl.drawing.effect.EffectList` 属性), 204
- `InputCells` (`openpyxl.worksheet.scenario` 中的类), 393
- `inputCells` (`openpyxl.worksheet.scenario.Scenario` 属性), 393
- `insert_cols()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 405
- `insert_rows()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 405
- `insertBlankRow` (`openpyxl.pivot.table.PivotField` 属性), 305
- `insertColumns` (`openpyxl.worksheet.protection.SheetProtection` 属性), 392
- `insertHyperlinks` (`openpyxl.worksheet.protection.SheetProtection` 属性), 392
- `insertPageBreak` (`openpyxl.pivot.table.PivotField` 属性), 305
- `insertRow` (`openpyxl.worksheet.table.Table` 属性), 396
- `insertRows` (`openpyxl.worksheet.protection.SheetProtection` 属性), 392
- `insertRowShift` (`openpyxl.worksheet.table.Table` 属性), 396
- `Integer` (`openpyxl.descriptors.base` 中的类), 186
- `intercept` (`openpyxl.chart.trendline.Trendline` 属性), 171
- `internal_value` (`openpyxl.cell.cell.Cell` 属性), 120
- `internal_value` (`openpyxl.cell.read_only.ReadOnlyCell` 属性), 122
- `intersection()` (`openpyxl.worksheet.cell_range.CellRange` 方法), 363
- `inv` (`openpyxl.drawing.colors.SchemeColor` 属性), 196
- `inv` (`openpyxl.drawing.colors.SystemColor` 属性), 199
- `invalid` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275
- `InvalidFileException`, 341
- `invalidUrl` (`openpyxl.drawing.text.Hyperlink` 属性), 341

- 247
- `invertIfNegative` (`openpyxl.chart.marker.DataPoint` 属性), 151
- `invertIfNegative` (`openpyxl.chart.series.Series` 属性), 163
- `invertIfNegative` (`openpyxl.chart.series.XYSeries` 属性), 165
- `invGamma` (`openpyxl.drawing.colors.SchemeColor` 属性), 196
- `invGamma` (`openpyxl.drawing.colors.SystemColor` 属性), 199
- `is_builtin()` (在 `openpyxl.styles.numbers` 模块中), 334
- `is_date` (`openpyxl.cell.cell.Cell` 属性), 120
- `is_date` (`openpyxl.cell.read_only.EmptyCell` 属性), 122
- `is_date` (`openpyxl.cell.read_only.ReadOnlyCell` 属性), 122
- `is_date_format()` (在 `openpyxl.styles.numbers` 模块中), 334
- `is_datetime()` (在 `openpyxl.styles.numbers` 模块中), 334
- `is_external` (`openpyxl.workbook.defined_name.DefinedName` 属性), 347
- `is_reserved` (`openpyxl.workbook.defined_name.DefinedName` 属性), 347
- `isdisjoint()` (`openpyxl.worksheet.cell_range.CellRange` 方法), 363
- `ISerialisableFile` (`openpyxl.packaging.interface` 中的类), 268
- `issubset()` (`openpyxl.worksheet.cell_range.CellRange` 方法), 364
- `issuperset()` (`openpyxl.worksheet.cell_range.CellRange` 方法), 364
- `italic` (`openpyxl.styles.fonts.Font` 属性), 330
- `item` (`openpyxl.pivot.fields.Tuple` 属性), 295
- `item` (`openpyxl.pivot.table.PageField` 属性), 302
- `itemPageCount` (`openpyxl.pivot.table.PivotField` 属性), 305
- `itemPrintTitles` (`openpyxl.pivot.table.TableDefinition` 属性), 315
- `items` (`openpyxl.pivot.table.PivotField` 属性), 305
- `items()` (`openpyxl.worksheet.table.TableList` 方法), 399
- `iter_cols()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 405
- `iter_rows()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 405
- `iterate` (`openpyxl.workbook.properties.CalcProperties` 属性), 349
- `iterateCount` (`openpyxl.workbook.properties.CalcProperties` 属性), 349
- `iterateDelta` (`openpyxl.workbook.properties.CalcProperties` 属性), 349
- ## J
- `join_lines` (`openpyxl.chart.pie_chart.ProjectedPieChart` 属性), 154
- `justifyLastLine` (`openpyxl.styles.alignment.Alignment` 属性), 320
- `installLastX` (`openpyxl.comments.comment_sheet.Properties` 属性), 183
- ## K
- `kern` (`openpyxl.drawing.text.CharacterProperties` 属性), 244
- `key` (`openpyxl.styles.styleable.NamedStyleDescriptor` 属性), 335
- `key` (`openpyxl.styles.styleable.NumberFormatDescriptor` 属性), 335
- `key` (`openpyxl.worksheet.smart_tag.CellSmartTagPr` 属性), 394
- `keyAttribute` (`openpyxl.pivot.cache.CacheHierarchy` 属性), 278
- `keywords` (`openpyxl.packaging.core.DocumentProperties` 属性), 264
- `kpis` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275

- kumimoji (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- kx (*openpyxl.drawing.effect.OuterShadow* 属性), 208
- kx (*openpyxl.drawing.effect.ReflectionEffect* 属性), 211
- ky (*openpyxl.drawing.effect.OuterShadow* 属性), 208
- ky (*openpyxl.drawing.effect.ReflectionEffect* 属性), 211
- ## L
- l (*openpyxl.chart.print_settings.PageMargins* 属性), 159
- l (*openpyxl.drawing.fill.RelativeRect* 属性), 218
- l (*openpyxl.drawing.geometry.GeomRect* 属性), 224
- labelOnly (*openpyxl.pivot.table.PivotArea* 属性), 303
- labels (*openpyxl.chart.series.Series* 属性), 163
- lang (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- lang (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- language (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- last_modified_by (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- lastClr (*openpyxl.drawing.colors.SystemColor* 属性), 199
- lastEdited (*openpyxl.workbook.properties.FileVersion* 属性), 350
- lastModifiedBy (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- lastPrinted (*openpyxl.packaging.core.DocumentProperties* 属性), 264
- lat (*openpyxl.drawing.geometry.SphereCoords* 属性), 228
- latin (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- latinLnBrk (*openpyxl.drawing.text.ParagraphProperties* 属性), 250
- layout (*openpyxl.chart.axis.DisplayUnitsLabel* 属性), 128
- Layout (*openpyxl.chart.layout* 中的类), 146
- layout (*openpyxl.chart.legend.Legend* 属性), 148
- layout (*openpyxl.chart.plotarea.PlotArea* 属性), 157
- layout (*openpyxl.chart.title.Title* 属性), 170
- layout (*openpyxl.chart.trendline.TrendlineLabel* 属性), 172
- layoutTarget (*openpyxl.chart.layout.ManualLayout* 属性), 147
- lblAlign (*openpyxl.chart.axis.TextAxis* 属性), 133
- lblOffset (*openpyxl.chart.axis.DateAxis* 属性), 127
- lblOffset (*openpyxl.chart.axis.TextAxis* 属性), 133
- left (*openpyxl.chart.print_settings.PageMargins* 属性), 159
- left (*openpyxl.drawing.fill.RelativeRect* 属性), 218
- left (*openpyxl.styles.borders.Border* 属性), 322
- left (*openpyxl.styles.fills.GradientFill* 属性), 328
- left (*openpyxl.worksheet.cell_range.CellRange* 属性), 364
- left (*openpyxl.worksheet.header_footer.HeaderFooterItem* 属性), 382
- left (*openpyxl.worksheet.page.PageMargins* 属性), 385
- leftFooterEvenPages (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- leftFooterFirstPage (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- leftFooterOddPages (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- leftHeaderEvenPages (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- leftHeaderFirstPage (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- leftHeaderOddPages (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- legend (*openpyxl.chart.chartspace.ChartContainer*

- 属性), 137
- Legend (*openpyxl.chart.legend* 中的类), 147
- LegendEntry (*openpyxl.chart.legend* 中的类), 148
- legendEntry (*openpyxl.chart.legend.Legend* 属性), 148
- legendPos (*openpyxl.chart.legend.Legend* 属性), 148
- len (*openpyxl.drawing.line.LineEndProperties* 属性), 233
- Length (*openpyxl.descriptors.base* 中的类), 186
- length (*openpyxl.drawing.line.DashStop* 属性), 232
- Level (*openpyxl.chart.data_source* 中的类), 140
- level (*openpyxl.pivot.cache.CacheField* 属性), 276
- level (*openpyxl.pivot.table.MemberList* 属性), 301
- level (*openpyxl.pivot.table.MemberProperty* 属性), 301
- LevelGroup (*openpyxl.pivot.cache* 中的类), 283
- lfe (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- lff (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- lfo (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- lhe (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- lhf (*openpyxl.chartsheet.relation.DrawingHF* 属性), 178
- lho (*openpyxl.chartsheet.relation.DrawingHF* 属性), 179
- LightRig (*openpyxl.drawing.geometry* 中的类), 224
- lightRig (*openpyxl.drawing.geometry.Scene3D* 属性), 227
- lin (*openpyxl.drawing.fill.GradientFillProperties* 属性), 215
- line (*openpyxl.chart.shapes.GraphicalProperties* 属性), 166
- line3DChart (*openpyxl.chart.plotarea.PlotArea* 属性), 157
- linear (*openpyxl.drawing.fill.GradientFillProperties* 属性), 215
- LinearShadeProperties (*openpyxl.drawing.fill* 中的类), 217
- LineBreak (*openpyxl.drawing.text* 中的类), 247
- LineChart (*openpyxl.chart.line_chart* 中的类), 149
- lineChart (*openpyxl.chart.plotarea.PlotArea* 属性), 157
- LineChart3D (*openpyxl.chart.line_chart* 中的类), 149
- LineEndProperties (*openpyxl.drawing.line* 中的类), 233
- LineProperties (*openpyxl.drawing.line* 中的类), 233
- Lines (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
- link (*openpyxl.drawing.fill.Blip* 属性), 213
- link (*openpyxl.worksheet.ole.OleObject* 属性), 385
- linkedCell (*openpyxl.worksheet.controls.ControlProperty* 属性), 367
- LinksUpToDate (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
- lIns (*openpyxl.drawing.text.RichTextProperties* 属性), 252
- listDataValidation (*openpyxl.worksheet.errors.IgnoredError* 属性), 375
- listFillRange (*openpyxl.worksheet.controls.ControlProperty* 属性), 367
- ListStyle (*openpyxl.drawing.text* 中的类), 247
- LITERAL (*openpyxl.formula.tokenizer.Token* 属性), 260
- ln (*openpyxl.chart.shapes.GraphicalProperties* 属性), 166
- ln (*openpyxl.drawing.text.CharacterProperties* 属性), 244
- lnRef (*openpyxl.drawing.geometry.ShapeStyle* 属性), 228
- lnSpC (*openpyxl.drawing.text.ParagraphProperties* 属性), 250
- lnSpCReduction (*openpyxl.drawing.text.TextNormalAutofit* 属性), 254
- load_workbook() (在 *openpyxl.reader.excel* 模块中), 319
- localname() (在 *openpyxl.xml.functions* 模块中),

409	260
<code>localnames()</code> (<code>openpyxl.workbook.defined_name.DefinedNameList</code> 方法), 348	<code>lon</code> (<code>openpyxl.drawing.geometry.SphereCoords</code> 属性), 228
<code>localSheetId</code> (<code>openpyxl.workbook.defined_name.DefinedName</code> 属性), 347	<code>longFileNames</code> (<code>openpyxl.workbook.web.WebPublishing</code> 属性), 359
<code>Location</code> (<code>openpyxl.pivot.table</code> 中的类), 300	<code>longText</code> (<code>openpyxl.pivot.cache.SharedItems</code> 属性), 289
<code>location</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 315	<code>lowestEdited</code> (<code>openpyxl.workbook.properties.FileVersion</code> 属性), 350
<code>location</code> (<code>openpyxl.worksheet.hyperlink.Hyperlink</code> 属性), 382	<code>lstStyle</code> (<code>openpyxl.chart.text.RichText</code> 属性), 169
<code>lock_revision</code> (<code>openpyxl.workbook.protection.WorkbookProtection</code> 属性), 353	<code>lum</code> (<code>openpyxl.drawing.colors.HSLColor</code> 属性), 195
<code>lock_structure</code> (<code>openpyxl.workbook.protection.WorkbookProtection</code> 属性), 353	<code>lum</code> (<code>openpyxl.drawing.colors.SchemeColor</code> 属性), 196
<code>lock_windows</code> (<code>openpyxl.workbook.protection.WorkbookProtection</code> 属性), 353	<code>lum</code> (<code>openpyxl.drawing.colors.SystemColor</code> 属性), 199
<code>locked</code> (<code>openpyxl.comments.comment_sheet.Properties</code> 属性), 183	<code>lum</code> (<code>openpyxl.drawing.effect.HSLEffect</code> 属性), 206
<code>locked</code> (<code>openpyxl.styles.protection.Protection</code> 属性), 334	<code>lum</code> (<code>openpyxl.drawing.fill.Blip</code> 属性), 213
<code>locked</code> (<code>openpyxl.worksheet.controls.ControlProperty</code> 属性), 367	<code>LuminanceEffect</code> (<code>openpyxl.drawing.effect</code> 中的类), 207
<code>locked</code> (<code>openpyxl.worksheet.ole.ObjectPr</code> 属性), 384	<code>lumMod</code> (<code>openpyxl.drawing.colors.SchemeColor</code> 属性), 197
<code>locked</code> (<code>openpyxl.worksheet.scenario.Scenario</code> 属性), 393	<code>lumMod</code> (<code>openpyxl.drawing.colors.SystemColor</code> 属性), 199
<code>lockRevision</code> (<code>openpyxl.workbook.protection.WorkbookProtection</code> 属性), 352	<code>lumOff</code> (<code>openpyxl.drawing.colors.SchemeColor</code> 属性), 197
<code>lockStructure</code> (<code>openpyxl.workbook.protection.WorkbookProtection</code> 属性), 353	<code>lumOff</code> (<code>openpyxl.drawing.colors.SystemColor</code> 属性), 199
<code>lockText</code> (<code>openpyxl.comments.comment_sheet.Properties</code> 属性), 183	<code>lv1</code> (<code>openpyxl.chart.data_source.MultiLevelStrData</code> 属性), 140
<code>lockWindows</code> (<code>openpyxl.workbook.protection.WorkbookProtection</code> 属性), 353	<code>lv1</code> (<code>openpyxl.drawing.text.ParagraphProperties</code> 属性), 250
<code>logBase</code> (<code>openpyxl.chart.axis.Scaling</code> 属性), 131	<code>lv11pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
<code>LOGICAL</code> (<code>openpyxl.formula.tokenizer.Token</code> 属性),	<code>lv12pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv13pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv14pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv15pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv16pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv17pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv18pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lv19pPr</code> (<code>openpyxl.drawing.text.ListStyle</code> 属性), 248
	<code>lxml_available()</code> (在 <code>openpyxl.xml</code> 模块中), 408

`lxml_env_set()` (在 `openpyxl.xml` 模块中), 408

M

`m` (`openpyxl.pivot.cache.GroupItems` 属性), 282

`m` (`openpyxl.pivot.cache.PCDSDTCEntries` 属性), 286

`m` (`openpyxl.pivot.cache.SharedItems` 属性), 289

`m` (`openpyxl.pivot.record.Record` 属性), 296

`m` (`openpyxl.pivot.table.FieldItem` 属性), 299

`macro` (`openpyxl.drawing.connector.ConnectorShape` 属性), 200

`macro` (`openpyxl.drawing.connector.Shape` 属性), 201

`macro` (`openpyxl.drawing.graphic.GraphicFrame` 属性), 230

`macro` (`openpyxl.drawing.picture.PictureFrame` 属性), 235

`macro` (`openpyxl.worksheet.controls.ControlProperty` 属性), 367

`macro` (`openpyxl.worksheet.ole.ObjectPr` 属性), 384

`majorGridlines` (`openpyxl.chart.axis.DateAxis` 属性), 127

`majorGridlines` (`openpyxl.chart.axis.NumericAxis` 属性), 130

`majorGridlines` (`openpyxl.chart.axis.SeriesAxis` 属性), 131

`majorGridlines` (`openpyxl.chart.axis.TextAxis` 属性), 133

`majorTickMark` (`openpyxl.chart.axis.DateAxis` 属性), 127

`majorTickMark` (`openpyxl.chart.axis.NumericAxis` 属性), 130

`majorTickMark` (`openpyxl.chart.axis.SeriesAxis` 属性), 132

`majorTickMark` (`openpyxl.chart.axis.TextAxis` 属性), 133

`majorTimeUnit` (`openpyxl.chart.axis.DateAxis` 属性), 128

`majorUnit` (`openpyxl.chart.axis.DateAxis` 属性), 128

`majorUnit` (`openpyxl.chart.axis.NumericAxis` 属性), 130

`make_operand()` (`openpyxl.formula.tokenizer.Token` 类方法), 261

`make_separator()` (`open-`

`pyxl.formula.tokenizer.Token` 类方法), 261

`make_subexp()` (`openpyxl.formula.tokenizer.Token` 类方法), 261

`man` (`openpyxl.worksheet.pagebreak.Break` 属性), 388

`Manager` (`openpyxl.packaging.extended.ExtendedProperties` 属性), 267

`Manifest` (`openpyxl.packaging.manifest` 中的类), 268

`manualBreakCount` (`openpyxl.worksheet.pagebreak.ColBreak` 属性), 388

`manualBreakCount` (`openpyxl.worksheet.pagebreak.RowBreak` 属性), 389

`ManualLayout` (`openpyxl.chart.layout` 中的类), 146

`manualLayout` (`openpyxl.chart.layout.Layout` 属性), 146

`mapId` (`openpyxl.worksheet.table.XMLColumnProps` 属性), 400

`mappingCount` (`openpyxl.pivot.cache.CacheField` 属性), 276

`maps` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275

`marker` (`openpyxl.chart.line_chart.LineChart` 属性), 149

`marker` (`openpyxl.chart.line_chart.LineChart3D` 属性), 150

`Marker` (`openpyxl.chart.marker` 中的类), 151

`marker` (`openpyxl.chart.marker.DataPoint` 属性), 151

`marker` (`openpyxl.chart.pivot.PivotFormat` 属性), 155

`marker` (`openpyxl.chart.series.Series` 属性), 163

`marker` (`openpyxl.chart.series.XYSeries` 属性), 165

`marL` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250

`marR` (`openpyxl.drawing.text.ParagraphProperties` 属性), 250

`MatchPattern` (`openpyxl.descriptors.base` 中的类), 186

`max` (`openpyxl.chart.axis.Scaling` 属性), 131

`max` (`openpyxl.chart.descriptors.NestedGapAmount` 属性), 143

`max` (`openpyxl.chart.descriptors.NestedOverlap` 属性),

- 143
- Max (*openpyxl.descriptors.base* 中的类), 186
- max (*openpyxl.descriptors.excel.Percentage* 属性), 188
- max (*openpyxl.descriptors.excel.TextPoint* 属性), 189
- max (*openpyxl.worksheet.dimensions.ColumnDimension* 属性), 371
- max (*openpyxl.worksheet.pagebreak.Break* 属性), 388
- max_col (*openpyxl.chart.reference.Reference* 属性), 161
- max_col (*openpyxl.worksheet.cell_range.CellRange* 属性), 364
- max_column (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406
- max_row (*openpyxl.chart.reference.Reference* 属性), 161
- max_row (*openpyxl.worksheet.cell_range.CellRange* 属性), 364
- max_row (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406
- maxDate (*openpyxl.pivot.cache.SharedItems* 属性), 290
- maximized (*openpyxl.workbook.views.CustomWorkbookView* 属性), 356
- maxLength (*openpyxl.formatting.rule.DataBar* 属性), 257
- maxRank (*openpyxl.pivot.cache.OLAPSet* 属性), 284
- maxSubtotal (*openpyxl.pivot.table.PivotField* 属性), 305
- maxSubtotal (*openpyxl.pivot.table.Reference* 属性), 310
- maxVal (*openpyxl.worksheet.filters.DynamicFilter* 属性), 377
- maxValIso (*openpyxl.worksheet.filters.DynamicFilter* 属性), 377
- maxValue (*openpyxl.pivot.cache.SharedItems* 属性), 290
- mdx (*openpyxl.pivot.cache.CalculatedMember* 属性), 280
- mdx (*openpyxl.pivot.cache.Query* 属性), 287
- mdxSubqueries (*openpyxl.pivot.table.TableDefinition* 属性), 315
- measure (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
- measure (*openpyxl.pivot.cache.PivotDimension* 属性), 286
- MeasureDimensionMap (*openpyxl.pivot.cache* 中的类), 283
- measureFilter (*openpyxl.pivot.table.PivotField* 属性), 305
- MeasureGroup (*openpyxl.pivot.cache* 中的类), 284
- measureGroup (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
- measureGroup (*openpyxl.pivot.cache.MeasureDimensionMap* 属性), 284
- measureGroup (*openpyxl.pivot.cache.PCDKPI* 属性), 285
- measureGroups (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
- measures (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
- member (*openpyxl.pivot.table.MemberList* 属性), 301
- MemberList (*openpyxl.pivot.table* 中的类), 301
- memberName (*openpyxl.pivot.cache.CalculatedMember* 属性), 280
- MemberProperty (*openpyxl.pivot.table* 中的类), 301
- memberPropertyField (*openpyxl.pivot.cache.CacheField* 属性), 276
- members (*openpyxl.pivot.table.PivotHierarchy* 属性), 308
- memberValueDatatype (*openpyxl.pivot.cache.CacheHierarchy* 属性), 278
- merge_cells() (*openpyxl.worksheet.worksheet.Worksheet* 方法), 406
- MergeCell (*openpyxl.worksheet.merge* 中的类), 383
- mergeCell (*openpyxl.worksheet.merge.MergeCells* 属性), 383
- MergeCells (*openpyxl.worksheet.merge* 中的类), 383
- merged_cell_ranges (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406

- MergedCell (*openpyxl.cell.cell* 中的类), 121
- MergedCellRange (*openpyxl.worksheet.merge* 中的类), 383
- mergeInterval (*openpyxl.workbook.views.CustomWorkbookView* 属性), 356
- mergeItem (*openpyxl.pivot.table.TableDefinition* 属性), 315
- meta (*openpyxl.drawing.connector.Shape* 属性), 201
- MetaSerialisable (*openpyxl.descriptors* 中的类), 185
- MetaStrict (*openpyxl.descriptors* 中的类), 185
- mime_type (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 173
- mime_type (*openpyxl.comments.comment_sheet.CommentSheet* 属性), 182
- mime_type (*openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing* 属性), 241
- mime_type (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
- mime_type (*openpyxl.pivot.record.RecordList* 属性), 297
- mime_type (*openpyxl.pivot.table.TableDefinition* 属性), 315
- mime_type (*openpyxl.workbook.external_link.external.ExternalLink* 属性), 345
- mime_type (*openpyxl.workbook.workbook.Workbook* 属性), 361
- mime_type (*openpyxl.worksheet.table.Table* 属性), 396
- mime_type (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406
- min (*openpyxl.chart.axis.Scaling* 属性), 131
- min (*openpyxl.chart.descriptors.NestedGapAmount* 属性), 143
- min (*openpyxl.chart.descriptors.NestedOverlap* 属性), 143
- Min (*openpyxl.descriptors.base* 中的类), 187
- min (*openpyxl.descriptors.excel.Percentage* 属性), 188
- min (*openpyxl.descriptors.excel.TextPoint* 属性), 189
- min (*openpyxl.worksheet.dimensions.ColumnDimension* 属性), 371
- min (*openpyxl.worksheet.pagebreak.Break* 属性), 388
- min_col (*openpyxl.chart.reference.Reference* 属性), 161
- min_col (*openpyxl.worksheet.cell_range.CellRange* 属性), 364
- min_column (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406
- min_row (*openpyxl.chart.reference.Reference* 属性), 161
- min_row (*openpyxl.worksheet.cell_range.CellRange* 属性), 364
- min_row (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406
- minDate (*openpyxl.pivot.cache.SharedItems* 属性), 355
- minimized (*openpyxl.workbook.views.BookView* 属性), 355
- minimized (*openpyxl.workbook.views.CustomWorkbookView* 属性), 356
- minLength (*openpyxl.formatting.rule.DataBar* 属性), 257
- MinMax (*openpyxl.descriptors.base* 中的类), 187
- minorGridlines (*openpyxl.chart.axis.DateAxis* 属性), 128
- minorGridlines (*openpyxl.chart.axis.NumericAxis* 属性), 130
- minorGridlines (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- minorGridlines (*openpyxl.chart.axis.TextAxis* 属性), 133
- minorTickMark (*openpyxl.chart.axis.DateAxis* 属性), 128
- minorTickMark (*openpyxl.chart.axis.NumericAxis* 属性), 130
- minorTickMark (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- minorTickMark (*openpyxl.chart.axis.TextAxis* 属性), 133
- minorTimeUnit (*openpyxl.chart.axis.DateAxis* 属性), 128
- minorUnit (*openpyxl.chart.axis.DateAxis* 属性), 128
- minorUnit (*openpyxl.chart.axis.NumericAxis* 属性), 128

- 130
- `minRefreshableVersion` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275
- `minRefreshableVersion` (`openpyxl.pivot.table.TableDefinition` 属性), 315
- `minSubtotal` (`openpyxl.pivot.table.PivotField` 属性), 305
- `minSubtotal` (`openpyxl.pivot.table.Reference` 属性), 310
- `minus` (`openpyxl.chart.error_bar.ErrorBars` 属性), 144
- `minute` (`openpyxl.worksheet.filters.DateGroupItem` 属性), 377
- `minValue` (`openpyxl.pivot.cache.SharedItems` 属性), 290
- `Missing` (`openpyxl.pivot.fields` 中的类), 293
- `missingCaption` (`openpyxl.pivot.table.TableDefinition` 属性), 315
- `missingItemsLimit` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275
- `miter` (`openpyxl.drawing.line.LineProperties` 属性), 234
- `MMClips` (`openpyxl.packaging.extended.ExtendedProperties` 属性), 267
- `modified` (`openpyxl.packaging.core.DocumentProperties` 属性), 264
- `month` (`openpyxl.worksheet.filters.DateGroupItem` 属性), 377
- `move_range()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 406
- `move_sheet()` (`openpyxl.workbook.workbook.Workbook` 方法), 361
- `moveWithCells` (`openpyxl.worksheet.ole.ObjectAnchor` 属性), 383
- `mpFld` (`openpyxl.pivot.table.PivotFilter` 属性), 307
- `mpMap` (`openpyxl.pivot.cache.CacheField` 属性), 277
- `mps` (`openpyxl.pivot.table.PivotHierarchy` 属性), 309
- `mruColors` (`openpyxl.styles.colors.ColorList` 属性), 326
- `MultiCellRange` (`openpyxl.worksheet.cell_range` 中的类), 365
- `MultiLevelStrData` (`openpyxl.chart.data_source` 中的类), 140
- `MultiLevelStrRef` (`openpyxl.chart.data_source` 中的类), 140
- `multiLvlStrCache` (`openpyxl.chart.data_source.MultiLevelStrRef` 属性), 140
- `multiLvlStrRef` (`openpyxl.chart.data_source.AxDataSource` 属性), 139
- `multipleFieldFilters` (`openpyxl.pivot.table.TableDefinition` 属性), 315
- `multipleItemSelectionAllowed` (`openpyxl.pivot.table.PivotField` 属性), 305
- `multipleItemSelectionAllowed` (`openpyxl.pivot.table.PivotHierarchy` 属性), 309
- `MultiSequence` (`openpyxl.descriptors.sequence` 中的类), 190
- `MultiSequencePart` (`openpyxl.descriptors.sequence` 中的类), 190
- ## N
- `n` (`openpyxl.pivot.cache.GroupItems` 属性), 282
- `n` (`openpyxl.pivot.cache.PCDSDTCEntries` 属性), 286
- `n` (`openpyxl.pivot.cache.SharedItems` 属性), 290
- `n` (`openpyxl.pivot.record.Record` 属性), 296
- `n` (`openpyxl.pivot.table.FieldItem` 属性), 299
- `name` (`openpyxl.chart.pivot.PivotSource` 属性), 155
- `name` (`openpyxl.chart.trendline.Trendline` 属性), 171
- `name` (`openpyxl.drawing.effect.EffectContainer` 属性), 204
- `name` (`openpyxl.drawing.geometry.GeomGuide` 属性), 223
- `name` (`openpyxl.drawing.properties.NonVisualDrawingProps`

- 属性), 238
- name (*openpyxl.drawing.text.EmbeddedWAVAudioFile* 属性), 246
- name (*openpyxl.drawing.text.GeomGuide* 属性), 246
- name (*openpyxl.packaging.workbook.ChildSheet* 属性), 271
- name (*openpyxl.pivot.cache.CacheField* 属性), 277
- name (*openpyxl.pivot.cache.CalculatedMember* 属性), 280
- name (*openpyxl.pivot.cache.LevelGroup* 属性), 283
- name (*openpyxl.pivot.cache.MeasureGroup* 属性), 284
- name (*openpyxl.pivot.cache.PageItem* 属性), 286
- name (*openpyxl.pivot.cache.PivotDimension* 属性), 286
- name (*openpyxl.pivot.cache.RangeSet* 属性), 288
- name (*openpyxl.pivot.cache.WorksheetSource* 属性), 290
- name (*openpyxl.pivot.table.DataField* 属性), 299
- name (*openpyxl.pivot.table.MemberProperty* 属性), 301
- name (*openpyxl.pivot.table.PageField* 属性), 302
- name (*openpyxl.pivot.table.PivotField* 属性), 305
- name (*openpyxl.pivot.table.PivotFilter* 属性), 307
- name (*openpyxl.pivot.table.PivotTableStyle* 属性), 309
- name (*openpyxl.pivot.table.TableDefinition* 属性), 315
- name (*openpyxl.styles.fonts.Font* 属性), 330
- name (*openpyxl.styles.named_styles.NamedStyle* 属性), 333
- name (*openpyxl.styles.table.TableStyle* 属性), 337
- name (*openpyxl.workbook.defined_name.DefinedName* 属性), 347
- name (*openpyxl.workbook.external_link.external.ExternalLink* 属性), 344
- name (*openpyxl.workbook.function_group.FunctionGroup* 属性), 348
- name (*openpyxl.workbook.smart_tags.SmartTag* 属性), 354
- name (*openpyxl.workbook.views.CustomWorkbookView* 属性), 356
- name (*openpyxl.worksheet.controls.Control* 属性), 366
- name (*openpyxl.worksheet.custom.CustomProperty* 属性), 368
- name (*openpyxl.worksheet.scenario.Scenario* 属性), 393
- name (*openpyxl.worksheet.table.Table* 属性), 396
- name (*openpyxl.worksheet.table.TableColumn* 属性), 398
- name (*openpyxl.worksheet.table.TableStyleInfo* 属性), 399
- named_styles (*openpyxl.workbook.workbook.Workbook* 属性), 361
- NamedRangeException, 341
- NamedStyle (*openpyxl.styles.named_styles* 中的类), 332
- NamedStyleDescriptor (*openpyxl.styles.styleable* 中的类), 335
- NamedStyleList (*openpyxl.styles.named_styles* 中的类), 333
- nameLen (*openpyxl.pivot.table.MemberProperty* 属性), 301
- names (*openpyxl.styles.named_styles.NamedStyleList* 属性), 334
- namespace (*openpyxl.descriptors.excel.Relation* 属性), 189
- namespace (*openpyxl.descriptors.serialisable.Serialisable* 属性), 192
- namespace (*openpyxl.drawing.colors.ColorChoice* 属性), 192
- namespace (*openpyxl.drawing.colors.SchemeColor* 属性), 197
- namespace (*openpyxl.drawing.colors.SystemColor* 属性), 199
- namespace (*openpyxl.drawing.fill.Blip* 属性), 213
- namespace (*openpyxl.drawing.fill.GradientFillProperties* 属性), 215
- namespace (*openpyxl.drawing.fill.GradientStop* 属性), 216
- namespace (*openpyxl.drawing.fill.LinearShadeProperties* 属性), 217
- namespace (*openpyxl.drawing.fill.PathShadeProperties* 属性), 217
- namespace (*openpyxl.drawing.fill.PatternFillProperties* 属性), 218

namespace (<i>openpyxl.drawing.fill.RelativeRect</i> 属性), 218	248	namespace (<i>openpyxl.drawing.text.ParagraphProperties</i> 属性), 250
namespace (<i>openpyxl.drawing.fill.StretchInfoProperties</i> 属性), 220	namespace (<i>openpyxl.drawing.text.RegularTextRun</i> 属性), 251	namespace (<i>openpyxl.drawing.text.RichTextProperties</i> 属性), 252
namespace (<i>openpyxl.drawing.geometry.GroupTransform2D</i> 属性), 224	namespace (<i>openpyxl.drawing.xdr.XDRPoint2D</i> 属 性), 254	namespace (<i>openpyxl.drawing.xdr.XDRPositiveSize2D</i> 属性), 255
namespace (<i>openpyxl.drawing.geometry.Point2D</i> 属 性), 225	namespace (<i>openpyxl.drawing.xdr.XDRTransform2D</i> 属性), 255	namespace (<i>openpyxl.packaging.core.DocumentProperties</i> 属性), 265
namespace (<i>openpyxl.drawing.geometry.PositiveSize2D</i> 属性), 226	namespaced() (在 <i>openpyxl.descriptors.namespace</i> 模块中), 189	namespaceUri (<i>open- pyxl.workbook.smart_tags.SmartTag</i> 属 性), 354
namespace (<i>openpyxl.drawing.geometry.PresetGeometry2D</i> 属性), 226	namespaceUri (<i>open- pyxl.workbook.smart_tags.SmartTag</i> 属 性), 354	nested (<i>openpyxl.descriptors.base.Typed</i> 属性), 188
namespace (<i>openpyxl.drawing.geometry.Shape3D</i> 属 性), 228	nested (<i>openpyxl.descriptors.nested.Nested</i> 属性), 189	Nested (<i>openpyxl.descriptors.nested</i> 中的类), 189
namespace (<i>openpyxl.drawing.geometry.Transform2D</i> 属性), 229	NestedBool (<i>openpyxl.descriptors.nested</i> 中的类), 190	NestedDateTime (<i>openpyxl.packaging.core</i> 中的类), 265
namespace (<i>openpyxl.drawing.graphic.GraphicData</i> 属性), 230	NestedFloat (<i>openpyxl.descriptors.nested</i> 中的类), 190	NestedGapAmount (<i>openpyxl.chart.descriptors</i> 中的 类), 143
namespace (<i>openpyxl.drawing.graphic.GraphicObject</i> 属性), 231	NestedInteger (<i>openpyxl.descriptors.nested</i> 中的 类), 190	NestedInteger (<i>openpyxl.descriptors.nested</i> 中的 类), 190
namespace (<i>openpyxl.drawing.line.DashStop</i> 属性), 232	NestedMinMax (<i>openpyxl.descriptors.nested</i> 中的类), 190	NestedNoneSet (<i>openpyxl.descriptors.nested</i> 中的 类), 190
namespace (<i>openpyxl.drawing.line.LineEndProperties</i> 属性), 233	NestedOverlap (<i>openpyxl.chart.descriptors</i> 中的类), 143	NestedOverlapping (<i>openpyxl.chart.descriptors</i> 中的类), 143
namespace (<i>openpyxl.drawing.line.LineProperties</i> 属 性), 234	NestedSequence (<i>openpyxl.descriptors.sequence</i> 中的 类), 191	NestedSequence (<i>openpyxl.descriptors.sequence</i> 中的 类), 191
namespace (<i>openpyxl.drawing.picture.PictureLocking</i> 属性), 235		
namespace (<i>openpyxl.drawing.properties.GroupLocking</i> 属性), 237		
namespace (<i>openpyxl.drawing.relation.ChartRelation</i> 属性), 239		
namespace (<i>openpyxl.drawing.text.CharacterProperties</i> 属性), 245		
namespace (<i>openpyxl.drawing.text.Font</i> 属性), 246		
namespace (<i>openpyxl.drawing.text.Hyperlink</i> 属性), 247		
namespace (<i>openpyxl.drawing.text.LineBreak</i> 属性), 247		
namespace (<i>openpyxl.drawing.text.ListStyle</i> 属性), 248		
namespace (<i>openpyxl.drawing.text.Paragraph</i> 属性),		

- `NestedSet` (`openpyxl.descriptors.nested` 中的类), 190
- `NestedString` (`openpyxl.descriptors.nested` 中的类), 190
- `NestedText` (`openpyxl.descriptors.nested` 中的类), 190
- `NestedValue` (`openpyxl.descriptors.nested` 中的类), 190
- `noAdjustHandles` (`openpyxl.drawing.fill.Blip` 属性), 213
- `noAdjustHandles` (`openpyxl.drawing.picture.PictureLocking` 属性), 235
- `noAdjustHandles` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `noAutofit` (`openpyxl.drawing.text.RichTextProperties` 属性), 252
- `noChangeArrowheads` (`openpyxl.drawing.fill.Blip` 属性), 214
- `noChangeArrowheads` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noChangeArrowheads` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `noChangeAspect` (`openpyxl.drawing.fill.Blip` 属性), 214
- `noChangeAspect` (`openpyxl.drawing.graphic.GraphicFrameLocking` 属性), 230
- `noChangeAspect` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noChangeAspect` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `noChangeShapeType` (`openpyxl.drawing.fill.Blip` 属性), 214
- `noChangeShapeType` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noChangeShapeType` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `pyxl.drawing.properties.GroupLocking` 属性), 237
- `noCrop` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noDrilldown` (`openpyxl.drawing.graphic.GraphicFrameLocking` 属性), 231
- `noEditPoints` (`openpyxl.drawing.fill.Blip` 属性), 214
- `noEditPoints` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noEditPoints` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `noEndCap` (`openpyxl.chart.error_bar.ErrorBars` 属性), 144
- `noFill` (`openpyxl.chart.shapes.GraphicalProperties` 属性), 166
- `noFill` (`openpyxl.drawing.line.LineProperties` 属性), 234
- `noFill` (`openpyxl.drawing.text.CharacterProperties` 属性), 245
- `noGrp` (`openpyxl.drawing.fill.Blip` 属性), 214
- `noGrp` (`openpyxl.drawing.graphic.GraphicFrameLocking` 属性), 231
- `noGrp` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noGrp` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `noMove` (`openpyxl.drawing.fill.Blip` 属性), 214
- `noMove` (`openpyxl.drawing.graphic.GraphicFrameLocking` 属性), 231
- `noMove` (`openpyxl.drawing.picture.PictureLocking` 属性), 236
- `noMove` (`openpyxl.drawing.properties.GroupLocking` 属性), 237
- `noMultiLvlLbl` (`openpyxl.chart.axis.TextAxis` 属性), 133
- `nonAutoSortDefault` (`openpyxl.pivot.table.PivotField` 属性), 305
- `NoneSet` (`openpyxl.descriptors.base` 中的类), 187
- `NonVisualConnectorProperties` (`openpyxl.drawing.connector` 中的类), 201

NonVisualDrawingProps	(<i>openpyxl.drawing.properties</i> 中的类), 238	noSelect (<i>openpyxl.drawing.properties.GroupLocking</i> 属性), 237
NonVisualDrawingShapeProps	(<i>openpyxl.drawing.properties</i> 中的类), 238	Notes (<i>openpyxl.packaging.extended.ExtendedProperties</i> 属性), 267
NonVisualGraphicFrame	(<i>openpyxl.drawing.graphic</i> 中的类), 231	noUnggrp (<i>openpyxl.drawing.properties.GroupLocking</i> 属性), 237
NonVisualGraphicFrameProperties	(<i>openpyxl.drawing.graphic</i> 中的类), 232	NUMBER (<i>openpyxl.formula.tokenizer.Token</i> 属性), 260
NonVisualGroupDrawingShapeProps	(<i>openpyxl.drawing.properties</i> 中的类), 239	Number (<i>openpyxl.pivot.fields</i> 中的类), 294
NonVisualGroupShape	(<i>openpyxl.drawing.properties</i> 中的类), 239	number_format (<i>openpyxl.cell.read_only.EmptyCell</i> 属性), 122
NonVisualPictureProperties	(<i>openpyxl.drawing.picture</i> 中的类), 234	number_format (<i>openpyxl.cell.read_only.ReadOnlyCell</i> 属性), 122
nonVisualProperties	(<i>openpyxl.drawing.graphic.GroupShape</i> 属性), 231	number_format (<i>openpyxl.styles.named_styles.NamedStyle</i> 属性), 333
noProof (<i>openpyxl.drawing.text.CharacterProperties</i> 属性), 245		number_format (<i>openpyxl.styles.styleable.StyleableObject</i> 属性), 336
noResize (<i>openpyxl.drawing.fill.Blip</i> 属性), 214		NumberFormat (<i>openpyxl.styles.numbers</i> 中的类), 334
noResize (<i>openpyxl.drawing.graphic.GraphicFrameLocking</i> 属性), 231		NumberFormatDescriptor (<i>openpyxl.chart.descriptors</i> 中的类), 143
noResize (<i>openpyxl.drawing.picture.PictureLocking</i> 属性), 236		NumberFormatDescriptor (<i>openpyxl.styles.numbers</i> 中的类), 334
noResize (<i>openpyxl.drawing.properties.GroupLocking</i> 属性), 237		NumberFormatDescriptor (<i>openpyxl.styles.styleable</i> 中的类), 335
norm (<i>openpyxl.drawing.geometry.Backdrop</i> 属性), 221		NumberFormatList (<i>openpyxl.styles.numbers</i> 中的类), 334
normalizeH (<i>openpyxl.drawing.text.CharacterProperties</i> 属性), 245		numberStoredAsText (<i>openpyxl.worksheet.errors.IgnoredError</i> 属性), 375
normAutofit (<i>openpyxl.drawing.text.RichTextProperties</i> 属性), 252		NumberValueDescriptor (<i>openpyxl.chart.data_source</i> 中的类), 142
noRot (<i>openpyxl.drawing.fill.Blip</i> 属性), 214		numCache (<i>openpyxl.chart.data_source.NumRef</i> 属性), 141
noRot (<i>openpyxl.drawing.picture.PictureLocking</i> 属性), 236		numCol (<i>openpyxl.drawing.text.RichTextProperties</i> 属性), 252
noRot (<i>openpyxl.drawing.properties.GroupLocking</i> 属性), 237		NumData (<i>openpyxl.chart.data_source</i> 中的类), 140
noSelect (<i>openpyxl.drawing.fill.Blip</i> 属性), 214		NumDataSource (<i>openpyxl.chart.data_source</i> 中的类), 141
noSelect (<i>openpyxl.drawing.graphic.GraphicFrameLocking</i> 属性), 231		NumericAxis (<i>openpyxl.chart.axis</i> 中的类), 129
noSelect (<i>openpyxl.drawing.picture.PictureLocking</i> 属性), 236		numFmt (<i>openpyxl.chart.axis.DateAxis</i> 属性), 128

- numFmt (*openpyxl.chart.axis.NumericAxis* 属性), 130
 - numFmt (*openpyxl.chart.axis.SeriesAxis* 属性), 132
 - numFmt (*openpyxl.chart.axis.TextAxis* 属性), 133
 - NumFmt (*openpyxl.chart.data_source* 中的类), 141
 - numFmt (*openpyxl.chart.label.DataLabel* 属性), 144
 - numFmt (*openpyxl.chart.label.DataLabelList* 属性), 145
 - numFmt (*openpyxl.chart.trendline.TrendlineLabel* 属性), 172
 - numFmt (*openpyxl.styles.differential.DifferentialStyle* 属性), 326
 - numFmt (*openpyxl.styles.numbers.NumberFormatList* 属性), 334
 - numFmtId (*openpyxl.pivot.cache.CacheField* 属性), 277
 - numFmtId (*openpyxl.pivot.table.DataField* 属性), 299
 - numFmtId (*openpyxl.pivot.table.PivotField* 属性), 305
 - numFmtId (*openpyxl.styles.cell_style.CellStyle* 属性), 324
 - numFmtId (*openpyxl.styles.cell_style.StyleArray* 属性), 324
 - numFmtId (*openpyxl.styles.numbers.NumberFormat* 属性), 334
 - numFmtId (*openpyxl.worksheet.scenario.InputCells* 属性), 393
 - numFmts (*openpyxl.styles.stylesheet.Stylesheet* 属性), 337
 - numLit (*openpyxl.chart.data_source.AxDataSource* 属性), 140
 - numLit (*openpyxl.chart.data_source.NumDataSource* 属性), 141
 - NumRef (*openpyxl.chart.data_source* 中的类), 141
 - numRef (*openpyxl.chart.data_source.AxDataSource* 属性), 140
 - numRef (*openpyxl.chart.data_source.NumDataSource* 属性), 141
 - NumVal (*openpyxl.chart.data_source* 中的类), 141
 - nvCxnSpPr (*openpyxl.drawing.connector.ConnectorShape* 属性), 200
 - nvGraphicFramePr (*openpyxl.drawing.graphic.GraphicFrame* 属性), 230
 - nvGrpSpPr (*openpyxl.drawing.graphic.GroupShape* 属性), 231
 - nvPicPr (*openpyxl.drawing.picture.PictureFrame* 属性), 235
 - nvSpPr (*openpyxl.drawing.connector.Shape* 属性), 201
- ## O
- ObjectAnchor (*openpyxl.worksheet.ole* 中的类), 383
 - ObjectPr (*openpyxl.worksheet.ole* 中的类), 384
 - objectPr (*openpyxl.worksheet.ole.OleObject* 属性), 385
 - objects (*openpyxl.chartsheet.protection.ChartsheetProtection* 属性), 176
 - objects (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
 - oddFooter (*openpyxl.worksheet.header_footer.HeaderFooter* 属性), 381
 - oddHeader (*openpyxl.worksheet.header_footer.HeaderFooter* 属性), 381
 - off (*openpyxl.drawing.geometry.GroupTransform2D* 属性), 224
 - off (*openpyxl.drawing.geometry.Transform2D* 属性), 229
 - off (*openpyxl.drawing.xdr.XDRTransform2D* 属性), 255
 - offset (*openpyxl.pivot.table.PivotArea* 属性), 303
 - offset() (*openpyxl.cell.cell.Cell* 方法), 120
 - ofPieChart (*openpyxl.chart.plotarea.PlotArea* 属性), 157
 - ofPieType (*openpyxl.chart.pie_chart.ProjectedPieChart* 属性), 154
 - OLAPSet (*openpyxl.pivot.cache* 中的类), 284
 - OLAPSets (*openpyxl.pivot.cache* 中的类), 284
 - OleObject (*openpyxl.worksheet.ole* 中的类), 384
 - oleObject (*openpyxl.worksheet.ole.OleObjects* 属性), 385
 - OleObjects (*openpyxl.worksheet.ole* 中的类), 385
 - oleSize (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
 - oleUpdate (*openpyxl.worksheet.ole.OleObject* 属性), 385

- OneCellAnchor (openpyxl.drawing.spreadsheet_drawing 中的类), 241
- oneCellAnchor (openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing 属性), 241
- oneField (openpyxl.pivot.cache.CacheHierarchy 属性), 278
- onlySync (openpyxl.workbook.views.CustomWorkbookView 属性), 357
- OP_IN (openpyxl.formula.tokenizer.Token 属性), 260
- OP_POST (openpyxl.formula.tokenizer.Token 属性), 260
- OP_PRE (openpyxl.formula.tokenizer.Token 属性), 260
- OPEN (openpyxl.formula.tokenizer.Token 属性), 260
- openpyxl (模块), 119
- openpyxl.cell (模块), 119
- openpyxl.cell.cell (模块), 119
- openpyxl.cell.read_only (模块), 121
- openpyxl.cell.text (模块), 122
- openpyxl.chart (模块), 125
- openpyxl.chart.area_chart (模块), 125
- openpyxl.chart.axis (模块), 127
- openpyxl.chart.bar_chart (模块), 134
- openpyxl.chart.bubble_chart (模块), 136
- openpyxl.chart.chartspace (模块), 137
- openpyxl.chart.data_source (模块), 139
- openpyxl.chart.descriptors (模块), 143
- openpyxl.chart.error_bar (模块), 143
- openpyxl.chart.label (模块), 144
- openpyxl.chart.layout (模块), 146
- openpyxl.chart.legend (模块), 147
- openpyxl.chart.line_chart (模块), 149
- openpyxl.chart.marker (模块), 150
- openpyxl.chart.picture (模块), 152
- openpyxl.chart.pie_chart (模块), 152
- openpyxl.chart.pivot (模块), 155
- openpyxl.chart.plotarea (模块), 156
- openpyxl.chart.print_settings (模块), 159
- openpyxl.chart.radar_chart (模块), 160
- openpyxl.chart.reader (模块), 160
- openpyxl.chart.reference (模块), 161
- openpyxl.chart.scatter_chart (模块), 161
- openpyxl.chart.series (模块), 162
- openpyxl.chart.series_factory (模块), 165
- openpyxl.chart.shapes (模块), 166
- openpyxl.chart.stock_chart (模块), 167
- openpyxl.chart.surface_chart (模块), 168
- openpyxl.chart.text (模块), 169
- openpyxl.chart.title (模块), 170
- openpyxl.chart.trendline (模块), 171
- openpyxl.chart.updown_bars (模块), 172
- openpyxl.chartsheet (模块), 173
- openpyxl.chartsheet.chartsheet (模块), 173
- openpyxl.chartsheet.custom (模块), 174
- openpyxl.chartsheet.properties (模块), 175
- openpyxl.chartsheet.protection (模块), 175
- openpyxl.chartsheet.publish (模块), 176
- openpyxl.chartsheet.relation (模块), 177
- openpyxl.chartsheet.views (模块), 180
- openpyxl.comments (模块), 180
- openpyxl.comments.author (模块), 180
- openpyxl.comments.comment_sheet (模块), 181
- openpyxl.comments.comments (模块), 183
- openpyxl.comments.shape_writer (模块), 184
- openpyxl.compat (模块), 184
- openpyxl.compat.abc (模块), 184
- openpyxl.compat.accumulate (模块), 184
- openpyxl.compat.numbers (模块), 185
- openpyxl.compat.singleton (模块), 185
- openpyxl.compat.strings (模块), 185
- openpyxl.descriptors (模块), 185
- openpyxl.descriptors.base (模块), 185
- openpyxl.descriptors.excel (模块), 188
- openpyxl.descriptors.namespace (模块), 189
- openpyxl.descriptors.nested (模块), 189
- openpyxl.descriptors.sequence (模块), 190
- openpyxl.descriptors.serialisable (模块), 191
- openpyxl.descriptors.slots (模块), 192
- openpyxl.drawing (模块), 192
- openpyxl.drawing.colors (模块), 192
- openpyxl.drawing.connector (模块), 200
- openpyxl.drawing.drawing (模块), 202
- openpyxl.drawing.effect (模块), 203

- openpyxl.drawing.fill (模块), 212
- openpyxl.drawing.geometry (模块), 221
- openpyxl.drawing.graphic (模块), 230
- openpyxl.drawing.image (模块), 232
- openpyxl.drawing.line (模块), 232
- openpyxl.drawing.picture (模块), 234
- openpyxl.drawing.properties (模块), 237
- openpyxl.drawing.relation (模块), 239
- openpyxl.drawing.spreadsheet_drawing (模块), 240
- openpyxl.drawing.text (模块), 242
- openpyxl.drawing.xdr (模块), 254
- openpyxl.formatting (模块), 255
- openpyxl.formatting.formatting (模块), 256
- openpyxl.formatting.rule (模块), 256
- openpyxl.formula (模块), 260
- openpyxl.formula.tokenizer (模块), 260
- openpyxl.formula.translate (模块), 262
- openpyxl.packaging (模块), 263
- openpyxl.packaging.core (模块), 264
- openpyxl.packaging.extended (模块), 265
- openpyxl.packaging.interface (模块), 268
- openpyxl.packaging.manifest (模块), 268
- openpyxl.packaging.relationship (模块), 269
- openpyxl.packaging.workbook (模块), 271
- openpyxl.pivot (模块), 274
- openpyxl.pivot.cache (模块), 274
- openpyxl.pivot.fields (模块), 291
- openpyxl.pivot.record (模块), 296
- openpyxl.pivot.table (模块), 297
- openpyxl.reader (模块), 318
- openpyxl.reader.drawings (模块), 318
- openpyxl.reader.excel (模块), 318
- openpyxl.reader.strings (模块), 319
- openpyxl.reader.workbook (模块), 319
- openpyxl.styles (模块), 320
- openpyxl.styles.alignment (模块), 320
- openpyxl.styles.borders (模块), 321
- openpyxl.styles.builtins (模块), 323
- openpyxl.styles.cell_style (模块), 323
- openpyxl.styles.colors (模块), 325
- openpyxl.styles.differential (模块), 326
- openpyxl.styles.fills (模块), 327
- openpyxl.styles.fonts (模块), 329
- openpyxl.styles.named_styles (模块), 332
- openpyxl.styles.numbers (模块), 334
- openpyxl.styles.protection (模块), 334
- openpyxl.styles.proxy (模块), 335
- openpyxl.styles.styleable (模块), 335
- openpyxl.styles.stylesheet (模块), 336
- openpyxl.styles.table (模块), 337
- openpyxl.utils (模块), 338
- openpyxl.utils.bind_dictionary (模块), 338
- openpyxl.utils.cell (模块), 338
- openpyxl.utils.dataframe (模块), 339
- openpyxl.utils.datetime (模块), 340
- openpyxl.utils.escape (模块), 340
- openpyxl.utils.exceptions (模块), 340
- openpyxl.utils.formulas (模块), 341
- openpyxl.utils.indexed_list (模块), 341
- openpyxl.utils.inference (模块), 342
- openpyxl.utils.protection (模块), 342
- openpyxl.utils.units (模块), 342
- openpyxl.workbook (模块), 343
- openpyxl.workbook.child (模块), 346
- openpyxl.workbook.defined_name (模块), 346
- openpyxl.workbook.external_link (模块), 343
- openpyxl.workbook.external_link.external (模块), 344
- openpyxl.workbook.external_reference (模块), 348
- openpyxl.workbook.function_group (模块), 348
- openpyxl.workbook.properties (模块), 349
- openpyxl.workbook.protection (模块), 352
- openpyxl.workbook.smart_tags (模块), 354
- openpyxl.workbook.views (模块), 355
- openpyxl.workbook.web (模块), 358
- openpyxl.workbook.workbook (模块), 359
- openpyxl.worksheet (模块), 362
- openpyxl.worksheet.cell_range (模块), 362
- openpyxl.worksheet.cell_watch (模块), 365
- openpyxl.worksheet.controls (模块), 366
- openpyxl.worksheet.copier (模块), 367
- openpyxl.worksheet.custom (模块), 367

- openpyxl.worksheet.datavalidation (模块), 368
- openpyxl.worksheet.dimensions (模块), 370
- openpyxl.worksheet.drawing (模块), 374
- openpyxl.worksheet.errors (模块), 374
- openpyxl.worksheet.filters (模块), 375
- openpyxl.worksheet.header_footer (模块), 381
- openpyxl.worksheet.hyperlink (模块), 382
- openpyxl.worksheet.merge (模块), 383
- openpyxl.worksheet.ole (模块), 383
- openpyxl.worksheet.page (模块), 385
- openpyxl.worksheet.pagebreak (模块), 388
- openpyxl.worksheet.picture (模块), 389
- openpyxl.worksheet.properties (模块), 389
- openpyxl.worksheet.protection (模块), 391
- openpyxl.worksheet.related (模块), 392
- openpyxl.worksheet.scenario (模块), 393
- openpyxl.worksheet.smart_tag (模块), 394
- openpyxl.worksheet.table (模块), 395
- openpyxl.worksheet.views (模块), 400
- openpyxl.worksheet.worksheet (模块), 403
- openpyxl.writer (模块), 407
- openpyxl.writer.excel (模块), 407
- openpyxl.writer.theme (模块), 408
- openpyxl.xml (模块), 408
- openpyxl.xml.constants (模块), 409
- openpyxl.xml.functions (模块), 409
- OPERAND (*openpyxl.formula.tokenizer.Token* 属性), 260
- operator (*openpyxl.formatting.rule.Rule* 属性), 259
- operator (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 369
- operator (*openpyxl.worksheet.filters.CustomFilter* 属性), 376
- optimizeMemory (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
- order (*openpyxl.chart.series.Series* 属性), 163
- order (*openpyxl.chart.series.XYSeries* 属性), 165
- order (*openpyxl.chart.trendline.Trendline* 属性), 171
- orientation (*openpyxl.chart.axis.Scaling* 属性), 131
- orientation (*openpyxl.worksheet.page.PrintPageSetupOverride* 属性), 387
- ORIENTATION_LANDSCAPE (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- ORIENTATION_PORTRAIT (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- OuterShadow (*openpyxl.drawing.effect* 中的类), 208
- outerShdw (*openpyxl.drawing.effect.EffectList* 属性), 204
- outline (*openpyxl.cell.text.InlineFont* 属性), 123
- outline (*openpyxl.pivot.table.PivotArea* 属性), 303
- outline (*openpyxl.pivot.table.PivotField* 属性), 305
- outline (*openpyxl.pivot.table.PivotHierarchy* 属性), 309
- outline (*openpyxl.pivot.table.TableDefinition* 属性), 315
- outline (*openpyxl.styles.borders.Border* 属性), 322
- outline (*openpyxl.styles.fonts.Font* 属性), 330
- Outline (*openpyxl.worksheet.properties* 中的类), 389
- outline_level (*openpyxl.worksheet.dimensions.Dimension* 属性), 371
- outlineData (*openpyxl.pivot.table.TableDefinition* 属性), 315
- outlineLevel (*openpyxl.worksheet.dimensions.Dimension* 属性), 371
- outlineLevelCol (*openpyxl.worksheet.dimensions.SheetFormatProperties* 属性), 373
- outlineLevelRow (*openpyxl.worksheet.dimensions.SheetFormatProperties* 属性), 373
- outlinePr (*openpyxl.worksheet.properties.WorksheetProperties* 属性), 390
- overlap (*openpyxl.chart.bar_chart.BarChart* 属性), 134
- overlay (*openpyxl.chart.legend.Legend* 属性), 148
- overlay (*openpyxl.chart.title.Title* 属性), 170
- Override (*openpyxl.packaging.manifest* 中的类), 269
- Override (*openpyxl.packaging.manifest.Manifest* 属性), 268

P

- `p` (*openpyxl.chart.text.RichText* 属性), 169
- `Page` (*openpyxl.pivot.cache* 中的类), 286
- `page_breaks` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 406
- `PageBreak()` (在 *openpyxl.worksheet.pagebreak* 模块中), 388
- `PageField` (*openpyxl.pivot.table* 中的类), 301
- `pageFields` (*openpyxl.pivot.table.TableDefinition* 属性), 315
- `PageItem` (*openpyxl.pivot.cache* 中的类), 286
- `pageItem` (*openpyxl.pivot.cache.Page* 属性), 286
- `PageMargins` (*openpyxl.chart.print_settings* 中的类), 159
- `pageMargins` (*openpyxl.chart.print_settings.PrintSettings* 属性), 159
- `pageMargins` (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
- `pageMargins` (*openpyxl.chartsheet.custom.CustomChartsheetView* 属性), 174
- `PageMargins` (*openpyxl.worksheet.page* 中的类), 385
- `pageOrder` (*openpyxl.worksheet.page.PrintPageSetup* 属性), 387
- `pageOverThenDown` (*openpyxl.pivot.table.TableDefinition* 属性), 316
- `Pages` (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
- `pages` (*openpyxl.pivot.cache.Consolidation* 属性), 280
- `pageSetup` (*openpyxl.chart.print_settings.PrintSettings* 属性), 160
- `pageSetup` (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
- `pageSetup` (*openpyxl.chartsheet.custom.CustomChartsheetView* 属性), 174
- `pageSetUpPr` (*openpyxl.worksheet.properties.WorksheetProperties* 属性), 390
- `PageSetupProperties` (*openpyxl.worksheet.properties* 中的类), 389
- `pageStyle` (*openpyxl.pivot.table.TableDefinition* 属性), 316
- `pageWrap` (*openpyxl.pivot.table.TableDefinition* 属性), 316
- `Pane` (*openpyxl.worksheet.views* 中的类), 400
- `pane` (*openpyxl.worksheet.views.Selection* 属性), 401
- `pane` (*openpyxl.worksheet.views.SheetView* 属性), 401
- `panose` (*openpyxl.drawing.text.Font* 属性), 246
- `paperHeight` (*openpyxl.worksheet.page.PrintPageSetup* 属性), 387
- `paperSize` (*openpyxl.worksheet.page.PrintPageSetup* 属性), 387
- `PAPERSIZE_A3` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_A4` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_A4_SMALL` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_A5` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_EXECUTIVE` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_LEDGER` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_LEGAL` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_LETTER` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_LETTER_SMALL` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_STATEMENT` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
- `PAPERSIZE_TABLOID` (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403

- `pyxl.worksheet.worksheet.Worksheet` 属
性), 403
- `paperWidth` (`openpyxl.worksheet.page.PrintPageSetup`
属性), 387
- `par` (`openpyxl.pivot.cache.FieldGroup` 属性), 281
- `Paragraph` (`openpyxl.drawing.text` 中的类), 248
- `ParagraphProperties` (`openpyxl.drawing.text` 中的
类), 249
- `paragraphs` (`openpyxl.chart.text.RichText` 属性), 169
- `Paragraphs` (`openpyxl.packaging.extended.ExtendedPropertie`
属性), 267
- `PAREN` (`openpyxl.formula.tokenizer.Token` 属性), 260
- `parent` (`openpyxl.cell.cell.Cell` 属性), 121
- `parent` (`openpyxl.cell.read_only.ReadOnlyCell` 属
性), 122
- `parent` (`openpyxl.comments.comments.Comment` 属
性), 183
- `parent` (`openpyxl.pivot.cache.CalculatedMember` 属
性), 280
- `parent` (`openpyxl.pivot.cache.PCDKPI` 属性), 285
- `parent` (`openpyxl.styles.styleable.StyleableObject` 属
性), 336
- `parentSet` (`openpyxl.pivot.cache.CacheHierarchy` 属
性), 278
- `parse()` (`openpyxl.reader.workbook.WorkbookParser`
方法), 320
- `PartName` (`openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing`
属性), 241
- `PartName` (`openpyxl.packaging.manifest.Override` 属
性), 269
- `path` (`openpyxl.comments.comment_sheet.CommentSheet`
属性), 182
- `path` (`openpyxl.drawing.fill.GradientFillProperties` 属
性), 215
- `path` (`openpyxl.drawing.fill.PathShadeProperties` 属
性), 217
- `path` (`openpyxl.drawing.geometry.Path2DList` 属性),
225
- `path` (`openpyxl.drawing.image.Image` 属性), 232
- `path` (`openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing`
属性), 242
- `path` (`openpyxl.packaging.manifest.Manifest` 属性),
- `path` (`openpyxl.pivot.cache.CacheDefinition` 属性),
275
- `path` (`openpyxl.pivot.record.RecordList` 属性), 297
- `path` (`openpyxl.pivot.table.TableDefinition` 属性), 316
- `path` (`openpyxl.workbook.external_link.external.ExternalLink`
属性), 345
- `path` (`openpyxl.workbook.workbook.Workbook` 属性),
361
- `paths` (`openpyxl.worksheet.table.Table` 属性), 396
- `Path2D` (`openpyxl.drawing.geometry` 中的类), 225
- `Path2DList` (`openpyxl.drawing.geometry` 中的类),
225
- `pathLst` (`openpyxl.drawing.geometry.CustomGeometry2D`
属性), 223
- `PathShadeProperties` (`openpyxl.drawing.fill` 中的
类), 217
- `pattern` (`openpyxl.descriptors.excel.Base64Binary`
属性), 188
- `pattern` (`openpyxl.descriptors.excel.CellRange` 属
性), 188
- `pattern` (`openpyxl.descriptors.excel.Guid` 属性), 188
- `pattern` (`openpyxl.descriptors.excel.HexBinary` 属
性), 188
- `pattern` (`openpyxl.descriptors.excel.Percentage` 属
性), 188
- `pattern` (`openpyxl.descriptors.excel.UniversalMeasure`
属性), 189
- `PatternFill` (`openpyxl.styles.fills` 中的类), 328
- `PatternFillProperties` (`openpyxl.drawing.fill` 中的
类), 217
- `patternType` (`openpyxl.styles.fills.PatternFill` 属性),
329
- `pattFill` (`openpyxl.chart.shapes.GraphicalProperties`
属性), 166
- `pattFill` (`openpyxl.drawing.line.LineProperties` 属
性), 234
- `pattFill` (`openpyxl.drawing.text.CharacterProperties`
属性), 245
- `PCDKPI` (`openpyxl.pivot.cache` 中的类), 285
- `PCSDTCEntries` (`openpyxl.pivot.cache` 中的类), 285
- `percent` (`openpyxl.formatting.rule.IconSet` 属性),

- 258
- percent (*openpyxl.formatting.rule.Rule* 属性), 259
- percent (*openpyxl.worksheet.filters.Top10* 属性), 380
- Percentage (*openpyxl.descriptors.excel* 中的类), 188
- period (*openpyxl.chart.trendline.Trendline* 属性), 171
- personalView (*openpyxl.workbook.views.CustomWorkbookView* 属性), 357
- phonetic (*openpyxl.cell.text.Text* 属性), 125
- phoneticPr (*openpyxl.cell.text.Text* 属性), 125
- PhoneticProperties (*openpyxl.cell.text* 中的类), 123
- PhoneticProperties (*openpyxl.cell.text.Text* 属性), 124
- PhoneticText (*openpyxl.cell.text* 中的类), 124
- pic (*openpyxl.drawing.graphic.GroupShape* 属性), 231
- pic (*openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor* 属性), 240
- pic (*openpyxl.drawing.spreadsheet_drawing.OneCellAnchor* 属性), 241
- pic (*openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor* 属性), 242
- picLocks (*openpyxl.drawing.picture.NonVisualPictureProperties* 属性), 235
- picture (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
- pictureFormat (*openpyxl.chart.picture.PictureOptions* 属性), 152
- PictureFrame (*openpyxl.drawing.picture* 中的类), 235
- PictureLocking (*openpyxl.drawing.picture* 中的类), 235
- PictureNonVisual (*openpyxl.drawing.picture* 中的类), 236
- pictureOptions (*openpyxl.chart.marker.DataPoint* 属性), 151
- PictureOptions (*openpyxl.chart.picture* 中的类), 152
- pictureOptions (*openpyxl.chart.series.Series* 属性), 163
- pictureStackUnit (*openpyxl.chart.picture.PictureOptions* 属性), 152
- pie3DChart (*openpyxl.chart.plotarea.PlotArea* 属性), 158
- PieChart (*openpyxl.chart.pie_chart* 中的类), 153
- pieChart (*openpyxl.chart.plotarea.PlotArea* 属性), 158
- PieChart3D (*openpyxl.chart.pie_chart* 中的类), 153
- pitchFamily (*openpyxl.drawing.text.Font* 属性), 246
- pivot (*openpyxl.formatting.formatting.ConditionalFormatting* 属性), 256
- pivot (*openpyxl.styles.table.TableStyle* 属性), 337
- pivot_caches (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
- pivot_caches (*openpyxl.reader.workbook.WorkbookParser* 属性), 320
- pivotArea (*openpyxl.pivot.cache.CalculatedItem* 属性), 279
- PivotArea (*openpyxl.pivot.table* 中的类), 302
- pivotArea (*openpyxl.pivot.table.AutoSortScope* 属性), 297
- pivotArea (*openpyxl.pivot.table.ChartFormat* 属性), 297
- pivotArea (*openpyxl.pivot.table.Format* 属性), 300
- pivotAreas (*openpyxl.pivot.table.ConditionalFormat* 属性), 298
- pivotButton (*openpyxl.styles.cell_style.CellStyle* 属性), 324
- pivotButton (*openpyxl.styles.cell_style.StyleArray* 属性), 324
- pivotButton (*openpyxl.styles.styleable.StyleableObject* 属性), 336
- PivotCache (*openpyxl.packaging.workbook* 中的类), 272
- pivotCaches (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
- PivotDimension (*openpyxl.pivot.cache* 中的类), 286
- PivotField (*openpyxl.pivot.table* 中的类), 303

- pivotFields (
- openpyxl.pivot.table.TableDefinition*
- 属性), 316
-
- PivotFilter (
- openpyxl.pivot.table*
- 中的类), 306
-
- PivotFilters (
- openpyxl.pivot.table*
- 中的类), 308
-
- pivotFmts (
- openpyxl.chart.chartspace.ChartContainer*
- 属性), 137
-
- PivotFormat (
- openpyxl.chart.pivot*
- 中的类), 155
-
- pivotHierarchies (
- openpyxl.pivot.table.TableDefinition*
- 属性), 316
-
- PivotHierarchy (
- openpyxl.pivot.table*
- 中的类), 308
-
- pivotSource (
- openpyxl.chart.chartspace.ChartSpace*
- 属性), 138
-
- PivotSource (
- openpyxl.chart.pivot*
- 中的类), 155
-
- pivotTables (
- openpyxl.worksheet.protection.SheetProtection*
- 属性), 392
-
- PivotTableStyle (
- openpyxl.pivot.table*
- 中的类), 309
-
- pivotTableStyle (
- openpyxl.pivot.table.TableDefinition*
- 属性), 316
-
- pivotTableStyleInfo (
- openpyxl.pivot.table.TableDefinition*
- 属性), 316
-
- pixels_to_EMU() (在
- openpyxl.utils.units*
- 模块中), 343
-
- pixels_to_points() (在
- openpyxl.utils.units*
- 模块中), 343
-
- plain (
- openpyxl.cell.text.Text*
- 属性), 125
-
- pLen (
- openpyxl.pivot.table.MemberProperty*
- 属性), 301
-
- plotArea (
- openpyxl.chart.chartspace.ChartContainer*
- 属性), 137
-
- PlotArea (
- openpyxl.chart.plotarea*
- 中的类), 156
-
- plotVisOnly (
- openpyxl.chart.chartspace.ChartContainer*
- 属性), 137
-
- plus (
- openpyxl.chart.error_bar.ErrorBars*
- 属性), 144
-
- Point2D (
- openpyxl.drawing.geometry*
- 中的类), 225
-
- Point3D (
- openpyxl.drawing.geometry*
- 中的类), 225
-
- points_to_pixels() (在
- openpyxl.utils.units*
- 模块中), 343
-
- pop() (
- openpyxl.chart.reference.Reference*
- 方法), 161
-
- pos (
- openpyxl.drawing.fill.GradientStop*
- 属性), 216
-
- pos (
- openpyxl.drawing.geometry.ConnectionSite*
- 属性), 222
-
- pos (
- openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor*
- 属性), 240
-
- pos (
- openpyxl.drawing.text.TabStop*
- 属性), 254
-
- position (
- openpyxl.chart.legend.Legend*
- 属性), 148
-
- position (
- openpyxl.styles.fills.Stop*
- 属性), 329
-
- PositiveSize2D (
- openpyxl.drawing.geometry*
- 中的类), 226
-
- pPos (
- openpyxl.pivot.table.MemberProperty*
- 属性), 301
-
- pPr (
- openpyxl.drawing.text.Paragraph*
- 属性), 248
-
- pPr (
- openpyxl.drawing.text.TextField*
- 属性), 254
-
- preferRelativeResize (
- openpyxl.drawing.picture.NonVisualPictureProperties*
- 属性), 235
-
- PresentationFormat (
- openpyxl.packaging.extended.ExtendedProperties*
- 属性), 267
-
- preserveFormatting (
- openpyxl.pivot.table.TableDefinition*
- 属性), 316
-
- preset (
- openpyxl.drawing.fill.PatternFillProperties*
- 属性), 218
-
- PresetGeometry2D (
- openpyxl.drawing.geometry*
- 中的类), 226
-
- PresetShadowEffect (
- openpyxl.drawing.effect*
- 中的类), 209
-
- PresetTextShape (
- openpyxl.drawing.text*
- 中的类), 251
-
- print_area (
- openpyxl.worksheet.worksheet.Worksheet*
- 属性), 406
-
- print_title_cols (
- openpyxl.worksheet.worksheet.Worksheet*
- 属性), 406
-
- print_title_rows (
- openpyxl.worksheet.worksheet.Worksheet*
- 属性), 407
-
- print_titles (
- openpyxl.worksheet.worksheet.Worksheet*
- 属性), 407
-
- printDrill (
- openpyxl.pivot.table.TableDefinition*
- 属

- 性), 316
- PrintOptions (*openpyxl.worksheet.page* 中的类), 386
- PrintPageSetup (*openpyxl.worksheet.page* 中的类), 386
- printSettings (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- PrintSettings (*openpyxl.chart.print_settings* 中的类), 159
- priority (*openpyxl.formatting.rule.Rule* 属性), 259
- priority (*openpyxl.pivot.table.ConditionalFormat* 属性), 298
- productSubtotal (*openpyxl.pivot.table.PivotField* 属性), 305
- productSubtotal (*openpyxl.pivot.table.Reference* 属性), 310
- progId (*openpyxl.worksheet.ole.OleObject* 属性), 385
- ProjectedPieChart (*openpyxl.chart.pie_chart* 中的类), 153
- prompt (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 369
- promptedSolutions (*openpyxl.workbook.properties.WorkbookProperties* 属性), 351
- promptTitle (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 369
- properties (*openpyxl.chart.text.RichText* 属性), 169
- Properties (*openpyxl.comments.comment_sheet* 中的类), 182
- properties (*openpyxl.drawing.text.Paragraph* 属性), 248
- properties (*openpyxl.drawing.text.RegularTextRun* 属性), 251
- properties (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
- propertyName (*openpyxl.pivot.cache.CacheField* 属性), 277
- protection (*openpyxl.cell.read_only.ReadOnlyCell* 属性), 122
- Protection (*openpyxl.chart.chartspace* 中的类), 139
- protection (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- protection (*openpyxl.styles.cell_style.CellStyle* 属性), 324
- protection (*openpyxl.styles.cell_style.CellStyleList* 属性), 324
- protection (*openpyxl.styles.differential.DifferentialStyle* 属性), 326
- protection (*openpyxl.styles.named_styles.NamedStyle* 属性), 333
- Protection (*openpyxl.styles.protection* 中的类), 334
- protection (*openpyxl.styles.styleable.StyleableObject* 属性), 336
- protectionId (*openpyxl.styles.cell_style.StyleArray* 属性), 325
- prst (*openpyxl.drawing.effect.PresetShadowEffect* 属性), 210
- prst (*openpyxl.drawing.fill.PatternFillProperties* 属性), 218
- prst (*openpyxl.drawing.geometry.Bevel* 属性), 221
- prst (*openpyxl.drawing.geometry.Camera* 属性), 222
- prst (*openpyxl.drawing.geometry.PresetGeometry2D* 属性), 226
- prst (*openpyxl.drawing.text.PresetTextShape* 属性), 251
- prstClr (*openpyxl.drawing.colors.ColorChoice* 属性), 192
- prstClr (*openpyxl.drawing.effect.GlowEffect* 属性), 205
- prstClr (*openpyxl.drawing.effect.InnerShadowEffect* 属性), 206
- prstClr (*openpyxl.drawing.effect.OuterShadow* 属性), 208
- prstClr (*openpyxl.drawing.effect.PresetShadowEffect* 属性), 210
- prstClr (*openpyxl.drawing.fill.GradientStop* 属性), 216
- prstClr (*openpyxl.drawing.fill.SolidColorFillProperties* 属性), 219
- prstDash (*openpyxl.drawing.line.LineProperties* 属性), 234
- prstGeom (*openpyxl.chart.shapes.GraphicalProperties* 属性), 166
- prstMaterial (*openpyxl.drawing.geometry.Shape3D*

- 属性), 228
- prstShdw (*openpyxl.drawing.effect.EffectList* 属性), 204
- prstTxWarp (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- pt (*openpyxl.chart.data_source.Level* 属性), 140
- pt (*openpyxl.chart.data_source.NumData* 属性), 141
- pt (*openpyxl.chart.data_source.StrData* 属性), 142
- pt (*openpyxl.worksheet.pagebreak.Break* 属性), 388
- ptCount (*openpyxl.chart.data_source.MultiLevelStrData* 属性), 140
- ptCount (*openpyxl.chart.data_source.NumData* 属性), 141
- ptCount (*openpyxl.chart.data_source.StrData* 属性), 142
- published (*openpyxl.chartsheet.properties.ChartsheetProperties* 属性), 175
- published (*openpyxl.pivot.table.TableDefinition* 属性), 316
- published (*openpyxl.worksheet.properties.WorksheetProperties* 属性), 390
- published (*openpyxl.worksheet.table.Table* 属性), 396
- publishItems (*openpyxl.workbook.properties.WorkbookProperties* 属性), 351
- publishToServer (*openpyxl.workbook.defined_name.DefinedName* 属性), 347
- Q**
- QualifiedDateTime (*openpyxl.packaging.core* 中的类), 265
- Query (*openpyxl.pivot.cache* 中的类), 286
- query (*openpyxl.pivot.cache.QueryCache* 属性), 287
- QueryCache (*openpyxl.pivot.cache* 中的类), 287
- queryCache (*openpyxl.pivot.cache.TupleCache* 属性), 290
- queryFailed (*openpyxl.pivot.cache.OLAPSet* 属性), 284
- queryTableFieldId (*openpyxl.worksheet.table.TableColumn* 属性), 398
- quote_sheetname() (在 *openpyxl.utils.cell* 模块中), 339
- quotePrefix (*openpyxl.styles.cell_style.CellStyle* 属性), 324
- quotePrefix (*openpyxl.styles.cell_style.StyleArray* 属性), 325
- quotePrefix (*openpyxl.styles.styleable.StyleableObject* 属性), 336
- R**
- r (*openpyxl.cell.text.Text* 属性), 125
- r (*openpyxl.chart.print_settings.PageMargins* 属性), 159
- r (*openpyxl.drawing.colors.RGBPercent* 属性), 195
- r (*openpyxl.drawing.fill.RelativeRect* 属性), 218
- r (*openpyxl.drawing.geometry.GeomRect* 属性), 224
- r (*openpyxl.drawing.text.Paragraph* 属性), 249
- r (*openpyxl.pivot.record.RecordList* 属性), 297
- r (*openpyxl.pivot.table.RowColItem* 属性), 311
- r (*openpyxl.workbook.external_link.external.ExternalCell* 属性), 344
- r (*openpyxl.workbook.external_link.external.ExternalRow* 属性), 345
- r (*openpyxl.worksheet.cell_watch.CellWatch* 属性), 365
- r (*openpyxl.worksheet.dimensions.RowDimension* 属性), 372
- r (*openpyxl.worksheet.scenario.InputCells* 属性), 393
- r (*openpyxl.worksheet.smart_tag.CellSmartTags* 属性), 395
- rad (*openpyxl.drawing.effect.BlurEffect* 属性), 203
- rad (*openpyxl.drawing.effect.GlowEffect* 属性), 206
- rad (*openpyxl.drawing.effect.SoftEdgesEffect* 属性), 212
- radarChart (*openpyxl.chart.plotarea.PlotArea* 属性), 158
- RadarChart (*openpyxl.chart.radar_chart* 中的类), 160
- radarStyle (*openpyxl.chart.radar_chart.RadarChart* 属性), 160
- RANGE (*openpyxl.formula.tokenizer.Token* 属性), 260

- `range_boundaries()` (在 `openpyxl.utils.cell` 模块中), 339
- `range_string` (`openpyxl.chart.reference.Reference` 属性), 161
- `range_to_tuple()` (在 `openpyxl.utils.cell` 模块中), 339
- `RangePr` (`openpyxl.pivot.cache` 中的类), 287
- `rangePr` (`openpyxl.pivot.cache.FieldGroup` 属性), 281
- `ranges` (`openpyxl.worksheet.cell_range.MultiCellRange` 属性), 365
- `ranges` (`openpyxl.worksheet.datavalidation.DataValidation` 属性), 369
- `RangeSet` (`openpyxl.pivot.cache` 中的类), 288
- `rangeSets` (`openpyxl.pivot.cache.Consolidation` 属性), 280
- `rank` (`openpyxl.formatting.rule.Rule` 属性), 259
- `rankBy` (`openpyxl.pivot.table.PivotField` 属性), 305
- `read()` (`openpyxl.reader.excel.ExcelReader` 方法), 318
- `read_chart()` (在 `openpyxl.chart.reader` 模块中), 160
- `read_chartsheet()` (`openpyxl.reader.excel.ExcelReader` 方法), 318
- `read_external_link()` (在 `openpyxl.workbook.external_link.external` 模块中), 346
- `read_manifest()` (`openpyxl.reader.excel.ExcelReader` 方法), 318
- `read_only` (`openpyxl.workbook.workbook.Workbook` 属性), 361
- `read_properties()` (`openpyxl.reader.excel.ExcelReader` 方法), 318
- `read_string_table()` (在 `openpyxl.reader.strings` 模块中), 319
- `read_strings()` (`openpyxl.reader.excel.ExcelReader` 方法), 318
- `read_theme()` (`openpyxl.reader.excel.ExcelReader` 方法), 319
- `read_workbook()` (`openpyxl.reader.excel.ExcelReader` 方法), 319
- `read_worksheets()` (`openpyxl.reader.excel.ExcelReader` 方法), 319
- `readingOrder` (`openpyxl.styles.alignment.Alignment` 属性), 320
- `ReadOnlyCell` (`openpyxl.cell.read_only` 中的类), 122
- `readOnlyRecommended` (`openpyxl.workbook.protection.FileSharing` 属性), 352
- `ReadOnlyWorkbookException`, 341
- `recalcAlways` (`openpyxl.worksheet.controls.ControlProperty` 属性), 367
- `Record` (`openpyxl.pivot.record` 中的类), 296
- `recordCount` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275
- `RecordList` (`openpyxl.pivot.record` 中的类), 297
- `records` (`openpyxl.pivot.cache.CacheDefinition` 属性), 275
- `red` (`openpyxl.drawing.colors.SchemeColor` 属性), 197
- `red` (`openpyxl.drawing.colors.SystemColor` 属性), 199
- `redMod` (`openpyxl.drawing.colors.SchemeColor` 属性), 197
- `redMod` (`openpyxl.drawing.colors.SystemColor` 属性), 199
- `redOff` (`openpyxl.drawing.colors.SchemeColor` 属性), 197
- `redOff` (`openpyxl.drawing.colors.SystemColor` 属性), 199
- `ref` (`openpyxl.chart.data_source.NumRef` 属性), 141
- `ref` (`openpyxl.comments.comment_sheet.CommentRecord` 属性), 181
- `ref` (`openpyxl.pivot.cache.RangeSet` 属性), 288
- `ref` (`openpyxl.pivot.cache.WorksheetSource` 属性), 291
- `ref` (`openpyxl.pivot.table.Location` 属性), 300
- `ref` (`openpyxl.worksheet.dimensions.SheetDimension` 属性), 373
- `ref` (`openpyxl.worksheet.filters.AutoFilter` 属性), 376
- `ref` (`openpyxl.worksheet.filters.SortCondition` 属性), 379
- `ref` (`openpyxl.worksheet.filters.SortState` 属性), 380
- `ref` (`openpyxl.worksheet.hyperlink.Hyperlink` 属性), 382

[ref](#) (*openpyxl.worksheet.merge.MergeCell* 属性), 383
[ref](#) (*openpyxl.worksheet.table.Table* 属性), 396
[Reference](#) (*openpyxl.chart.reference* 中的类), 161
[Reference](#) (*openpyxl.pivot.table* 中的类), 309
[references](#) (*openpyxl.pivot.table.PivotArea* 属性), 303
[refersTo](#) (*openpyxl.workbook.external_link.external.ExternalDefinition* 属性), 344
[reflection](#) (*openpyxl.drawing.effect.EffectList* 属性), 204
[ReflectionEffect](#) (*openpyxl.drawing.effect* 中的类), 211
[refMode](#) (*openpyxl.workbook.properties.CalcProperties* 属性), 349
[refreshAllConnections](#) (*openpyxl.workbook.properties.WorkbookProperties* 属性), 351
[refreshedBy](#) (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
[refreshedDate](#) (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
[refreshedDateIso](#) (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
[refreshedVersion](#) (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
[refreshError](#) (*openpyxl.workbook.external_link.external.ExternalDefinition* 属性), 345
[refreshOnLoad](#) (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
[RegularTextRun](#) (*openpyxl.drawing.text* 中的类), 251
[reindex\(\)](#) (*openpyxl.worksheet.dimensions.ColumnDimension* 方法), 371
[rel_type](#) (*openpyxl.pivot.cache.CacheDefinition* 属性), 275
[rel_type](#) (*openpyxl.pivot.record.RecordList* 属性), 297
[rel_type](#) (*openpyxl.pivot.table.TableDefinition* 属性), 316
[Related](#) (*openpyxl.worksheet.related* 中的类), 392
[Relation](#) (*openpyxl.descriptors.excel* 中的类), 188
[Relationship](#) (*openpyxl.packaging.relationship* 中的类), 269
[Relationship](#) (*openpyxl.packaging.relationship.RelationshipList* 属性), 270
[RelationshipList](#) (*openpyxl.packaging.relationship* 中的类), 270
[relative](#) (*openpyxl.pivot.table.Reference* 属性), 310
[relativeIndent](#) (*openpyxl.styles.alignment.Alignment* 属性), 320
[RelativeRect](#) (*openpyxl.drawing.fill* 中的类), 218
[rels](#) (*openpyxl.reader.workbook.WorkbookParser* 属性), 320
[remove\(\)](#) (*openpyxl.workbook.workbook.Workbook* 方法), 361
[remove\(\)](#) (*openpyxl.worksheet.cell_range.MultiCellRange* 方法), 365
[remove_named_range\(\)](#) (*openpyxl.workbook.workbook.Workbook* 方法), 361
[remove_sheet\(\)](#) (*openpyxl.workbook.workbook.Workbook* 方法), 361
[render\(\)](#) (*openpyxl.formula.tokenizer.Tokenizer* 方法), 262
[RepairLoad](#) (*openpyxl.packaging.workbook.FileRecoveryProperties* 属性), 271
[reservationPassword](#) (*openpyxl.workbook.protection.FileSharing* 属性), 352
[rev](#) (*openpyxl.drawing.geometry.SphereCoords* 属性), 229
[reverse](#) (*openpyxl.formatting.rule.IconSet* 属性), 258
[revision](#) (*openpyxl.packaging.core.DocumentProperties* 属性), 265
[revision_password](#) (*openpyxl.workbook.protection.WorkbookProtection* 属性), 352

属性), 353	179
revisionsAlgorithmName (openpyxl.workbook.protection.WorkbookProtection 属性), 353	rhf (openpyxl.chartsheet.relation.DrawingHF 属性), 179
revisionsHashValue (openpyxl.workbook.protection.WorkbookProtection 属性), 353	rho (openpyxl.chartsheet.relation.DrawingHF 属性), 179
revisionsPassword (openpyxl.workbook.protection.WorkbookProtection 属性), 353	rich (openpyxl.chart.text.Text 属性), 170
revisionsPasswordCharacterSet (openpyxl.workbook.protection.WorkbookProtection 属性), 353	RichText (openpyxl.cell.text 中的类), 124
revisionsSaltValue (openpyxl.workbook.protection.WorkbookProtection 属性), 353	RichText (openpyxl.chart.text 中的类), 169
revisionsSpinCount (openpyxl.workbook.protection.WorkbookProtection 属性), 353	RichTextProperties (openpyxl.drawing.text 中的类), 251
rfe (openpyxl.chartsheet.relation.DrawingHF 属性), 179	rig (openpyxl.drawing.geometry.LightRig 属性), 224
rff (openpyxl.chartsheet.relation.DrawingHF 属性), 179	right (openpyxl.chart.print_settings.PageMargins 属性), 159
rfo (openpyxl.chartsheet.relation.DrawingHF 属性), 179	right (openpyxl.drawing.fill.RelativeRect 属性), 218
rFont (openpyxl.cell.text.InlineFont 属性), 123	right (openpyxl.styles.borders.Border 属性), 322
RGB (openpyxl.drawing.colors.ColorChoice 属性), 192	right (openpyxl.styles.fills.GradientFill 属性), 328
RGB (openpyxl.drawing.fill.GradientStop 属性), 216	right (openpyxl.worksheet.cell_range.CellRange 属性), 364
RGB (openpyxl.drawing.fill.SolidColorFillProperties 属性), 219	right (openpyxl.worksheet.header_footer.HeaderFooterItem 属性), 382
RGB (openpyxl.styles.colors 中的类), 326	right (openpyxl.worksheet.page.PageMargins 属性), 386
rgb (openpyxl.styles.colors.Color 属性), 325	rightFooterEvenPages (openpyxl.chartsheet.relation.DrawingHF 属性), 179
rgb (openpyxl.styles.colors.RgbColor 属性), 326	rightFooterFirstPage (openpyxl.chartsheet.relation.DrawingHF 属性), 179
RgbColor (openpyxl.styles.colors 中的类), 326	rightFooterOddPages (openpyxl.chartsheet.relation.DrawingHF 属性), 179
RGBPercent (openpyxl.drawing.colors 中的类), 195	rightHeaderEvenPages (openpyxl.chartsheet.relation.DrawingHF 属性), 179
RGBPercent (openpyxl.drawing.colors.ColorChoice 属性), 192	rightHeaderFirstPage (openpyxl.chartsheet.relation.DrawingHF 属性), 179
RGBPercent (openpyxl.drawing.fill.GradientStop 属性), 216	rightHeaderOddPages (openpyxl.chartsheet.relation.DrawingHF 属性), 179
RGBPercent (openpyxl.drawing.fill.SolidColorFillProperties 属性), 219	rightToLeft (openpyxl.worksheet.views.SheetView 属性), 401
rhe (openpyxl.chartsheet.relation.DrawingHF 属性),	

- `rIns` (`openpyxl.drawing.text.RichTextProperties` 属性), 253
- `rot` (`openpyxl.drawing.geometry.Camera` 属性), 222
- `rot` (`openpyxl.drawing.geometry.GroupTransform2D` 属性), 224
- `rot` (`openpyxl.drawing.geometry.LightRig` 属性), 225
- `rot` (`openpyxl.drawing.geometry.Transform2D` 属性), 229
- `rot` (`openpyxl.drawing.text.RichTextProperties` 属性), 253
- `rot` (`openpyxl.drawing.xdr.XDRTransform2D` 属性), 255
- `rotWithShape` (`openpyxl.drawing.effect.OuterShadow` 属性), 209
- `rotWithShape` (`openpyxl.drawing.effect.ReflectionEffect` 属性), 211
- `rotWithShape` (`openpyxl.drawing.fill.BlipFillProperties` 属性), 214
- `rotWithShape` (`openpyxl.drawing.fill.GradientFillProperties` 属性), 215
- `round` (`openpyxl.drawing.line.LineProperties` 属性), 234
- `roundedCorners` (`openpyxl.chart.chartspace.ChartSpace` 属性), 138
- `row` (`openpyxl.cell.cell.Cell` 属性), 121
- `row` (`openpyxl.cell.cell.MergedCell` 属性), 121
- `row` (`openpyxl.cell.read_only.ReadOnlyCell` 属性), 122
- `row` (`openpyxl.drawing.spreadsheet_drawing.AnchorMarker` 属性), 241
- `ROW` (`openpyxl.formula.tokenizer.Token` 属性), 260
- `row` (`openpyxl.workbook.external_link.external.ExternalSheetData` 属性), 345
- `ROW_RANGE_RE` (`openpyxl.formula.translate.Translator` 属性), 262
- `RowBreak` (`openpyxl.worksheet.pagebreak` 中的类), 388
- `RowColField` (`openpyxl.pivot.table` 中的类), 311
- `RowColItem` (`openpyxl.pivot.table` 中的类), 311
- `RowDimension` (`openpyxl.worksheet.dimensions` 中的类), 372
- `rowFields` (`openpyxl.pivot.table.TableDefinition` 属性), 316
- `rowGrandTotals` (`openpyxl.pivot.table.TableDefinition` 属性), 316
- `rowHeaderCaption` (`openpyxl.pivot.table.TableDefinition` 属性), 316
- `rowHidden` (`openpyxl.comments.comment_sheet.Properties` 属性), 183
- `RowHierarchiesUsage` (`openpyxl.pivot.table` 中的类), 311
- `rowHierarchiesUsage` (`openpyxl.pivot.table.TableDefinition` 属性), 316
- `rowHierarchyUsage` (`openpyxl.pivot.table.RowHierarchiesUsage` 属性), 311
- `rowItems` (`openpyxl.pivot.table.TableDefinition` 属性), 316
- `rowOff` (`openpyxl.drawing.spreadsheet_drawing.AnchorMarker` 属性), 241
- `rowPageCount` (`openpyxl.pivot.table.Location` 属性), 300
- `rows` (`openpyxl.chart.reference.Reference` 属性), 161
- `rows` (`openpyxl.worksheet.cell_range.CellRange` 属性), 364
- `rows` (`openpyxl.worksheet.worksheet.Worksheet` 属性), 407
- `rows_from_range()` (在 `openpyxl.utils.cell` 模块中), 339
- `SheetData` (`openpyxl.cell.text.Text` 属性), 125
- `rPr` (`openpyxl.cell.text.RichText` 属性), 124
- `rPr` (`openpyxl.drawing.text.LineBreak` 属性), 247
- `rPr` (`openpyxl.drawing.text.RegularTextRun` 属性), 251
- `rPr` (`openpyxl.drawing.text.TextField` 属性), 254

- p>
rtl (
- openpyxl.drawing.text.CharacterProperties*
- 属性), 245
rtl (
- openpyxl.drawing.text.ParagraphProperties*
- 属性), 250
rtlCol (
- openpyxl.drawing.text.RichTextProperties*
- 属性), 253
Rule (
- openpyxl.formatting.rule*
- 中的类), 258
rules (
- openpyxl.formatting.formatting.ConditionalFormatting*
- 模块中), 408
属性), 256
RuleType (
- openpyxl.formatting.rule*
- 中的类), 259
rupBuild (
- openpyxl.workbook.properties.FileVersion*
- 属性), 350
S
s (
- openpyxl.pivot.cache.GroupItems*
- 属性), 282
s (
- openpyxl.pivot.cache.PCDSDTCEntries*
- 属性), 286
s (
- openpyxl.pivot.cache.SharedItems*
- 属性), 290
s (
- openpyxl.pivot.record.Record*
- 属性), 296
s (
- openpyxl.pivot.table.FieldItem*
- 属性), 299
s (
- openpyxl.worksheet.dimensions.RowDimension*
- 属性), 372
safe_string() (在
- openpyxl.compat.strings*
- 模块中), 185
saltValue (
- openpyxl.chartsheet.protection.ChartsheetProtection*
- 属性), 176
属性), 176
saltValue (
- openpyxl.workbook.protection.FileSharing*
- 属性), 352
saltValue (
- openpyxl.worksheet.protection.SheetProtection*
- 属性), 392
属性), 392
sat (
- openpyxl.drawing.colors.HSLColor*
- 属性), 195
sat (
- openpyxl.drawing.colors.SchemeColor*
- 属性), 197
sat (
- openpyxl.drawing.colors.SystemColor*
- 属性), 199
sat (
- openpyxl.drawing.effect.HSLEffect*
- 属性), 206
satMod (
- openpyxl.drawing.colors.SchemeColor*
- 属性), 197
satMod (
- openpyxl.drawing.colors.SystemColor*
- 属性), 199
satOff (
- openpyxl.drawing.colors.SchemeColor*
- 属性), 197
satOff (
- openpyxl.drawing.colors.SystemColor*
- 属性), 199
save() (
- openpyxl.workbook.workbook.Workbook*
- 方法), 362
save() (
- openpyxl.writer.excel.ExcelWriter*
- 方法), 407
save_token() (
- openpyxl.formula.tokenizer.Tokenizer*
- 方法), 262
save_virtual_workbook() (在
- openpyxl.writer.excel*
- 模块中), 408
save_workbook() (在
- openpyxl.writer.excel*
- 模块中), 408
saveData (
- openpyxl.pivot.cache.CacheDefinition*
- 属性), 275
saveExternalLinkValues (
- openpyxl.workbook.properties.WorkbookProperties*
- 属性), 351
sb (
- openpyxl.cell.text.PhoneticText*
- 属性), 124
scale (
- openpyxl.chartsheet.custom.CustomChartsheetView*
- 属性), 174
scale (
- openpyxl.worksheet.page.PrintPageSetup*
- 属性), 387
ScaleCrop (
- openpyxl.packaging.extended.ExtendedProperties*
- 属性), 267
scaled (
- openpyxl.drawing.fill.LinearShadeProperties*
- 属性), 217
scaleWithDoc (
- openpyxl.worksheet.header_footer.HeaderFooter*
- 属性), 381
Scaling (
- openpyxl.chart.axis*
- 中的类), 131
scaling (
- openpyxl.chart.axis.DateAxis*
- 属性), 128
scaling (
- openpyxl.chart.axis.NumericAxis*
- 属性), 130
scaling (
- openpyxl.chart.axis.SeriesAxis*
- 属性), 132
scaling (
- openpyxl.chart.axis.TextAxis*
- 属性), 133
scatterChart (
- openpyxl.chart.plotarea.PlotArea*
- 属性), 158
ScatterChart (
- openpyxl.chart.scatter_chart*
- 中的类), 161
scatterStyle (
- openpyxl.chart.scatter_chart.ScatterChart*
- 属性), 162
Scenario (
- openpyxl.worksheet.scenario*
- 中的类), 393
scenario (
- openpyxl.worksheet.scenario.ScenarioList*

- 属性), 394
- ScenarioList (*openpyxl.worksheet.scenario* 中的类), 393
- scenarios (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
- scene3d (*openpyxl.chart.shapes.GraphicalProperties* 属性), 166
- Scene3D (*openpyxl.drawing.geometry* 中的类), 227
- scene3d (*openpyxl.drawing.properties.GroupShapeProperties* 属性), 238
- scene3d (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- scheme (*openpyxl.cell.text.InlineFont* 属性), 123
- scheme (*openpyxl.styles.fonts.Font* 属性), 330
- schemeClr (*openpyxl.drawing.colors.ColorChoice* 属性), 193
- schemeClr (*openpyxl.drawing.effect.GlowEffect* 属性), 206
- schemeClr (*openpyxl.drawing.effect.InnerShadowEffect* 属性), 207
- schemeClr (*openpyxl.drawing.effect.OuterShadow* 属性), 209
- schemeClr (*openpyxl.drawing.effect.PresetShadowEffect* 属性), 210
- schemeClr (*openpyxl.drawing.fill.GradientStop* 属性), 217
- schemeClr (*openpyxl.drawing.fill.SolidColorFillProperties* 属性), 220
- SchemeColor (*openpyxl.drawing.colors* 中的类), 195
- scope (*openpyxl.pivot.table.ConditionalFormat* 属性), 298
- scrgbClr (*openpyxl.drawing.colors.ColorChoice* 属性), 193
- scrgbClr (*openpyxl.drawing.effect.GlowEffect* 属性), 206
- scrgbClr (*openpyxl.drawing.effect.InnerShadowEffect* 属性), 207
- scrgbClr (*openpyxl.drawing.effect.OuterShadow* 属性), 209
- scrgbClr (*openpyxl.drawing.effect.PresetShadowEffect* 属性), 211
- scrgbClr (*openpyxl.drawing.fill.GradientStop* 属性), 217
- scrgbClr (*openpyxl.drawing.fill.SolidColorFillProperties* 属性), 220
- second (*openpyxl.worksheet.filters.DateGroupItem* 属性), 377
- secondPiePt (*openpyxl.chart.pie_chart.CustomSplit* 属性), 152
- secondPieSize (*openpyxl.chart.pie_chart.ProjectPieChart* 属性), 154
- selected (*openpyxl.pivot.table.Reference* 属性), 310
- selected_cell (*openpyxl.worksheet.worksheet.Worksheet* 属性), 407
- selection (*openpyxl.chart.chartspace.Protection* 属性), 139
- Selection (*openpyxl.worksheet.views* 中的类), 400
- selection (*openpyxl.worksheet.views.SheetView* 属性), 401
- selectLockedCells (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
- selectUnlockedCells (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
- SEP (*openpyxl.formula.tokenizer.Token* 属性), 261
- separator (*openpyxl.chart.label.DataLabel* 属性), 145
- separator (*openpyxl.chart.label.DataLabelList* 属性), 146
- seq_types (*openpyxl.descriptors.sequence.Sequence* 属性), 191
- Sequence (*openpyxl.descriptors.sequence* 中的类), 191
- ser (*openpyxl.chart.area_chart.AreaChart* 属性), 126
- ser (*openpyxl.chart.area_chart.AreaChart3D* 属性), 126
- ser (*openpyxl.chart.bar_chart.BarChart* 属性), 134
- ser (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- ser (*openpyxl.chart.bubble_chart.BubbleChart* 属性), 135

- 136
- `ser` (`openpyxl.chart.line_chart.LineChart` 属性), 149
- `ser` (`openpyxl.chart.line_chart.LineChart3D` 属性), 150
- `ser` (`openpyxl.chart.pie_chart.DoughnutChart` 属性), 152
- `ser` (`openpyxl.chart.pie_chart.PieChart` 属性), 153
- `ser` (`openpyxl.chart.pie_chart.PieChart3D` 属性), 153
- `ser` (`openpyxl.chart.pie_chart.ProjectedPieChart` 属性), 154
- `ser` (`openpyxl.chart.radar_chart.RadarChart` 属性), 160
- `ser` (`openpyxl.chart.scatter_chart.ScatterChart` 属性), 162
- `ser` (`openpyxl.chart.stock_chart.StockChart` 属性), 167
- `ser` (`openpyxl.chart.surface_chart.SurfaceChart` 属性), 168
- `ser` (`openpyxl.chart.surface_chart.SurfaceChart3D` 属性), 169
- `serAx` (`openpyxl.chart.plotarea.PlotArea` 属性), 158
- `Serialisable` (`openpyxl.descriptors.serialisable` 中的类), 191
- `Series` (`openpyxl.chart.series` 中的类), 162
- `series` (`openpyxl.pivot.table.ChartFormat` 属性), 298
- `SeriesAxis` (`openpyxl.chart.axis` 中的类), 131
- `SeriesFactory()` (在 `openpyxl.chart.series_factory` 模块中), 165
- `SeriesLabel` (`openpyxl.chart.series` 中的类), 164
- `serLines` (`openpyxl.chart.bar_chart.BarChart` 属性), 134
- `serLines` (`openpyxl.chart.bar_chart.BarChart3D` 属性), 135
- `serLines` (`openpyxl.chart.pie_chart.ProjectedPieChart` 属性), 154
- `serverField` (`openpyxl.pivot.cache.CacheField` 属性), 277
- `serverField` (`openpyxl.pivot.table.PivotField` 属性), 306
- `ServerFormat` (`openpyxl.pivot.cache` 中的类), 288
- `serverFormat` (`openpyxl.pivot.cache.ServerFormatList` 属性), 288
- `ServerFormatList` (`openpyxl.pivot.cache` 中的类), 288
- `serverFormats` (`openpyxl.pivot.cache.TupleCache` 属性), 290
- `Set` (`openpyxl.descriptors.base` 中的类), 187
- `set` (`openpyxl.pivot.cache.CacheHierarchy` 属性), 278
- `set` (`openpyxl.pivot.cache.CalculatedMember` 属性), 280
- `set` (`openpyxl.pivot.cache.OLAPSets` 属性), 285
- `set_dimension()` (`openpyxl.drawing.drawing.Drawing` 方法), 202
- `set_password()` (`openpyxl.worksheet.protection.SheetProtection` 方法), 392
- `set_printer_settings()` (`openpyxl.worksheet.worksheet.Worksheet` 方法), 407
- `set_revisions_password()` (`openpyxl.workbook.protection.WorkbookProtection` 方法), 353
- `set_workbook_password()` (`openpyxl.workbook.protection.WorkbookProtection` 方法), 353
- `setDefinition` (`openpyxl.pivot.cache.OLAPSet` 属性), 284
- `sets` (`openpyxl.pivot.cache.TupleCache` 属性), 290
- `shade` (`openpyxl.drawing.colors.SchemeColor` 属性), 197
- `shade` (`openpyxl.drawing.colors.SystemColor` 属性), 199
- `shadow` (`openpyxl.cell.text.InlineFont` 属性), 123
- `shadow` (`openpyxl.styles.fonts.Font` 属性), 330
- `shape` (`openpyxl.chart.bar_chart.BarChart3D` 属性), 135
- `shape` (`openpyxl.chart.series.Series` 属性), 163
- `Shape` (`openpyxl.drawing.connector` 中的类), 201
- `shape3D` (`openpyxl.chart.shapes.GraphicalProperties` 属性), 166
- `Shape3D` (`openpyxl.drawing.geometry` 中的类), 227

shapeId (*openpyxl.comments.comment_sheet.CommentRecord* 属性), 271
 shapeId (*openpyxl.worksheet.controls.Control* 属性), 366
 shapeId (*openpyxl.worksheet.ole.OleObject* 属性), 385
 ShapeMeta (*openpyxl.drawing.connector* 中的类), 202
 ShapeStyle (*openpyxl.drawing.geometry* 中的类), 228
 ShapeWriter (*openpyxl.comments.shape_writer* 中的类), 184
 SharedDoc (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
 SharedItems (*openpyxl.pivot.cache* 中的类), 288
 sharedItems (*openpyxl.pivot.cache.CacheField* 属性), 277
 sheet (*openpyxl.pivot.cache.RangeSet* 属性), 288
 sheet (*openpyxl.pivot.cache.WorksheetSource* 属性), 291
 sheet (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
 sheet_properties (*openpyxl.worksheet.page.PrintPageSetup* 属性), 387
 sheet_state (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
 sheet_view (*openpyxl.worksheet.worksheet.Worksheet* 属性), 407
 SheetBackgroundPicture (*openpyxl.chartsheet.relation* 中的类), 179
 SheetBackgroundPicture (*openpyxl.worksheet.picture* 中的类), 389
 sheetData (*openpyxl.workbook.external_link.external.ExternalSheetData* 属性), 345
 sheetDataSet (*openpyxl.workbook.external_link.external.ExternalSheetDataSet* 属性), 344
 SheetDimension (*openpyxl.worksheet.dimensions* 中的类), 373
 SheetFormatProperties (*openpyxl.worksheet.dimensions* 中的类), 373
 sheetId (*openpyxl.packaging.workbook.ChildSheet* 属性), 181
 sheetId (*openpyxl.workbook.external_link.external.ExternalDefinedName* 属性), 344
 sheetId (*openpyxl.workbook.external_link.external.ExternalSheetData* 属性), 345
 sheetname (*openpyxl.chart.reference.Reference* 属性), 161
 sheetName (*openpyxl.workbook.external_link.external.ExternalSheetName* 属性), 346
 sheetNames (*openpyxl.workbook.external_link.external.ExternalWorkbook* 属性), 344
 sheetnames (*openpyxl.workbook.workbook.Workbook* 属性), 362
 sheetPr (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
 sheetProtection (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
 SheetProtection (*openpyxl.worksheet.protection* 中的类), 391
 sheets (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
 SHEETSTATE_HIDDEN (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
 SHEETSTATE_VERYHIDDEN (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
 SHEETSTATE_VISIBLE (*openpyxl.worksheet.worksheet.Worksheet* 属性), 403
 SheetTitleException, 341
 sheetView (*openpyxl.chartsheet.views.ChartsheetViewList* 属性), 180
 SheetView (*openpyxl.worksheet.views* 中的类), 401
 SheetView (*openpyxl.worksheet.views.SheetViewList* 属性), 402
 SheetViewList (*openpyxl.worksheet.views* 中的类), 402
 sheetViews (*openpyxl.chartsheet.chartsheet.Chartsheet* 属性), 174
 shift() (*openpyxl.worksheet.cell_range.CellRange*

方法), 364	<i>pyxl.pivot.table.PivotTableStyle</i> 属 性),
<code>short_color()</code> (在 <i>openpyxl.utils.units</i> 模块中), 343	309
<code>shortcutKey</code> (<i>openpyxl.workbook.defined_name.DefinedName</i> 属 性), 347	<code>showColumnStripes</code> (<i>openpyxl.worksheet.table.TableStyleInfo</i> 属 性), 399
<code>show</code> (<i>openpyxl.workbook.smart_tags.SmartTagProperties</i> 属 性), 354	<code>showComments</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属 性), 357
<code>show</code> (<i>openpyxl.worksheet.scenario.ScenarioList</i> 属 性), 394	<code>showDataAs</code> (<i>openpyxl.pivot.table.DataField</i> 属 性), 299
<code>show_gridlines</code> (<i>openpyxl.worksheet.worksheet.Worksheet</i> 属 性), 407	<code>showDataDropDown</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>show_summary_below</code> (<i>openpyxl.worksheet.worksheet.Worksheet</i> 属 性), 407	<code>showDataTips</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>show_summary_right</code> (<i>openpyxl.worksheet.worksheet.Worksheet</i> 属 性), 407	<code>showDLblsOverMax</code> (<i>openpyxl.chart.chartspace.ChartContainer</i> 属 性), 137
<code>showAll</code> (<i>openpyxl.pivot.table.PivotField</i> 属 性), 306	<code>showDrill</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>showAsCaption</code> (<i>openpyxl.pivot.table.MemberProperty</i> 属 性), 301	<code>showDropDown</code> (<i>openpyxl.worksheet.datavalidation.DataValidation</i> 属 性), 369
<code>showBorderUnselectedTables</code> (<i>openpyxl.workbook.properties.WorkbookProperties</i> 属 性), 351	<code>showDropDowns</code> (<i>openpyxl.pivot.table.PivotField</i> 属 性), 306
<code>showBubbleSize</code> (<i>openpyxl.chart.label.DataLabel</i> 属 性), 145	<code>showDropZones</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>showBubbleSize</code> (<i>openpyxl.chart.label.DataLabelList</i> 属 性), 146	<code>showEmptyCol</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>showButton</code> (<i>openpyxl.worksheet.filters.FilterColumn</i> 属 性), 378	<code>showEmptyRow</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>showCalcMbrs</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 316	<code>showError</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属 性), 317
<code>showCatName</code> (<i>openpyxl.chart.label.DataLabel</i> 属 性), 145	<code>showErrorMessage</code> (<i>openpyxl.worksheet.datavalidation.DataValidation</i> 属 性), 369
<code>showCatName</code> (<i>openpyxl.chart.label.DataLabelList</i> 属 性), 146	<code>showFirstColumn</code> (<i>openpyxl.worksheet.table.TableStyleInfo</i> 属 性), 399
<code>showCell</code> (<i>openpyxl.pivot.table.MemberProperty</i> 属 性), 301	<code>showFormulaBar</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属 性), 357
<code>showColHeaders</code> (<i>openpyxl.pivot.table.PivotTableStyle</i> 属 性), 309	
<code>showColStripes</code> (<i>openpyxl.pivot.table.PivotTableStyle</i> 属 性), 309	

<code>showFormulas</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 401	<code>showMemberPropertyTips</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属性), 317
<code>showGridLines</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 401	<code>showMissing</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属性), 317
<code>showHeaders</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属性), 317	<code>showMultipleLabel</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属性), 317
<code>showHorizontalScroll</code> (<i>openpyxl.workbook.views.BookView</i> 属性), 355	<code>showNegBubbles</code> (<i>openpyxl.chart.bubble_chart.BubbleChart</i> 属性), 136
<code>showHorizontalScroll</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属性), 357	<code>showObjects</code> (<i>openpyxl.workbook.properties.WorkbookProperties</i> 属性), 351
<code>showHorzBorder</code> (<i>openpyxl.chart.plotarea.DataTable</i> 属性), 156	<code>showObjects</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属性), 357
<code>showInFieldList</code> (<i>openpyxl.pivot.table.PivotHierarchy</i> 属性), 309	<code>showOutline</code> (<i>openpyxl.chart.plotarea.DataTable</i> 属性), 156
<code>showInkAnnotation</code> (<i>openpyxl.workbook.properties.WorkbookProperties</i> 属性), 351	<code>showOutlineSymbols</code> (<i>openpyxl.worksheet.properties.Outline</i> 属性), 389
<code>showInputMessage</code> (<i>openpyxl.worksheet.datavalidation.DataValidation</i> 属性), 369	<code>showOutlineSymbols</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 401
<code>showItems</code> (<i>openpyxl.pivot.table.TableDefinition</i> 属性), 317	<code>showPercent</code> (<i>openpyxl.chart.label.DataLabel</i> 属性), 145
<code>showKeys</code> (<i>openpyxl.chart.plotarea.DataTable</i> 属性), 156	<code>showPercent</code> (<i>openpyxl.chart.label.DataLabelList</i> 属性), 146
<code>showLastColumn</code> (<i>openpyxl.pivot.table.PivotTableStyle</i> 属性), 309	<code>showPivotChartFilter</code> (<i>openpyxl.workbook.properties.WorkbookProperties</i> 属性), 351
<code>showLastColumn</code> (<i>openpyxl.worksheet.table.TableStyleInfo</i> 属性), 399	<code>showPropAsCaption</code> (<i>openpyxl.pivot.table.PivotField</i> 属性), 306
<code>showLeaderLines</code> (<i>openpyxl.chart.label.DataLabel</i> 属性), 145	<code>showPropCell</code> (<i>openpyxl.pivot.table.PivotField</i> 属性), 306
<code>showLeaderLines</code> (<i>openpyxl.chart.label.DataLabelList</i> 属性), 146	<code>showPropTip</code> (<i>openpyxl.pivot.table.PivotField</i> 属性), 306
<code>showLegendKey</code> (<i>openpyxl.chart.label.DataLabel</i> 属性), 145	<code>showRowColHeaders</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 401
<code>showLegendKey</code> (<i>openpyxl.chart.label.DataLabelList</i> 属性), 146	<code>showRowHeaders</code> (<i>openpyxl.pivot.table.PivotTableStyle</i> 属性), 309

<code>showRowStripes</code> (<i>openpyxl.pivot.table.PivotTableStyle</i> 属性), 309	<code>shrink()</code> (<i>openpyxl.worksheet.cell_range.CellRange</i> 方法), 364
<code>showRowStripes</code> (<i>openpyxl.worksheet.table.TableStyleInfo</i> 属性), 399	<code>shrink_to_fit</code> (<i>openpyxl.styles.alignment.Alignment</i> 属性), 320
<code>showRuler</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 402	<code>shrinkToFit</code> (<i>openpyxl.styles.alignment.Alignment</i> 属性), 320
<code>showSerName</code> (<i>openpyxl.chart.label.DataLabel</i> 属性), 145	<code>Side</code> (<i>openpyxl.styles.borders</i> 中的类), 322
<code>showSerName</code> (<i>openpyxl.chart.label.DataLabelList</i> 属性), 146	<code>sideWall</code> (<i>openpyxl.chart.bar_chart.BarChart3D</i> 属性), 135
<code>showSheetTabs</code> (<i>openpyxl.workbook.views.BookView</i> 属性), 355	<code>sideWall</code> (<i>openpyxl.chart.chartspace.ChartContainer</i> 属性), 137
<code>showSheetTabs</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属性), 357	<code>Singleton</code> (<i>openpyxl.compat.singleton</i> 中的类), 185
<code>showStatusbar</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属性), 357	<code>size</code> (<i>openpyxl.chart.error_bar.ErrorBars</i> 属性), 144
<code>showTip</code> (<i>openpyxl.pivot.table.MemberProperty</i> 属性), 301	<code>size</code> (<i>openpyxl.chart.marker.Marker</i> 属性), 151
<code>showVal</code> (<i>openpyxl.chart.label.DataLabel</i> 属性), 145	<code>size</code> (<i>openpyxl.styles.fonts.Font</i> 属性), 330
<code>showVal</code> (<i>openpyxl.chart.label.DataLabelList</i> 属性), 146	<code>size</code> (<i>openpyxl.styles.table.TableStyleElement</i> 属性), 337
<code>showValue</code> (<i>openpyxl.formatting.rule.DataBar</i> 属性), 257	<code>size</code> (<i>openpyxl.worksheet.cell_range.CellRange</i> 属性), 365
<code>showValue</code> (<i>openpyxl.formatting.rule.IconSet</i> 属性), 258	<code>sizeRepresents</code> (<i>openpyxl.chart.bubble_chart.BubbleChart</i> 属性), 136
<code>showVertBorder</code> (<i>openpyxl.chart.plotarea.DataTable</i> 属性), 156	<code>sizeWithCells</code> (<i>openpyxl.worksheet.ole.ObjectAnchor</i> 属性), 383
<code>showVerticalScroll</code> (<i>openpyxl.workbook.views.BookView</i> 属性), 355	<code>Slides</code> (<i>openpyxl.packaging.extended.ExtendedProperties</i> 属性), 267
<code>showVerticalScroll</code> (<i>openpyxl.workbook.views.CustomWorkbookView</i> 属性), 357	<code>SmartTag</code> (<i>openpyxl.workbook.smart_tags</i> 中的类), 354
<code>showWhiteSpace</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 402	<code>SmartTagList</code> (<i>openpyxl.workbook.smart_tags</i> 中的类), 354
<code>showZeros</code> (<i>openpyxl.worksheet.views.SheetView</i> 属性), 402	<code>smartTagPr</code> (<i>openpyxl.packaging.workbook.WorkbookPackage</i> 属性), 273
	<code>SmartTagProperties</code> (<i>openpyxl.workbook.smart_tags</i> 中的类), 354
	<code>SmartTags</code> (<i>openpyxl.worksheet.smart_tag</i> 中的类), 395
	<code>smartTagType</code> (<i>openpyxl.workbook.smart_tags.SmartTagList</i> 属性), 354
	<code>smartTagTypes</code> (<i>openpyxl.workbook.smart_tags.SmartTagList</i> 属性), 354

- pyxl.packaging.workbook.WorkbookPackage* 属性), 273
- smooth* (*openpyxl.chart.line_chart.LineChart* 属性), 149
- smooth* (*openpyxl.chart.line_chart.LineChart3D* 属性), 150
- smooth* (*openpyxl.chart.series.Series* 属性), 163
- smooth* (*openpyxl.chart.series.XYSeries* 属性), 165
- smtClean* (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- smtId* (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- SN_RE* (*openpyxl.formula.tokenizer.Tokenizer* 属性), 261
- snd* (*openpyxl.drawing.text.Hyperlink* 属性), 247
- softEdge* (*openpyxl.drawing.effect.EffectList* 属性), 205
- SoftEdgesEffect* (*openpyxl.drawing.effect* 中的类), 212
- SolidColorFillProperties* (*openpyxl.drawing.fill* 中的类), 219
- solidFill* (*openpyxl.chart.shapes.GraphicalProperties* 属性), 167
- solidFill* (*openpyxl.drawing.line.LineProperties* 属性), 234
- solidFill* (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- solveOrder* (*openpyxl.pivot.cache.CalculatedMember* 属性), 280
- sort* (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
- sortBy* (*openpyxl.worksheet.filters.SortCondition* 属性), 380
- sortByTuple* (*openpyxl.pivot.cache.OLAPSet* 属性), 284
- SortCondition* (*openpyxl.worksheet.filters* 中的类), 379
- sortCondition* (*openpyxl.worksheet.filters.SortState* 属性), 380
- sortMethod* (*openpyxl.worksheet.filters.SortState* 属性), 380
- SortState* (*openpyxl.worksheet.filters* 中的类), 380
- sortState* (*openpyxl.worksheet.filters.AutoFilter* 属性), 376
- sortState* (*openpyxl.worksheet.table.Table* 属性), 396
- sortType* (*openpyxl.pivot.cache.OLAPSet* 属性), 284
- sortType* (*openpyxl.pivot.table.PivotField* 属性), 306
- sourceLinked* (*openpyxl.chart.data_source.NumFmt* 属性), 141
- sourceObject* (*openpyxl.chartsheet.publish.WebPublishItem* 属性), 176
- sourceObject* (*openpyxl.workbook.web.WebPublishObject* 属性), 358
- sourceRef* (*openpyxl.chartsheet.publish.WebPublishItem* 属性), 176
- sourceType* (*openpyxl.chartsheet.publish.WebPublishItem* 属性), 176
- sp* (*openpyxl.drawing.line.DashStop* 属性), 232
- sp* (*openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor* 属性), 240
- sp* (*openpyxl.drawing.spreadsheet_drawing.OneCellAnchor* 属性), 241
- sp* (*openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor* 属性), 242
- sp3d* (*openpyxl.chart.shapes.GraphicalProperties* 属性), 167
- space* (*openpyxl.drawing.line.DashStop* 属性), 232
- Spacing* (*openpyxl.drawing.text* 中的类), 253
- spAutoFit* (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- spc* (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- spcAft* (*openpyxl.drawing.text.ParagraphProperties* 属性), 251
- spcBef* (*openpyxl.drawing.text.ParagraphProperties* 属性), 251
- spcCol* (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- spcFirstLastPara* (*openpyxl.drawing.text.RichTextProperties* 属性), 253

- spcPct (*openpyxl.drawing.text.Spacing* 属性), 253
- spcPts (*openpyxl.drawing.text.Spacing* 属性), 253
- SphereCoords (*openpyxl.drawing.geometry* 中的类), 228
- spinCount (*openpyxl.chartsheet.protection.ChartsheetProtection* 属性), 176
- spinCount (*openpyxl.workbook.protection.FileSharing* 属性), 352
- spinCount (*openpyxl.worksheet.protection.SheetProtection* 属性), 392
- splitPos (*openpyxl.chart.pie_chart.ProjectedPieChart* 属性), 154
- splitType (*openpyxl.chart.pie_chart.ProjectedPieChart* 属性), 154
- spLocks (*openpyxl.drawing.properties.NonVisualDrawingShapeProperties* 属性), 239
- spPr (*openpyxl.chart.axis.ChartLines* 属性), 127
- spPr (*openpyxl.chart.axis.DateAxis* 属性), 128
- spPr (*openpyxl.chart.axis.DisplayUnitsLabel* 属性), 128
- spPr (*openpyxl.chart.axis.NumericAxis* 属性), 130
- spPr (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- spPr (*openpyxl.chart.axis.TextAxis* 属性), 133
- spPr (*openpyxl.chart.chartspace.ChartSpace* 属性), 138
- spPr (*openpyxl.chart.error_bar.ErrorBars* 属性), 144
- spPr (*openpyxl.chart.label.DataLabel* 属性), 145
- spPr (*openpyxl.chart.label.DataLabelList* 属性), 146
- spPr (*openpyxl.chart.legend.Legend* 属性), 148
- spPr (*openpyxl.chart.marker.DataPoint* 属性), 151
- spPr (*openpyxl.chart.marker.Marker* 属性), 151
- spPr (*openpyxl.chart.pivot.PivotFormat* 属性), 155
- spPr (*openpyxl.chart.plotarea.DataTable* 属性), 156
- spPr (*openpyxl.chart.plotarea.PlotArea* 属性), 158
- spPr (*openpyxl.chart.series.Series* 属性), 163
- spPr (*openpyxl.chart.series.XYSeries* 属性), 165
- spPr (*openpyxl.chart.surface_chart.BandFormat* 属性), 168
- spPr (*openpyxl.chart.title.Title* 属性), 170
- spPr (*openpyxl.chart.trendline.Trendline* 属性), 171
- spPr (*openpyxl.chart.trendline.TrendlineLabel* 属性), 172
- spPr (*openpyxl.drawing.connector.ConnectorShape* 属性), 201
- spPr (*openpyxl.drawing.connector.Shape* 属性), 202
- spPr (*openpyxl.drawing.picture.PictureFrame* 属性), 202
- SpreadsheetDrawing (*openpyxl.drawing.spreadsheet_drawing* 中的类), 241
- sqLType (*openpyxl.pivot.cache.CacheField* 属性), 277
- sqref (*openpyxl.formatting.formatting.ConditionalFormatting* 属性), 256
- sqref (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 369
- sqref (*openpyxl.worksheet.errors.IgnoredError* 属性), 375
- sqref (*openpyxl.worksheet.scenario.ScenarioList* 属性), 394
- sqref (*openpyxl.worksheet.views.Selection* 属性), 401
- srcRect (*openpyxl.drawing.fill.BlipFillProperties* 属性), 215
- srgbClr (*openpyxl.drawing.colors.ColorChoice* 属性), 193
- srgbClr (*openpyxl.drawing.effect.GlowEffect* 属性), 206
- srgbClr (*openpyxl.drawing.effect.InnerShadowEffect* 属性), 207
- srgbClr (*openpyxl.drawing.effect.OuterShadow* 属性), 209
- srgbClr (*openpyxl.drawing.effect.PresetShadowEffect* 属性), 211
- srgbClr (*openpyxl.drawing.fill.GradientStop* 属性), 217
- srgbClr (*openpyxl.drawing.fill.SolidColorFillProperties* 属性), 220
- st (*openpyxl.pivot.fields.Error* 属性), 292
- st (*openpyxl.pivot.fields.Missing* 属性), 293
- st (*openpyxl.pivot.fields.Number* 属性), 294
- st (*openpyxl.pivot.fields.Text* 属性), 295
- stA (*openpyxl.drawing.effect.ReflectionEffect* 属性), 211
- start (*openpyxl.styles.borders.Border* 属性), 322
- start_color (*openpyxl.styles.fills.PatternFill* 属性), 322

329	StretchInfoProperties (<i>openpyxl.drawing.fill</i> 中的类), 220
startAt (<i>openpyxl.drawing.text.AutounumberBullet</i> 属性), 242	Strict (<i>openpyxl.descriptors</i> 中的类), 185
startDate (<i>openpyxl.pivot.cache.RangePr</i> 属性), 287	strike (<i>openpyxl.cell.text.InlineFont</i> 属性), 123
startNum (<i>openpyxl.pivot.cache.RangePr</i> 属性), 287	strike (<i>openpyxl.drawing.text.CharacterProperties</i> 属性), 245
state (<i>openpyxl.chartsheet.custom.CustomChartsheetView</i> 属性), 174	strike (<i>openpyxl.styles.fonts.Font</i> 属性), 330
state (<i>openpyxl.packaging.workbook.ChildSheet</i> 属性), 271	strikethrough (<i>openpyxl.styles.fonts.Font</i> 属性), 330
state (<i>openpyxl.worksheet.views.Pane</i> 属性), 400	String (<i>openpyxl.descriptors.base</i> 中的类), 187
status (<i>openpyxl.pivot.cache.PCDKPI</i> 属性), 285	STRING_REGEXES (<i>openpyxl.formula.tokenizer.Tokenizer</i> 属性), 261
statusBar (<i>openpyxl.workbook.defined_name.DefinedName</i> 属性), 347	StringValue1 (<i>openpyxl.pivot.table.PivotFilter</i> 属性), 307
stCxn (<i>openpyxl.drawing.connector.NonVisualConnectorProperties</i> 属性), 201	stringValue2 (<i>openpyxl.pivot.table.PivotFilter</i> 属性), 307
stdDev (<i>openpyxl.formatting.rule.Rule</i> 属性), 259	strip_ws_name() (<i>openpyxl.formula.translate.Translator</i> 静态方法), 262
stdDevPSubtotal (<i>openpyxl.pivot.table.PivotField</i> 属性), 306	strLit (<i>openpyxl.chart.data_source.AxDataSource</i> 属性), 140
stdDevPSubtotal (<i>openpyxl.pivot.table.Reference</i> 属性), 310	stroke (<i>openpyxl.drawing.geometry.Path2D</i> 属性), 225
stdDevSubtotal (<i>openpyxl.pivot.table.PivotField</i> 属性), 306	StrRef (<i>openpyxl.chart.data_source</i> 中的类), 142
stdDevSubtotal (<i>openpyxl.pivot.table.Reference</i> 属性), 310	strRef (<i>openpyxl.chart.data_source.AxDataSource</i> 属性), 140
stockChart (<i>openpyxl.chart.plotarea.PlotArea</i> 属性), 158	strRef (<i>openpyxl.chart.series.SeriesLabel</i> 属性), 164
StockChart (<i>openpyxl.chart.stock_chart</i> 中的类), 167	strRef (<i>openpyxl.chart.text.Text</i> 属性), 170
Stop (<i>openpyxl.styles.fills</i> 中的类), 329	StrVal (<i>openpyxl.chart.data_source</i> 中的类), 142
stop (<i>openpyxl.styles.fills.GradientFill</i> 属性), 328	style (<i>openpyxl.chart.chartspace.ChartSpace</i> 属性), 138
stop_list (<i>openpyxl.drawing.fill.GradientFillProperties</i> 属性), 215	style (<i>openpyxl.chart.error_bar.ErrorBars</i> 属性), 144
stopIfTrue (<i>openpyxl.formatting.rule.Rule</i> 属性), 259	style (<i>openpyxl.drawing.connector.ConnectorShape</i> 属性), 201
StopList (<i>openpyxl.styles.fills</i> 中的类), 329	style (<i>openpyxl.drawing.connector.Shape</i> 属性), 202
stPos (<i>openpyxl.drawing.effect.ReflectionEffect</i> 属性), 211	style (<i>openpyxl.drawing.picture.PictureFrame</i> 属性), 235
strCache (<i>openpyxl.chart.data_source.StrRef</i> 属性), 142	style (<i>openpyxl.styles.borders.Side</i> 属性), 322
StrData (<i>openpyxl.chart.data_source</i> 中的类), 142	style (<i>openpyxl.styles.styleable.StyleableObject</i> 属性), 336
stretch (<i>openpyxl.drawing.fill.BlipFillProperties</i> 属性), 215	

<code>style</code> (<code>openpyxl.worksheet.dimensions.Dimension</code> 属性), 371	306
<code>style_array</code> (<code>openpyxl.cell.read_only.ReadOnlyCell</code> 属性), 122	<code>sumSubtotal</code> (<code>openpyxl.pivot.table.Reference</code> 属性), 311
<code>style_id</code> (<code>openpyxl.styles.styleable.StyleableObject</code> 属性), 336	<code>supportAdvancedDrill</code> (<code>openpyxl.pivot.cache.CacheDefinition</code> 属性), 276
<code>style_names</code> (<code>openpyxl.workbook.workbook.Workbook</code> 属性), 362	<code>supportSubquery</code> (<code>openpyxl.pivot.cache.CacheDefinition</code> 属性), 276
<code>StyleableObject</code> (<code>openpyxl.styles.styleable</code> 中的类), 335	<code>surface3DChart</code> (<code>openpyxl.chart.plotarea.PlotArea</code> 属性), 158
<code>StyleArray</code> (<code>openpyxl.styles.cell_style</code> 中的类), 324	<code>surfaceChart</code> (<code>openpyxl.chart.plotarea.PlotArea</code> 属性), 158
<code>StyleArrayDescriptor</code> (<code>openpyxl.styles.styleable</code> 中的类), 335	<code>SurfaceChart</code> (<code>openpyxl.chart.surface_chart</code> 中的类), 168
<code>StyleDescriptor</code> (<code>openpyxl.styles.styleable</code> 中的类), 335	<code>SurfaceChart3D</code> (<code>openpyxl.chart.surface_chart</code> 中的类), 168
<code>StyleMatrixReference</code> (<code>openpyxl.drawing.geometry</code> 中的类), 229	<code>sx</code> (<code>openpyxl.drawing.effect.OuterShadow</code> 属性), 209
<code>StyleProxy</code> (<code>openpyxl.styles.proxy</code> 中的类), 335	<code>sx</code> (<code>openpyxl.drawing.effect.ReflectionEffect</code> 属性), 212
<code>styles</code> (<code>openpyxl.styles.differential.DifferentialStyleList</code> 属性), 327	<code>sx</code> (<code>openpyxl.drawing.fill.TileInfoProperties</code> 属性), 220
<code>Stylesheet</code> (<code>openpyxl.styles.stylesheet</code> 中的类), 336	<code>sy</code> (<code>openpyxl.drawing.effect.OuterShadow</code> 属性), 209
<code>subject</code> (<code>openpyxl.packaging.core.DocumentProperties</code> 属性), 265	<code>sy</code> (<code>openpyxl.drawing.effect.ReflectionEffect</code> 属性), 212
<code>subtotal</code> (<code>openpyxl.pivot.table.DataField</code> 属性), 299	<code>sy</code> (<code>openpyxl.drawing.fill.TileInfoProperties</code> 属性), 221
<code>subtotalCaption</code> (<code>openpyxl.pivot.table.PivotField</code> 属性), 306	<code>sym</code> (<code>openpyxl.drawing.text.CharacterProperties</code> 属性), 245
<code>subtotalHiddenItems</code> (<code>openpyxl.pivot.table.TableDefinition</code> 属性), 317	<code>symbol</code> (<code>openpyxl.chart.marker.Marker</code> 属性), 151
<code>subtotalTop</code> (<code>openpyxl.pivot.table.PivotField</code> 属性), 306	<code>syncHorizontal</code> (<code>openpyxl.worksheet.properties.WorksheetProperties</code> 属性), 390
<code>subtotalTop</code> (<code>openpyxl.pivot.table.PivotHierarchy</code> 属性), 309	<code>syncRef</code> (<code>openpyxl.worksheet.properties.WorksheetProperties</code> 属性), 390
<code>subtype</code> (<code>openpyxl.formula.tokenizer.Token</code> 属性), 261	<code>syncVertical</code> (<code>openpyxl.worksheet.properties.WorksheetProperties</code> 属性), 390
<code>summaryBelow</code> (<code>openpyxl.worksheet.properties.Outline</code> 属性), 389	<code>sysClr</code> (<code>openpyxl.drawing.colors.ColorChoice</code> 属性), 193
<code>summaryRight</code> (<code>openpyxl.worksheet.properties.Outline</code> 属性), 389	<code>sysClr</code> (<code>openpyxl.drawing.effect.GlowEffect</code> 属性), 206
<code>sumSubtotal</code> (<code>openpyxl.pivot.table.PivotField</code> 属性),	

- p>sysClr (
- openpyxl.drawing.effect.InnerShadowEffect*
- 属性), 207
p>sysClr (
- openpyxl.drawing.effect.OuterShadow*
- 属性), 209
p>sysClr (
- openpyxl.drawing.effect.PresetShadowEffect*
- 属性), 211
p>sysClr (
- openpyxl.drawing.fill.GradientStop*
- 属性), 217
p>sysClr (
- openpyxl.drawing.fill.SolidColorFillProperties*
- 属性), 220
p>SystemColor (
- openpyxl.drawing.colors*
- 中的类), 197
p>sz (
- openpyxl.cell.text.InlineFont*
- 属性), 123
p>sz (
- openpyxl.drawing.text.CharacterProperties*
- 属性), 245
p>sz (
- openpyxl.styles.fonts.Font*
- 属性), 331
- ## T
- p>t (
- openpyxl.cell.text.PhoneticText*
- 属性), 124
p>t (
- openpyxl.cell.text.RichText*
- 属性), 124
p>t (
- openpyxl.cell.text.Text*
- 属性), 125
p>t (
- openpyxl.chart.print_settings.PageMargins*
- 属性), 159
p>t (
- openpyxl.drawing.fill.RelativeRect*
- 属性), 219
p>t (
- openpyxl.drawing.geometry.GeomRect*
- 属性), 224
p>t (
- openpyxl.drawing.text.RegularTextRun*
- 属性), 251
p>t (
- openpyxl.drawing.text.TextField*
- 属性), 254
p>t (
- openpyxl.pivot.table.FieldItem*
- 属性), 299
p>t (
- openpyxl.pivot.table.RowColItem*
- 属性), 311
p>t (
- openpyxl.workbook.external_link.external.ExternalCell*
- 属性), 344
p>tab (
- openpyxl.drawing.text.TabStopList*
- 属性), 254
p>tabColor (
- openpyxl.chartsheet.properties.ChartsheetProperties*
- 属性), 175
p>tabColor (
- openpyxl.worksheet.properties.WorksheetProperties*
- 属性), 390
p>table (
- openpyxl.styles.table.TableStyle*
- 属性), 337
p>Table (
- openpyxl.worksheet.table*
- 中的类), 395
p>tableBorderDxfId (
- openpyxl.worksheet.table.Table*
- 属性), 396
p>TableColumn (
- openpyxl.worksheet.table*
- 中的类), 397
p>tableColumns (
- openpyxl.worksheet.table.Table*
- 属性), 396
p>TableDefinition (
- openpyxl.pivot.table*
- 中的类), 311
p>TableFormula (
- openpyxl.worksheet.table*
- 中的类), 398
p>TableList (
- openpyxl.worksheet.table*
- 中的类), 398
p>TableNameDescriptor (
- openpyxl.worksheet.table*
- 中的类), 399
p>tablePart (
- openpyxl.worksheet.table.TablePartList*
- 属性), 399
p>TablePartList (
- openpyxl.worksheet.table*
- 中的类), 399
p>tables (
- openpyxl.worksheet.worksheet.Worksheet*
- 属性), 407
p>TableStyle (
- openpyxl.styles.table*
- 中的类), 337
p>tableStyle (
- openpyxl.styles.table.TableStyleList*
- 属性), 338
p>TableStyleElement (
- openpyxl.styles.table*
- 中的类), 337
p>tableStyleElement (
- openpyxl.styles.table.TableStyle*
- 属性), 337
p>TableStyleInfo (
- openpyxl.worksheet.table*
- 中的类), 399
p>tableStyleInfo (
- openpyxl.worksheet.table.Table*
- 属性), 396
p>TableStyleList (
- openpyxl.styles.table*
- 中的类), 338
p>tableStyles (
- openpyxl.styles.stylesheet.Stylesheet*
- 属性), 337
p>tableType (
- openpyxl.worksheet.table.Table*
- 属性), 396
p>tabLst (
- openpyxl.drawing.text.ParagraphProperties*
- 属性), 251
p>tabRatio (
- openpyxl.workbook.views.BookView*
- 属性), 355
p>tabRatio (
- openpyxl.workbook.views.CustomWorkbookView*
- 属性), 357
p>tabSelected (
- openpyxl.chartsheet.views.ChartsheetView*
- 属性), 180
p>tabSelected (
- openpyxl.worksheet.views.SheetView*
- 属性), 402
p>TabStop (
- openpyxl.drawing.text*
- 中的类), 254
p>TabStopList (
- openpyxl.drawing.text*
- 中的类), 254
p>tag (
- openpyxl.pivot.table.TableDefinition*
- 属性), 317
p>tagname (
- openpyxl.cell.text.InlineFont*
- 属性), 123

tagname (<i>openpyxl.cell.text.PhoneticProperties</i> 属性), 124	tagname (<i>openpyxl.chart.data_source.StrData</i> 属性), 142
tagname (<i>openpyxl.cell.text.PhoneticText</i> 属性), 124	tagname (<i>openpyxl.chart.data_source.StrRef</i> 属性), 142
tagname (<i>openpyxl.cell.text.RichText</i> 属性), 124	tagname (<i>openpyxl.chart.data_source.StrVal</i> 属性), 142
tagname (<i>openpyxl.cell.text.Text</i> 属性), 125	tagname (<i>openpyxl.chart.error_bar.ErrorBars</i> 属性), 144
tagname (<i>openpyxl.chart.area_chart.AreaChart</i> 属性), 126	tagname (<i>openpyxl.chart.label.DataLabel</i> 属性), 145
tagname (<i>openpyxl.chart.area_chart.AreaChart3D</i> 属性), 126	tagname (<i>openpyxl.chart.label.DataLabelList</i> 属性), 146
tagname (<i>openpyxl.chart.axis.ChartLines</i> 属性), 127	tagname (<i>openpyxl.chart.layout.Layout</i> 属性), 146
tagname (<i>openpyxl.chart.axis.DateAxis</i> 属性), 128	tagname (<i>openpyxl.chart.layout.ManualLayout</i> 属性), 147
tagname (<i>openpyxl.chart.axis.DisplayUnitsLabel</i> 属性), 129	tagname (<i>openpyxl.chart.legend.Legend</i> 属性), 148
tagname (<i>openpyxl.chart.axis.DisplayUnitsLabelList</i> 属性), 129	tagname (<i>openpyxl.chart.legend.LegendEntry</i> 属性), 148
tagname (<i>openpyxl.chart.axis.NumericAxis</i> 属性), 130	tagname (<i>openpyxl.chart.line_chart.LineChart</i> 属性), 149
tagname (<i>openpyxl.chart.axis.Scaling</i> 属性), 131	tagname (<i>openpyxl.chart.line_chart.LineChart3D</i> 属性), 150
tagname (<i>openpyxl.chart.axis.SeriesAxis</i> 属性), 132	tagname (<i>openpyxl.chart.marker.DataPoint</i> 属性), 151
tagname (<i>openpyxl.chart.axis.TextAxis</i> 属性), 133	tagname (<i>openpyxl.chart.marker.Marker</i> 属性), 151
tagname (<i>openpyxl.chart.bar_chart.BarChart</i> 属性), 134	tagname (<i>openpyxl.chart.picture.PictureOptions</i> 属性), 152
tagname (<i>openpyxl.chart.bar_chart.BarChart3D</i> 属性), 135	tagname (<i>openpyxl.chart.pie_chart.CustomSplit</i> 属性), 152
tagname (<i>openpyxl.chart.bubble_chart.BubbleChart</i> 属性), 136	tagname (<i>openpyxl.chart.pie_chart.DoughnutChart</i> 属性), 153
tagname (<i>openpyxl.chart.chartspace.ChartContainer</i> 属性), 137	tagname (<i>openpyxl.chart.pie_chart.PieChart</i> 属性), 153
tagname (<i>openpyxl.chart.chartspace.ChartSpace</i> 属性), 138	tagname (<i>openpyxl.chart.pie_chart.PieChart3D</i> 属性), 153
tagname (<i>openpyxl.chart.chartspace.ExternalData</i> 属性), 139	tagname (<i>openpyxl.chart.pie_chart.ProjectPieChart</i> 属性), 154
tagname (<i>openpyxl.chart.chartspace.Protection</i> 属性), 139	tagname (<i>openpyxl.chart.pivot.PivotFormat</i> 属性), 155
tagname (<i>openpyxl.chart.data_source.AxDataSource</i> 属性), 140	tagname (<i>openpyxl.chart.pivot.PivotSource</i> 属性), 155
tagname (<i>openpyxl.chart.data_source.Level</i> 属性), 140	tagname (<i>openpyxl.chart.plotarea.DataTable</i> 属性), 156
tagname (<i>openpyxl.chart.data_source.MultiLevelStrData</i> 属性), 140	
tagname (<i>openpyxl.chart.data_source.MultiLevelStrRef</i> 属性), 140	

tagname (<i>openpyxl.chart.plotarea.PlotArea</i> 属性), 158	属性), 176
tagname (<i>openpyxl.chart.print_settings.PageMargins</i> 属性), 159	tagname (<i>openpyxl.chartsheet.publish.WebPublishItem</i> 属性), 176
tagname (<i>openpyxl.chart.print_settings.PrintSettings</i> 属性), 160	tagname (<i>openpyxl.chartsheet.publish.WebPublishItems</i> 属性), 177
tagname (<i>openpyxl.chart.radar_chart.RadarChart</i> 属性), 160	tagname (<i>openpyxl.chartsheet.relation.SheetBackgroundPicture</i> 属性), 180
tagname (<i>openpyxl.chart.scatter_chart.ScatterChart</i> 属性), 162	tagname (<i>openpyxl.chartsheet.views.ChartsheetView</i> 属性), 180
tagname (<i>openpyxl.chart.series.Series</i> 属性), 163	tagname (<i>openpyxl.chartsheet.views.ChartsheetViewList</i> 属性), 180
tagname (<i>openpyxl.chart.series.SeriesLabel</i> 属性), 164	tagname (<i>openpyxl.comments.author.AuthorList</i> 属性), 181
tagname (<i>openpyxl.chart.shapes.GraphicalProperties</i> 属性), 167	tagname (<i>openpyxl.comments.comment_sheet.CommentRecord</i> 属性), 181
tagname (<i>openpyxl.chart.stock_chart.StockChart</i> 属性), 167	tagname (<i>openpyxl.comments.comment_sheet.CommentSheet</i> 属性), 182
tagname (<i>openpyxl.chart.surface_chart.BandFormat</i> 属性), 168	tagname (<i>openpyxl.descriptors.serialisable.Serialisable</i> 属性), 192
tagname (<i>openpyxl.chart.surface_chart.BandFormatList</i> 属性), 168	tagname (<i>openpyxl.drawing.colors.ColorChoice</i> 属性), 193
tagname (<i>openpyxl.chart.surface_chart.SurfaceChart</i> 属性), 168	tagname (<i>openpyxl.drawing.colors.ColorMapping</i> 属性), 195
tagname (<i>openpyxl.chart.surface_chart.SurfaceChart3D</i> 属性), 169	tagname (<i>openpyxl.drawing.colors.HSLColor</i> 属性), 195
tagname (<i>openpyxl.chart.text.RichText</i> 属性), 169	tagname (<i>openpyxl.drawing.colors.RGBPercent</i> 属性), 195
tagname (<i>openpyxl.chart.text.Text</i> 属性), 170	tagname (<i>openpyxl.drawing.colors.SchemeColor</i> 属性), 197
tagname (<i>openpyxl.chart.title.Title</i> 属性), 170	tagname (<i>openpyxl.drawing.colors.SystemColor</i> 属性), 199
tagname (<i>openpyxl.chart.trendline.Trendline</i> 属性), 172	tagname (<i>openpyxl.drawing.connector.ConnectorShape</i> 属性), 201
tagname (<i>openpyxl.chart.trendline.TrendlineLabel</i> 属性), 172	tagname (<i>openpyxl.drawing.connector.ShapeMeta</i> 属性), 202
tagname (<i>openpyxl.chart.updownBars.UpDownBars</i> 属性), 173	tagname (<i>openpyxl.drawing.effect.GrayscaleEffect</i> 属性), 206
tagname (<i>openpyxl.chartsheet.chartsheet.Chartsheet</i> 属性), 174	tagname (<i>openpyxl.drawing.effect.LuminanceEffect</i> 属性), 208
tagname (<i>openpyxl.chartsheet.custom.CustomChartsheet</i> 属性), 175	tagname (<i>openpyxl.drawing.effect.OuterShadow</i> 属性), 209
tagname (<i>openpyxl.chartsheet.custom.CustomChartsheet</i> 属性), 175	tagname (<i>openpyxl.drawing.effect.TintEffect</i> 属性),
tagname (<i>openpyxl.chartsheet.properties.ChartsheetProperties</i> 属性), 175	
tagname (<i>openpyxl.chartsheet.protection.ChartsheetProtection</i> 属性), 176	

212	
tagname (openpyxl.drawing.fill.Blip 属性), 214	tagname (openpyxl.drawing.graphic.GraphicFrame 属性), 230
tagname (openpyxl.drawing.fill.BlipFillProperties 属性), 215	tagname (openpyxl.drawing.graphic.GraphicObject 属性), 231
tagname (openpyxl.drawing.fill.GradientFillProperties 属性), 215	tagname (openpyxl.drawing.graphic.Non VisualGraphicFrame 属性), 232
tagname (openpyxl.drawing.fill.GradientStop 属性), 217	tagname (openpyxl.drawing.graphic.Non VisualGraphicFrameProperties 属性), 232
tagname (openpyxl.drawing.fill.LinearShadeProperties 属性), 217	tagname (openpyxl.drawing.line.DashStop 属性), 233
tagname (openpyxl.drawing.fill.PathShadeProperties 属性), 217	tagname (openpyxl.drawing.line.LineEndProperties 属性), 233
tagname (openpyxl.drawing.fill.PatternFillProperties 属性), 218	tagname (openpyxl.drawing.line.LineProperties 属性), 234
tagname (openpyxl.drawing.fill.RelativeRect 属性), 219	tagname (openpyxl.drawing.picture.Non VisualPictureProperties 属性), 235
tagname (openpyxl.drawing.fill.SolidColorFillProperties 属性), 220	tagname (openpyxl.drawing.picture.PictureFrame 属性), 235
tagname (openpyxl.drawing.fill.StretchInfoProperties 属性), 220	tagname (openpyxl.drawing.picture.PictureLocking 属性), 236
tagname (openpyxl.drawing.geometry.Bevel 属性), 222	tagname (openpyxl.drawing.picture.PictureNon Visual 属性), 236
tagname (openpyxl.drawing.geometry.Camera 属性), 222	tagname (openpyxl.drawing.properties.GroupLocking 属性), 237
tagname (openpyxl.drawing.geometry.GroupTransform2D 属性), 224	tagname (openpyxl.drawing.properties.GroupShapeProperties 属性), 238
tagname (openpyxl.drawing.geometry.LightRig 属性), 225	tagname (openpyxl.drawing.properties.Non VisualDrawingProps 属性), 238
tagname (openpyxl.drawing.geometry.Point2D 属性), 225	tagname (openpyxl.drawing.properties.Non VisualDrawingShapeProps 属性), 239
tagname (openpyxl.drawing.geometry.Point3D 属性), 225	tagname (openpyxl.drawing.properties.Non VisualGroupDrawingShape 属性), 239
tagname (openpyxl.drawing.geometry.PositiveSize2D 属性), 226	tagname (openpyxl.drawing.properties.Non VisualGroupShape 属性), 239
tagname (openpyxl.drawing.geometry.SphereCoords 属性), 229	tagname (openpyxl.drawing.relation.ChartRelation 属性), 239
tagname (openpyxl.drawing.geometry.Transform2D 属性), 229	tagname (openpyxl.drawing.spreadsheet_drawing.AbsoluteAnchor 属性), 240
tagname (openpyxl.drawing.geometry.Vector3D 属性), 230	tagname (openpyxl.drawing.spreadsheet_drawing.AnchorMarker 属性), 241
tagname (openpyxl.drawing.graphic.GraphicData 属性), 230	tagname (openpyxl.drawing.spreadsheet_drawing.OneCellAnchor 属性), 241
	tagname (openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing

属性), 242	性), 271
tagname (openpyxl.drawing.spreadsheet_drawing.TwoCellAnchor 属性), 242	tagname (openpyxl.packaging.workbook.FileRecoveryProperties 属性), 272
tagname (openpyxl.drawing.text.CharacterProperties 属性), 245	tagname (openpyxl.packaging.workbook.PivotCache 属性), 272
tagname (openpyxl.drawing.text.Font 属性), 246	tagname (openpyxl.packaging.workbook.WorkbookPackage 属性), 273
tagname (openpyxl.drawing.text.Hyperlink 属性), 247	tagname (openpyxl.pivot.cache.CacheDefinition 属性), 276
tagname (openpyxl.drawing.text.LineBreak 属性), 247	tagname (openpyxl.pivot.cache.CacheField 属性), 277
tagname (openpyxl.drawing.text.ListStyle 属性), 248	tagname (openpyxl.pivot.cache.CacheHierarchy 属性), 279
tagname (openpyxl.drawing.text.Paragraph 属性), 249	tagname (openpyxl.pivot.cache.CacheSource 属性), 279
tagname (openpyxl.drawing.text.ParagraphProperties 属性), 251	tagname (openpyxl.pivot.cache.CalculatedItem 属性), 279
tagname (openpyxl.drawing.text.RegularTextRun 属性), 251	tagname (openpyxl.pivot.cache.CalculatedMember 属性), 280
tagname (openpyxl.drawing.text.RichTextProperties 属性), 253	tagname (openpyxl.pivot.cache.Consolidation 属性), 280
tagname (openpyxl.formatting.formatting.ConditionalFormatting 属性), 256	tagname (openpyxl.pivot.cache.DiscretePr 属性), 280
tagname (openpyxl.formatting.rule.ColorScale 属性), 256	tagname (openpyxl.pivot.cache.FieldGroup 属性), 281
tagname (openpyxl.formatting.rule.DataBar 属性), 257	tagname (openpyxl.pivot.cache.FieldUsage 属性), 281
tagname (openpyxl.formatting.rule.FormatObject 属性), 257	tagname (openpyxl.pivot.cache.GroupItems 属性), 282
tagname (openpyxl.formatting.rule.IconSet 属性), 258	tagname (openpyxl.pivot.cache.GroupLevel 属性), 282
tagname (openpyxl.formatting.rule.Rule 属性), 259	tagname (openpyxl.pivot.cache.GroupMember 属性), 282
tagname (openpyxl.packaging.core.DocumentProperties 属性), 265	tagname (openpyxl.pivot.cache.Groups 属性), 283
tagname (openpyxl.packaging.extended.ExtendedProperties 属性), 268	tagname (openpyxl.pivot.cache.LevelGroup 属性), 283
tagname (openpyxl.packaging.manifest.FileExtension 属性), 268	tagname (openpyxl.pivot.cache.MeasureDimensionMap 属性), 284
tagname (openpyxl.packaging.manifest.Manifest 属性), 269	tagname (openpyxl.pivot.cache.MeasureGroup 属性), 284
tagname (openpyxl.packaging.manifest.Override 属性), 269	tagname (openpyxl.pivot.cache.OLAPSet 属性), 284
tagname (openpyxl.packaging.relationship.Relationship 属性), 270	tagname (openpyxl.pivot.cache.Page 属性), 286
tagname (openpyxl.packaging.relationship.RelationshipList 属性), 270	tagname (openpyxl.pivot.cache.PageItem 属性), 286
tagname (openpyxl.packaging.workbook.ChildSheet 属性), 271	tagname (openpyxl.pivot.cache.PCDKPI 属性), 285
	tagname (openpyxl.pivot.cache.PCDSDTCEntries 属性), 286
	tagname (openpyxl.pivot.cache.PivotDimension 属性), 286

- tagname (*openpyxl.pivot.cache.Query* 属性), 287
- tagname (*openpyxl.pivot.cache.QueryCache* 属性), 287
- tagname (*openpyxl.pivot.cache.RangePr* 属性), 287
- tagname (*openpyxl.pivot.cache.RangeSet* 属性), 288
- tagname (*openpyxl.pivot.cache.ServerFormat* 属性), 288
- tagname (*openpyxl.pivot.cache.ServerFormatList* 属性), 288
- tagname (*openpyxl.pivot.cache.SharedItems* 属性), 290
- tagname (*openpyxl.pivot.cache.TupleCache* 属性), 290
- tagname (*openpyxl.pivot.cache.WorksheetSource* 属性), 291
- tagname (*openpyxl.pivot.fields.Boolean* 属性), 291
- tagname (*openpyxl.pivot.fields.DateTimeField* 属性), 292
- tagname (*openpyxl.pivot.fields.Error* 属性), 292
- tagname (*openpyxl.pivot.fields.Index* 属性), 293
- tagname (*openpyxl.pivot.fields.Missing* 属性), 293
- tagname (*openpyxl.pivot.fields.Number* 属性), 294
- tagname (*openpyxl.pivot.fields.Text* 属性), 295
- tagname (*openpyxl.pivot.record.Record* 属性), 296
- tagname (*openpyxl.pivot.record.RecordList* 属性), 297
- tagname (*openpyxl.pivot.table.ChartFormat* 属性), 298
- tagname (*openpyxl.pivot.table.ColHierarchiesUsage* 属性), 298
- tagname (*openpyxl.pivot.table.ConditionalFormat* 属性), 298
- tagname (*openpyxl.pivot.table.DataField* 属性), 299
- tagname (*openpyxl.pivot.table.FieldItem* 属性), 300
- tagname (*openpyxl.pivot.table.Format* 属性), 300
- tagname (*openpyxl.pivot.table.HierarchyUsage* 属性), 300
- tagname (*openpyxl.pivot.table.Location* 属性), 301
- tagname (*openpyxl.pivot.table.MemberList* 属性), 301
- tagname (*openpyxl.pivot.table.MemberProperty* 属性), 301
- tagname (*openpyxl.pivot.table.PageField* 属性), 302
- tagname (*openpyxl.pivot.table.PivotArea* 属性), 303
- tagname (*openpyxl.pivot.table.PivotField* 属性), 306
- tagname (*openpyxl.pivot.table.PivotFilter* 属性), 307
- tagname (*openpyxl.pivot.table.PivotHierarchy* 属性), 309
- tagname (*openpyxl.pivot.table.PivotTableStyle* 属性), 309
- tagname (*openpyxl.pivot.table.Reference* 属性), 311
- tagname (*openpyxl.pivot.table.RowColField* 属性), 311
- tagname (*openpyxl.pivot.table.RowColItem* 属性), 311
- tagname (*openpyxl.pivot.table.RowHierarchiesUsage* 属性), 311
- tagname (*openpyxl.pivot.table.TableDefinition* 属性), 317
- tagname (*openpyxl.styles.alignment.Alignment* 属性), 320
- tagname (*openpyxl.styles.borders.Border* 属性), 322
- tagname (*openpyxl.styles.cell_style.CellStyle* 属性), 324
- tagname (*openpyxl.styles.cell_style.CellStyleList* 属性), 324
- tagname (*openpyxl.styles.cell_style.StyleArray* 属性), 325
- tagname (*openpyxl.styles.colors.Color* 属性), 325
- tagname (*openpyxl.styles.colors.ColorList* 属性), 326
- tagname (*openpyxl.styles.colors.RgbColor* 属性), 326
- tagname (*openpyxl.styles.differential.DifferentialStyle* 属性), 326
- tagname (*openpyxl.styles.differential.DifferentialStyleList* 属性), 327
- tagname (*openpyxl.styles.fills.Fill* 属性), 327
- tagname (*openpyxl.styles.fills.GradientFill* 属性), 328
- tagname (*openpyxl.styles.fills.PatternFill* 属性), 329
- tagname (*openpyxl.styles.fills.Stop* 属性), 329
- tagname (*openpyxl.styles.fonts.Font* 属性), 331
- tagname (*openpyxl.styles.protection.Protection* 属性), 334
- tagname (*openpyxl.styles.stylesheet.Stylesheet* 属性), 337
- tagname (*openpyxl.styles.table.TableStyle* 属性), 337
- tagname (*openpyxl.styles.table.TableStyleElement* 属

- 性), 337
- tagname (*openpyxl.styles.table.TableStyleList* 属性), 338
- tagname (*openpyxl.workbook.defined_name.DefinedName* 属性), 347
- tagname (*openpyxl.workbook.defined_name.DefinedNameList* 属性), 348
- tagname (*openpyxl.workbook.external_link.external.ExternalLink* 属性), 344
- tagname (*openpyxl.workbook.external_link.external.ExternalLinkList* 属性), 345
- tagname (*openpyxl.workbook.external_link.external.ExternalLinkList* 属性), 345
- tagname (*openpyxl.workbook.external_reference.ExternalReference* 属性), 348
- tagname (*openpyxl.workbook.function_group.FunctionGroup* 属性), 348
- tagname (*openpyxl.workbook.function_group.FunctionGroupList* 属性), 348
- tagname (*openpyxl.workbook.properties.CalcProperties* 属性), 349
- tagname (*openpyxl.workbook.properties.FileVersion* 属性), 350
- tagname (*openpyxl.workbook.properties.WorkbookProperties* 属性), 351
- tagname (*openpyxl.workbook.protection.FileSharing* 属性), 352
- tagname (*openpyxl.workbook.protection.WorkbookProtection* 属性), 353
- tagname (*openpyxl.workbook.smart_tags.SmartTag* 属性), 354
- tagname (*openpyxl.workbook.smart_tags.SmartTagList* 属性), 354
- tagname (*openpyxl.workbook.smart_tags.SmartTagProperties* 属性), 354
- tagname (*openpyxl.workbook.views.BookView* 属性), 355
- tagname (*openpyxl.workbook.views.CustomWorkbookView* 属性), 357
- tagname (*openpyxl.workbook.web.WebPublishing* 属性), 359
- tagname (*openpyxl.workbook.web.WebPublishObjectList* 属性), 358
- tagname (*openpyxl.worksheet.cell_watch.CellWatch* 属性), 365
- tagname (*openpyxl.worksheet.cell_watch.CellWatches* 属性), 366
- tagname (*openpyxl.worksheet.controls.Control* 属性), 366
- tagname (*openpyxl.worksheet.controls.ControlProperty* 属性), 367
- tagname (*openpyxl.worksheet.controls.Controls* 属性), 367
- tagname (*openpyxl.worksheet.custom.CustomProperties* 属性), 368
- tagname (*openpyxl.worksheet.custom.CustomProperty* 属性), 368
- tagname (*openpyxl.worksheet.datavalidation.DataValidation* 属性), 369
- tagname (*openpyxl.worksheet.datavalidation.DataValidationList* 属性), 370
- tagname (*openpyxl.worksheet.dimensions.SheetDimension* 属性), 373
- tagname (*openpyxl.worksheet.dimensions.SheetFormatProperties* 属性), 373
- tagname (*openpyxl.worksheet.drawing.Drawing* 属性), 374
- tagname (*openpyxl.worksheet.errors.Extension* 属性), 374
- tagname (*openpyxl.worksheet.errors.ExtensionList* 属性), 374
- tagname (*openpyxl.worksheet.errors.IgnoredError* 属性), 375
- tagname (*openpyxl.worksheet.errors.IgnoredErrors* 属性), 375
- tagname (*openpyxl.worksheet.filters.AutoFilter* 属性), 376
- tagname (*openpyxl.worksheet.filters.ColorFilter* 属性), 376
- tagname (*openpyxl.worksheet.filters.CustomFilter* 属性), 376
- tagname (*openpyxl.worksheet.filters.CustomFilters* 属性), 376

性), 376	性), 388
tagname (<i>openpyxl.worksheet.filters.DateGroupItem</i> 属性), 377	tagname (<i>openpyxl.worksheet.pagebreak.RowBreak</i> 属性), 389
tagname (<i>openpyxl.worksheet.filters.DynamicFilter</i> 属性), 377	tagname (<i>openpyxl.worksheet.picture.SheetBackgroundPicture</i> 属性), 389
tagname (<i>openpyxl.worksheet.filters.FilterColumn</i> 属性), 378	tagname (<i>openpyxl.worksheet.properties.Outline</i> 属性), 389
tagname (<i>openpyxl.worksheet.filters.Filters</i> 属性), 379	tagname (<i>openpyxl.worksheet.properties.PageSetupProperties</i> 属性), 389
tagname (<i>openpyxl.worksheet.filters.IconFilter</i> 属性), 379	tagname (<i>openpyxl.worksheet.properties.WorksheetProperties</i> 属性), 390
tagname (<i>openpyxl.worksheet.filters.SortCondition</i> 属性), 380	tagname (<i>openpyxl.worksheet.protection.SheetProtection</i> 属性), 392
tagname (<i>openpyxl.worksheet.filters.SortState</i> 属性), 380	tagname (<i>openpyxl.worksheet.scenario.InputCells</i> 属性), 393
tagname (<i>openpyxl.worksheet.filters.Top10</i> 属性), 380	tagname (<i>openpyxl.worksheet.scenario.Scenario</i> 属性), 393
tagname (<i>openpyxl.worksheet.header_footer.HeaderFooter</i> 属性), 381	tagname (<i>openpyxl.worksheet.scenario.ScenarioList</i> 属性), 394
tagname (<i>openpyxl.worksheet.hyperlink.Hyperlink</i> 属性), 382	tagname (<i>openpyxl.worksheet.smart_tag.CellSmartTag</i> 属性), 394
tagname (<i>openpyxl.worksheet.hyperlink.HyperlinkList</i> 属性), 382	tagname (<i>openpyxl.worksheet.smart_tag.CellSmartTagPr</i> 属性), 394
tagname (<i>openpyxl.worksheet.merge.MergeCell</i> 属性), 383	tagname (<i>openpyxl.worksheet.smart_tag.CellSmartTags</i> 属性), 395
tagname (<i>openpyxl.worksheet.merge.MergeCells</i> 属性), 383	tagname (<i>openpyxl.worksheet.smart_tag.SmartTags</i> 属性), 395
tagname (<i>openpyxl.worksheet.ole.ObjectAnchor</i> 属性), 383	tagname (<i>openpyxl.worksheet.table.Table</i> 属性), 397
tagname (<i>openpyxl.worksheet.ole.ObjectPr</i> 属性), 384	tagname (<i>openpyxl.worksheet.table.TableColumn</i> 属性), 398
tagname (<i>openpyxl.worksheet.ole.OleObject</i> 属性), 385	tagname (<i>openpyxl.worksheet.table.TableFormula</i> 属性), 398
tagname (<i>openpyxl.worksheet.ole.OleObjects</i> 属性), 385	tagname (<i>openpyxl.worksheet.table.TablePartList</i> 属性), 399
tagname (<i>openpyxl.worksheet.page.PageMargins</i> 属性), 386	tagname (<i>openpyxl.worksheet.table.TableStyleInfo</i> 属性), 399
tagname (<i>openpyxl.worksheet.page.PrintOptions</i> 属性), 386	tagname (<i>openpyxl.worksheet.table.XMLColumnProps</i> 属性), 400
tagname (<i>openpyxl.worksheet.page.PrintPageSetup</i> 属性), 388	tagname (<i>openpyxl.worksheet.views.SheetView</i> 属性), 402
tagname (<i>openpyxl.worksheet.pagebreak.Break</i> 属性), 388	tagname (<i>openpyxl.worksheet.views.SheetViewList</i> 属性), 402
tagname (<i>openpyxl.worksheet.pagebreak.ColBreak</i> 属	

<code>tailEnd</code> (<code>openpyxl.drawing.line.LineProperties</code> 属性), 234	<code>textHAlign</code> (<code>openpyxl.comments.comment_sheet.Properties</code> 属性), 183
<code>Target</code> (<code>openpyxl.packaging.relationship.Relationship</code> 属性), 270	<code>textlink</code> (<code>openpyxl.drawing.connector.Shape</code> 属性), 202
<code>target</code> (<code>openpyxl.packaging.relationship.Relationship</code> 属性), 270	<code>TextNormalAutofit</code> (<code>openpyxl.drawing.text</code> 中的类), 254
<code>target</code> (<code>openpyxl.worksheet.hyperlink.Hyperlink</code> 属性), 382	<code>TextPoint</code> (<code>openpyxl.descriptors.excel</code> 中的类), 189
<code>TargetMode</code> (<code>openpyxl.packaging.relationship.Relationship</code> 属性), 270	<code>textPropertes</code> (<code>openpyxl.chart.axis.DisplayUnitsLabel</code> 属性), 129
<code>targetScreenSize</code> (<code>openpyxl.workbook.web.WebPublishing</code> 属性), 359	<code>textProperties</code> (<code>openpyxl.chart.chartspace.ChartSpace</code> 属性), 138
<code>Template</code> (<code>openpyxl.packaging.extended.ExtendedProperties</code> 属性), 267	<code>textProperties</code> (<code>openpyxl.chart.legend.Legend</code> 属性), 148
<code>template</code> (<code>openpyxl.workbook.workbook.Workbook</code> 属性), 362	<code>textProperties</code> (<code>openpyxl.chart.trendline.TrendlineLabel</code> 属性), 172
<code>Text</code> (<code>openpyxl.cell.text</code> 中的类), 124	<code>textRotation</code> (<code>openpyxl.styles.alignment.Alignment</code> 属性), 320
<code>text</code> (<code>openpyxl.cell.text.PhoneticText</code> 属性), 124	<code>textVAlign</code> (<code>openpyxl.comments.comment_sheet.Properties</code> 属性), 183
<code>text</code> (<code>openpyxl.cell.text.RichText</code> 属性), 124	<code>tgtFrame</code> (<code>openpyxl.drawing.text.Hyperlink</code> 属性), 247
<code>text</code> (<code>openpyxl.chart.axis.DisplayUnitsLabel</code> 属性), 129	<code>theme</code> (<code>openpyxl.styles.colors.Color</code> 属性), 325
<code>Text</code> (<code>openpyxl.chart.text</code> 中的类), 169	<code>thickBot</code> (<code>openpyxl.worksheet.dimensions.RowDimension</code> 属性), 373
<code>text</code> (<code>openpyxl.chart.title.Title</code> 属性), 170	<code>thickBottom</code> (<code>openpyxl.worksheet.dimensions.SheetFormatProperties</code> 属性), 373
<code>text</code> (<code>openpyxl.comments.comment_sheet.CommentRange</code> 属性), 181	<code>thicket</code> (<code>openpyxl.workbook.web.WebPublishing</code> 属性), 359
<code>text</code> (<code>openpyxl.comments.comments.Comment</code> 属性), 183	<code>thickTop</code> (<code>openpyxl.worksheet.dimensions.RowDimension</code> 属性), 373
<code>Text</code> (<code>openpyxl.descriptors.base</code> 中的类), 187	<code>thickTop</code> (<code>openpyxl.worksheet.dimensions.SheetFormatProperties</code> 属性), 374
<code>text</code> (<code>openpyxl.drawing.text.Paragraph</code> 属性), 249	<code>thresh</code> (<code>openpyxl.drawing.effect.AlphaBiLevelEffect</code> 属性), 203
<code>text</code> (<code>openpyxl.formatting.rule.Rule</code> 属性), 259	<code>thresh</code> (<code>openpyxl.drawing.effect.BiLevelEffect</code> 属性), 203
<code>TEXT</code> (<code>openpyxl.formula.tokenizer.Token</code> 属性), 261	<code>tickLblPos</code> (<code>openpyxl.chart.axis.DateAxis</code> 属性), 128
<code>Text</code> (<code>openpyxl.pivot.fields</code> 中的类), 294	<code>tickLblPos</code> (<code>openpyxl.chart.axis.NumericAxis</code> 属性), 128
<code>text</code> (<code>openpyxl.worksheet.table.TableFormula</code> 属性), 398	
<code>text_rotation</code> (<code>openpyxl.styles.alignment.Alignment</code> 属性), 321	
<code>TextAxis</code> (<code>openpyxl.chart.axis</code> 中的类), 132	
<code>TextBody</code> (<code>openpyxl.chart.pivot.PivotFormat</code> 属性), 155	
<code>TextField</code> (<code>openpyxl.drawing.text</code> 中的类), 254	

- 性), 130
- tickLblPos (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- tickLblPos (*openpyxl.chart.axis.TextAxis* 属性), 133
- tickLblSkip (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- tickLblSkip (*openpyxl.chart.axis.TextAxis* 属性), 133
- tickMarkSkip (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- tickMarkSkip (*openpyxl.chart.axis.TextAxis* 属性), 133
- tile (*openpyxl.drawing.fill.BlipFillProperties* 属性), 215
- TileInfoProperties (*openpyxl.drawing.fill* 中的类), 220
- tileRect (*openpyxl.drawing.fill.GradientFillProperties* 属性), 215
- time (*openpyxl.pivot.cache.CacheHierarchy* 属性), 279
- time (*openpyxl.pivot.cache.PCDKPI* 属性), 285
- time_to_days() (在 *openpyxl.utils.datetime* 模块中), 340
- timedelta_to_days() (在 *openpyxl.utils.datetime* 模块中), 340
- timePeriod (*openpyxl.formatting.rule.Rule* 属性), 259
- tIns (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- tint (*openpyxl.drawing.colors.SchemeColor* 属性), 197
- tint (*openpyxl.drawing.colors.SystemColor* 属性), 199
- tint (*openpyxl.drawing.fill.Blip* 属性), 214
- tint (*openpyxl.styles.colors.Color* 属性), 325
- TintEffect (*openpyxl.drawing.effect* 中的类), 212
- title (*openpyxl.chart.axis.DateAxis* 属性), 128
- title (*openpyxl.chart.axis.NumericAxis* 属性), 130
- title (*openpyxl.chart.axis.SeriesAxis* 属性), 132
- title (*openpyxl.chart.axis.TextAxis* 属性), 134
- title (*openpyxl.chart.chartspace.ChartContainer* 属性), 137
- title (*openpyxl.chart.series.Series* 属性), 163
- Title (*openpyxl.chart.title* 中的类), 170
- title (*openpyxl.chartsheet.publish.WebPublishItem* 属性), 176
- title (*openpyxl.drawing.properties.Non VisualDrawingProps* 属性), 238
- title (*openpyxl.packaging.core.DocumentProperties* 属性), 265
- title (*openpyxl.workbook.web.WebPublishObject* 属性), 358
- title_maker() (在 *openpyxl.chart.title* 模块中), 171
- TitleDescriptor (*openpyxl.chart.title* 中的类), 170
- TitlesOfParts (*openpyxl.packaging.extended.ExtendedProperties* 属性), 267
- to (*openpyxl.drawing.spreadsheet__drawing.TwoCellAnchor* 属性), 242
- to (*openpyxl.worksheet.ole.ObjectAnchor* 属性), 384
- to_array() (*openpyxl.styles.cell_style.CellStyle* 方法), 324
- to_excel() (在 *openpyxl.utils.datetime* 模块中), 340
- to_IS08601() (在 *openpyxl.utils.datetime* 模块中), 340
- to_tree() (*openpyxl.chart.chartspace.ChartSpace* 方法), 139
- to_tree() (*openpyxl.chart.plotarea.PlotArea* 方法), 158
- to_tree() (*openpyxl.chart.series.Series* 方法), 164
- to_tree() (*openpyxl.chart.text.Text* 方法), 170
- to_tree() (*openpyxl.chartsheet.chartsheet.Chartsheet* 方法), 174
- to_tree() (*openpyxl.comments.comment_sheet.CommentSheet* 方法), 182
- to_tree() (*openpyxl.descriptors.nested.EmptyTag* 方法), 189
- to_tree() (*openpyxl.descriptors.nested.Nested* 方法), 189
- to_tree() (*openpyxl.descriptors.nested.NestedText* 方法), 190
- to_tree() (*openpyxl.descriptors.sequence.MultiSequence* 方法), 190
- to_tree() (*openpyxl.descriptors.sequence.NestedSequence* 方法), 190

- 方法), 191
- `to_tree()` (`openpyxl.descriptors.sequence.Sequence` 方法), 191
- `to_tree()` (`openpyxl.descriptors.sequence.ValueSequence` 方法), 191
- `to_tree()` (`openpyxl.descriptors.serialisable.Serialisable` 方法), 192
- `to_tree()` (`openpyxl.packaging.core.NestedDateTime` 方法), 265
- `to_tree()` (`openpyxl.packaging.core.QualifiedDateTime` 方法), 265
- `to_tree()` (`openpyxl.packaging.extended.ExtendedProperties` 方法), 268
- `to_tree()` (`openpyxl.packaging.manifest.Manifest` 方法), 269
- `to_tree()` (`openpyxl.packaging.relationship.Relationship` 方法), 270
- `to_tree()` (`openpyxl.packaging.workbook.WorkbookPackage` 方法), 273
- `to_tree()` (`openpyxl.pivot.cache.CacheDefinition` 方法), 276
- `to_tree()` (`openpyxl.pivot.record.RecordList` 方法), 297
- `to_tree()` (`openpyxl.pivot.table.TableDefinition` 方法), 317
- `to_tree()` (`openpyxl.styles.fills.GradientFill` 方法), 328
- `to_tree()` (`openpyxl.styles.fills.PatternFill` 方法), 329
- `to_tree()` (`openpyxl.styles.stylesheet.Stylesheet` 方法), 337
- `to_tree()` (`openpyxl.workbook.external_link.external.ExternalLink` 方法), 345
- `to_tree()` (`openpyxl.worksheet.datavalidation.DataValidation` 方法), 370
- `to_tree()` (`openpyxl.worksheet.dimensions.ColumnDimensions` 方法), 371
- `to_tree()` (`openpyxl.worksheet.dimensions.DimensionHolder` 方法), 372
- `to_tree()` (`openpyxl.worksheet.header_footer.HeaderFooter` 方法), 382
- `to_tree()` (`openpyxl.worksheet.related.Related` 方法), 392
- `to_tree()` (`openpyxl.worksheet.table.Table` 方法), 397
- `Token` (`openpyxl.formula.tokenizer` 中的类), 260
- `TOKEN_ENDERS` (`openpyxl.formula.tokenizer.Tokenizer` 属性), 261
- `Tokenizer` (`openpyxl.formula.tokenizer` 中的类), 261
- `TokenizerError`, 262
- `tooltip` (`openpyxl.drawing.text.Hyperlink` 属性), 247
- `tooltip` (`openpyxl.worksheet.hyperlink.Hyperlink` 属性), 382
- `top` (`openpyxl.chart.print_settings.PageMargins` 属性), 159
- `top` (`openpyxl.drawing.fill.RelativeRect` 属性), 219
- `top` (`openpyxl.styles.borders.Border` 属性), 322
- `top` (`openpyxl.styles.fills.GradientFill` 属性), 328
- `top` (`openpyxl.worksheet.cell_range.CellRange` 属性), 365
- `top` (`openpyxl.worksheet.filters.Top10` 属性), 380
- `top` (`openpyxl.worksheet.page.PageMargins` 属性), 386
- `Top10` (`openpyxl.worksheet.filters` 中的类), 380
- `top10` (`openpyxl.worksheet.filters.FilterColumn` 属性), 378
- `topAutoShow` (`openpyxl.pivot.table.PivotField` 属性), 306
- `topLeftCell` (`openpyxl.worksheet.views.Pane` 属性), 400
- `topLeftCell` (`openpyxl.worksheet.views.SheetView` 属性), 402
- `tostring()` (在 `openpyxl.comments.comment_sheet` 模块中), 183
- `tostring()` (在 `openpyxl.comments.shape_writer` 模块中), 184
- `tostring()` (在 `openpyxl.packaging.core` 模块中), 265
- `tostring()` (在 `openpyxl.packaging.manifest` 模块中), 269
- `tostring()` (在 `openpyxl.packaging.relationship` 模块中), 270
- `tostring()` (在 `openpyxl.pivot.cache` 模块中), 291

- p>
tostring() (在
- `openpyxl.pivot.record`
- 模块中), 297
tostring() (在
- `openpyxl.pivot.table`
- 模块中), 318
tostring() (在
- `openpyxl.worksheet.table`
- 模块中), 400
tostring() (在
- `openpyxl.writer.excel`
- 模块中), 408
tostring() (在
- `openpyxl.xml.functions`
- 模块中), 409
totalsRowBorderDxfId (openpyxl.worksheet.table.Table 属性), 397
totalsRowCellStyle (openpyxl.worksheet.table.Table 属性), 397
totalsRowCellStyle (openpyxl.worksheet.table.TableColumn 属性), 398
totalsRowCount (openpyxl.worksheet.table.Table 属性), 397
totalsRowDxfId (openpyxl.worksheet.table.Table 属性), 397
totalsRowDxfId (openpyxl.worksheet.table.TableColumn 属性), 398
totalsRowFormula (openpyxl.worksheet.table.TableColumn 属性), 398
totalsRowFunction (openpyxl.worksheet.table.TableColumn 属性), 398
totalsRowLabel (openpyxl.worksheet.table.TableColumn 属性), 398
totalsRowShown (openpyxl.worksheet.table.Table 属性), 397
TotalTime (openpyxl.packaging.extended.ExtendedProperties 属性), 267
tpl (openpyxl.pivot.fields.TupleList 属性), 296
tpls (openpyxl.pivot.cache.OLAPSet 属性), 284
tpls (openpyxl.pivot.cache.Query 属性), 287
tpls (openpyxl.pivot.fields.Error 属性), 292
tpls (openpyxl.pivot.fields.Missing 属性), 293
tpls (openpyxl.pivot.fields.Number 属性), 294
tpls (openpyxl.pivot.fields.Text 属性), 295
transform (openpyxl.chart.shapes.GraphicalProperties 属性), 167
Transform (openpyxl.drawing.colors 中的类), 200
Transform2D (openpyxl.drawing.geometry 中的类), 229
transitionEntry (openpyxl.worksheet.properties.WorksheetProperties 属性), 390
transitionEvaluation (openpyxl.worksheet.properties.WorksheetProperties 属性), 390
translate_col() (openpyxl.formula.translate.Translator 静态方法), 262
translate_formula() (openpyxl.formula.translate.Translator 方法), 262
translate_range() (openpyxl.formula.translate.Translator 类方法), 263
translate_row() (openpyxl.formula.translate.Translator 静态方法), 263
Translator (openpyxl.formula.translate 中的类), 262
TranslatorError, 263
trend (openpyxl.pivot.cache.PCDKPI 属性), 285
trendline (openpyxl.chart.series.Series 属性), 164
trendline (openpyxl.chart.series.XYSeries 属性), 165
Trendline (openpyxl.chart.trendline 中的类), 171
TrendlineLabel (openpyxl.chart.trendline 中的类), 172
trendlineLbl (openpyxl.chart.trendline.Trendline 属性), 172
trendlineType (openpyxl.chart.trendline.Trendline 属性), 172
Tuple (openpyxl.descriptors.base 中的类), 187
Tuple (openpyxl.pivot.fields 中的类), 295
TupleCache (openpyxl.pivot.cache 中的类), 290
tupleCache (openpyxl.pivot.cache.CacheDefinition 属性), 276
TupleList (openpyxl.pivot.fields 中的类), 296
TwoCellAnchor (openpyxl.drawing.spreadsheet_drawing 中的

- 类), 242
 - twoCellAnchor (openpyxl.drawing.spreadsheet_drawing.SpreadsheetDrawing 属性), 242
 - twoDigitTextYear (openpyxl.worksheet.errors.IgnoredError 属性), 375
 - tx (openpyxl.chart.axis.DisplayUnitsLabel 属性), 129
 - tx (openpyxl.chart.series.Series 属性), 164
 - tx (openpyxl.chart.series.XYSeries 属性), 165
 - tx (openpyxl.chart.title.Title 属性), 170
 - tx (openpyxl.chart.trendline.TrendlineLabel 属性), 172
 - tx (openpyxl.drawing.fill.TileInfoProperties 属性), 221
 - tx1 (openpyxl.drawing.colors.ColorMapping 属性), 195
 - tx2 (openpyxl.drawing.colors.ColorMapping 属性), 195
 - txBax (openpyxl.drawing.properties.NonVisualDrawingProperties 属性), 239
 - txBody (openpyxl.drawing.connector.Shape 属性), 202
 - txPr (openpyxl.chart.axis.DateAxis 属性), 128
 - txPr (openpyxl.chart.axis.DisplayUnitsLabel 属性), 129
 - txPr (openpyxl.chart.axis.NumericAxis 属性), 131
 - txPr (openpyxl.chart.axis.SeriesAxis 属性), 132
 - txPr (openpyxl.chart.axis.TextAxis 属性), 134
 - txPr (openpyxl.chart.chartspace.ChartSpace 属性), 139
 - txPr (openpyxl.chart.label.DataLabel 属性), 145
 - txPr (openpyxl.chart.label.DataLabelList 属性), 146
 - txPr (openpyxl.chart.legend.Legend 属性), 148
 - txPr (openpyxl.chart.legend.LegendEntry 属性), 148
 - txPr (openpyxl.chart.pivot.PivotFormat 属性), 155
 - txPr (openpyxl.chart.plotarea.DataTable 属性), 156
 - txPr (openpyxl.chart.title.Title 属性), 170
 - txPr (openpyxl.chart.trendline.TrendlineLabel 属性), 172
 - ty (openpyxl.drawing.fill.TileInfoProperties 属性), 221
 - type (openpyxl.cell.text.PhoneticProperties 属性), 124
 - type (openpyxl.chart.pie_chart.ProjectedPieChart 属性), 154
 - type (openpyxl.chart.radar_chart.RadarChart 属性), 160
 - type (openpyxl.drawing.effect.EffectContainer 属性), 204
 - type (openpyxl.drawing.line.LineEndProperties 属性), 233
 - type (openpyxl.drawing.text.AutounumberBullet 属性), 242
 - type (openpyxl.drawing.text.TextField 属性), 254
 - type (openpyxl.formatting.rule.FormatObject 属性), 257
 - type (openpyxl.formatting.rule.Rule 属性), 259
 - type (openpyxl.formula.tokenizer.Token 属性), 261
 - Type (openpyxl.packaging.relationship.Relationship 属性), 270
 - Type (openpyxl.pivot.cache.CacheSource 属性), 279
 - type (openpyxl.pivot.table.ConditionalFormat 属性), 298
 - type (openpyxl.pivot.table.PivotArea 属性), 303
 - type (openpyxl.pivot.table.PivotFilter 属性), 307
 - type (openpyxl.styles.colors.Color 属性), 325
 - type (openpyxl.styles.fills.GradientFill 属性), 328
 - type (openpyxl.styles.table.TableStyleElement 属性), 337
 - type (openpyxl.workbook.defined_name.DefinedName 属性), 347
 - type (openpyxl.worksheet.datavalidation.DataValidation 属性), 369
 - type (openpyxl.worksheet.filters.DynamicFilter 属性), 377
 - type (openpyxl.worksheet.smart_tag.CellSmartTag 属性), 394
 - Typed (openpyxl.descriptors.base 中的类), 187
 - typeface (openpyxl.drawing.text.Font 属性), 246
 - tzname() (openpyxl.utils.datetime.GMT 方法), 340
- ## U
- u (openpyxl.cell.text.InlineFont 属性), 123

- u (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- u (*openpyxl.pivot.fields.Boolean* 属性), 291
- u (*openpyxl.pivot.fields.DateTimeField* 属性), 292
- u (*openpyxl.pivot.fields.Error* 属性), 292
- u (*openpyxl.pivot.fields.Missing* 属性), 293
- u (*openpyxl.pivot.fields.Number* 属性), 294
- u (*openpyxl.pivot.fields.Text* 属性), 295
- u (*openpyxl.styles.fonts.Font* 属性), 331
- uFill (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- uFillTx (*openpyxl.drawing.text.CharacterProperties* 属性), 245
- uiObject (*openpyxl.comments.comment_sheet.Properties* 属性), 183
- uiObject (*openpyxl.worksheet.controls.ControlProperty* 属性), 367
- uiObject (*openpyxl.worksheet.ole.ObjectPr* 属性), 384
- uLn (*openpyxl.drawing.text.CharacterProperties* 属性), 246
- uLnTx (*openpyxl.drawing.text.CharacterProperties* 属性), 246
- un (*openpyxl.pivot.fields.Error* 属性), 293
- un (*openpyxl.pivot.fields.Missing* 属性), 294
- un (*openpyxl.pivot.fields.Number* 属性), 294
- un (*openpyxl.pivot.fields.Text* 属性), 295
- unbalanced (*openpyxl.pivot.cache.CacheHierarchy* 属性), 279
- unbalancedGroup (*openpyxl.pivot.cache.CacheHierarchy* 属性), 279
- unbind() (*openpyxl.comments.comments.Comment* 方法), 183
- underline (*openpyxl.styles.fonts.Font* 属性), 331
- UNDERLINE_DOUBLE (*openpyxl.styles.fonts.Font* 属性), 329
- UNDERLINE_DOUBLE_ACCOUNTING (*openpyxl.styles.fonts.Font* 属性), 329
- UNDERLINE_SINGLE (*openpyxl.styles.fonts.Font* 属性), 329
- UNDERLINE_SINGLE_ACCOUNTING (*openpyxl.styles.fonts.Font* 属性), 329
- undone (*openpyxl.worksheet.scenario.InputCells* 属性), 393
- unescape() (在 *openpyxl.utils.escape* 模块中), 340
- union() (*openpyxl.worksheet.cell_range.CellRange* 方法), 365
- unique (*openpyxl.descriptors.sequence.Sequence* 属性), 191
- uniqueList (*openpyxl.pivot.cache.CacheField* 属性), 277
- uniqueMemberProperty (*openpyxl.pivot.table.PivotField* 属性), 306
- uniqueName (*openpyxl.pivot.cache.CacheHierarchy* 属性), 279
- uniqueName (*openpyxl.pivot.cache.GroupLevel* 属性), 282
- uniqueName (*openpyxl.pivot.cache.GroupMember* 属性), 283
- uniqueName (*openpyxl.pivot.cache.LevelGroup* 属性), 283
- uniqueName (*openpyxl.pivot.cache.PCDKPI* 属性), 285
- uniqueName (*openpyxl.pivot.cache.PivotDimension* 属性), 286
- uniqueName (*openpyxl.worksheet.table.TableColumn* 属性), 398
- uniqueParent (*openpyxl.pivot.cache.LevelGroup* 属性), 283
- UniversalMeasure (*openpyxl.descriptors.excel* 中的类), 189
- unlockedFormula (*openpyxl.worksheet.errors.IgnoredError* 属性), 375
- unmerge_cells() (*openpyxl.worksheet.worksheet.Worksheet* 方法), 407
- up (*openpyxl.drawing.geometry.Backdrop* 属性), 221
- upBars (*openpyxl.chart.updown_bars.UpDownBars* 属性), 173
- updatedVersion (*openpyxl.pivot.table.TableDefinition* 属性), 317

- p (openpyxl.workbook.properties.WorkbookProperties 属性), 351
-
- put (openpyxl.workbook.properties.WorkbookProperties 属性), 351
-
- put_offset (openpyxl.utils.datetime.GMT 方法), 340
-
- upDownBars (openpyxl.chart.line_chart.LineChart 属性), 149
-
- upDownBars (openpyxl.chart.line_chart.LineChart3D 属性), 150
-
- upDownBars (openpyxl.chart.stock_chart.StockChart 属性), 167
-
- UpDownBars (openpyxl.chart.updown_bars 中的类), 172
-
- upgradeOnRefresh (openpyxl.pivot.cache.CacheDefinition 属性), 276
-
- upright (openpyxl.drawing.text.RichTextProperties 属性), 253
-
- uri (openpyxl.descriptors.excel.Extension 属性), 188
-
- uri (openpyxl.drawing.graphic.GraphicData 属性), 230
-
- uri (openpyxl.worksheet.errors.Extension 属性), 374
-
- url (openpyxl.workbook.smart_tags.SmartTag 属性), 354
-
- useA (openpyxl.drawing.effect.ColorChangeEffect 属性), 204
-
- useAutoFormatting (openpyxl.pivot.table.TableDefinition 属性), 317
-
- useFirstPageNumber (openpyxl.worksheet.page.PrintPageSetup 属性), 388
-
- usePrinterDefaults (openpyxl.worksheet.page.PrintPageSetup 属性), 388
-
- user (openpyxl.pivot.cache.GroupLevel 属性), 282
-
- user (openpyxl.worksheet.scenario.Scenario 属性), 393
-
- userInterface (openpyxl.chart.chartspace.Protection 属性), 139
-
- userName (openpyxl.workbook.protection.FileSharing 属性), 352
-
- userShapes (openpyxl.chart.chartspace.ChartSpace 属性), 139
-
- v (openpyxl.chart.data_source.NumVal 属性), 142
-
- v (openpyxl.chart.data_source.StrVal 属性), 142
-
- v (openpyxl.chart.series.SeriesLabel 属性), 164
-
- v (openpyxl.pivot.fields.Boolean 属性), 291
-
- v (openpyxl.pivot.fields.DateTimeField 属性), 292
-
- v (openpyxl.pivot.fields.Error 属性), 293
-
- v (openpyxl.pivot.fields.Index 属性), 293
-
- v (openpyxl.pivot.fields.Number 属性), 294
-
- v (openpyxl.pivot.fields.Text 属性), 295
-
- v (openpyxl.workbook.external_link.external.ExternalCell 属性), 344
-
- vacatedStyle (openpyxl.pivot.table.TableDefinition 属性), 318
-
- val (openpyxl.chart.error_bar.ErrorBars 属性), 144
-
- val (openpyxl.chart.series.Series 属性), 164
-
- val (openpyxl.drawing.colors.SchemeColor 属性), 197
-
- val (openpyxl.drawing.colors.SystemColor 属性), 199
-
- val (openpyxl.formatting.rule.FormatObject 属性), 257
-
- val (openpyxl.worksheet.filters.CustomFilter 属性), 376
-
- val (openpyxl.worksheet.filters.DynamicFilter 属性), 377
-
- val (openpyxl.worksheet.filters.Top10 属性), 380
-
- val (openpyxl.worksheet.scenario.InputCells 属性), 393
-
- val (openpyxl.worksheet.smart_tag.CellSmartTagPr 属性), 394
-
- valAx (openpyxl.chart.plotarea.PlotArea 属性), 158
-
- validation_type (openpyxl.worksheet.datavalidation.Data Validation 属性), 369
-
- valIso (openpyxl.worksheet.filters.DynamicFilter 属性), 377
-
- value (openpyxl.cell.cell.Cell 属性), 121
-
- value (openpyxl.cell.cell.MergedCell 属性), 121
-
- value (openpyxl.cell.read_only.EmptyCell 属性), 122

- value (*openpyxl.cell.read_only.ReadOnlyCell* 属性), 122
- value (*openpyxl.chart.series.SeriesLabel* 属性), 164
- value (*openpyxl.drawing.text.RegularTextRun* 属性), 251
- value (*openpyxl.formula.tokenizer.Token* 属性), 261
- value (*openpyxl.pivot.cache.PCDKPI* 属性), 285
- value (*openpyxl.styles.colors.Color* 属性), 325
- value (*openpyxl.workbook.defined_name.DefinedName* 属性), 347
- ValueDescriptor (*openpyxl.formatting.rule* 中的类), 259
- values (*openpyxl.worksheet.worksheet.Worksheet* 属性), 407
- ValueSequence (*openpyxl.descriptors.sequence* 中的类), 191
- varPSubtotal (*openpyxl.pivot.table.PivotField* 属性), 306
- varPSubtotal (*openpyxl.pivot.table.Reference* 属性), 311
- varSubtotal (*openpyxl.pivot.table.PivotField* 属性), 306
- varSubtotal (*openpyxl.pivot.table.Reference* 属性), 311
- varyColors (*openpyxl.chart.area_chart.AreaChart* 属性), 126
- varyColors (*openpyxl.chart.area_chart.AreaChart3D* 属性), 126
- varyColors (*openpyxl.chart.bar_chart.BarChart* 属性), 134
- varyColors (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- varyColors (*openpyxl.chart.bubble_chart.BubbleChart* 属性), 136
- varyColors (*openpyxl.chart.line_chart.LineChart* 属性), 149
- varyColors (*openpyxl.chart.line_chart.LineChart3D* 属性), 150
- varyColors (*openpyxl.chart.pie_chart.DoughnutChart* 属性), 153
- varyColors (*openpyxl.chart.pie_chart.PieChart* 属性), 153
- varyColors (*openpyxl.chart.pie_chart.PieChart3D* 属性), 153
- varyColors (*openpyxl.chart.pie_chart.ProjectedPieChart* 属性), 154
- varyColors (*openpyxl.chart.radar_chart.RadarChart* 属性), 160
- varyColors (*openpyxl.chart.scatter_chart.ScatterChart* 属性), 162
- vbProcedure (*openpyxl.workbook.defined_name.DefinedName* 属性), 347
- Vector3D (*openpyxl.drawing.geometry* 中的类), 229
- VectorLpstr (*openpyxl.packaging.extended* 中的类), 268
- VectorVariant (*openpyxl.packaging.extended* 中的类), 268
- version (*openpyxl.packaging.core.DocumentProperties* 属性), 265
- vert (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- vertAlign (*openpyxl.cell.text.InlineFont* 属性), 123
- vertAlign (*openpyxl.styles.fonts.Font* 属性), 331
- vertical (*openpyxl.styles.alignment.Alignment* 属性), 321
- vertical (*openpyxl.styles.borders.Border* 属性), 322
- verticalCentered (*openpyxl.worksheet.page.PrintOptions* 属性), 386
- verticalDpi (*openpyxl.worksheet.page.PrintPageSetup* 属性), 388
- vertOverflow (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- view (*openpyxl.worksheet.views.SheetView* 属性), 402
- view3D (*openpyxl.chart.bar_chart.BarChart3D* 属性), 135
- view3D (*openpyxl.chart.chartspace.ChartContainer* 属性), 137
- visibility (*openpyxl.workbook.views.BookView* 属性), 355
- visualProperties (*openpyxl.drawing.graphic.GroupShape* 属性), 231

- p>visualTotals (
- openpyxl.pivot.table.TableDefinition*
- 属性), 318
-
- p>vm (
- openpyxl.workbook.external_link.external.ExternalCell*
- 属性), 344
-
- p>vml (
- openpyxl.comments.shape_writer.ShapeWriter*
- 属性), 184
-
- p>vml (
- openpyxl.workbook.web.WebPublishing*
- 属性), 359
-
- p>vml_path (
- openpyxl.comments.shape_writer.ShapeWriter*
- 属性), 184
-
- ## W
- p>w (
- openpyxl.chart.layout.ManualLayout*
- 属性), 147
-
- p>w (
- openpyxl.drawing.geometry.Bevel*
- 属性), 222
-
- p>w (
- openpyxl.drawing.geometry.Path2D*
- 属性), 225
-
- p>w (
- openpyxl.drawing.line.LineEndProperties*
- 属性), 233
-
- p>w (
- openpyxl.drawing.line.LineProperties*
- 属性), 234
-
- p>webPublishing (
- openpyxl.packaging.workbook.WorkbookPackage*
- 属性), 273
-
- p>WebPublishing (
- openpyxl.workbook.web*
- 中的类), 358
-
- p>WebPublishItem (
- openpyxl.chartsheet.publish*
- 中的类), 176
-
- p>webPublishItem (
- openpyxl.chartsheet.publish.WebPublishItems*
- 属性), 177
-
- p>webPublishItems (
- openpyxl.chartsheet.chartsheet.Chartsheet*
- 属性), 174
-
- p>WebPublishItems (
- openpyxl.chartsheet.publish*
- 中的类), 176
-
- p>WebPublishObject (
- openpyxl.workbook.web*
- 中的类), 358
-
- p>webPublishObject (
- openpyxl.workbook.web.WebPublishObjectList*
- 属性), 358
-
- p>WebPublishObjectList (
- openpyxl.workbook.web*
- 中的类), 358
-
- p>webPublishObjects (
- openpyxl.packaging.workbook.WorkbookPackage*
- 属性), 273
-
- p>weight (
- openpyxl.pivot.cache.PCDKPI*
- 属性), 285
-
- p>whitespace() (在
- openpyxl.xml.functions*
- 模块中), 409
-
- p>width (
- openpyxl.chart.layout.ManualLayout*
- 属性), 147
-
- p>width (
- openpyxl.drawing.drawing.Drawing*
- 属性), 202
-
- p>width (
- openpyxl.drawing.geometry.PositiveSize2D*
- 属性), 226
-
- p>width (
- openpyxl.drawing.line.LineProperties*
- 属性), 234
-
- p>width (
- openpyxl.worksheet.dimensions.ColumnDimension*
- 属性), 371
-
- p>windowHeight (
- openpyxl.workbook.views.BookView*
- 属性), 355
-
- p>windowHeight (
- openpyxl.workbook.views.CustomWorkbookView*
- 属性), 357
-
- p>windowProtection (
- openpyxl.worksheet.views.SheetView*
- 属性), 402
-
- p>windowWidth (
- openpyxl.workbook.views.BookView*
- 属性), 355
-
- p>windowWidth (
- openpyxl.workbook.views.CustomWorkbookView*
- 属性), 357
-
- p>wireframe (
- openpyxl.chart.surface_chart.SurfaceChart*
- 属性), 168
-
- p>wireframe (
- openpyxl.chart.surface_chart.SurfaceChart3D*
- 属性), 169
-
- p>wMode (
- openpyxl.chart.layout.ManualLayout*
- 属性), 147
-
- p>Words (
- openpyxl.packaging.extended.ExtendedProperties*
- 属性), 267
-
- p>Workbook (
- openpyxl.workbook.workbook*
- 中的类), 359
-
- p>workbook_password (
- openpyxl.workbook.protection.WorkbookProtection*
- 属性), 354
-
- p>workbookAlgorithmName (
- openpyxl.workbook.protection.WorkbookProtection*
- 属性), 353
-
- p>WorkbookAlreadySaved, 341
-
- p>workbookHashValue (
- openpyxl.workbook.protection.WorkbookProtection*

- 属性), 353
- WorkbookPackage (*openpyxl.packaging.workbook* 中的类), 272
- workbookParameter (*openpyxl.workbook.defined_name.DefinedName* 属性), 347
- WorkbookParser (*openpyxl.reader.workbook* 中的类), 319
- workbookPassword (*openpyxl.workbook.protection.WorkbookProtection* 属性), 354
- workbookPasswordCharacterSet (*openpyxl.workbook.protection.WorkbookProtection* 属性), 354
- workbookPr (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
- WorkbookProperties (*openpyxl.workbook.properties* 中的类), 350
- workbookProtection (*openpyxl.packaging.workbook.WorkbookPackage* 属性), 273
- WorkbookProtection (*openpyxl.workbook.protection* 中的类), 352
- workbookSaltValue (*openpyxl.workbook.protection.WorkbookProtection* 属性), 354
- workbookSpinCount (*openpyxl.workbook.protection.WorkbookProtection* 属性), 354
- workbookViewId (*openpyxl.chartsheet.views.ChartsheetView* 属性), 180
- workbookViewId (*openpyxl.worksheet.views.SheetView* 属性), 402
- Worksheet (*openpyxl.worksheet.worksheet* 中的类), 403
- WorksheetCopy (*openpyxl.worksheet.copier* 中的类), 367
- WorksheetProperties (*openpyxl.worksheet.properties* 中的类), 390
- worksheets (*openpyxl.workbook.workbook.Workbook* 属性), 362
- WorksheetSource (*openpyxl.pivot.cache* 中的类), 290
- worksheetSource (*openpyxl.pivot.cache.CacheSource* 属性), 279
- wrap (*openpyxl.drawing.text.RichTextProperties* 属性), 253
- wrap_text (*openpyxl.styles.alignment.Alignment* 属性), 321
- wrapText (*openpyxl.styles.alignment.Alignment* 属性), 321
- write() (*openpyxl.comments.shape_writer.ShapeWriter* 方法), 184
- write_data() (*openpyxl.writer.excel.ExcelWriter* 方法), 407
- write_only (*openpyxl.workbook.workbook.Workbook* 属性), 362
- write_shapes() (*openpyxl.comments.comment_sheet.CommentSheet* 方法), 182
- write_stylesheet() (在 *openpyxl.styles.stylesheet* 模块中), 337
- write_theme() (在 *openpyxl.writer.theme* 模块中), 408
- write_worksheet() (*openpyxl.writer.excel.ExcelWriter* 方法), 408
- WriteOnlyCell() (在 *openpyxl.cell.cell* 模块中), 121
- WSPACE (*openpyxl.formula.tokenizer.Token* 属性), 261
- WSPACE_RE (*openpyxl.formula.tokenizer.Tokenizer* 属性), 261
- X
- x (*openpyxl.chart.layout.ManualLayout* 属性), 147
- x (*openpyxl.drawing.geometry.AdjPoint2D* 属性), 221
- x (*openpyxl.drawing.geometry.Point2D* 属性), 225
- x (*openpyxl.drawing.geometry.Point3D* 属性), 225
- x (*openpyxl.drawing.xdr.XDRPoint2D* 属性), 255
- x (*openpyxl.pivot.cache.DiscretePr* 属性), 281
- x (*openpyxl.pivot.cache.FieldUsage* 属性), 281
- x (*openpyxl.pivot.fields.Boolean* 属性), 291
- x (*openpyxl.pivot.fields.DateTimeField* 属性), 292
- x (*openpyxl.pivot.fields.Error* 属性), 293
- x (*openpyxl.pivot.fields.Missing* 属性), 294

- `x` (`openpyxl.pivot.fields.Number` 属性), 294
- `x` (`openpyxl.pivot.fields.Text` 属性), 295
- `x` (`openpyxl.pivot.record.Record` 属性), 296
- `x` (`openpyxl.pivot.table.FieldItem` 属性), 300
- `x` (`openpyxl.pivot.table.Reference` 属性), 311
- `x` (`openpyxl.pivot.table.RowColField` 属性), 311
- `x` (`openpyxl.pivot.table.RowColItem` 属性), 311
- `x_axis` (`openpyxl.chart.area_chart.AreaChart` 属性), 126
- `x_axis` (`openpyxl.chart.area_chart.AreaChart3D` 属性), 126
- `x_axis` (`openpyxl.chart.bar_chart.BarChart` 属性), 134
- `x_axis` (`openpyxl.chart.bar_chart.BarChart3D` 属性), 135
- `x_axis` (`openpyxl.chart.bubble_chart.BubbleChart` 属性), 136
- `x_axis` (`openpyxl.chart.line_chart.LineChart` 属性), 149
- `x_axis` (`openpyxl.chart.line_chart.LineChart3D` 属性), 150
- `x_axis` (`openpyxl.chart.radar_chart.RadarChart` 属性), 160
- `x_axis` (`openpyxl.chart.scatter_chart.ScatterChart` 属性), 162
- `x_axis` (`openpyxl.chart.stock_chart.StockChart` 属性), 167
- `x_axis` (`openpyxl.chart.surface_chart.SurfaceChart3D` 属性), 169
- `XDRPoint2D` (`openpyxl.drawing.xdr` 中的类), 254
- `XDRPositiveSize2D` (`openpyxl.drawing.xdr` 中的类), 255
- `XDRTransform2D` (`openpyxl.drawing.xdr` 中的类), 255
- `xf` (`openpyxl.styles.cell_style.CellStyleList` 属性), 324
- `xfId` (`openpyxl.styles.cell_style.CellStyle` 属性), 324
- `xfId` (`openpyxl.styles.cell_style.StyleArray` 属性), 325
- `xfId` (`openpyxl.styles.named_styles.NamedStyle` 属性), 333
- `xfrm` (`openpyxl.chart.shapes.GraphicalProperties` 属性), 167
- `xfrm` (`openpyxl.drawing.graphic.GraphicFrame` 属性), 230
- `xfrm` (`openpyxl.drawing.properties.GroupShapeProperties` 属性), 238
- `xlm` (`openpyxl.workbook.defined_name.DefinedName` 属性), 347
- `xmlBased` (`openpyxl.worksheet.smart_tag.CellSmartTag` 属性), 394
- `xmlColumnPr` (`openpyxl.worksheet.table.TableColumn` 属性), 398
- `XMLColumnProps` (`openpyxl.worksheet.table` 中的类), 399
- `xmlDataType` (`openpyxl.worksheet.table.XMLColumnProps` 属性), 400
- `xMode` (`openpyxl.chart.layout.ManualLayout` 属性), 147
- `xpath` (`openpyxl.worksheet.table.XMLColumnProps` 属性), 400
- `xSplit` (`openpyxl.worksheet.views.Pane` 属性), 400
- `xVal` (`openpyxl.chart.series.Series` 属性), 164
- `xVal` (`openpyxl.chart.series.XYSeries` 属性), 165
- `xWindow` (`openpyxl.workbook.views.BookView` 属性), 355
- `xWindow` (`openpyxl.workbook.views.CustomWorkbookView` 属性), 357
- `xWindow` (`openpyxl.worksheet.datavalidation.DataValidationList` 属性), 370
- `XYSeries` (`openpyxl.chart.series` 中的类), 164
- Y**
- `y` (`openpyxl.chart.layout.ManualLayout` 属性), 147
- `y` (`openpyxl.drawing.geometry.AdjPoint2D` 属性), 221
- `y` (`openpyxl.drawing.geometry.Point2D` 属性), 225
- `y` (`openpyxl.drawing.geometry.Point3D` 属性), 225
- `y` (`openpyxl.drawing.xdr.XDRPoint2D` 属性), 255
- `y_axis` (`openpyxl.chart.area_chart.AreaChart` 属性), 126
- `y_axis` (`openpyxl.chart.area_chart.AreaChart3D` 属性), 126
- `y_axis` (`openpyxl.chart.bar_chart.BarChart` 属性), 134
- `y_axis` (`openpyxl.chart.bar_chart.BarChart3D` 属性), 135

[y_axis](#) ([openpyxl.chart.bubble_chart.BubbleChart](#) 属性), 136
[y_axis](#) ([openpyxl.chart.line_chart.LineChart](#) 属性), 149
[y_axis](#) ([openpyxl.chart.line_chart.LineChart3D](#) 属性), 150
[y_axis](#) ([openpyxl.chart.radar_chart.RadarChart](#) 属性), 160
[y_axis](#) ([openpyxl.chart.scatter_chart.ScatterChart](#) 属性), 162
[y_axis](#) ([openpyxl.chart.stock_chart.StockChart](#) 属性), 167
[y_axis](#) ([openpyxl.chart.surface_chart.SurfaceChart3D](#) 属性), 169
[year](#) ([openpyxl.worksheet.filters.DateGroupItem](#) 属性), 377
[yMode](#) ([openpyxl.chart.layout.ManualLayout](#) 属性), 147
[ySplit](#) ([openpyxl.worksheet.views.Pane](#) 属性), 400
[yVal](#) ([openpyxl.chart.series.Series](#) 属性), 164
[yVal](#) ([openpyxl.chart.series.XYSeries](#) 属性), 165
[yWindow](#) ([openpyxl.workbook.views.BookView](#) 属性), 355
[yWindow](#) ([openpyxl.workbook.views.CustomWorkbookView](#) 属性), 357
[yWindow](#) ([openpyxl.worksheet.datavalidation.DataValidationList](#) 属性), 370
[zoom](#) ([openpyxl.drawing.geometry.Camera](#) 属性), 222
[zoomScale](#) ([openpyxl.chartsheet.views.ChartsheetView](#) 属性), 180
[zoomScale](#) ([openpyxl.worksheet.views.SheetView](#) 属性), 402
[zoomScaleNormal](#) ([openpyxl.worksheet.views.SheetView](#) 属性), 402
[zoomScalePageLayoutView](#) ([openpyxl.worksheet.views.SheetView](#) 属性), 402
[zoomScaleSheetLayoutView](#) ([openpyxl.worksheet.views.SheetView](#) 属性), 402
[zoomToFit](#) ([openpyxl.chartsheet.custom.CustomChartsheetView](#) 属性), 175
[zoomToFit](#) ([openpyxl.chartsheet.views.ChartsheetView](#) 属性), 180
[zoomToFit](#) ([openpyxl.worksheet.views.SheetView](#) 属性), 402
[zVal](#) ([openpyxl.chart.series.Series](#) 属性), 164

Z

[z](#) ([openpyxl.drawing.geometry.Point3D](#) 属性), 226
[z](#) ([openpyxl.drawing.geometry.Shape3D](#) 属性), 228
[z_axis](#) ([openpyxl.chart.area_chart.AreaChart3D](#) 属性), 126
[z_axis](#) ([openpyxl.chart.bar_chart.BarChart3D](#) 属性), 136
[z_axis](#) ([openpyxl.chart.line_chart.LineChart3D](#) 属性), 150
[z_axis](#) ([openpyxl.chart.surface_chart.SurfaceChart3D](#) 属性), 169
[z_order](#) ([openpyxl.worksheet.ole.ObjectAnchor](#) 属性), 384
[zeroHeight](#) ([openpyxl.worksheet.dimensions.SheetFormatProperties](#)