

Complete HTML5

Tips & Secrets for Professionals



80+ pages
of professional hints and tricks

Contents

About	1
Chapter 1: Getting started with HTML	2
Section 1.1: Hello World	2
Chapter 2: Headings	3
Section 2.1: Using Headings	4
Chapter 3: Anchors and Hyperlinks	4
Section 3.1: Link to another site	5
Section 3.2: Link to an anchor	5
Section 3.3: Link to a page on the same site	6
Section 3.4: Link that dials a number	6
Section 3.5: Open link in new tab/window	6
Section 3.6: Link that runs JavaScript	7
Section 3.7: Link that runs email client	7
Chapter 4: Tables	8
Section 4.1: Simple Table	8
Section 4.2: Spanning columns or rows	8
Section 4.3: Column Groups	9
Section 4.4: Table with thead, tbody, tfoot, and caption	10
Section 4.5: Heading scope	11
Chapter 5: Input Control Elements	12
Section 5.1: Text	13
Section 5.2: Checkbox and Radio Buttons	13
Section 5.3: Input Validation	15
Section 5.4: Color	17
Section 5.5: Password	17
Section 5.6: File	18
Section 5.7: Button	18
Section 5.8: Submit	19
Section 5.9: Reset	19
Section 5.10: Hidden	19
Section 5.11: Tel	20
Section 5.12: Email	20
Section 5.13: Number	20
Section 5.14: Range	20
Section 5.15: Search	20
Section 5.16: Image	20
Section 5.17: Week	21
Section 5.18: Url	21
Section 5.19: DateTime-Local	21
Section 5.20: Month	21
Section 5.21: Time	21
Section 5.22: DateTime (Global)	21
Section 5.23: Date	22
Chapter 6: Sectioning Elements	22
Section 6.1: Nav Element	22
Section 6.2: Article Element	23
Section 6.3: Main Element	24

Section 6.4: Header Element	25
Section 6.5: Footer Element	26
Section 6.6: Section Element	26
Chapter 7: Lists	26
Section 7.1: Ordered List	27
Section 7.2: Unordered List	28
Section 7.3: Nested lists	29
Section 7.4: Description List	29
Chapter 8: Comments	30
Section 8.1: Creating comments	30
Section 8.2: Conditional comments for Internet Explorer	30
Section 8.3: Commenting out whitespace between inline elements	31
Chapter 9: IFrames	32
Section 9.1: Basics of an Inline Frame	32
Section 9.2: Sandboxing	32
Section 9.3: Setting the Frame Size	32
Section 9.4: Using the "srcdoc" Attribute	32
Section 9.5: Using Anchors with IFrames	33
Chapter 10: Text Formatting	33
Section 10.1: Highlighting	33
Section 10.2: Bold, Italic, and Underline	34
Section 10.3: Abbreviation	34
Section 10.4: Inserted, Deleted, or Stricken	35
Section 10.5: Superscript and Subscript	35
Chapter 11: Classes and IDs	35
Section 11.1: Giving an element a class	35
Section 11.2: Giving an element an ID	36
Section 11.3: Acceptable Values	37
Section 11.4: Problems related to duplicated IDs	38
Chapter 12: Images	39
Section 12.1: Creating an image	39
Section 12.2: Choosing alt text	39
Section 12.3: Responsive image using the srcset attribute	40
Section 12.4: Responsive image using picture element	41
Chapter 13: Linking Resources	41
Section 13.1: JavaScript	42
Section 13.2: External CSS Stylesheet	42
Section 13.3: Favicon	43
Section 13.4: Alternative CSS	43
Section 13.5: Resource Hint: dns-prefetch, prefetch, prerender	43
Section 13.6: Link 'media' attribute	43
Section 13.7: Prev and Next	44
Section 13.8: Web Feed	44
Chapter 14: Selection Menu Controls	44
Section 14.1: Select Menu	44
Section 14.2: Options	45
Section 14.3: Option Groups	45
Section 14.4: Datalist	46
Chapter 15: Output Element	46

Section 15.1: Output Element Using For and Form Attributes	46
Section 15.2: Output Element with Attributes	47
Chapter 16: Content Languages	47
Section 16.1: Base Document Language	47
Section 16.2: Element Language	47
Section 16.3: Elements with Multiple Languages	48
Section 16.4: Regional URLs	48
Section 16.5: Handling Attributes with Different Languages	48
Chapter 17: Doctypes	48
Section 17.1: Adding the Doctype	48
Section 17.2: HTML 5 Doctype	49
Section 17.3: HTML 4.01 Doctypes	49
Section 17.4: Old Doctypes	49
Chapter 18: Forms	50
Section 18.1: Submitting	50
Section 18.2: Target attribute in form tag	51
Section 18.3: Uploading Files	51
Section 18.4: Grouping a few input fields	51
Chapter 19: Canvas	52
Section 19.1: Basic Example	52
Section 19.2: Drawing two rectangles on a <canvas>	53
Chapter 20: Data Attributes	54
Section 20.1: Older browsers support	54
Section 20.2: Data Attribute Use	54
Chapter 21: SVG	54
Section 21.1: Inline SVG	54
Section 21.2: Embedding external SVG files in HTML	55
Section 21.3: Embedding SVG using CSS	55
Chapter 22: Meta Information	56
Section 22.1: Page Information	56
Section 22.2: Character Encoding	57
Section 22.3: Robots	57
Section 22.4: Social Media	57
Section 22.5: Mobile Layout Control	58
Section 22.6: Automatic Refresh	59
Section 22.7: Phone Number Recognition	59
Section 22.8: Automatic redirect	59
Section 22.9: Web App	60
Chapter 23: Void Elements	60
Section 23.1: Void elements	60
Chapter 24: Div Element	61
Section 24.1: Basic usage	61
Section 24.2: Nesting	62
Chapter 25: Label Element	62
Section 25.1: About Label	62
Section 25.2: Basic Use	63
Chapter 26: Marking up computer code	63
Section 26.1: Block with <pre> and <code>	63
Section 26.2: Inline with <code>	64

Chapter 27: Media Elements	64
Section 27.1: Audio	64
Section 27.2: Video	64
Section 27.3: Using ` <code><video></code> ` and ` <code><audio></code> ` element to display audio/video content	64
Section 27.4: Video header or background	65
Chapter 28: Tabindex	66
Section 28.1: Add an element to the tabbing order	66
Section 28.2: Remove an element from the tabbing order	66
Section 28.3: Define a custom tabbing order (not recommended)	66
Chapter 29: ARIA	66
Section 29.1: role="presentation"	67
Section 29.2: role="alert"	67
Section 29.3: role="alertdialog"	67
Section 29.4: role="application"	67
Section 29.5: role="article"	68
Section 29.6: role="banner"	68
Section 29.7: role="button"	68
Section 29.8: role="cell"	68
Section 29.9: role="checkbox"	68
Section 29.10: role="columnheader"	69
Section 29.11: role="combobox"	69
Section 29.12: role="complementary"	69
Section 29.13: role="contentinfo"	69
Section 29.14: role="definition"	69
Section 29.15: role="dialog"	70
Section 29.16: role="directory"	70
Section 29.17: role="document"	70
Section 29.18: role="form"	70
Section 29.19: role="grid"	71
Section 29.20: role="gridcell"	71
Section 29.21: role="group"	71
Section 29.22: role="heading"	71
Section 29.23: role="img"	71
Section 29.24: role="link"	71
Section 29.25: role="list"	72
Section 29.26: role="listbox"	72
Section 29.27: role="listitem"	72
Section 29.28: role="log"	72
Section 29.29: role="main"	72
Section 29.30: role="marquee"	73
Section 29.31: role="math"	73
Section 29.32: role="menu"	73
Section 29.33: role="menubar"	73
Section 29.34: role="menuitem"	73
Section 29.35: role="menuitemcheckbox"	73
Section 29.36: role="menuitemradio"	73
Section 29.37: role="navigation"	74
Section 29.38: role="note"	74
Section 29.39: role="option"	74
Section 29.40: role="progressbar"	74

Section 29.41: role="radio"	74
Section 29.42: role="region"	74
Section 29.43: role="radiogroup"	75
Section 29.44: role="row"	75
Section 29.45: role="rowgroup"	75
Section 29.46: role="rowheader"	75
Section 29.47: role="scrollbar"	75
Section 29.48: role="search"	76
Section 29.49: role="searchbox"	76
Section 29.50: role="separator"	76
Section 29.51: role="slider"	76
Section 29.52: role="spinbutton"	76
Section 29.53: role="status"	77
Section 29.54: role="switch"	77
Section 29.55: role="tab"	77
Section 29.56: role="table"	77
Section 29.57: role="tablist"	77
Section 29.58: role="tabpanel"	77
Section 29.59: role="textbox"	78
Section 29.60: role="timer"	78
Section 29.61: role="toolbar"	78
Section 29.62: role="tooltip"	78
Section 29.63: role="tree"	78
Section 29.64: role="treegrid"	79
Section 29.65: role="treeitem"	79
Chapter 30: Global Attributes	79
Section 30.1: Contenteditable Attribute	80
Chapter 31: Marking-up Quotes	80
Section 31.1: Inline with <q>	80
Section 31.2: Block with <blockquote>	80
Chapter 32: Include JavaScript Code in HTML	81
Section 32.1: Handling disabled Javascript	82
Section 32.2: Linking to an external JavaScript file	82
Section 32.3: Directly including JavaScript code	82
Section 32.4: Including a JavaScript file executing asynchronously	82
Chapter 33: Image Maps	82
Section 33.1: Introduction to Image Maps	83
Chapter 34: Using HTML with CSS	83
Section 34.1: External Stylesheet Use	83
Section 34.2: Internal Stylesheet	84
Section 34.3: Inline Style	84
Section 34.4: Multiple Stylesheets	84
Chapter 35: Progress Element	85
Section 35.1: Progress	85
Section 35.2: Changing the color of a progress bar	85
Section 35.3: HTML Fallback	86
Chapter 36: Character Entities	86
Section 36.1: Character Entities in HTML	86
Section 36.2: Common Special Characters	87

<u>Chapter 37: Paragraphs</u>	87
<u>Section 37.1: HTML Paragraphs</u>	87
<u>Chapter 38: HTML 5 Cache</u>	88
<u>Section 38.1: Basic Example of Html 5 cache</u>	88
<u>Chapter 39: Embed</u>	88
<u>Section 39.1: Basic usage</u>	88
<u>Section 39.2: Defining the MIME type</u>	88
<u>Chapter 40: Navigation Bars</u>	88
<u>Section 40.1: Basic Navigation Bar</u>	88
<u>Section 40.2: HTML5 Navigation Bar</u>	89
<u>Chapter 41: HTML Event Attributes</u>	89
<u>Section 41.1: HTML Form Events</u>	89
<u>Section 41.2: Keyboard Events</u>	89
<u>Credits</u>	90
<u>You may also like</u>	95

Please feel free to share this PDF with anyone for free,
latest version of this book can be downloaded from:

<http://GoalKicker.com/HTMLBook>

Important notice:

These Complete HTML5 Tips & Secrets for Professionals series are compiled from Stack Overflow Documentation via [Archive.org](https://archive.org), the content is written by the beautiful people at Stack Overflow, text content is released under Creative Commons BY-SA, see credits at the end of this book whom contributed to the various chapters. Images may be copyright of their respective owners unless otherwise specified

This book creation is not affiliated with HTML5 group(s) nor Stack Overflow, and all terms and trademarks belong to their respective company owners

The information presented in this book is not guaranteed to be correct nor accurate, use at your own risk

Send feedback and corrections to web@petercv.com

Chapter 1: Getting started with HTML

Version	Specification	Release Date
1.0	N/A	1994-01-01
2.0	RFC 1866	1995-11-24
3.2	W3C: HTML 3.2 Specification	1997-01-14
4.0	W3C: HTML 4.0 Specification	1998-04-24
4.01	W3C: HTML 4.01 Specification	1999-12-24
5	WHATWG: HTML Living Standard	2014-10-28
5.1	W3C: HTML 5.1 Specification	2016-11-01

Section 1.1: Hello World

Introduction

HTML (**H**ypertext **M**arkup **L**anguage) uses a markup system composed of elements which represent specific content. *Markup* means that with HTML you declare *what* is presented to a viewer, not *how* it is presented. Visual representations are defined by [Cascading Style Sheets \(CSS\)](#) and realized by browsers. [Still existing elements that allow for such](#), like e.g. [font](#), "are entirely obsolete, and must not be used by authors"[1].

HTML is sometimes called a programming language but it has no logic, so is a **markup language**. HTML tags provide semantic meaning and machine-readability to the content in the page.

An element usually consists of an opening tag (`<element_name>`), a closing tag (`</element_name>`), which contain the element's name surrounded by angle brackets, and the content in between:

```
<element_name>...content...</element_name>
```

There are some HTML elements that don't have a closing tag or any contents. These are called [void elements](#). Void elements include `<img>`, `<meta>`, `<link>` and `<input>`.

Element names can be thought of as descriptive keywords for the content they contain, such as `video`, `audio`, `table`, `footer`.

A HTML page may consist of potentially hundreds of elements which are then read by a web browser, interpreted and rendered into human readable or audible content on the screen.

For this document it is important to note the difference between elements and tags:

Elements: `video`, `audio`, `table`, `footer`

Tags: `<video>`, `<audio>`, `<table>`, `<footer>`, `</html>`, `</body>`

Element insight

Let's break down a tag...

The `<p>` tag represents a common paragraph.

Elements commonly have an opening tag and a closing tag. The opening tag contains the element's name in angle brackets (`<p>`). The closing tag is identical to the opening tag with the addition of a forward slash (`/`) between the opening bracket and the element's name (`</p>`).

Content can then go between these two tags: `<p>This is a simple paragraph.</p>`

Creating a simple page

The following HTML example creates a simple ["Hello World"](#) web page.

HTML files can be created using any [text editor](#). The files must be saved with a `.html` or `.htm[2]` extension in order to be recognized as HTML files.

Once created, this file can be opened in any web browser.

```
<!DOCTYPE html>
<html lang="en">

  <head>
    <meta charset="UTF-8">
    <title>Hello!</title>
  </head>

  <body>
    <h1>Hello World!</h1>
    <p>This is a simple paragraph.</p>
  </body>

</html>
```

Simple page break down

These are the tags used in the example:

Tag	Meaning
<code><!DOCTYPE></code>	Defines the HTML version used in the document. In this case it is HTML5. See the doctypes topic for more information.
<code><html></code>	Opens the page. No markup should come after the closing tag (<code></html></code>). The <code>lang</code> attribute declares the primary language of the page using the ISO language codes (en for English). See the Content Language topic for more information.
<code><head></code>	Opens the head section, which does not appear in the main browser window but mainly contains information <i>about</i> the HTML document, called <i>metadata</i> . It can also contain imports from external stylesheets and scripts. The closing tag is <code></head></code> .
<code><meta></code>	Gives the browser some metadata about the document. The <code>charset</code> attribute declares the character encoding . Modern HTML documents should always use UTF-8 , even though it is not a requirement. In HTML, the <code><meta></code> tag does not require a closing tag. See the Meta topic for more information.
<code><title></code>	The title of the page. Text written between this opening and the closing tag (<code></title></code>) will be displayed on the tab of the page or in the title bar of the browser.
<code><body></code>	Opens the part of the document displayed to users, i.e. all the visible or audible content of a page. No content should be added after the closing tag <code></body></code> .
<code><h1></code>	A level 1 heading for the page. See headings for more information.
<code><p></code>	Represents a common paragraph of text.

1. ? [HTML5, 11.2 Non-conforming features](#)

2. ? `.htm` is inherited from the legacy [DOS](#) three character file extension limit.

Chapter 2: Headings

- `<h1> . . . </h1>`
- `<h2> . . . </h2>`

- `<h3>...</h3>`
- `<h4>...</h4>`
- `<h5>...</h5>`
- `<h6>...</h6>`

HTML provides not only plain paragraph tags, but six separate header tags to indicate headings of various sizes and thicknesses. Enumerated as heading 1 through heading 6, heading 1 has the largest and thickest text while heading 6 is the smallest and thinnest, down to the paragraph level. This topic details proper usage of these tags.

Section 2.1: Using Headings

Headings can be used to describe the topic they precede and they are defined with the `<h1>` to `<h6>` tags. Headings support all the [global attributes](#).

- `<h1>` defines the most important heading.
- `<h6>` defines the least important heading.

Defining a heading:

```
<h1>Heading 1</h1>
<h2>Heading 2</h2>
<h3>Heading 3</h3>
<h4>Heading 4</h4>
<h5>Heading 5</h5>
<h6>Heading 6</h6>
```

Correct structure matters

Search engines and other **user agents** usually index page content based on heading elements, for example to create a table of contents, so using the correct structure for headings is important.

In general, an article should have one `h1` element for the main title followed by `h2` subtitles – going down a layer if necessary. If there are `h1` elements on a higher level they shouldn't be used to describe any lower level content.

Example document (extra indentation to illustrate hierarchy):

```
<h1>Main title</h1>
<p>Introduction</p>

  <h2>Reasons</h2>

    <h3>Reason 1</h3>
    <p>Paragraph</p>

    <h3>Reason 2</h3>
    <p>Paragraph</p>

  <h2>In conclusion</h2>
  <p>Paragraph</p>
```

Chapter 3: Anchors and Hyperlinks

- `<a href="URL or anchor">Link Text</a>`

Parameter

Details

<code>href</code>	Specifies the destination address. It can be an absolute or relative URL, or the <code>name</code> of an anchor. An absolute URL is the complete URL of a website like http://example.com/ . A relative URL points to another directory and/or document inside the same website, e.g. /about-us/ points to the directory "about-us" inside the root directory (<code>/</code>). When pointing to another directory without explicitly specifying the document, web servers typically return the document "index.html" inside that directory.
<code>hreflang</code>	Specifies the language of the resource linked by the <code>href</code> attribute (which must be present with this one). Use language values from BCP 47 for HTML5 and RFC 1766 for HTML 4.
<code>rel</code>	Specifies the relationship between the current document and the linked document. For HTML5, the values must be defined in the specification or registered in the Microformats wiki .
<code>target</code>	Specifies where to open the link, e.g. in a new tab or window. Possible values are <code>_blank</code> , <code>_self</code> , <code>_parent</code> , <code>_top</code> , and <code>framename</code> (deprecated). Forcing such behaviour is not recommended since it violates the control of the user over a website.
<code>title</code>	Specifies extra information about a link. The information is most often shown as a tooltip text when the cursor moves over the link. This attribute is not restricted to links, it can be used on almost all HTML tags.
<code>download</code>	Specifies that the target will be downloaded when a user clicks on the hyperlink. The value of the attribute will be the name of the downloaded file. There are no restrictions on allowed values, and the browser will automatically detect the correct file extension and add it to the file (.img, .pdf, etc.). If the value is omitted, the original filename is used.

Anchor tags are commonly used to link separate webpages, but they can also be used to link between different places in a single document, often within table of contents or even launch external applications. This topic explains the implementation and application of HTML anchor tags in various roles.

Section 3.1: Link to another site

This is the basic use of the `<a>` ([anchor element](#)) element:

```
<a href="http://example.com/">Link to example.com</a>
```

It creates a hyperlink, to the URL <http://example.com/> as specified by the `href` (hypertext reference) attribute, with the anchor text "Link to example.com". It would look something like the following:

[Link to example.com](http://example.com/)

To denote that this link leads to an external website, you can use the `external` link type:

```
<a href="http://example.com/" rel="external">example site</a>
```

You can link to a site that uses a protocol other than HTTP. For example, to link to an FTP site, you can do,

```
<a href="ftp://example.com/">This could be a link to a FTP site</a>
```

In this case, the difference is that this anchor tag is requesting that the user's browser connect to `example.com` using the File Transfer Protocol (FTP) rather than the Hypertext Transfer Protocol (HTTP).

[This could be a link to a FTP site](#)

Section 3.2: Link to an anchor

Anchors can be used to jump to specific tags on an HTML page. The `<a>` tag can point to any element that has an `id` attribute. To learn more about IDs, visit the [documentation about Classes and IDs](#). Anchors are mostly used to jump to a subsection of a page and are used in conjunction with header tags.

Suppose you've created a page (`page1.html`) on many topics:

```
<h2>First topic</h2>
<p>Content about the first topic</p>
<h2>Second topic</h2>
```

```
<p>Content about the second topic</p>
```

Once you have several sections, you may want to create a Table of Contents at the top of the page with quick-links (or bookmarks) to specific sections.

If you gave an `id` attribute to your topics, you could then link to them

```
<h2 id="Topic1">First topic</h2>
<p>Content about the first topic</p>
<h2 id="Topic2">Second topic</h2>
<p>Content about the second topic</p>
```

Now you can use the anchor in your table of contents:

```
<h1>Table of Contents</h1>
  <a href="#Topic1">Click to jump to the First Topic</a>
  <a href="#Topic2">Click to jump to the Second Topic</a>
```

These anchors are also attached to the web page they're on (`page1.html`). So you can link across the site from one page to the other by referencing the page *and* anchor name.

Remember, you can always `<a href="page1.html#Topic1">look back in the First Topic</a>` for supporting information.

Section 3.3: Link to a page on the same site

You can use a [relative path](#) to link to pages on the same website.

```
<a href="/example">Text Here</a>
```

The above example would go to the file `example` at the root directory (`/`) of the server.

If this link was on <http://example.com>, the following two links would bring the user to the same location

```
<a href="/page">Text Here</a>
<a href="http://example.com/page">Text Here</a>
```

Both of the above would go to the `page` file at the root directory of `example.com`.

Section 3.4: Link that dials a number

If the value of the `href`-attribute begins with `tel:`, your device will dial the number when you click it. This works on mobile devices or on computers/tablets running software – like Skype or FaceTime – that can make phone calls.

```
<a href="tel:11234567890">Call us</a>
```

Most devices and programs will prompt the user in some way to confirm the number they are about to dial.

Section 3.5: Open link in new tab/window

```
<a href="example.com" target="_blank">Text Here</a>
```

The `target` attribute specifies where to open the link. By setting it to `_blank`, you tell the browser to open it in a new tab or window (per user preference).

SECURITY VULNERABILITY WARNING!

Using `target="_blank"` gives the opening site partial access to the `window.opener` object via JavaScript, which allows that page to then access and change the `window.opener.location` of *your* page and potentially redirect users to malware or phishing sites.

Whenever using this for pages you do not control, add `rel="noopener"` to your link to prevent the `window.opener` object from being sent with the request.

Currently, Firefox does not support `noopener`, so you will need to use `rel="noopener noreferrer"` for maximum effect.

Section 3.6: Link that runs JavaScript

Simply use the `javascript:` protocol to run the text as JavaScript instead of opening it as a normal link:

```
<a href="javascript:myFunction();">Run Code</a>
```

You can also achieve the same thing using the `onclick` attribute:

```
<a href="#" onclick="myFunction(); return false;">Run Code</a>
```

The `return false;` is necessary to prevent your page from scrolling to the top when the link to `#` is clicked. Make sure to include all code you'd like to run before it, as returning will stop execution of further code.

Also noteworthy, you can include an exclamation mark `!` after the hashtag in order to prevent the page from scrolling to the top. This works because any invalid slug will cause the link to not scroll *anywhere* on the page, because it couldn't locate the element it references (an element with `id="!"`). You could also just use any invalid slug (such as `#scrollsNowhere`) to achieve the same effect. In this case, `return false;` is not required:

```
<a href="#!" onclick="myFunction();">Run Code</a>
```

Should you be using any of this?

The answer is almost certainly **no**. Running JavaScript inline with the element like this is fairly bad practice. Consider using pure JavaScript solutions that look for the element in the page and bind a function to it instead. [Listening for an event](#)

Also consider whether this element is really a *button* instead of a *link*. If so, you should use `<button>`.

Section 3.7: Link that runs email client

Basic usage

If the value of the `href`-attribute begins with `mailto:` it will try to open an email client on click:

```
<a href="mailto:example@example.com">Send email</a>
```

This will put the email address `example@example.com` as the recipient for the newly created email.

Cc and Bcc

You can also add addresses for cc- or bcc-recipients using the following syntax:

```
<a href="mailto:example@example.com?cc=john@example.com&bcc=jane@example.com">Send email</a>
```

Subject and body text

You can populate the subject and body for the new email as well:

```
<a href="mailto:example@example.com?subject=Example+subject&body=Message+text">Send email</a>
```

Those values must be [URL encoded](#).

Clicking on a link with `mailto:` will try to open the default email client specified by your operating system or it will ask you to choose what client you want to use. Not all options specified after the recipient's address are supported in all email clients.

Chapter 4: Tables

- `<table></table>`
- `<thead></thead>`
- `<tbody></tbody>`
- `<tfoot></tfoot>`
- `<tr></tr>`
- `<th></th>`
- `<td></td>`

The HTML `<table>` element allows web authors to display tabular data (such as text, images, links, other tables, etc.) in a two dimensional table with rows and columns of cells.

Section 4.1: Simple Table

```
<table>
  <tr>
    <th>Heading 1/Column 1</th>
    <th>Heading 2/Column 2</th>
  </tr>
  <tr>
    <td>Row 1 Data Column 1</td>
    <td>Row 1 Data Column 2</td>
  </tr>
  <tr>
    <td>Row 2 Data Column 1</td>
    <td>Row 2 Data Column 2</td>
  </tr>
</table>
```

This will render a `<table>` consisting of three total rows (`<tr>`): one row of header cells (`<th>`) and two rows of content cells (`<td>`). `<th>` elements are *tabular headers* and `<td>` elements are *tabular data*. You can put whatever you want inside a `<td>` or `<th>`.

Heading 1/Column 1 Heading 2/Column 2

Row 1 Data Column 1 Row 1 Data Column 2

Row 2 Data Column 1 Row 2 Data Column 2

Section 4.2: Spanning columns or rows

Table cells can span multiple columns or rows using the `colspan` and `rowspan` attributes. These attributes can be applied to `<th>` and `<td>` elements.

```
<table>
  <tr>
    <td>row 1 col 1</td>
    <td>row 1 col 2</td>
    <td>row 1 col 3</td>
  </tr>
  <tr>
    <td colspan="3">This second row spans all three columns</td>
  </tr>
  <tr>
    <td rowspan="2">This cell spans two rows</td>
```

```

        <td>row 3 col 2</td>
        <td>row 3 col 3</td>
    </tr>
    <tr>
        <td>row 4 col 2</td>
        <td>row 4 col 3</td>
    </tr>
</table>

```

Will result in

row 1 col 1	row 1 col 2	row 1 col 3
This second row spans all three columns		
This cell spans two rows	row 3 col 2	row 3 col 3
	row 4 col 2	row 4 col 3

Note that you should not design a table where both rows and columns overlap as this is invalid HTML and the result is handled differently by different web browsers.

rowspan = A non-negative integer that specifies the number of rows spanned by a cell. The default value of this attribute is one (1). A value of zero (0) means that the cell will extend from the current row until the last row of the table (<thead>, <tbody>, or <tfoot>).

colspan = A non-negative integer that specifies the number of columns spanned by the current cell. The default value of this attribute is one (1). A value of zero (0) means that the cell will extend from the current to the last column of the column group <colgroup> in which the cell is defined.

Section 4.3: Column Groups

Sometimes you may want to apply styling to a column or group of columns. Or for semantic purposes, you may want to group columns together. To do this, use <colgroup> and <col> elements.

The optional <colgroup> tag allows you to group columns together. <colgroup> elements must be child elements of a <table> and must come after any <caption> elements and before any table content (e.g., <tr>, <thead>, <tbody>, etc.).

```

<table>
    <colgroup span="2"></colgroup>
    <colgroup span="2"></colgroup>
    ...
</table>

```

The optional <col> tag allows you to reference individual columns or a range of columns without applying a logical grouping. <col> elements are optional, but if present, they must be inside a <colgroup> element.

```

<table>
    <colgroup>
        <col id="MySpecialColumn" />
        <col />
    </colgroup>
    <colgroup>
        <col class="CoolColumn" />
        <col class="NeatColumn" span="2" />
    </colgroup>
    ...
</table>

```

The following CSS styles can be applied to `<colgroup>` and `<col>` elements:

- `border`
- `background`
- `width`
- `visibility`
- `display` (as in `display: none`)
 - `display: none`; will actually remove the columns from the display, causing the table to render as if those cells don't exist

For more information, see [HTML5 Tabular data](#).

Section 4.4: Table with `thead`, `tbody`, `tfoot`, and `caption`

HTML also provides the tables with the `<thead>`, `<tbody>`, `<tfoot>`, and `<caption>` elements. These additional elements are useful for adding semantic value to your tables and for providing a place for separate CSS styling.

When printing out a table that doesn't fit onto one (paper) page, most browsers repeat the contents of `<thead>` on every page.

There's a specific order that must be adhered to, and we should be aware that not every element falls into place as one would expect. The following example demonstrates how our 4 elements should be placed.

```
<table>
<caption>Table Title</caption> <!--| caption is the first child of table |-->
<thead> <!--=====| thead is after caption |-->
  <tr>
    <th>Header content 1</th>
    <th>Header content 2</th>
  </tr>
</thead>

<tbody> <!--=====| tbody is after thead |-->
  <tr>
    <td>Body content 1</td>
    <td>Body content 2</td>
  </tr>
</tbody>

<tfoot><!--| tfoot can be placed before or after tbody, but not in a group of tbody. |-->
<!--| Regardless where tfoot is in markup, it's rendered at the bottom. |-->

  <tr>
    <td>Footer content 1</td>
    <td>Footer content 2</td>
  </tr>
</tfoot>
```

</table>

The following example's results are demonstrated twice--the first table lacks any styles, the second table has a few CSS properties applied: background-color, color, and border*. The styles are provided as a visual guide and is not an essential aspect of the topic at hand.

Table Title	
Header content 1	Header content 2
Body content 1	Body content 2
Footer content 1	Footer content 2

Table Title	
Header content 1	Header content 2
Body content 1	Body content 2
Footer content 1	Footer content 2

Element	Styles Applies
<caption>	Yellow text on black background.
<thead>	Bold text on purple background.
<tbody>	Text on blue background.
<tfoot>	Text on green background.
<th>	Orange borders.
<td>	Red borders.

Section 4.5: Heading scope

th elements are very commonly used to indicate headings for table rows and columns, like so:

```
<table>
  <thead>
    <tr>
      <td></td>
      <th>Column Heading 1</th>
      <th>Column Heading 2</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <th>Row Heading 1</th>
      <td></td>
      <td></td>
    </tr>
    <tr>
      <th>Row Heading 2</th>
      <td></td>
      <td></td>
    </tr>
  </tbody>
</table>
```

This can be improved for accessibility by the use of the scope attribute. The above example would be amended as follows:

```
<table>
  <thead>
```

```

    <tr>
      <td></td>
      <th scope="col">Column Heading 1</th>
      <th scope="col">Column Heading 2</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <th scope="row">Row Heading 1</th>
      <td></td>
      <td></td>
    </tr>
    <tr>
      <th scope="row">Row Heading 1</th>
      <td></td>
      <td></td>
    </tr>
  </tbody>
</table>

```

`scope` is known as an *enumerated attribute*, meaning that it can have a value from a specific set of possible values. This set includes:

- `col`
- `row`
- `colgroup`
- `rowgroup`

References:

- <https://developer.mozilla.org/en-US/docs/Web/HTML/Element/th#attr-scope>
- <https://www.w3.org/TR/WCAG20-TECHS/H63.html>

Chapter 5: Input Control Elements

- `<input type="" name="" value="">`

Parameter	Details
<code>class</code>	Indicates the Class of the input
<code>id</code>	Indicates the ID of the input
<code>type</code>	Identifies the type of input control to display. Acceptable values are <code>hidden</code> , <code>text</code> , <code>tel</code> , <code>url</code> , <code>email</code> , <code>password</code> , <code>date</code> , <code>time</code> , <code>number</code> , <code>range</code> , <code>color</code> , <code>checkbox</code> , <code>radio</code> , <code>file</code> , <code>submit</code> , <code>image</code> , <code>reset</code> , and <code>button</code> . Defaults to <code>text</code> if not specified, if the value is invalid, or if the browser does not support the type specified.
<code>name</code>	Indicates the name of the input
<code>disabled</code>	Boolean value that indicates the input should be disabled. Disabled controls cannot be edited, are not sent on form submission, and cannot receive focus.
<code>checked</code>	When the value of the type attribute is <code>radio</code> or <code>checkbox</code> , the presence of this Boolean attribute indicates that the control is selected by default; otherwise it is ignored.
<code>multiple</code>	HTML5 Indicates multiple files or values can be passed (Applies only to <code>file</code> and <code>email</code> type inputs)
<code>placeholder</code>	HTML5 A hint to the user of what can be entered in the control . The placeholder text must not contain carriage returns or line-feeds
<code>autocomplete</code>	HTML5 Indicates whether the value of the control can be automatically completed by the browser.
<code>readonly</code>	Boolean value that indicates the input is not editable. Readonly controls are still sent on form submission, but will not receive focus. HTML5: This attribute is ignored when the value of <code>type</code> attribute is either set to <code>hidden</code> , <code>range</code> , <code>color</code> , <code>checkbox</code> , <code>radio</code> , <code>file</code> or <code>button</code> .
<code>required</code>	HTML5 Indicates a value must be present or the element must be checked in order for the form to be submitted

alt	An alternative text for images, in case they are not displayed.
autofocus	The <code><input></code> element should get the focus when page loads.
value	Specifies the value of <code><input></code> element.
step	The <code>step</code> attribute specifies the legal number intervals. It works with the following input types: number, range, date, datetime-local, month, time and week.

A key component of interactive web systems, input tags are HTML elements designed to take a specific form of input from users. Different types of input elements can regulate the data entered to fit a specified format and provide security to password entry.

Section 5.1: Text

The most basic input type and the default input if no `type` is specified. This input type defines a single-line text field with line-breaks automatically removed from the input value. All other characters can be entered into this. `<input>` elements are used within a `<form>` element to declare input controls that allow users to input data.

Syntax

```
<input type="text">
```

or (without specifying a `type`, using the default attribute):

```
<input>
```

The default width of a text field input is 20 characters. This can be changed by specifying a value for the `size` attribute like this:

```
<input type="text" size="50">
```

The `size` attribute is distinctly different than setting a width with CSS. Using a width defines a specific value (in number of pixel, percentage of the parent element, etc.) that the input must always be wide. Using the `size` calculates the amount of width to allocate based on the font being used and how wide the characters normally are.

Note: Using the `size` attribute does not inherently limit the number of characters which can be entered into the box, only how wide the box is displayed. For limiting the length, see [Input Validation](#).

An input field only allows one line of text. If you need a multi-line text input for substantial amount of text, use a `<textarea>` element instead.

Section 5.2: Checkbox and Radio Buttons

Overview

Checkboxes and radio buttons are written with the HTML tag `<input>`, and their behavior is defined in the [HTML specification](#).

The simplest checkbox or radio button is an `<input>` element with a `type` attribute of `checkbox` or `radio`, respectively:

```
<input type="checkbox">
<input type="radio">
```

A single stand-alone checkbox element is used for a single binary option such as a yes-or-no question. Checkboxes are independent, meaning the user may select as many choices as they would like in a group of checkboxes. In other words, checking one checkbox does *not* uncheck the other checkboxes in checkbox group.

Radio buttons usually come in groups (if it's not grouped with another radio button, you probably meant to use a

checkbox instead) identified by using the same `name` attribute on all buttons within that group. The selection of radio buttons are *mutually exclusive*, meaning the user may only select one choice from a group of radio buttons. When a radio button is checked, any other radio button with the same `name` that was previously checked becomes unchecked.

Example:

```
<input type="radio" name="color" id="red" value="#F00">  
<input type="radio" name="color" id="green" value="#0F0">  
<input type="radio" name="color" id="blue" value="#00F">
```

When viewed, radio buttons appear as a circle (unchecked) or a filled circle (checked). Checkboxes appear as a square (unchecked) or a filled square (checked). Depending on the browser and operating system, the square sometimes has rounded corners.

Attributes

checkboxes and radio buttons have a number of attributes to control their behavior:

value

Like any other input element, the `value` attribute specifies the string value to associate with the button in the event of form submission. However, checkboxes and radio buttons are special in that when the value is omitted, it defaults to `on` when submitted, rather than sending a blank value. The `value` attribute is not reflected in the button's appearance.

checked

The `checked` attribute specifies the initial state of a checkbox or radio button. This is a boolean attribute and may be omitted.

Each of these are valid, equivalent ways to define a checked radio button:

```
<input checked>  
<input checked="">  
<input checked="checked">  
<input checked="ChEcKeD">
```

The absence of the `checked` attribute is the only valid syntax for an unchecked button:

```
<input type="radio">  
<input type="checkbox">
```

When resetting a `<form>`, checkboxes and radio buttons revert to the state of their `checked` attribute.

Accessibility

Labels

To give context to the buttons and show users what each button is for, each of them should have a label. This can be done using a `<label>` element to wrap the button. Also, this makes the label clickable, so you select the corresponding button.

Example:

```
<label>  
  <input type="radio" name="color" value="#F00">  
  Red  
</label>
```

or with a `<label>` element with a `for` attribute set to the `id` attribute of the button:

```
<input type="checkbox" name="color" value="#F00" id="red">
<label for="red">Red</label>
```

Button Groups

Since each radio button affects the others in the group, it is common to provide a label or context for the entire group of radio buttons.

To provide a label for the entire group, the radio buttons should be included in a `<fieldset>` element with a `<legend>` element within it.

Example:

```
<fieldset>
  <legend>Theme color:</legend>
  <p>
    <input type="radio" name="color" id="red" value="#F00">
    <label for="red">Red</label>
  </p>
  <p>
    <input type="radio" name="color" id="green" value="#0F0">
    <label for="green">Green</label>
  </p>
  <p>
    <input type="radio" name="color" id="blue" value="#00F">
    <label for="blue">Blue</label>
  </p>
</fieldset>
```

Checkboxes can also be grouped in a similar fashion, with a `fieldset` and `legend` identifying the group of related checkboxes. However, keep in mind that checkboxes should *not* share the same name because they are not mutually exclusive. Doing this will result in the form submitting multiple values for the same key and not all server-side languages handle this in the same way (undefined behavior). Each checkbox should either have a unique name, or use a set of square brackets (`[]`) to indicate that the form should submit an array of values for that key. Which method you choose should depend on how you plan to handle the form data client-side or server-side. You should also keep the legend short, since some combinations of browsers and screen readers read the legend before each input field in the `fieldset`.

Section 5.3: Input Validation

HTML input validation is done automatically by the browser based on special attributes on the input element. It could partially or completely replace JavaScript input validation. This kind of validation can be circumvented by the user via specially crafted HTTP requests, so it does not replace server-side input validation. The validation only occurs when attempting to submit the form, so all restricted inputs must be inside a form in order for validation to occur (unless you're using JavaScript). Keep in mind that inputs which are disabled or read-only will not trigger validation.

Some newer input types (like `email`, `url`, `tel`, `date` and many more) are automatically validated and do not require your own validation constraints.

Version≥5

Required

Use the `required` attribute to indicate that a field must be completed in order to pass validation.

```
<input required>
```

Minimum / Maximum Length

Use the `minlength` and `maxlength` attributes to indicate length requirements. Most browsers will prevent the user from typing more than *max* characters into the box, preventing them from making their entry invalid even before they attempt submission.

```
<input minlength="3">
<input maxlength="15">
<input minlength="3" maxlength="15">
```

Specifying a range

Use `min` and `max` attributes to restrict the range of numbers a user can input into an input of type `number` or `range`


Marks: `<input type="number" size="6" name="marks" min="0" max="100" />`
Subject Feedback: `<input type="range" size="2" name="feedback" min="1" max="5" />`
Version≥5

Match a Pattern

For more control, use the `pattern` attribute to specify any regular expression that must be matched in order to pass validation. You can also specify a `title`, which is included in the validation message if the field doesn't pass.

```
<input pattern="\d*" title="Numbers only, please.">
```

Here's the message shown in Google Chrome version 51 when attempting to submit the form with an invalid value inside this field:

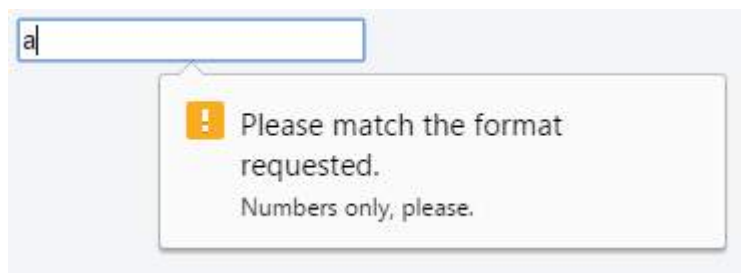

Not all browsers display a message for invalid patterns, although there is full support among most used modern browsers.

Check the latest support on [CanIUse](#) and implement accordingly.

Version≥5

Accept File Type

For input fields of type `file`, it is possible to accept only certain types of files, such as videos, images, audios, specific file extensions, or certain [media types](#). For example:

```
<input type="file" accept="image/*" title="Only images are allowed">
```

Multiple values can be specified with a comma, e.g.:

```
<input type="file" accept="image/*, .rar, application/zip">
```

Note: Adding `novalidate` attribute to the `form` element or `formnovalidate` attribute to the submit button, prevents validation on form elements. For example:

```
<form>
  <input type="text" name="name" required>
  <input type="email" name="email" required>
  <input pattern="\d*" name="number" required>
```

```
<input type="submit" value="Publish"> <!-- form will be validated -->
<input type="submit" value="Save" formnovalidate> <!-- form will NOT be validated -->
</form>
```

The form has fields that are required for "publishing" the draft but aren't required for "saving" the draft.

Section 5.4: Color

Version≥5

```
<input type="color" name="favcolor" value="#ff0000">
```

In supporting browsers, the input element with a type attribute whose value is `color` creates a button-like control, with a color equal to the value of `color` attribute (defaults to black if value is not specified or is an invalid hexadecimal format).



Clicking this button opens the operating system's color widget, which allows user to select a color.



Fallback for browsers which do not support this input type is a regular `input type=text`.

Section 5.5: Password

```
<input type="password" name="password">
```

The input element with a type attribute whose value is `password` creates a single-line text field similar to the `input type=text`, except that text is not displayed as the user enters it.

```
<input type="password" name="password" placeholder="Password">
```

Placeholder text is shown in plain text and is overwritten automatically when a user starts typing.

Note: Some browsers and systems modify the default behavior of the password field to also display the most recently typed character for a short duration, like so:



Section 5.6: File

```
<input type="file" name="fileSubmission">
```

File inputs allow users to select a file from their local filesystem for use with the current page. If used in conjunction with a `form` element, they can be used to allow users to upload files to a server (for more info see [Uploading Files](#)).

The following example allows users to use the file input to select a file from their filesystem and upload that file to a script on the server named `upload_file.php`.

```
<form action="upload_file.php" method="post" enctype="multipart/form-data">
  Select file to upload:
  <input type="file" name="fileSubmission" id="fileSubmission">
  <input type="submit" value="Upload your file" name="submit">
</form>
```

Multiple files

Adding the `multiple` attribute the user will be able to select **more than one** file:

```
<input type="file" name="fileSubmission" id="fileSubmission" multiple>
```

Accept Files

Accept attribute specifies the types of files that user can select. E.g. `.png`, `.gif`, `.jpeg`.

```
<input type="file" name="fileSubmission" accept="image/x-png,image/gif,image/jpeg" />
```

Section 5.7: Button

```
<input type="button" value="Button Text">
```

Buttons can be used for triggering actions to occur on the page, without submitting the form. You can also use the `<button>` element if you require a button that can be more easily styled or contain other elements:

```
<button type="button">Button Text</button>
```

Buttons are typically used with an "onclick" event:

```
<input type="button" onclick="alert('hello world!')" value="Click Me">
```

or

```
<button type="button" onclick="alert('hello world!')">Click Me</button>
```

Attributes

[name]

The `name` of the button, which is submitted with the form data.

[type]

The `type` of the button.

Possible values are:

`submit` : The button submits the form data to the server. This is the default if the attribute is not specified, or if the attribute is dynamically changed to an empty or invalid value.

reset : The button resets all the controls to their initial values.

button : The button has no default behavior. It can have client-side scripts associated with the element's events, which are triggered when the events occur.

menu : The button opens a popup menu defined via its designated element.

[value]

The initial value of the button.

Version≥5

Extra Attributes for Submit Buttons

Attribute	Description
form	Specifies the ID of the form the button belongs to. If none is specified, it will belong to its ancestor form element (if one exists).
formaction	Specifies where to send the form-data when the form is submitted using this button.
formenctype	Specifies how the form-data should be encoded when submitting it to the server using this button. Can only be used with formmethod ="post".
formmethod	Specifies the HTTP method to use (POST or GET) when sending form-data using this button.
formnovalidate	Specifies that the form-data should not be validated on submission.
formtarget	Specifies where to display the response that is received after submitting the form using this button.

Section 5.8: Submit

```
<input type="submit" value="Submit">
```

A submit input creates a button which submits the form it is inside when clicked.

You can also use the **<button>** element if you require a submit button that can be more easily styled or contain other elements:

```
<button type="submit">  
   Submit  
</button>
```

Section 5.9: Reset

```
<input type="reset" value="Reset">
```

An input of type **reset** creates a button which, when clicked, resets all inputs in the form it is contained in to their default state.

- Text in an input field will be reset to blank or its default value (specified using the **value** attribute).
- Any option(s) in a selection menu will be deselected unless they have the **selected** attribute.
- All checkboxes and radio boxes will be deselected unless they have the **checked** attribute.

Note: A reset button must be inside or attached to (via the **form** attribute) a **<form>** element in order to have any effect. The button will only reset the elements within this form.

Section 5.10: Hidden

```
<input type="hidden" name="inputName" value="inputValue">
```

A hidden input won't be visible to the user, but its value will be sent to the server when the form is submitted

nonetheless.

Section 5.11: Tel

```
<input type="tel" value="+8400000000">
```

The input element with a type attribute whose value is `tel` represents a one-line plain-text edit control for entering a telephone number.

Section 5.12: Email

Version≥5

The `<input type="email">` is used for input fields that should contain an e-mail address.

```
<form>
  <label>E-mail: <label>
  <input type="email" name="email">
</form>
```

E-mail address can be automatically validated when submitted depending on browser support.

Section 5.13: Number

Version≥5

```
<input type="number" value="0" name="quantity">
```

The Input element with a type attribute whose value is `number` represents a precise control for setting the element's value to a string representing a number.

Please note that this field does not guarantee to have a correct number. It just allows all the symbols which could be used in any real number, for example user will be able to enter value like `e1e-`, `0`.

Section 5.14: Range

Version≥5

```
<input type="range" min="" max="" step="" />
```

A control for entering a number whose exact value is not important.

Attribute	Description	Default value
min	Minimum value for range	0
max	Maximum value for range	100
step	Amount to increase by on each increment.	1

Section 5.15: Search

Version≥5

Input type search is used for textual search. It will add magnifier symbol next to space for text on most browsers

```
<input type="search" name="googlesearch">
```

Section 5.16: Image

```
<input type="image" src="img.png" alt="image_name" height="50px" width="50px"/>
```

An Image. You must use the `src` attribute to define the source of the image and the `alt` attribute to define alternative text. You can use the `height` and `width` attributes to define the size of the image in pixels.

Section 5.17: Week

Version≥5

```
<input type="week" />
```

Dependent on browser support, a control will show for entering a week-year number and a week number with no time zone.

Section 5.18: Url

Version≥5

```
<input type="url" name="Homepage">
```

This is used for input fields that should contain a URL address.

Depending on browser support, the `url` field can be automatically validated when submitted.

Some smartphones recognize the `url` type, and adds ".com" to the keyboard to match url input.

Section 5.19: DateTime-Local

Version≥5

```
<input type="datetime-local" />
```

Dependent on browser support, a date and time picker will pop up on screen for you to choose a date and time.

Section 5.20: Month

Version≥5

```
<input type="month" />
```

Dependent on browser support, a control will show to pick the month.

Section 5.21: Time

Version≥5

```
<input type="time" />
```

The `time` input marks this element as accepting a string representing a time. The format is defined in [RFC 3339](#) and should be a partial-time such as

```
19:04:39
08:20:39.04
```

Currently, all versions of Edge, Chrome, Opera, and Chrome for Android support `type="time"`. The newer versions of Android Browser, specifically 4.4 and up support it. Safari for iOS offers partial support, not supporting `min`, `max`, and `step` attributes.

Section 5.22: DateTime (Global)

The input element with a type attribute whose value is "**datetime**" represents a control for setting the element's value to a string representing a **global date and time (with timezone information)**.

```
<fieldset>
  <p><label>Meeting time: <input type=datetime name="meeting.start"></label>
</fieldset>
```

Permitted attributes:

- global attributes
- name
- disabled
- form
- type
- autocomplete
- autofocus
- list
- min & max
- step (float)
- readonly
- required value

Section 5.23: Date

Version≥5

```
<input type="date" />
```

A date picker will pop up on screen for you to choose a date. This is not supported in Firefox or Internet Explorer.

Chapter 6: Sectioning Elements

Section 6.1: Nav Element

The `<nav>` element is primarily intended to be used for sections that contain **main navigation blocks** for the website, this can include links to other parts of the web page (*e.g. anchors for a table of contents*) or other pages entirely.

Inline items

The following will display an inline set of hyperlinks.

```
<nav>
  <a href="https://google.com">Google</a>
  <a href="https://www.yahoo.com">Yahoo!</a>
  <a href="https://www.bing.com">Bing</a>
</nav>
```

Use list items when needed

If the content represents a list of items, use a list item to show this and enhance the user experience.

Note the `role="navigation"`, *more on this below*.

```
<nav role="navigation">
  <ul>
    <li><a href="https://google.com">Google</a></li>
    <li><a href="https://www.yahoo.com">Yahoo!</a></li>
    <li><a href="https://www.bing.com">Bing</a></li>
  </ul>
</nav>
```

Avoid unnecessary usage

`<footer>` elements may have a list of links to other parts of the site (FAQ, T&C, etc.). The footer element alone is sufficient in this case, you don't *need* to further wrap your links with a `<nav>` element in the `<footer>`.

```

<!-- the <nav> is not required in the <footer> -->
<footer>
  <nav>
    <a href="#">...</a>
  </nav>
</footer>

<!-- The footer alone is sufficient -->
<footer>
  <a href="#">...</a>
</footer>

```

Notes:

- [<main> element](#) descendants are not allowed within a `<nav>`

Adding a `role="navigation"` ARIA role to the `<nav>` element is advised to aid user agents that don't support HTML5 and also to provide more context for those that do.

```
<nav role="navigation"><!-- ... --></nav>
```

Screen Readers: *(software that allows blind or visually impaired users to navigate the site)*

User agents like screen readers will interpret the `<nav>` element differently depending on their requirements.

- It could give the `<nav>` element a higher priority when rendering the page
- It could delay the rendering of the element
- It could adapt the page in a specific way to tailor for the user's needs
example: make the text links within the `<nav>` elements larger for someone who's visually impaired.

[Click here to read the official HTML5 Specification for the `<nav>` element](#)

Section 6.2: Article Element

The `<article>` element contains **self-contained content** like articles, blog posts, user comments or an interactive widget that could be distributed outside the context of the page, for example by RSS.

- When article elements are nested, the contents of the inner article node should be related to the outer article element.

A blog (section) with multiple posts (article), and comments (article) might look something like this.

```

<section>
  <!-- Each individual blog post is an <article> -->
  <article>
    <header>
      <h1>Blog Post</h1>
      <time datetime="2016-03-13">13th March 2016</time>
    </header>

    <p>The article element represents a self contained article or document.</p>
    <p>The section element represents a grouping of content.</p>

    <section>
      <h2>Comments <small>relating to "Blog Post"</small></h2>

      <!-- Related comment is also a self-contained article -->
      <article id="user-comment-1">
        <p>Excellent!</p>
        <footer><p>...</p><time>...</time></footer>
      </article>
    </section>
  </article>
</section>

```

```

        </article>
      </section>
    </article>

    <!-- ./repeat: <article> -->

</section>

<!-- Content unrelated to the blog or posts should be outside the section. -->
<footer>
  <p>This content should be unrelated to the blog.</p>
</footer>

```

Avoid unnecessary usage

When the main content of the page (excluding headers, footers, navigation bars, etc.) is simply one group of elements. You can omit the `<article>` in favour of the `<main>` element.

```

<article>
  <p>This doesn't make sense, this article has no real `context`.</p>
</article>

```

Instead, replace the article with a `<main>` element to indicate this is the main content for this page.

```

<main>
  <p>I'm the main content, I don't need to belong to an article.</p>
</main>

```

If you use another element, ensure you specify the `<main>` ARIA role for correct interpretation and rendering across multiple devices and non HTML5 browsers.

```

<section role="main">
  <p>This section is the main content of this page.</p>
</section>

```

Notes:

- `<main>` element descendants are not allowed within a `<article>`

[Click here to read the official HTML5 Specification for the `<article>` element](#)

Section 6.3: Main Element

The `<main>` element contains the **main content** for your web page. This content is unique to the individual page, and should not appear elsewhere on the site. Repeating content like headers, footers, navigation, logos, etc., is placed outside the element.

- The `<main>` element should only ever be used at most **once** on a single page.
- The `<main>` element must not be included as a descendant of an `article`, `aside`, `footer`, `header` or `nav` element.

In the following example, we're displaying a **single blog post** (and related information like references and comments).

```

<body>
  <header>
    <nav>...</nav>
  </header>

  <main>

```

```

<h1>Individual Blog Post</h1>
<p>An introduction for the post.</p>

<article>
  <h2>References</h2>
  <p>...</p>
</article>

<article>
  <h2>Comments</h2> ...
</article>
</main>

<footer>...</footer>
</body>

```

- The blog post is contained within the `<main>` element to indicate this is the main content for this page (and therefore, unique across the website).
- The `<header>` and `<footer>` tags are *siblings* to the `<main>` element.

Notes:

The HTML5 specification recognizes the `<main>` element as a **grouping** element, and not a *sectioning* element.

- [ARIA role attributes](#): `main` (default), `presentation`

Adding a `role="main"` [ARIA role](#) attribute to **other elements** intended to be used as main content is advised to aid user agents that don't support HTML5 and also to provide more context for those that do.

The `<main>` element by default has the main role, and so does not need to be provided.

[Click here to read the official HTML5 Specification for the `<main>` element](#)

Section 6.4: Header Element

The `<header>` element represents introductory content for its nearest ancestor sectioning content or sectioning root element. A `<header>` typically contains a group of introductory or navigational aids.

Note: The header element is not sectioning content; it doesn't introduce a new section.

Examples:

```

<header>
  <p>Welcome to...</p>
  <h1>Voidwars!</h1>
</header>

```

In this example, the `<article>` has a `<header>`.

```

<article>
  <header>
    <h1>Flexbox: The definitive guide</h1>
  </header>
  <p>The guide about Flexbox was supposed to be here, but it turned out Wes wasn't a Flexbox expert either.</p>
</article>

```

Section 6.5: Footer Element

The `<footer>` element contains the footer part of the page.

Here is an example for `<footer>` element that contain p paragraph tag.

```
<footer>
  <p>All rights reserved</p>
</footer>
```

Section 6.6: Section Element

The `<section>` element represents a generic section to thematically group content. Every section, typically, should be able to be identified with a heading element as a child of the section.

- You can use the `<section>` element within an `<article>` and vice-versa.
- Every section should have a *theme* (a heading element identifying this region)
- Don't use the `<section>` element as a general styling 'container'.
If you need a container to apply styling, use a `<div>` instead.

In the following example, we're displaying a **single blog post** with multiple chapters each chapter is a section (*a set of thematically grouped content, which can be identified by the heading elements in each section*).

```
<article>
  <header>
    <h2>Blog Post</h2>
  </header>
  <p>An introduction for the post.</p>
  <section>
    <h3>Chapter 1</h3>
    <p>...</p>
  </section>
  <section>
    <h3>Chapter 2</h3>
    <p>...</p>
  </section>
  <section>
    <h3>Comments</h3> ...
  </section>
</article>
```

Notes:

Developers should use the **article** element when it makes sense to syndicate the contents of the element.

[Click here to read the official HTML5 Specification for the `<main>` element](#)

Chapter 7: Lists

- `<ol>` ordered list items `</ol>`
- `<ul>` unordered list items `</ul>`
- `<li>` list item (ordered and not) `</li>`
- `<dl>` description list items `</dl>`
- `<dt>` description list title `</dt>`
- `<dd>` description list description `</dd>`

HTML offers three ways for specifying lists: ordered lists, unordered lists, and description lists. Ordered lists use ordinal sequences to indicate the order of list elements, unordered lists use a defined symbol such as a bullet to list elements in no designated order, and description lists use indents to list elements with their children. This topic explains the implementation and combination of these lists in HTML markup.

Section 7.1: Ordered List

An ordered list can be created with the `<ol>` tag and each list item can be created with the `<li>` tag as in the example below:

```
<ol>
  <li>Item</li>
  <li>Another Item</li>
  <li>Yet Another Item</li>
</ol>
```

This will produce a numbered list (which is the default style):

1. Item
2. Another Item
3. Yet Another Item

Manually changing the numbers

There are a couple of ways you can play with which numbers appear on the list items in an ordered list. The first way is to set a starting number, using the `start` attribute. The list will start at this defined number, and continue incrementing by one as usual.

```
<ol start="3">
  <li>Item</li>
  <li>Some Other Item</li>
  <li>Yet Another Item</li>
</ol>
```

This will produce a numbered list (which is the default style):

3. Item
4. Some Other Item
5. Yet Another Item

You can also explicitly set a certain list item to a specific number. Further list items after one with a specified value will continue incrementing by one from that list item's value, ignoring where the parent list was at.

```
<li value="7"></li>
```

It is also worth noting that, by using the `value` attribute directly on a list item, you can override an ordered list's existing numbering system by restarting the numbering at a lower value. So if the parent list was already up to value 7, and encountered a list item at value 4, then that list item would still display as 4 and continue counting from that point again.

```
<ol start="5">
  <li>Item</li>
  <li>Some Other Item</li>
  <li value="4">A Reset Item</li>
  <li>Another Item</li>
  <li>Yet Another Item</li>
</ol>
```

So the example above will produce a list that follows the numbering pattern of 5, 6, 4, 5, 6 - starting again at a number lower than the previous and duplicating the number 6 in the list.

Note: The `start` and `value` attributes only accept a number - even if the ordered list is set to display as Roman numerals or letters.

Version≥5

You can reverse the numbering by adding `reversed` in your `ol` element:

```
<ol reversed>
  <li>Item</li>
  <li>Some Other Item</li>
  <li value="4">A Reset Item</li>
  <li>Another Item</li>
  <li>Yet Another Item</li>
</ol>
```

Reverse numbering is helpful if you're continually adding to a list, such as with new podcast episodes or presentations, and you want the most recent items to appear first.

Changing the type of numeral

You can easily change the type of numeral shown in the list item marker by using the `type` attribute

```
<ol type="1|a|A|i|I">
```

Type	Description	Examples
1	Default value - Decimal numbers	1,2,3,4
a	Alphabetically ordered (lowercase)	a,b,c,d
A	Alphabetically ordered (uppercase)	A,B,C,D
i	Roman Numerals (lowercase)	i,ii,iii,iv
I	Roman Numerals (uppercase)	I,II,III,IV

You should use `ol` to display a list of items, where the items have been intentionally ordered and order should be emphasized. If changing the order of the items does NOT make the list incorrect, you should use `<ul>`.

Section 7.2: Unordered List

An unordered list can be created with the `<ul>` tag and each list item can be created with the `<li>` tag as shown by the example below:

```
<ul>
  <li>Item</li>
  <li>Another Item</li>
  <li>Yet Another Item</li>
</ul>
```

This will produce a bulleted list (which is the default style):

- Item
- Another Item
- Yet Another Item

You should use `ul` to display a list of items, where the order of the items is not important. If changing the order of the items makes the list incorrect, you should use `<ol>`.

Section 7.3: Nested lists

You can nest lists to represent sub-items of a list item.

```
<ul>
  <li>item 1</li>
  <li>item 2
    <ul>
      <li>sub-item 2.1</li>
      <li>sub-item 2.2</li>
    </ul>
  </li>
  <li>item 3</li>
</ul>
```

- item 1
- item 2
 - sub-item 2.1
 - sub-item 2.2
- item 3

The nested list has to be a child of the `li` element.

You can nest different types of list, too:

```
<ol>
  <li>Hello, list!</li>
  <li>
    <ul>
      <li>Hello, nested list!</li>
    </ul>
  </li>
</ol>
```

Section 7.4: Description List

A description list (or *definition list*, as it was called before HTML5) can be created with the `dl` element. It consists of name-value groups, where the name is given in the `dt` element, and the value is given in the `dd` element.

```
<dl>
  <dt>name 1</dt>
  <dd>value for 1</dd>
  <dt>name 2</dt>
  <dd>value for 2</dd>
</dl>
```

[Live demo](#)

A name-value group can have more than one name and/or more than one value (which represent alternatives):

```
<dl>

  <dt>name 1</dt>
  <dt>name 2</dt>
  <dd>value for 1 and 2</dd>

  <dt>name 3</dt>
  <dd>value for 3</dd>
  <dd>value for 3</dd>

</dl>
```

Chapter 8: Comments

- `<!-- Comment text -->`

Similar to other programming, markup, and markdown languages, comments in HTML provide other developers with development specific information without affecting the user interface. Unlike other languages however, HTML comments can be used to specify HTML elements for Internet Explorer only. This topic explains how to write HTML comments, and their functional applications.

Section 8.1: Creating comments

HTML comments can be used to leave notes to yourself or other developers about a specific point in code. They can be initiated with `<!--` and concluded with `-->`, like so:

```
<!-- I'm an HTML comment! -->
```

They can be incorporated inline within other content:

```
<h1>This part will be displayed <!-- while this will not be displayed -->.</h1>
```

They can also span multiple lines to provide more information:

```
<!-- This is a multiline HTML comment.  
  Whatever is in here will not be rendered by the browser.  
  You can "comment out" entire sections of HTML code.  
-->
```

However, they **cannot** appear within another HTML tag, like this:

```
<h1 <!-- testAttribute="something" -->>This will not work</h1>
```

This produces invalid HTML as the entire `<h1 <!-- testAttribute="something" -->` block would be considered a single start tag `h1` with some other invalid information contained within it, followed by a single `>` closing bracket that does nothing.

For compatibility with tools that try to parse HTML as XML or SGML, the body of your comment should not contain two dashes `--`.

Section 8.2: Conditional comments for Internet Explorer

Conditional comments can be used to customize code for different versions of Microsoft Internet Explorer. For example, different HTML classes, script tags, or stylesheets can be provided. Conditional comments are supported in Internet Explorer versions 5 through 9. Older and newer Internet Explorer versions, and all non-IE browsers, are considered "downlevel" and treat conditional comments as ordinary HTML comments.

Downlevel-hidden

Downlevel-hidden comments work by encapsulating the entire content within what appears to be a normal HTML comment. Only IE 5 through 9 will still read it as a conditional comment, and they will hide or display the content accordingly. In other browsers the content will be hidden.

```
<!--[if IE]>  
  Revealed in IE 5 through 9. Commented out and hidden in all other browsers.  
<![endif]-->
```

```
<!--[if lt IE 8]>
    Revealed only in specified versions of IE 5-9 (here, IE less than 8).
<![endif]-->

<!--[if !IE]>
    Revealed in no browsers. Equivalent to a regular HTML comment.
<![endif]-->

<!--
    For purposes of comparison, this is a regular HTML comment.
-->
```

Downlevel-revealed

These are slightly different than downlevel-hidden comments: only the conditional comment itself is contained within the normal comment syntax. Browsers which do not support conditional comments will simply ignore them and display the rest of the content between them.

```
<!--[if IE]>-->
    The HTML inside this comment is revealed in IE 5-9, and in all other browsers.
<!--<![endif]-->

<!--[if IE 9]>-->
    This is revealed in specified versions of IE 5-9, and in all other browsers.
<!--<![endif]-->

<!--[if !IE]>-->
    This is not revealed in IE 5-9. It's still revealed in other browsers.
<!--<![endif]-->
```

Section 8.3: Commenting out whitespace between inline elements

Inline display elements, usually such as `span` or `a`, will include up to one white-space character before and after them in the document. In order to avoid very long lines in the markup (that are hard to read) and unintentional white-space (which affects formatting), the white-space can be commented out.

```
<!-- Use an HTML comment to nullify the newline character below: -->
<a href="#">I hope there will be no extra whitespace after this!</a><!--
--><button>Foo</button>
```

Try it without a comment between the inline elements, and there will be one space between them. Sometimes picking up the space character is desired.

Example code:

```
<!-- Use an HTML comment to nullify the newline character below: -->
<a href="#">I hope there will be no extra whitespace after this!</a><!--
--><button>Foo</button>
<hr>
<!-- Without it, you can notice a small formatting difference: -->
<a href="#">I hope there will be no extra whitespace after this!</a>
<button>Foo</button>
```

Output:



Chapter 9: IFrames

Attribute	Details
<code>name</code>	Sets the element's name, to be used with an <code>a</code> tag to change the iframe's <code>src</code> .
<code>width</code>	Sets the element's width in pixels.
<code>height</code>	Sets the element's height in pixels.
<code>src</code>	Specifies the page that will be displayed in the frame.
<code>srcdoc</code>	Specifies the content that will be displayed in the frame, assuming the browser supports it. The content must be valid HTML.
<code>sandbox</code>	When set, the contents of the iframe is treated as being from a unique origin and features including scripts, plugins, forms and popups will be disabled. Restrictions can be selectively relaxed by adding a space separated list of values. See the table in Remarks for possible values.
<code>allowfullscreen</code>	Whether to allow the iframe's contents to use <code>requestFullscreen()</code>

Section 9.1: Basics of an Inline Frame

The term "IFrame" means Inline Frame. It can be used to include another page in your page. This will yield a small frame which shows the exact contents of the `base.html`.

```
<iframe src="base.html"></iframe>
```

Section 9.2: Sandboxing

The following embeds an untrusted web page with all restrictions enabled

```
<iframe sandbox src="http://example.com/"></iframe>
```

To allow the page to run scripts and submit forms, add `allow-scripts` and `allow-forms` to the `sandbox` attribute.

```
<iframe sandbox="allow-scripts allow-forms" src="http://example.com/"></iframe>
```

If there is untrusted content (such as user comments) on the same domain as the parent web page, an iframe can be used to disable scripts while still allowing the parent document to interact with it's content using JavaScript.

```
<iframe sandbox="allow-same-origin allow-top-navigation"
src="http://example.com/untrusted/comments/page2">
```

The parent document can add event listeners and resize the IFrame to fit its contents. This, along with `allow-top-navigation`, can make the sandboxed iframe appear to be part of parent document.

This sandbox is not a replacement for sanitizing input but can be used as part of a [defense in depth](#) strategy.

Also be aware that this sandbox can be subverted by an attacker convincing a user to visit the iframe's source directly. The [Content Security Policy](#) HTTP header can be used to mitigate this attack.

Section 9.3: Setting the Frame Size

The IFrame can be resized using the `width` and `height` attributes, where the values are represented in pixels (HTML 4.01 allowed percentage values, but HTML 5 only allows values in CSS pixels).

```
<iframe src="base.html" width="800" height="600"></iframe>
```

Section 9.4: Using the "srcdoc" Attribute

The `srcdoc` attribute can be used (instead of the `src` attribute) to specify the exact contents of the iframe as a whole HTML document. This will yield an IFrame with the text "IFrames are cool!"

```
<iframe srcdoc="<p>IFrames are cool!</p>"></iframe>
```

If the `srcdoc` attribute isn't supported by the browser, the `Iframe` will instead fall back to using the `src` attribute, but if both the `src` and `srcdoc` attributes are present and supported by the browser, `srcdoc` takes precedence.

```
<iframe srcdoc="<p>Iframes are cool!</p>" src="base.html"></iframe>
```

In the above example, if the browser does not support the `srcdoc` attribute, it will instead display the contents of the `base.html` page.

Section 9.5: Using Anchors with IFrames

Normally a change of webpage within an `Iframe` is initiated from within the `Iframe`, for example, clicking a link inside the `Iframe`. However, it is possible to change an `Iframe`'s content from outside the `Iframe`. You can use an anchor tag whose `href` attribute is set to the desired URL and whose `target` attribute is set to the `iframe`'s `name` attribute.

```
<iframe src="webpage.html" name="myIframe"></iframe>
<a href="different_webpage.html" target="myIframe">Change the Iframe content to
different_webpage.html</a>
```

Chapter 10: Text Formatting

- `<abbr>`Abbreviation`</abbr>`
- `<b>`Bold Text`</b>`
- `<del>`Deleted Text`</del>`
- `<em>`Emphasized Text`</em>`
- `<i>`Italic Text`</i>`
- `<ins>`Inserted Text`</ins>`
- `<mark>`Marked (or Highlighted) Text`</mark>`
- `<s>`Stricken Text`</s>`
- `<strong>`Strong Text`</strong>`
- `<sub>`Subscript Text`</sub>`
- `<sup>`Superscript Text`</sup>`
- `<u>`Underlined Text`</u>`

While most HTML tags are used to create elements, HTML also provides in-text formatting tags to apply specific text-related styles to portions of text. This topic includes examples of HTML text formatting such as highlighting, bolding, underlining, subscript, and stricken text.

Section 10.1: Highlighting

The `<mark>` element is new in HTML5 and is used to mark or highlight text in a document "due to its relevance in another context".¹

The most common example would be in the results of a search where the user has entered a search query and results are shown highlighting the desired query.

```
<p>Here is some content from an article that contains the <mark>searched query</mark>
that we are looking for. Highlighting the text will make it easier for the user to
find what they are looking for.</p>
```

Output:

Here is some content from an article that contains the **searched query** that we are looking for. Highlighting the text will make it easier for the user to find what they are looking for.

A common standard formatting is black text on a yellow background, but this can be changed with CSS.

Section 10.2: Bold, Italic, and Underline

Bold Text

To bold text, use the `<strong>` or `<b>` tags:

```
<strong>Bold Text Here</strong>
```

or

```
<b>Bold Text Here</b>
```

What's the difference? Semantics. `<strong>` is used to indicate that the text is fundamentally or semantically *important* to the surrounding text, while `<b>` indicates no such importance and simply represents text that should be bolded.

If you were to use `<b>` a text-to-speech program would not say the word(s) any differently than any of the other words around it - you are simply drawing attention to them without adding any additional importance. By using `<strong>`, though, the same program would want to speak those word(s) with a different tone of voice to convey that the text is important in some way.

Italic Text

To italicize text, use the `<em>` or `<i>` tags:

```
<em>Italicized Text Here</em>
```

or

```
<i>Italicized Text Here</i>
```

What's the difference? Semantics. `<em>` is used to indicate that the text should have extra emphasis that should be stressed, while `<i>` simply represents text which should be set off from the normal text around it.

For example, if you wanted to stress the action inside a sentence, one might do so by emphasizing it in italics via `<em>`: "Would you just *submit* the edit already?"

But if you were identifying a book or newspaper that you would normally italicize stylistically, you would simply use `<i>`: "I was forced to read *Romeo and Juliet* in high school."

Underlined Text

While the `<u>` element itself was deprecated in HTML 4, it was reintroduced with alternate semantic meaning in HTML 5 - to represent an unarticulated, non-textual annotation. You might use such a rendering to indicate misspelled text on the page, or for a Chinese proper name mark.

```
<p>This paragraph contains some <u>misspelled</u> text.</p>
```

Section 10.3: Abbreviation

To mark some expression as an abbreviation, use `<abbr>` tag:

```
<p>I like to write <abbr title="Hypertext Markup Language">HTML</abbr>!</p>
```

If present, the `title` attribute is used to present the full description of such abbreviation.

Section 10.4: Inserted, Deleted, or Stricken

To mark text as inserted, use the `<ins>` tag:

```
<ins>New Text</ins>
```

To mark text as deleted, use the `<del>` tag:

```
<del>Deleted Text</del>
```

To strike through text, use the `<s>` tag:

```
<s>Struck-through text here</s>
```

Section 10.5: Superscript and Subscript

To offset text either upward or downward you can use the tags `<sup>` and `<sub>`.

To create superscript:

```
<sup>superscript here</sup>
```

To create subscript:

```
<sub>subscript here</sub>
```

Chapter 11: Classes and IDs

- `class="class1 class2 class3"`
- `id="uniqueid"`

Parameter	Details
<code>class</code>	Indicates the Class of the element (non-unique)
<code>id</code>	Indicates the ID of the element (unique in the same context)

Classes and IDs make referencing HTML elements from scripts and stylesheets easier. The class attribute can be used on one or more tags and is used by CSS for styling. IDs however are intended to refer to a single element, meaning the same ID should never be used twice. IDs are generally used with JavaScript and internal document links, and are discouraged in CSS. This topic contains helpful explanations and examples regarding proper usage of class and ID attributes in HTML.

Section 11.1: Giving an element a class

Classes are identifiers for the elements that they are assigned to. Use the `class` attribute to assign a class to an element.

```
<div class="example-class"></div>
```

To assign multiple classes to an element, separate the class names with spaces.

```
<div class="class1 class2"></div>
```

Using classes in CSS

Classes can be used for styling certain elements without changing all elements of that kind. For example, these two `span` elements can have completely different stylings:

```
<span></span>  
<span class="special"></span>
```

Classes of the same name can be given to any number of elements on a page and they will all receive the styling associated with that class. This will always be true unless you specify the element within the CSS.

For example, we have two elements, both with the class `highlight`:

```
<div class="highlight">Lorem ipsum</div>
<span class="highlight">Lorem ipsum</span>
```

If our CSS is as below, then the color green will be applied to the text within both elements:

```
.highlight { color: green; }
```

However, if we only want to target `div`'s with the class `highlight` then we can add specificity like below:

```
div.highlight { color: green; }
```

Nevertheless, when styling with CSS, it is generally recommended that only classes (e.g. `.highlight`) be used rather than elements with classes (e.g. `div.highlight`).

As with any other selector, classes can be nested:

```
.main .highlight { color: red; } /* Descendant combinator */
.footer > .highlight { color: blue; } /* Child combinator */
```

You can also chain the class selector to only select elements that have a combination of several classes. For example, if this is our HTML:

```
<div class="special left menu">This text will be pink</div>
```

And we want to colour this specific piece of text pink, we can do the following in our CSS:

```
.special.left.menu { color: pink; }
```

Section 11.2: Giving an element an ID

The ID attribute of an element is an identifier which must be unique in the whole document. Its purpose is to uniquely identify the element when linking (using an anchor), scripting, or styling (with CSS).

```
<div id="example-id"></div>
```

You should not have two elements with the same ID in the same document, even if the attributes are attached to two different kinds of elements. For example, the following code is incorrect:

```
<div id="example-id"></div>
<span id="example-id"></span>
```

Browsers will do their best to render this code, but unexpected behavior may occur when styling with CSS or adding functionality with JavaScript.

To reference elements by their ID in CSS, prefix the ID with `#`.

```
#example-id { color: green; }
```

To jump to an element with an ID on a given page, append `#` with the element name in the URL.

```
http://example.com/about#example-id
```

This feature is supported in most browsers and does not require additional JavaScript or CSS to work.

Section 11.3: Acceptable Values

For an ID

Version≥5

The only restrictions on the value of an `id` are:

1. it must be unique in the document
2. it must not contain any space characters
3. it must contain at least one character

So the value can be all digits, just one digit, just punctuation characters, include special characters, whatever. Just no whitespace.

So these are valid:

```
<div id="container"> ... </div>
<div id="999"> ... </div>
<div id="#%LV-| |"> ... </div>
<div id="____V"> ... </div>
<div id="??"> ... </div>
<div id="?"> ... </div>
<div id="{ }"> ... </div>
<div id="@"> ... </div>
<div id="??a?€~¥"> ... </div>
```

This is invalid:

```
<div id=" "> ... </div>
```

This is also invalid, when included in the same document:

```
<div id="results"> ... </div>
<div id="results"> ... </div>
```

Version≤4.01

An `id` value must begin with a letter, which can then be followed only by:

- letters (A-Z/a-z)
- digits (0-9)
- hyphens ("-")
- underscores ("_")
- colons (":")
- periods (".")

Referring to the first group of examples in the HTML5 section above, only one is valid:

```
<div id="container"> ... </div>
```

These are also valid:

```
<div id="sampletext"> ... </div>
<div id="sample-text"> ... </div>
<div id="sample_text"> ... </div>
<div id="sample:text"> ... </div>
<div id="sample.text"> ... </div>
```

Again, if it doesn't start with a letter (uppercase or lowercase), it's not valid.

For a Class

The rules for classes are essentially the same as for an `id`. The difference is that `class` values *do not* need to be unique in the document.

Referring to the examples above, although this is not valid in the same document:

```
<div id="results"> ... </div>
<div id="results"> ... </div>
```

This is perfectly okay:

```
<div class="results"> ... </div>
<div class="results"> ... </div>
```

Important Note: How ID and Class values are treated outside of HTML

Keep in mind that the rules and examples above apply within the context of HTML.

Using numbers, punctuation or special characters in the value of an `id` or a `class` may cause trouble in other contexts, such as CSS, JavaScript and regular expressions.

For example, although the following `id` is valid in HTML5:

```
<div id="9lions"> ... </div>
```

... it is invalid in CSS:

4.1.3 Characters and case

In CSS, *identifiers* (including element names, classes, and IDs in selectors) can contain only the characters [a-zA-Z0-9] and ISO 10646 characters U+00A0 and higher, plus the hyphen (-) and the underscore (_); **they cannot start with a digit, two hyphens, or a hyphen followed by a digit**. (emphasis added)

In most cases you may be able to escape characters in contexts where they have restrictions or special meaning.

W3C References

- [3.2.5.1 The `id` attribute](#)
- [3.2.5.7 The `class` attribute](#)
- [6.2 SGML basic types](#)

Section 11.4: Problems related to duplicated IDs

Having more than one element with the same ID is a hard to troubleshoot problem. The HTML parser will usually try to render the page in any case. Usually no error occurs. But the page could end up in a mis-behaving web page.

In this example:

```
<div id="aDiv">a</div>
<div id="aDiv">b</div>
```

CSS selectors still work

```
#aDiv {
  color: red;
}
```

But JavaScript fails to handle both elements:

```
var html = document.getElementById("aDiv").innerHTML;
```

In this case `html` variable bears only the first `div` content (`"a"`).

Chapter 12: Images

- `<img src="" alt="">`

Parameters

	Details
<code>src</code>	Specifies the URL of the image
<code>srcset</code>	Images to use in different situations (e.g., high-resolution displays, small monitors, etc)
<code>sizes</code>	Image sizes between breakpoints
<code>crossorigin</code>	How the element handles crossorigin requests
<code>usemap</code>	Name of image map to use
<code>ismap</code>	Whether the image is a server-side image map
<code>alt</code>	Alternative text that should be displayed if for some reason the image could not be displayed
<code>width</code>	Specifies the width of the image (optional)
<code>height</code>	Specifies the height of the image (optional)

Section 12.1: Creating an image

To add an image to a page, use the `img` tag.

Image tags (`img`) do not have closing tags. The two main attributes you give to the `img` tag are `src`, the image source and `alt`, which is alternative text describing the image.

```

```

You can also get images from a web URL:

```

```

Note: Images are not technically inserted into an HTML page, images are linked to HTML pages. The `<img>` tag creates a holding space for the referenced image.

It is also possible to embed images directly inside the page using base64:

```

```

Tip: To link an image to another document, simply nest the `<img>` tag inside `<a>` tags.

Section 12.2: Choosing alt text

Alt-text is used by screen readers for visually impaired users and by search engines. It's therefore important to write good alt-text for your images.

The text should look correct even if you replace the image with its alt attribute. For example:

```
<!-- Incorrect -->
 An anonymous user wrote:
<blockquote>Lorem ipsum dolor sed.</blockquote>
<a href="https://google.com/"></a> /
<a href="https://google.com/"></a>
```

Without the images, this would look like:

Anonymous user avatar An anonymous user wrote:

Lorem ipsum dolor sed. [Edit icon](#) / [Delete icon](#)

To correct this:

- Remove the alt-text for the avatar. This image adds information for sighted users (an easily identifiable icon to show that the user is anonymous) but this information is already available in the text.¹
- Remove the "icon" from the alt-text for the icons. Knowing that this would be an icon if it were there does not help to convey its actual purpose.

```
<!-- Correct -->
 An anonymous user wrote:
<blockquote>Lorem ipsum dolor sed.</blockquote>
<a href="https://google.com/"></a> /
<a href="https://google.com/"></a>
```

An anonymous user wrote:

Lorem ipsum dolor sed. [Edit](#) / [Delete](#)

Footnotes

1 There is a semantic difference between including an empty alt attribute and excluding it altogether. An empty alt attribute indicates that the image is *not* a key part of the content (as is true in this case - it's just an additive image that is not necessary to understand the rest) and thus may be omitted from rendering. However, the lack of an alt attribute indicates that the image *is* a key part of the content and that there simply is no textual equivalent available for rendering.

Section 12.3: Responsive image using the srcset attribute

Using srcset with sizes

```

```

`sizes` are like media queries, describing how much space the image takes of the viewport.

- if viewport is larger than 1200px, image is exactly 580px (for example our content is centered in container which is max 1200px wide. Image takes half of it minus margins).
- if viewport is between 640px and 1200px, image takes 48% of viewport (for example image scales with our page and takes half of viewport width minus margins).
- if viewport is any other size, in our case less than 640px, image takes 98% of viewport (for example image scales with our page and takes full width of viewport minus margins). **Media condition must be omitted for last item.**

`srcset` is just telling the browser what images we have available, and what are their sizes.

- `img/hello-300.jpg` is 300px wide,
- `img/hello-600.jpg` is 600px wide,
- `img/hello-900.jpg` is 900px wide,
- `img/hello-1200.jpg` is 1200px wide

`src` is always mandatory image source. In case of using with `srcset`, `src` will serve fallback image in case browser is

not supporting srcset.

Using srcset without sizes

```

```

srcset provides list of available images, with device-pixel ratio x descriptor.

- if device-pixel ratio is 1, use `img/hello-300.jpg`
- if device-pixel ratio is 2, use `img/hello-600.jpg`
- if device-pixel ratio is 3, use `img/hello-1200.jpg`

src is always mandatory image source. In case of using with srcset, src will serve fallback image in case browser is not supporting srcset.

Section 12.4: Responsive image using picture element

Code

```
<picture>
  <source media="(min-width: 600px)" srcset="large_image.jpg">
  <source media="(min-width: 450px)" srcset="small_image.jpg">
  
</picture>
```

Usage

To display different images under different screen width, you must include all images using the source tag in a picture tag as shown in the above example.

Result

- On screens with screen width >600px, it shows large_image.jpg
- On screens with screen width >450px, it shows small_image.jpg
- On screens with other screen width, it shows default_image.jpg

Chapter 13: Linking Resources

- `<link rel="link-relation" type="mime-type" href="url">`
- `<script src="path-to-script"></script>`

Attribute	Details
charset	Specifies the character encoding of the linked document
crossorigin	Specifies how the element handles cross origin requests
href	Specifies the location of the linked document
hreflang	Specifies the language of the text in the linked document
media	Specifies on what device the linked document will be displayed, often used with selecting stylesheets based on the device in question
rel	Required. Specifies the relationship between the current document and the linked document
rev	Specifies the relationship between the linked document and the current document
sizes	Specifies the size of the linked resource. Only when <code>rel="icon"</code>
target	Specifies where the linked document is to be loaded
type	Specifies the media type of the linked document
integrity	Specifies a base64 encoded hash (sha256, sha384, or sha512) of the linked resource allowing the browser to verify its legitimacy.

While many scripts, icons, and stylesheets can be written straight into HTML markup, it is best practice and more efficient to include these resources in their own file and link them to your document. This topic covers linking external resources such as stylesheets and scripts into an HTML document.

Section 13.1: JavaScript

Synchronous

```
<script src="path/to.js"></script>
```

Standard practice is to place JavaScript `<script>` tags just before the closing `</body>` tag. Loading your scripts last allows your site's visuals to show up more quickly and discourages your JavaScript from trying to interact with elements that haven't loaded yet.

Asynchronous

```
<script src="path/to.js" async></script>
```

Another alternative, when the Javascript code being loaded is not necessary for page initialization, it can be loaded asynchronously, speeding up the page load. Using `async` the browser will load the contents of the script in parallel and, once it is fully downloaded, will interrupt the HTML parsing in order to parse the Javascript file.

Deferred

```
<script src="path/to.js" defer></script>
```

Deferred scripts are like `async` scripts, with the exception that the parsing will only be performed once the HTML is fully parsed. Deferred scripts are guaranteed to be loaded in the order of declaration, same way as synchronous scripts.

<noscript>

```
<noscript>JavaScript disabled</noscript>
```

The `<noscript>` element defines content to be displayed if the user has scripts disabled or if the browser does not support using scripts. The `<noscript>` tag can be placed in either the `<head>` or the `<body>`.

Section 13.2: External CSS Stylesheet

```
<link rel="stylesheet" href="path/to.css" type="text/css">
```

The standard practice is to place CSS `<link>` tags inside the `<head>` tag at the top of your HTML. This way the CSS will be loaded first and will apply to your page as it is loading, rather than showing unstyled HTML until the CSS is loaded. The `type` attribute is not necessary in HTML5, because HTML5 usually supports CSS.

```
<link rel="stylesheet" href="path/to.css" type="text/css">
```

and

```
<link rel="stylesheet" href="path/to.css">
```

... do the same thing in HTML5.

Another, though less common practice, is to use an `@import` statement inside direct CSS. Like this:

```
<style type="text/css">
  @import("path/to.css")
</style>

<style>
  @import("path/to.css")
</style>
```

Section 13.3: Favicon

```
<link rel="icon" type="image/png" href="/favicon.png">
<link rel="shortcut icon" type="image/x-icon" href="/favicon.ico">
```

Use the mime-type `image/png` for PNG files and `image/x-icon` for icon (`*.ico`) files. For the difference, see [this SO question](#).

A file named `favicon.ico` at the root of your website will typically be loaded and applied automatically, without the need for a `<link>` tag. If this file ever changes, browsers can be slow and stubborn about updating their cache.

Section 13.4: Alternative CSS

```
<link rel="alternate stylesheet" href="path/to/style.css" title="yourTitle">
```

Some browsers allow alternate style sheets to apply if they are offered. By default they will not be applied, but usually they can be changed through the browser settings:

Firefox lets the user select the stylesheet using the View > Page Style submenu, Internet Explorer also supports this feature (beginning with IE 8), also accessed from View > Page Style (at least as of IE 11), but Chrome requires an extension to use the feature (as of version 48). The web page can also provide its own user interface to let the user switch styles.

(Source: the [MDN Docs](#))

Section 13.5: Resource Hint: dns-prefetch, prefetch, prerender

Preconnect

The `preconnect` relationship is similar to `dns-prefetch` in that it will resolve the DNS. However, it will also make the TCP handshake, and optional TLS negotiation. This is an experimental feature.

```
<link rel="preconnect" href="URL">
```

DNS-Prefetch

Informs browsers to resolve the DNS for a URL, so that all assets from that URL load faster.

```
<link rel="dns-prefetch" href="URL">
```

Prefetch

Informs the browsers that a given resource should be prefetched so it can be loaded more quickly.

```
<link rel="prefetch" href="URL">
```

DNS-Prefetch resolves only the domain name whereas prefetch downloads/stores the specified resources.

Prerender

Informs browsers to fetch and render the URL in the background, so that they can be delivered to the user instantaneously as the user navigates to that URL. This is an experimental feature.

```
<link rel="prerender" href="URL">
```

Section 13.6: Link 'media' attribute

```
<link rel="stylesheet" href="test.css" media="print">
```

Media specifies what style sheet should be used for what type of media. Using the `print` value would only display

that style sheet for print pages.

The value of this attribute can be any of the [mediatype values](#) (similar to a CSS [media query](#)).

Section 13.7: Prev and Next

When a page is part of a series of articles, for instance, one can use prev and next to point to pages that are coming before and after.

```
<link rel="prev" href="http://stackoverflow.com/documentation/java/topics">
<link rel="next" href="http://stackoverflow.com/documentation/css/topics">
```

Section 13.8: Web Feed

Use the `rel="alternate"` attribute to allow discoverability of your Atom/RSS feeds.

```
<link rel="alternate" type="application/atom+xml" href="http://example.com/feed.xml" />
<link rel="alternate" type="application/rss+xml" href="http://example.com/feed.xml" />
```

See the MDN docs for [RSS feeds](#) and [Atomic RSS](#).

Chapter 14: Selection Menu Controls

- `<select name=""></select>`
- `<datalist id=""></datalist>`
- `<optgroup label="Option Group"></optgroup>`
- `<option value="">Option</option>`

Section 14.1: Select Menu

The `<select>` element generates a drop-down menu from which the user can choose an option.

```
<select name="">
  <option value="1">One</option>
  <option value="2">Two</option>
  <option value="3">Three</option>
  <option value="4">Four</option>
</select>
```

Changing the Size

You can change the size of the selection menu with the `size` attribute. A size of 0 or 1 displays the standard drop-down style menu. A size greater than 1 will convert the drop-down into a box displaying that many lines, with one option per line and a scrollbar in order to scroll through the available options.

```
<select name="" size="4"></select>
```

Multi-option Selection Menus

By default, users can only select a single option. Adding the `multiple` attribute allows users to select multiple options at once and submit all selected options with the form. Using the `multiple` attribute automatically converts the drop-down menu into a box as if it had a size defined. The default size when this occurs is determined by the specific browser you are using, and it is not possible to change it back to a drop-down style menu while allowing multiple selections.

```
<select name="" multiple></select>
```

When using the `multiple` attribute, there is a difference between using 0 and 1 for the size, whereas no difference exists when not using the attribute. Using 0 will cause the browser to behave in whatever default manner it is programmed to do. Using 1 will explicitly set the size of the resulting box to only one row high.

Section 14.2: Options

The options inside a selection menu are what the user will be selection. The normal syntax for an option is as follows:

```
<option>Some Option</option>
```

However, it's important to note that the text inside the `<option>` element itself is not always used, and essentially becomes the default value for attributes which are not specified.

The attributes which control the actual appearance and function of the option are `value` and `label`. The label represents the text which will be displayed in the drop-down menu (what you're looking at and will click on to select it). The value represents the text which will be sent along with form submission. If either of these values is omitted, it uses the text inside the element as the value instead. So the example we gave above could be "expanded" to this:

```
<option label="Some Option" value="Some Option">
```

Note the omission of the inside text and end tag, which are not required to actually construct an option inside the menu. If they were included, the inside text would be ignored because both attributes are already specified and the text is not needed. However, you probably won't see a lot of people writing them this way. The most common way it's written is with a value that will be sent to the server, along with the inside text which eventually becomes the label attribute, like so:

```
<option value="option1">Some Option</option>
```

Selecting an option by default

You can also specify a certain option to be selected in the menu by default by attaching the `selected` attribute to it. By default, if no option is specified as selected in the menu, the first option in the menu will be selected when rendered. If more than one option has the `selected` attribute attached, then the last option present in the menu with the attribute will be the one selected by default.

```
<option value="option1" selected>Some option</option>
```

If you're using the attribute in a multi-option selection menu, then all the options with the attribute will be selected by default, and none will be selected if no options have the attribute.

```
<select multiple>
  <option value="option1" selected>Some option</option>
  <option value="option2" selected>Some option</option>
</select>
```

Section 14.3: Option Groups

You can neatly group your options within a selection menu in order to provide a more structured layout in a long list of options by using the `<optgroup>` element.

The syntax is very basic, by simply using the element with a `label` attribute to identify the title for the group, and containing zero or more options that should be within that group.

```
<select name="">
  <option value="milk">Milk</option>
  <optgroup label="Fruits">
```

```

<option value="banana">Bananas</option>
<option value="strawberry">Strawberries</option>
</optgroup>
<optgroup label="Vegetables" disabled>
  <option value="carrot">Carrots</option>
  <option value="zucchini">Zucchini</option>
</optgroup>
</select>

```

When using option groups, not all options need to be contained within a group. As well, disabling an option group will disable all options within the group, and it is not possible to manually re-enable a single option within a disabled group.

Section 14.4: Datalist

The `<datalist>` tag specifies a list of pre-defined options for an `<input>` element. It provide an "autocomplete" feature on `<input>` elements. Users will see a drop-down list of options as they write.

```

<input list="Languages">

<datalist id="Languages">
  <option value="PHP">
  <option value="Perl">
  <option value="Python">
  <option value="Ruby">
  <option value="C+">
</datalist>

```

Browser Support

Chrome	Edge	Mozilla	Safari	Opera
20.0	10.0	4.0	Not Supported	9.0

Chapter 15: Output Element

Attribute	Description
Global	Attributes that are available to any HTML5 element. For comprehensive documentation of these attributes see: MDN Global Attributes
name	A string representing the name of an output. As a form element, output can be referenced by it's name using the <code>document.forms</code> property. This attribute is also used for collecting values on a form submit.
for	A space separated list of form element ids (e.g. <code><inputs id="inp1"></code> for value is <code>"inp1"</code>) that the output is meant to display calculations for.
form	A string representing the <code><form></code> that is associated to the output. If the output is actually outside the <code><form></code> , this attribute will ensure that the output still belongs to the <code><form></code> and subject to collections and submits of said <code><form></code> .

Section 15.1: Output Element Using For and Form Attributes

The following demo features an `<output>` element's use of the `[for]` and `[form]` attributes. Keep in mind, `<output>` needs JavaScript in order to function. Inline JavaScript is commonly used in forms as this example demonstrates. Although the `<input>` elements are `type="number"`, their values are not numbers, they are text. So if you require the values to be calculated, you must convert each value into a number using methods such as: `parseInt()`, `parseFloat()`, `Number()`, etc.

Live Demo

```

<!--form1 will collect the values of in1 and in2 on 'input' event.-->
<!--out1 value will be the sum of in1 and in2 values.-->

<form id="form1" name="form1" oninput="out1.value = parseInt(in1.value, 10) + parseInt(in2.value,

```

```

10)">

<fieldset>

  <legend>Output Example</legend>

  <input type="number" id="in1" name="in1" value="0">
<br/>
+
<input type="number" id="in2" name="in2" value="0">

</fieldset>

</form>

<!--[for] attribute enables out1 to display calculations for in1 and in2.-->
<!--[form] attribute designates form1 as the form owner of out1 even if it isn't a descendant.-->

<output name="out1" for="in1 in2" form="form1">0</output>

```

Section 15.2: Output Element with Attributes

```
<output name="out1" form="form1" for="inp1 inp2"></output>
```

Chapter 16: Content Languages

- `<element lang="language_code">` <!-- Language code has to be in the format [ISO 639-1](https://en.wikipedia.org/wiki/ISO_639-1) https://en.wikipedia.org/wiki/ISO_639-1) -->

Section 16.1: Base Document Language

It's a good practice to declare the primary language of the document in the `html` element:

```
<html lang="en">
```

If no other `lang` attribute is specified in the document, it means that *everything* (i.e., element content and attribute text values) is in that language.

If the document contains parts in other languages, these parts should get their own `lang` attributes to "overwrite" the language declaration.

Section 16.2: Element Language

The `lang` attribute is used to specify the language of element content and attribute text values:

```

<p lang="en">The content of this element is in English.</p>
<p lang="en" title="The value of this attribute is also in English.">The content of this element is
in English.</p>

```

The language declaration gets inherited:

```

<div lang="en">
  <p>This element contains English content.</p>
  <p title="This attribute, too.">Same with this element.</p>
</div>

```

Section 16.3: Elements with Multiple Languages

You can "overwrite" a language declaration:

```
<p lang="en">This English sentence contains the German word <span lang="de">Hallo</span>.</p>
```

Section 16.4: Regional URLs

It is possible to add the attribute `hreflang` to the elements `<a>` and `<area>` that create hyperlinks. Such it specifies the language of the linked resource. The language defined must be a valid [BCP 47](#)[1] language tag.

```
<p>  
  <a href="example.org" hreflang="en">example.org</a> is one of IANA's example domains.  
</p>
```

1. ? IETF Network Working Group: RFC 5646 [Tags for Identifying Languages](#), IETF, September 2009

Section 16.5: Handling Attributes with Different Languages

You can "overwrite" a parent element's language declaration by introducing any element apart from `applet`, `base`, `basefont`, `br`, `frame`, `frameset`, `hr`, `iframe`, `meta`, `param`, `script` (of HTML 4.0) with an own `lang` attribute:

```
<p lang="en" title="An English paragraph">  
  <span lang="de" title="A German sentence">Hallo Welt!</span>  
</p>
```

Chapter 17: Doctypes

- `<!DOCTYPE [version-specific string]>`

Doctypes - short for 'document type' - help browsers to understand the version of HTML the document is written in for better interpretability. Doctype declarations are not HTML tags and belong at the very top of a document. This topic explains the structure and declaration of various doctypes in HTML.

Section 17.1: Adding the Doctype

The `<!DOCTYPE>` declaration should always be included at the top of the HTML document, before the `<html>` tag.

Version≥5

See [HTML 5 Doctype](#) for details on the HTML 5 Doctype.

```
<!DOCTYPE html>  
Version=4.01
```

See [HTML 4.01 Doctypes](#) for details on how these types differ from each other.

Strict

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01//EN" "http://www.w3.org/TR/html4/strict.dtd">
```

Transitional

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"  
"http://www.w3.org/TR/html4/loose.dtd">
```

Frameset

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Frameset//EN"  
"http://www.w3.org/TR/html4/frameset.dtd">
```

Section 17.2: HTML 5 Doctype

HTML5 is not based on SGML, and therefore does not require a reference to a DTD.

HTML 5 Doctype declaration:

```
<!DOCTYPE html>
```

Case Insensitivity

Per the [W3.org HTML 5 DOCTYPE Spec](http://www.w3.org/html5/2012/04/5-DOCTYPE.html):

A DOCTYPE must consist of the following components, in this order:

1. A string that is an ASCII **case-insensitive** match for the string "`<!DOCTYPE`".

therefore the following DOCTYPEs are also valid:

```
<!doctype html>
<!doctypePe html>
<!DocTYpe html>
```

This SO article discusses the topic extensively: [Uppercase or lowercase doctype?](http://stackoverflow.com/questions/1461329/doctype-case-sensitivity)

Section 17.3: HTML 4.01 Doctypes

The HTML 4.01 specification provides several different types of doctypes that allow different types of elements to be specified within the document.

HTML 4.01 Strict

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01//EN" "http://www.w3.org/TR/html4/strict.dtd">
```

Includes all HTML elements and attributes, but **does not include presentational or deprecated elements** and **framesets are not allowed**.

HTML 4.01 Transitional

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
```

Includes all HTML elements and attributes and presentational and deprecated elements, but **framesets are not allowed**.

HTML 4.01 Frameset

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Frameset//EN"
"http://www.w3.org/TR/html4/frameset.dtd">
```

Includes all HTML elements and attributes, presentational and deprecated elements. Framesets are allowed.

Section 17.4: Old Doctypes

HTML 3.2

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 3.2 Final//EN">
```

HTML 3.2 is well supported by most browsers in use. However, HTML 3.2 has limited support for style sheets and no support for HTML 4 features such as frames and internationalization.

HTML 2.0

```
<!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML//EN">
```

HTML 2.0 is widely supported by browsers but lacks support for tables, frames, and internationalization, as well as many commonly used presentation elements and attributes.

Chapter 18: Forms

- `<form method="post|get" action="somePage.php" target="_blank|_self|_parent|_top|frameName">`

Attribute	Description
<code>accept-charset</code>	Specifies the character encodings that are to be used for the form submission.
<code>action</code>	Specifies where to send the form-data when a form is submitted.
<code>autocomplete</code>	Specifies whether a form should have autocomplete on or off.
<code>enctype</code>	Specifies how the form-data should be encoded when submitting it to the server (only for <code>method="post"</code>).
<code>method</code>	Specifies the HTTP method to use when sending form-data (POST or GET).
<code>name</code>	Specifies the name of a form.
<code>novalidate</code>	Specifies that the form should not be validated when submitted.
<code>target</code>	Specifies where to display the response that is received after submitting the form.

In order to group input elements and submit data, HTML uses a form element to encapsulate input and submission elements. These forms handle sending the data in the specified method to a page handled by a server or handler. This topic explains and demonstrates the usage of HTML forms in collecting and submitting input data.

Section 18.1: Submitting

The Action Attribute

The action attribute defines the action to be performed when the form is submitted, which usually leads to a script that collects the information submitted and works with it. If you leave it blank, it will send it to the same file

```
<form action="action.php">
```

The Method Attribute

The method attribute is used to define the HTTP method of the form which is either GET or POST.

```
<form action="action.php" method="get">
<form action="action.php" method="post">
```

The GET method is mostly used to *get* data, for example to receive a post by its ID or name, or to submit a search query. The GET method will append the form data to the URL specified in the action attribute.

```
www.example.com/action.php?firstname=Mickey&lastname=Mouse
```

The POST method is used when submitting data to a script. The POST method does not append the form data to the action URL but sends using the request body.

To submit the data from the form correctly, a name attribute name must be specified. As an example let's send the value of the field and set its name to *lastname*:

```
<input type="text" name="lastname" value="Mouse">
```

More attributes

```
<form action="action.php" method="post" target="_blank" accept-charset="UTF-8"
enctype="application/x-www-form-urlencoded" autocomplete="off" novalidate>
```

```
<!-- form elements -->
```

```
</form>
```

Section 18.2: Target attribute in form tag

The target attribute specifies a name or a keyword that indicates where to display the response that is received after submitting the form.

The target attribute defines a name of, or keyword for, a browsing context (e.g. tab, window, or inline frame).

Form Tag with a target attribute:

```
<form target="_blank">
```

Attribute Values

Value	Description
_blank	The response is displayed in a new window or tab
_self	The response is displayed in the same frame (this is default)
_parent	The response is displayed in the parent frame
_top	The response is displayed in the full body of the window
framename	The response is displayed in a named iframe

Note: The target attribute was **deprecated** in **HTML 4.01**. The target attribute is **supported** in **HTML5**.

Frames and framesets are not supported in **HTML5**, so the **_parent, _top and framename values are now mostly used with iframes**.

Section 18.3: Uploading Files

Images and files can be uploaded/submitted to server by setting **enctype** attribute of **form** tag to **multipart/form-data**. **enctype** specifies how form data would be encoded while submitting to the server.

Example

```
<form method="post" enctype="multipart/form-data" action="upload.php">
  <input type="file" name="pic" />
  <input type="submit" value="Upload" />
</form>
```

Section 18.4: Grouping a few input fields

While designing a form, you might like to group a few input fields into a group to help organise the form layout. This can be done by using the tag **fieldset**. Here is an example for using it.

For each fieldset, you can set a legend for the set using the tag **LEGEND TEXT**

Example

```
<form>
  <fieldset>
    <legend>1st field set:</legend>
    Field one:<br>
    <input type="text"><br>
    Field two:<br>
    <input type="text"><br>
  </fieldset><br>
  <fieldset>
    <legend>2nd field set:</legend>
    Field three:<br>
    <input type="text"><br>
    Field four:<br>
  </fieldset>
</form>
```

```

    <input type="text"><br>
</fieldset><br>
<input type="submit" value="Submit">
</form>

```

Result

Browser Support

Chrome, IE, Edge, FireFox, Safari and Opera's latest versions also supports the tag

Chapter 19: Canvas

Attribute	Description
height	Specifies the canvas height
width	Specifies the canvas width

Section 19.1: Basic Example

The canvas element was introduced in HTML5 for drawing graphics.

```

<canvas id="myCanvas">
    Cannot display graphic. Canvas is not supported by your browser (IE<9)
</canvas>

```

The above will create a transparent HTML<canvas> element of 300×150 px in size.

You can use the **canvas** element to draw amazing stuff like shapes, graphs, manipulate images, create engaging games etc. with **JavaScript**.

The canvas's 2D *drawable layer* surface Object is referred to as `CanvasRenderingContext2D`; or from a `HTMLCanvasElement` using the `.getContext("2d")` method:

```

var ctx = document.getElementById("myCanvas").getContext("2d");
// now we can refer to the canvas's 2D layer context using `ctx`

ctx.fillStyle = "#f00";
ctx.fillRect(0, 0, ctx.canvas.width, ctx.canvas.height); // x, y, width, height

ctx.fillStyle = "#000";
ctx.fillText("My red canvas with some black text", 24, 32); // text, x, y

```

Section 19.2: Drawing two rectangles on a <canvas>

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8" />
  <title>Draw two rectangles on the canvas</title>
  <style>
    canvas{
      border:1px solid gray;
    }
  </style>
  <script async>
    window.onload = init; // call init() once the window is completely loaded
    function init(){
      // #1 - get reference to <canvas> element
      var canvas = document.querySelector('canvas');

      // #2 - get reference to the drawing context and drawing API
      var ctx = canvas.getContext('2d');


      // #3 - all fill operations are now in red
      ctx.fillStyle = 'red';

      // #4 - fill a 100x100 rectangle at x=0,y=0
      ctx.fillRect(0,0,100,100);

      // #5 - all fill operations are now in green
      ctx.fillStyle = 'green';

      // #6 - fill a 50x50 rectangle at x=25,y=25
      ctx.fillRect(25,25,50,50);
    }
  </script>
</head>
<body>
  <canvas width=300 height=200>Your browser does not support canvas.</canvas>
</body>
</html>
```

This example looks like this:

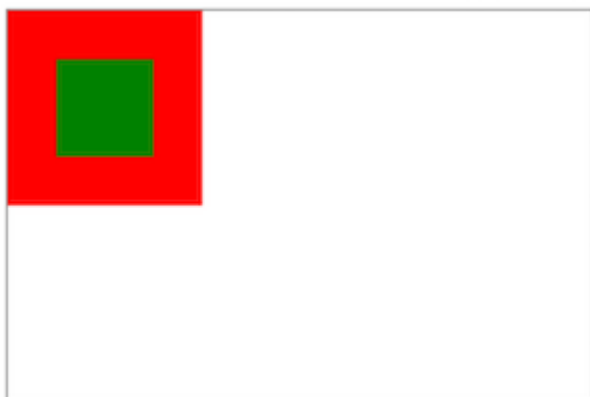

Chapter 20: Data Attributes

- `<element data-custom-name="somevalue">`

Value	Description
somevalue	Specifies the value of the attribute (as a string)

Section 20.1: Older browsers support

Data attributes were introduced in HTML5 which is supported by all modern browsers, but older browsers before HTML5 don't recognize the data attributes.

However, in HTML specifications, attributes that are not recognized by the browser must be left alone and the browser will simply ignore them when rendering the page.

Web developers have utilized this fact to create non-standard attributes which are any attributes not part of the HTML specifications. For example, the `value` attribute in the line below is considered a non-standard attribute because the specifications for the `<img>` tag don't have a `value` attribute and it is not a global attribute:

```

```

This means that although data attributes are not supported in older browsers, they still work and you can set and retrieve them using the same generic JavaScript `setAttribute` and `getAttribute` methods, but you cannot use the new `dataset` property which is only supported in modern browsers.

Section 20.2: Data Attribute Use

HTML5 `data-*` attributes provide a convenient way to store data in HTML elements. The stored data can be read or modified using JavaScript

```
<div data-submitted="yes" class="user_profile">  
  ... some content ...  
</div>
```

- Data attribute structure is `data-*`, i.e. the name of the data attribute comes after the `data-` part. Using this name, the attribute can be accessed.
- Data in string format (including `json`) can be stored using `data-*` attribute.

Chapter 21: SVG

SVG stands for Scalable Vector Graphics. SVG is used to define graphics for the Web

The HTML `<svg>` element is a container for SVG graphics.

SVG has several methods for drawing paths, boxes, circles, text, and graphic images.

Section 21.1: Inline SVG

SVG can be written directly into a HTML document. Inline SVG can be styled and manipulated using CSS and JavaScript.

```
<body>  
  <svg class="attention" xmlns="http://www.w3.org/2000/svg"  
  xmlns:xlink="http://www.w3.org/1999/xlink" viewBox="0 0 1000 1000" >
```

```

    <path id="attention"
d="m571,767l0,-106q0,-8,-5,-13t-12,-5l-108,0q-7,0,-12,5t-5,13l0,106q0,8,5,13t12,6l108,0q7,0,12,-6t5
,-13zm-1,-208l10,-257q0,-6,-5,-10q-7,-6,-14,-6l-122,0q-7,0,-14,6q-5,4,-5,12l9,255q0,5,6,9t13,31l03,
0q8,0,13,-3t6,-9zm-7,-522l428,786q20,35,-1,70q-10,17,-26,26t-35,10l-858,0q-18,0,-35,-10t-26,-26q-21
,-35,-1,-70l429,-786q9,-17,26,-27t36,-10t36,10t27,27z" />
  </svg>
</body>

```

The above inline SVG can then be styled using the corresponding CSS class:

```

.attention {
  fill: red;
  width: 50px;
  height: 50px;
}

```

The result looks like this:



Section 21.2: Embedding external SVG files in HTML

You can use the `<img>` or `<object>` elements to embed external SVG elements. Setting the height and width is optional but is highly recommended.

Using the image element

```

```

Using `<img>` does not allow you to style the SVG using CSS or manipulate it using JavaScript.

Using the object element

```
<object type="image/svg+xml" data="attention.svg" width="50" height="50">
```

Unlike `<img>`, `<object>` directly imports the SVG into the document and therefore it can be manipulated using Javascript and CSS.

Section 21.3: Embedding SVG using CSS

You can add external SVG files using the `background-image` property, just as you would do with any other image.

HTML:

```
<div class="attention"></div>
```

CSS:

```

.attention {
  background-image: url(attention.svg);
  background-size: 100% 100%;
  width: 50px;
  height: 50px;
}

```

You can also embed the image directly into a css file using a data url:

```

background-image:
url(data:image/svg+xml,%3Csvg%20xmlns%3D%22http%3A%2F%2Fwww.w3.org%2F2000%2Fsvg%22%20xmlns%3Axlink%
3D%22http%3A%2F%2Fwww.w3.org%2F1999%2Fxmlns%22%20viewBox%3D%220%200%201000%201000%22%20%3E%0D%0A%3C

```

```
path%20id%3D%22attention%22%20d%3D%22m571%2C76710%2C-106q0%2C-8%2C-5%2C-13t-12%2C-51-108%2C0q-7%2C0%2C-12%2C5t-5%2C1310%2C106q0%2C8%2C5%2C13t12%2C61108%2C0q7%2C0%2C12%2C-6t5%2C-13Zm-1%2C-208110%2C-257q0%2C-6%2C-5%2C-10q-7%2C-6%2C-14%2C-61-122%2C0q-7%2C0%2C-14%2C6q-5%2C4%2C-5%2C1219%2C255q0%2C5%2C6%2C9t13%2C31103%2C0q8%2C0%2C13%2C-3t6%2C-9Zm-7%2C-5221428%2C786q20%2C35%2C-1%2C70q-10%2C17%2C-26%2C26t-35%2C101-858%2C0q-18%2C0%2C-35%2C-10t-26%2C-26q-21%2C-35%2C-1%2C-701429%2C-786q9%2C-17%2C26%2C-27t36%2C-10t36%2C10t27%2C27Z%22%20%2F%3E%0D%0A%3C%2Fsvg%3E);
```

Chapter 22: Meta Information

- `<meta name="metadata name" content="value">`
- `<meta http-equiv="pragma directive" content="value">`
- `<meta charset="encoding label">`

Meta tags in HTML documents provide useful information about the document including a description, keywords, author, dates of modifications and around 90 other fields. This topic covers the usage and purpose of these tags.

Section 22.1: Page Information

application-name

Giving the name of the Web application that the page represents.

```
<meta name="application-name" content="OpenStreetMap">
```

If it's not a Web application, the `application-name` meta tag must not be used.

author

Set the author of the page:

```
<meta name="author" content="Your Name">
```

Only one name can be given.

description

Set the description of the page:

```
<meta name="description" content="Page Description">
```

The `description` meta tag can be used by various search engines while indexing your web page for searching purpose. Usually, the description contained within the meta tag is the short summary that shows up under the page/website's main title in the search engine results. Google usually uses only the first 20-25 words of your description.

generator

```
<meta name="generator" content="HTML Generator 1.42">
```

Identifies one of the software packages used to generate the document. Only to be used for pages where the markup is automatically generated.

keywords

Set keywords for search engines (comma-separated):

```
<meta name="keywords" content="Keyword1, Keyword2">
```

The `keywords` meta tag is sometimes used by search engines to know the search query which is relevant to your web page.

As a rule of thumb, it is probably a good idea to not add too many words, as most search engines that use this meta tag for indexing will only index the first ~20 words. Make sure that you put the most important keywords first.

Section 22.2: Character Encoding

The `charset` attribute specifies the character encoding for the HTML document and needs to be a valid character encoding (examples include `windows-1252`, `ISO-8859-2`, `Shift_JIS`, and `UTF-8`). `UTF-8` (Unicode) is the most widely used and should be used for any new project.

Version=5

```
<meta charset="UTF-8">
<meta charset="ISO-8859-1">
```

All browsers have always recognized the `<meta charset>` form, but if you for some reason need your page to be valid HTML 4.01, you can use the following instead:

```
<meta http-equiv="content-type" content="text/html; charset=UTF-8">
<meta http-equiv="content-type" content="text/html; charset=ISO-8859-1">
```

See also the [Encoding Standard](#), to view all available character encoding labels that browsers recognize.

Section 22.3: Robots

The `robots` attribute, supported by several major search engines, controls whether search engine spiders are allowed to index a page or not and whether they should follow links from a page or not.

```
<meta name="robots" content="noindex">
```

This example instructs all search engines to not show the page in search results. Other allowed values are:

Value/Directive	Meaning
<code>all</code>	Default. Equivalent to <code>index</code> , <code>follow</code> . See note below.
<code>noindex</code>	Do not index the page at all.
<code>nofollow</code>	Do not follow the links on this page
<code>follow</code>	The links on the page can be followed. See note below.
<code>none</code>	Equivalent to <code>noindex</code> , <code>nofollow</code> .
<code>noarchive</code>	Do not make a cached version of this page available in search results.
<code>nocache</code>	Synonym of <code>noarchive</code> used by some bots such as Bing.
<code>nosnippet</code>	Do not show a snippet of this page in search results.
<code>noodp</code>	Do not use metadata of this page from the Open Directory project for titles or snippets in search results.
<code>notranslate</code>	Do not offer translations of this page in search results.
<code>noimageindex</code>	Do not index images on this page.
<code>unavailable_after [RFC-850 date/time]</code>	Do not show this page in search results after the specified date/time. The date/time must be specified in the RFC 850 format .

Note: Explicitly defining `index` and/or `follow`, while valid values, is not necessary as pretty much all search engines will assume they are allowed to do so if not explicitly prevented from doing so. Similar to how the `robots.txt` file operates, search engines generally only look for things they are *not allowed* to do. Only stating things a search engine isn't allowed to do also prevents accidentally stating opposites (such as `index`, ..., `noindex`) which not all search engines will treat in the same way.

Section 22.4: Social Media

Open Graph is a standard for metadata that extends the normal information contained within a site's head markup. This enables websites such as Facebook to display deeper and richer information about a website in a structured format. This information is then automatically displayed when users share links to websites containing

OG metadata on Facebook.

Facebook / Open Graph

```
<meta property="fb:app_id" content="123456789">
<meta property="og:url" content="https://example.com/page.html">
<meta property="og:type" content="website">
<meta property="og:title" content="Content Title">
<meta property="og:image" content="https://example.com/image.jpg">
<meta property="og:description" content="Description Here">
<meta property="og:site_name" content="Site Name">
<meta property="og:locale" content="en_US">
<meta property="article:author" content="">
<!-- Facebook: https://developers.facebook.com/docs/sharing/webmasters#markup -->
<!-- Open Graph: http://ogp.me/ -->
```

- [Facebook Open Graph Markup](#)
- [Open Graph protocol](#)

Facebook / Instant Articles

```
<meta charset="utf-8">
<meta property="op:markup_version" content="v1.0">

<!-- The URL of the web version of your article -->
<link rel="canonical" href="http://example.com/article.html">

<!-- The style to be used for this article -->
<meta property="fb:article_style" content="myarticlestyle">
```

- [Facebook Instant Articles: Creating Articles](#)
- [Instant Articles: Format Reference](#)

Twitter uses its own markup for metadata. This metadata is used as information to control how tweets are displayed when they contain a link to the site.

Twitter

```
<meta name="twitter:card" content="summary">
<meta name="twitter:site" content="@site_account">
<meta name="twitter:creator" content="@individual_account">
<meta name="twitter:url" content="https://example.com/page.html">
<meta name="twitter:title" content="Content Title">
<meta name="twitter:description" content="Content description less than 200 characters">
<meta name="twitter:image" content="https://example.com/image.jpg">
```

- [Twitter Cards: Getting Started Guide](#)
- [Twitter Card Validator](#)

Google+ / Schema.org

```
<link href="https://plus.google.com/+YourPage" rel="publisher">
<meta itemprop="name" content="Content Title">
<meta itemprop="description" content="Content description less than 200 characters">
<meta itemprop="image" content="https://example.com/image.jpg">
```

Section 22.5: Mobile Layout Control

Common mobile-optimized sites use the `<meta name="viewport">` tag like this:

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

The viewport element gives the browser instructions on how to control the page's dimensions and scaling based on the device you are using.

In the above example, `content="width=device-width"` means that the browser will render the width of the page at the width of its own screen. So if that screen is 480px wide, the browser window will be 480px wide. `initial-scale=1` depicts that the initial zoom (which is 1 in this case, means it does not zoom).

Below are the attributes this tag supports:

Attribute	Description
<code>width</code>	The width of the virtual viewport of the device. Values1: <code>device-width</code> or the actual width in pixels, like <code>480</code>
<code>height</code>	The height of the virtual viewport of the device. Values2: <code>device-height</code> or the actual width in pixels, like <code>600</code>
<code>initial-scale</code>	The initial zoom when the page is loaded. 1.0 does not zoom.
<code>minimum-scale</code>	The minimum amount the visitor can zoom on the page. <code>1.0</code> does not zoom.
<code>maximum-scale</code>	The maximum amount the visitor can zoom on the page. <code>1.0</code> does not zoom.
<code>user-scalable</code>	Allows the device to zoom in and out. Values are yes or no. If set to no, the user is not able to zoom in the webpage. The default is yes. Browser settings can ignore this rule.

Notes:

1 The `width` property can be either specified in *pixels* (`width=600`) or by *device-width* (`width=device-width`) which represents the physical width of the device's screen.

2 Similarly, the `height` property can be either specified in *pixels* (`height=600`) or by *device-height* (`height=device-height`) which represents the physical height of the device's screen.

Section 22.6: Automatic Refresh

To refresh the page every five seconds, add this `meta` element in the `head` element:

```
<meta http-equiv="refresh" content="5">
```

CAUTION! While this is a valid command, it is recommended that you do not use it because of its negative effects on user experience. Refreshing the page too often can cause it to become unresponsive, and often scrolls to the top of the page. If some information on the page needs to be updated continuously, there are much better ways to do that by only refreshing a portion of a page.

Section 22.7: Phone Number Recognition

Mobile platforms like iOS automatically recognize phone numbers and turn them into `tel:` links. While the feature is very practical, the system sometimes detects ISBN codes and other numbers as telephone numbers.

For mobile Safari and some other WebKit-based mobile browsers to turn off automatic phone number recognition and formatting, you need this `meta` tag:

```
<meta name="format-detection" content="telephone=no">
```

Section 22.8: Automatic redirect

Sometimes your webpage needs a automatic redirect.

For example, to redirect to `example.com` after 5 seconds:

```
<meta http-equiv="refresh" content="5;url=https://www.example.com/" />
```

This line will send you to the designated website (in this case `example.com` after 5 seconds).

If you need to change the time delay before a redirect, simply changing the number right before your `;url=` will

alter the time delay.

Section 22.9: Web App

You can set up your web app or website to have an application shortcut icon added to a device's homescreen, and have the app launch in full-screen "app mode" using Chrome for Android's ["Add to homescreen"](#) menu item.

Below meta tag(s) will open web app in full-screen mode (without address bar).

Android Chrome

```
<meta name="mobile-web-app-capable" content="yes">
```

IOS

```
<meta name="apple-mobile-web-app-capable" content="yes">
```

You can also set color for status bar and address bar in meta tag.

Android Chrome

```
<meta name="theme-color" content="black">
```

IOS

```
<meta name="apple-mobile-web-app-status-bar-style" content="black">
```

Chapter 23: Void Elements

Not all HTML tags are of the same structure. While most elements require an opening tag, a closing tag, and contents, some elements - known as void elements - only require an opening tag as they themselves do not contain any elements. This topic explains and demonstrates the proper usage of void elements in HTML

Section 23.1: Void elements

HTML 4.01/XHTML 1.0 Strict includes the following void elements:

- `area` - clickable, defined area in an image
- `base` - specifies a base URL from which all links base
- `br` - line break
- `col` - column in a table [deprecated]
- `hr` - horizontal rule (line)
- `img` - image
- `input` - field where users enter data
- `link` - links an external resource to the document
- `meta` - provides information about the document
- `param` - defines parameters for plugins

HTML 5 standards include all non-deprecated tags from the previous list and

- `command` - represents a command users can invoke [obsolete]
- `keygen` - facilitates public key generation for web certificates [deprecated]
- `source` - specifies media sources for `picture`, `audio`, and `video` elements

The example below does **not** include void elements:

```

<div>
  <a href="http://stackoverflow.com/">
    <h3>Click here to visit <i>Stack Overflow!</i></h3>
  </a>
  <button onclick="alert('Hello!');">Say Hello!</button>
  <p>My favorite language is <b>HTML</b>. Here are my others:</p>
  <ol>
    <li>CSS</li>
    <li>JavaScript</li>
    <li>PHP</li>
  </ol>
</div>

```

Notice how every element has an opening tag, a closing tag, and text or other elements inside the opening and closing tags. Void tags however, are shown in the example below:

```


<br>
<hr>
<input type="number" placeholder="Enter your favorite number">

```

With the exception of the `img` tag, all of these void elements have only an opening tag. The `img` tag, unlike any other tag, has a self closing `/` before the greater than sign of the opening tag. It is best practice to have a space before the slash.

Chapter 24: Div Element

- `<div>example div</div>`

The `div` element in HTML is a container element that encapsulates other elements and can be used to group and separate parts of a webpage. A `div` by itself does not inherently represent anything but is a powerful tool in web design. This topic covers the purpose and applications of the `div` element.

Section 24.1: Basic usage

The `<div>` element usually has no specific semantic meaning by itself, simply representing a division, and is typically used for grouping and encapsulating other elements within an HTML document and separating those from other groups of content. As such, each `<div>` is best described by its contents.

```

<div>
  <p>Hello! This is a paragraph.</p>
</div>

```

The `div` element is typically a [block-level element](#), meaning that it separates a block of an HTML document and occupying the maximum width of the page. Browsers typically have the following default CSS rule:

```

div {
  display: block;
}

```

It's strongly encouraged by the **The World Wide Web Consortium (W3C)** to view the `div` element as an element of last resort, for when no other element is suitable. The use of more appropriate elements instead of the `div` element leads to better accessibility for readers and easier maintainability for authors.

For example, a blog post would be marked up using `<article>`, a chapter using `<section>`, a page's navigation aids using `<nav>`, and a group of form controls using `<fieldset>`.

`div` elements can be useful for stylistic purposes or to wrap multiple paragraphs within a section that are all to be

annotated in a similar way.


Section 24.2: Nesting

It is a common practice to place multiple `<div>` inside another `<div>`. This is usually referred to as "nesting" elements and allows for further dividing elements into subsections or aid developers with CSS styling.

The `<div class="outer-div">` is used to group together two `<div class="inner-div">` elements; each containing a `<p>` element.

```
<div class="outer-div">
  <div class="inner-div">
    <p>This is a paragraph</p>
  </div>
  <div class="inner-div">
    <p>This is another paragraph</p>
  </div>
</div>
```

This will yield the following result (CSS styles applied for clarity):

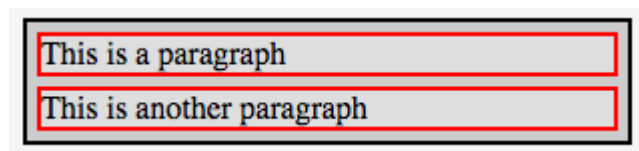

Nesting inline and block elements While nesting elements you should keep in mind, that there are inline and block elements. while block elements "add a line break in the background", what means, other nested elements are shown in the next line automatically, inline elements can be positioned next to each other by default

Avoid deep `<div>` nesting

A deep and oftenly used nested container layouts shows a bad coding style.

Rounded corners or some similar functions often create such an HTML code. For most of the last generation browsers there are CSS3 counterparts. Try to use as little as possible HTML elements to increase the content to tag ratio and reduce page load, resulting in a better ranking in search engines.

div section Element should be not nested deeper than 6 layers.

Chapter 25: Label Element

- `<label>`Example `<input type="radio" name="r"></label>` // Wrapping a control Element
- `<label for="rad1">`Example`</label>` `<input id="rad1" type="radio" name="r">` // Using `for` attribute

Attributes	Description
for	Reference to the target ID Element. I.e: <code>for="surname"</code>
form	HTML5, [Obsolete] Reference to the form containing the Target Element. Label elements are expected within a <code><form></code> Element. If the <code>form="someFormId"</code> is provided this allows you to place the Label anywhere in the document.

Section 25.1: About Label

The `<label>` element is used to reference a form action element.

In the scope of **User Interface** it's used to ease the target / selection of elements like Type `radio` or `checkbox`.

`<label>` as wrapper

It can enclose the desired action element

```
<label>
  <input type="checkbox" name="Cats">
  I like Cats!
</label>
```

(Clicking on the text the target `input` will toggle it's state / value)

<label> as reference

Using the `for` attribute you don't have to place the control element as descendant of `label` - but the `for` value must match it's ID

```
<input id="cats" type="checkbox" name="Cats">
<label for="cats" >I like Cats!</label>
```

Note

Don't use more than one Control Element within a `<label>` element

Section 25.2: Basic Use

Simple form with labels...

```
<form action="/login" method="POST">

  <label for="username">Username:</label>
  <input id="username" type="text" name="username" />

  <label for="pass">Password:</label>
  <input id="pass" type="password" name="pass" />

  <input type="submit" name="submit" />

</form>
```

Version≥5

```
<form id="my-form" action="/login" method="POST">

  <input id="username" type="text" name="username" />

  <label for="pass">Password:</label>
  <input id="pass" type="password" name="pass" />

  <input type="submit" name="submit" />

</form>

<label for="username" form="my-form">Username:</label>
```

Chapter 26: Marking up computer code

- `<pre>`Formatted text`</pre>`
- `<code>`Inline Code`</code>`

Section 26.1: Block with `<pre>` and `<code>`

If the formatting (white space, new lines, indentation) of the code matters, use the `pre` element in combination with the `code` element:

```
<pre>
```

```

<code>
x = 42
if x == 42:
    print "x is ...    ... 42"
</code>
</pre>

```

You still have to escape characters with special meaning in HTML (like `<` with `<`), so for *displaying* a block of HTML code (`<p>This is a paragraph.</p>`), it could look like this:

```

<pre>
  <code>
    &lt;p>This is a paragraph.&lt;/p>
  </code>
</pre>

```

Section 26.2: Inline with `<code>`

If a sentence contains computer code (for example, the name of an HTML element), use the `code` element to mark it up:

```

<p>The <code>a</code> element creates a hyperlink.</p>

```

Chapter 27: Media Elements

Attribute	Details
width	Sets the element's width in pixels.
height	Sets the element's height in pixels.
<code><source></code>	Defines resources of the audio or video files
track	Defines the text track for media elements
controls	Displays controls
autoplay	Automatically start playing the media
loop	Plays the media in a repeated cycle
muted	Plays the media without sound
poster	Assigns an image to display until a video is loaded

Section 27.1: Audio

HTML5 provides a new standard for embedding an audio file on a web page.

You can embed an audio file to a page using the `<audio>` element:

```

<audio controls>
  <source src="file.mp3" type="audio/mpeg">
Your browser does not support the audio element.
</audio>

```

Section 27.2: Video

You can embed also a video to a webpage using the `<video>` element:

```

<video width="500" height="700" controls>
  <source src="video.mp4" type="video/mp4">
Your browser does not support the video tag.
</video>

```

Section 27.3: Using `<video>` and `<audio>` element to display audio/video

content

Use the HTML or `<audio>` element to embed video/audio content in a document. The video/audio element contains one or more video/audio sources. To specify a source, use either the `src` attribute or the `<source>` element; the browser will choose the most suitable one.

Audio tag example:

```
<!-- Simple video example -->
<video src="videofile.webm" autoplay poster="posterimage.jpg">
  Sorry, your browser doesn't support embedded videos,
  but don't worry, you can <a href="videofile.webm">download it</a>
  and watch it with your favorite video player!
</video>

<!-- Video with subtitles -->
<video src="foo.webm">
  <track kind="subtitles" src="foo.en.vtt" srclang="en" label="English">
  <track kind="subtitles" src="foo.sv.vtt" srclang="sv" label="Svenska">
</video>

<!-- Simple video example -->
<video width="480" controls poster="https://archive.org/download/WebmVp8Vorbis/webmvp8.gif" >
  <source src="https://archive.org/download/WebmVp8Vorbis/webmvp8.webm" type="video/webm">
  <source src="https://archive.org/download/WebmVp8Vorbis/webmvp8_512kb.mp4" type="video/mp4">
  <source src="https://archive.org/download/WebmVp8Vorbis/webmvp8.ogv" type="video/ogg">
  Your browser doesn't support HTML5 video tag.
</video>
```

Audio tag example:

```
<!-- Simple audio playback -->
<audio src="http://developer.mozilla.org/@api/deki/files/2926/=AudioTest_(1).ogg" autoplay>
  Your browser does not support the <code>audio</code> element.
</audio>

<!-- Audio playback with captions -->
<audio src="foo.ogg">
  <track kind="captions" src="foo.en.vtt" srclang="en" label="English">
  <track kind="captions" src="foo.sv.vtt" srclang="sv" label="Svenska">
</audio>
```

Section 27.4: Video header or background

Adding a video that will autoplay on a loop and has no controls or sound. Perfect for a video header or background.

```
<video width="1280" height="720" autoplay muted loop poster="video.jpg" id="videobg">
  <source src="video.mp4" type="video/mp4">
  <source src="video.webm" type="video/webm">
  <source src="video.ogv" type="video/ogg">
</video>
```

This CSS provides a fallback if the video cannot be loaded. Note that it is recommended to use the first frame of the video as the poster video.jpg.

```
#videobg {
  background: url(video.jpg) no-repeat;
  background-size: cover;
}
```

Chapter 28: Tabindex

Value	Meaning
negative	element will be focusable, but it should not be reachable via sequential keyboard navigation
0	element will be focusable and reachable through keyboard sequential navigation, but it's relative order is defined by the platform convention
positive	element must be focusable and accessible via sequential keyboard navigation; it's relative order will be defined by the attribute value: the sequential follow the increasing number of the <code>tabindex</code>

Section 28.1: Add an element to the tabbing order

```
<div tabindex="0">Some button</div>
```

Note: Try to use a native HTML button or an `a` tag where appropriate.

Section 28.2: Remove an element from the tabbing order

```
<button tabindex="-1">This button will not be reachable by tab</button>
```

The element will be removed from the tabbing order but will still be focusable.

Section 28.3: Define a custom tabbing order (not recommended)

```
<div tabindex="2">Second</div>
<div tabindex="1">First</div>
```

Positive values will insert the element at the tabbing order position of its respective value. Elements without preference (i.e. `tabindex="0"` or native elements such as button and `a`) will be appended after those with preference.

Positive values are **not recommended** as they disrupt the expected behavior of tabbing and might confuse people who rely on screenreaders. Try to create a natural order by rearranging your DOM structure.

Chapter 29: ARIA

- `aria-live`
- `aria-relevant`
- `aria-autocomplete`
- `aria-checked`
- `aria-disabled`
- `aria-expanded`
- `aria-haspopup`
- `aria-hidden`
- `aria-invalid`
- `aria-label`
- `aria-level`
- `aria-multiline`
- `aria-multiselectable`
- `aria-orientation`
- `aria-pressed`
- `aria-readonly`
- `aria-required`
- `aria-selected`
- `aria-sort`
- `aria-valuemax`

- aria-valuemin
- aria-valuenow
- aria-valuetext
- aria-atomic
- aria-busy
- aria-dropeffect
- aria-dragged
- aria-activedescendant
- aria-controls
- aria-describedby
- aria-flowto
- aria-labelledby
- aria-owns
- aria-posinset
- aria-setsize

Section 29.1: role="presentation"

An element whose implicit native role semantics will not be mapped to the accessibility API.

```
<div style="float:left;">Some content on the left.</div>
<div style="float:right;">Some content on the right</div>
<div role="presentation" style="clear:both;"></div> <!-- Only used to clear floats -->
```

Section 29.2: role="alert"

A message with important, and usually time-sensitive, information.

```
<div role="alert" aria-live="assertive">Your session will expire in 60 seconds.</div>
```

Note that I've included both `role="alert"` and `aria-live="assertive"` at the same time. These are synonymous attributes, but some screen readers only support one or the other. By using both simultaneously we therefore maximize the chances that the live region will function as expected.

Source - Heydon Pickering ['Some practical ARIA examples'](#)

Section 29.3: role="alertdialog"

A type of dialog that contains an alert message, where initial focus goes to an element within the dialog.

```
<div role="alertdialog">
  <h1>Warning</h1>
  <div role="alert">Your session will expire in 60 seconds.</div>
</div>
```

Section 29.4: role="application"

A region declared as a web application, as opposed to a web document. In this example, the application is a simple calculator that might add two numbers together.

```
<div role="application">
  <h1>Calculator</h1>
  <input id="num1" type="text"> + <input id="num2" type="text"> =
  <span id="result"></span>
</div>
```

Section 29.5: role="article"

A section of a page that consists of a composition that forms an independent part of a document, page, or site.

Setting an ARIA role and/or aria-* attribute that matches the default implicit ARIA semantics is unnecessary and is not recommended as these properties are already set by the browser.

```
<article>
  <h1>My first article</h1>
  <p>Lorem ipsum...</p>
</article>
```

You would use `role=article` on non-semantic elements (not recommended, invalid)

```
<div role="article">
  <h1>My first article</h1>
  <p>Lorem ipsum...</p>
</div>
```

W3C Entry for [role=article](#)

Section 29.6: role="banner"

A region that contains mostly site-oriented content, rather than page-specific content.

```
<div role="banner">
  <h1>My Site</h1>

  <ul>
    <li><a href="/">Home</a></li>
    <li><a href="/about">About</a></li>
    <li><a href="/contact">Contact</a></li>
  </ul>
</div>
```

Section 29.7: role="button"

An input that allows for user-triggered actions when clicked or pressed.

```
<button role="button">Add</button>
```

Section 29.8: role="cell"

A cell in a tabular container.

```
<table>
  <thead>
    <!-- etc -->
  </thead>
  <tbody>
    <td role="cell">95</td>
    <td role="cell">14</td>
    <td role="cell">25</td>
  </tbody>
</table>
```

Section 29.9: role="checkbox"

A checkable input that has three possible values: true, false, or mixed.

```
<p>
```

```
<input type="checkbox" role="checkbox" aria-checked="false">
I agree to the terms
</p>
```

Section 29.10: role="columnheader"

A cell containing header information for a column.

```
<table role="grid">
  <thead>
    <tr>
      <th role="columnheader">Day 1</th>
      <th role="columnheader">Day 2</th>
      <th role="columnheader">Day 3</th>
    </tr>
  </thead>
  <tbody>
    <!-- etc -->
  </tbody>
</table>
```

Section 29.11: role="combobox"

A presentation of a select; usually similar to a textbox where users can type ahead to select an option, or type to enter arbitrary text as a new item in the list.

```
<input type="text" role="combobox" aria-expanded="false">
```

Typically, you would use JavaScript to build the rest of the typeahead or list select functionality.

Section 29.12: role="complementary"

A supporting section of the document, designed to be complementary to the main content at a similar level in the DOM hierarchy, but remains meaningful when separated from the main content.

```
<div role="complementary">
  <h2>More Articles</h2>

  <ul>
    <!-- etc -->
  </ul>
</div>
```

Section 29.13: role="contentinfo"

A large perceivable region that contains information about the parent document.

```
<p role="contentinfo">
  Author: Albert Einstein<br>
  Published: August 15, 1940
</p>
```

Section 29.14: role="definition"

A definition of a term or concept.

```
<span role="term" aria-labelledby="def1">Love</span>
<span id="def1" role="definition">an intense feeling of deep affection.</span>
```

Section 29.15: role="dialog"

A dialog is an application window that is designed to interrupt the current processing of an application in order to prompt the user to enter information or require a response.

```
<div role="dialog">
  <p>Are you sure?</p>
  <button role="button">Yes</button>
  <button role="button">No</button>
</div>
```

Section 29.16: role="directory"

A list of references to members of a group, such as a static table of contents.

```
<ul role="directory">
  <li><a href="/chapter-1">Chapter 1</a></li>
  <li><a href="/chapter-2">Chapter 2</a></li>
  <li><a href="/chapter-3">Chapter 3</a></li>
</ul>
```

Section 29.17: role="document"

A region containing related information that is declared as document content, as opposed to a web application.

```
<div role="document">
  <h1>The Life of Albert Einstein</h1>
  <p>Lorem ipsum...</p>
</div>
```

Section 29.18: role="form"

A landmark region that contains a collection of items and objects that, as a whole, combine to create a form.

Using the semantically correct HTML element `<form>` implies default ARIA semantics, meaning `role=form` is not required as you should not apply a contrasting role to an element that is already semantic, as adding a role overrides the native semantics of an element.

Setting an ARIA role and/or aria-* attribute that matches the default implicit ARIA semantics is unnecessary and is not recommended as these properties are already set by the browser.

```
<form action="">
  <fieldset>
    <legend>Login form</legend>
    <div>
      <label for="username">Your username</label>
      <input type="text" id="username" aria-describedby="username-tip" required />
      <div role="tooltip" id="username-tip">Your username is your email address</div>
    </div>
    <div>
      <label for="password">Your password</label>
      <input type="text" id="password" aria-describedby="password-tip" required />
      <div role="tooltip" id="password-tip">Was emailed to you when you signed up</div>
    </div>
  </fieldset>
</form>
```

You would use `role=form` on non-semantic elements (not recommended, invalid)

```
<div role=form>
  <input type="email" placeholder="Your email address">
```

```
<button>Sign up</button>
</div>
```

Section 29.19: role="grid"

A grid is an interactive control which contains cells of tabular data arranged in rows and columns, like a table.

```
<table role="grid">
  <thead>
    <!-- etc -->
  </thead>
  <tbody>
    <!-- etc -->
  </tbody>
</table>
```

Section 29.20: role="gridcell"

A cell in a grid or treegrid.

```
<table role="grid">
  <thead>
    <!-- etc -->
  </thead>
  <tbody>
    <tr>
      <td role="gridcell">17</td>
      <td role="gridcell">64</td>
      <td role="gridcell">18</td>
    </tr>
  </tbody>
</table>
```

Section 29.21: role="group"

A set of user interface objects which are not intended to be included in a page summary or table of contents by assistive technologies.

```
<div role="group">
  <button role="button">Previous</button>
  <button role="button">Next</button>
</div>
```

Section 29.22: role="heading"

A heading for a section of the page.

```
<h1 role="heading">Introduction</h1>
<p>Lorem ipsum...</p>
```

Section 29.23: role="img"

A container for a collection of elements that form an image.

```
<figure role="img">
  
  <figcaption>This is my cat, Albert.</figcaption>
</figure>
```

Section 29.24: role="link"

An interactive reference to an internal or external resource that, when activated, causes the user agent to navigate to that resource.

In the majority of cases setting an ARIA role and/or aria-* attribute that matches the [default implicit ARIA semantics](#) is unnecessary and not recommended as these properties are already set by the browser.

Source - <https://www.w3.org/TR/html5/dom.html#aria-usage-note>

Section 29.25: role="list"

A group of non-interactive list items.

```
<ul role="list">
  <li role="listitem">One</li>
  <li role="listitem">Two</li>
  <li role="listitem">Three</li>
</ul>
```

Section 29.26: role="listbox"

A widget that allows the user to select one or more items from a list of choices.

```
<ul role="listbox">
  <li>One</li>
  <li>Two</li>
  <li>Three</li>
</ul>
```

Typically, you would use JavaScript to build the multiple-selection functionality.

Section 29.27: role="listitem"

A single item in a list or directory.

```
<ul role="list">
  <li role="listitem">One</li>
  <li role="listitem">Two</li>
  <li role="listitem">Three</li>
</ul>
```

Section 29.28: role="log"

A type of live region where new information is added in meaningful order and old information may disappear.

```
<ul role="log">
  <li>User 1 logged in.</li>
  <li>User 2 logged in.</li>
  <li>User 1 logged out.</li>
</ul>
```

Section 29.29: role="main"

The main content of a document.

```
<!-- header & nav here -->
<div role="main">
  <p>Lorem ipsum...</p>
</div>
<!-- footer here -->
```

Section 29.30: role="marquee"

A type of live region where non-essential information changes frequently.

```
<ul role="marquee">
  <li>Dow +0.26%</li>
  <li>Nasdaq +0.54%</li>
  <li>S&P +0.44%</li>
</ul>
```

Section 29.31: role="math"

Content that represents a mathematical expression.

```

```

Section 29.32: role="menu"

A type of widget that offers a list of choices to the user.

```
<ul role="menu">
  <li role="menuitem">New</li>
  <li role="menuitem">Open</li>
  <li role="menuitem">Save</li>
  <li role="menuitem">Close</li>
</ul>
```

Section 29.33: role="menubar"

A presentation of menu that usually remains visible and is usually presented horizontally.

```
<ul role="menubar">
  <li role="menuitem">File</li>
  <li role="menuitem">Edit</li>
  <li role="menuitem">View</li>
  <li role="menuitem">Help</li>
</ul>
```

Section 29.34: role="menuitem"

An option in a group of choices contained by a menu or menubar.

```
<ul role="menubar">
  <li role="menuitem">File</li>
  <li role="menuitem">Edit</li>
  <li role="menuitem">View</li>
  <li role="menuitem">Help</li>
</ul>
```

Section 29.35: role="menuitemcheckbox"

A checkable menuitem that has three possible values: true, false, or mixed.

```
<ul role="menu">
  <li role="menuitem">Console</li>
  <li role="menuitem">Layout</li>
  <li role="menuitemcheckbox" aria-checked="true">Word wrap</li>
</ul>
```

Section 29.36: role="menuitemradio"

A checkable menuitem in a group of menuitemradio roles, only one of which can be checked at a time.

```
<ul role="menu">
  <li role="menuitemradio" aria-checked="true">Left</li>
  <li role="menuitemradio" aria-checked="false">Center</li>
  <li role="menuitemradio" aria-checked="false">Right</li>
</ul>
```

Section 29.37: role="navigation"

A collection of navigational elements (usually links) for navigating the document or related documents.

```
<ul role="navigation">
  <li><a href="/">Home</a></li>
  <li><a href="/about">About</a></li>
  <li><a href="/contact">Contact</a></li>
</ul>
```

Section 29.38: role="note"

A section whose content is parenthetical or ancillary to the main content of the resource.

```
<p>Lorem ipsum...</p>
<p>Lorem ipsum...</p>
<p role="note">Lorem ipsum...</p>
```

Section 29.39: role="option"

A selectable item in a select list.

```
<ul role="listbox">
  <li role="option">Option 1</li>
  <li role="option">Option 2</li>
  <li role="option">Option 3</li>
</ul>
```

Section 29.40: role="progressbar"

An element that displays the progress status for tasks that take a long time.

```
<progress role="progressbar" value="25" max="100">25%</progress>
```

Section 29.41: role="radio"

A checkable input in a group of radio roles, only one of which can be checked at a time.

```
<div role="radiogroup">
  <input role="radio" type="radio" aria-checked="true"> One<br>
  <input role="radio" type="radio" aria-checked="false"> Two<br>
  <input role="radio" type="radio" aria-checked="false"> Three
</div>
```

Section 29.42: role="region"

A large perceivable section of a web page or document, that the author feels is important enough to be included in a page summary or table of contents, for example, an area of the page containing live sporting event statistics.

```
<div role="region">
  Home team: 4<br>
  Away team: 2
</div>
```

Section 29.43: role="radiogroup"

A group of radio buttons.

```
<div role="radiogroup">
  <input role="radio" type="radio" aria-checked="true"> One<br>
  <input role="radio" type="radio" aria-checked="false"> Two<br>
  <input role="radio" type="radio" aria-checked="false"> Three
</div>
```

Section 29.44: role="row"

A row of cells in a tabular container.

```
<table>
  <thead>
    <!-- etc -->
  </thead>
  <tbody>
    <tr role="row">
      <!-- etc -->
    </tr>
  </tbody>
</table>
```

Section 29.45: role="rowgroup"

A group containing one or more row elements in a grid.

```
<table>
  <thead role="rowgroup">
    <!-- etc -->
  </thead>
  <tbody role="rowgroup">
    <!-- etc -->
  </tbody>
</table>
```

Section 29.46: role="rowheader"

A cell containing header information for a row in a grid.

```
<table role="grid">
  <thead>
    <!-- etc -->
  </thead>
  <tbody>
    <tr>
      <th role="rowheader">Day 1</th>
      <td>65</td>
    </tr>
    <tr>
      <th role="rowheader">Day 2</th>
      <td>74</td>
    </tr>
  </tbody>
</table>
```

Section 29.47: role="scrollbar"

A graphical object that controls the scrolling of content within a viewing area, regardless of whether the content is

fully displayed within the viewing area.

```
<div id="content1">Lorem ipsum...</div>
<div
  role="scrollbar"
  aria-controls="content1"
  aria-orientation="vertical"
  aria-valuemax="100"
  aria-valuemin="0"
  aria-valuenow="25">
  <div class="scrollhandle"></div>
</div>
```

Section 29.48: role="search"

A landmark region that contains a collection of items and objects that, as a whole, combine to create a search facility.

```
<div role="search">
  <input role="searchbox" type="text">
  <button role="button">Search</button>
</div>
```

Section 29.49: role="searchbox"

A type of textbox intended for specifying search criteria.

```
<div role="search">
  <input role="searchbox" type="text">
  <button role="button">Search</button>
</div>
```

Section 29.50: role="separator"

A divider that separates and distinguishes sections of content or groups of menuitems.

```
<p>Lorem ipsum...</p>
<hr role="separator">
<p>Lorem ipsum...</p>
```

Section 29.51: role="slider"

A user input where the user selects a value from within a given range.

```
<div
  role="slider"
  aria-valuemax="100"
  aria-valuemin="0"
  aria-valuenow="25">
  <div class="sliderhandle"></div>
</div>
```

Section 29.52: role="spinbutton"

A form of range that expects the user to select from among discrete choices.

```
<input
  role="spinbutton"
  aria-valuemax="100"
  aria-valuemin="0"
  aria-valuenow="25">
```

```
type="number"  
value="25">
```

Section 29.53: role="status"

A container whose content is advisory information for the user but is not important enough to justify an alert, often but not necessarily presented as a status bar.

```
<div role="status">Online</div>
```

Section 29.54: role="switch"

A type of checkbox that represents on/off values, as opposed to checked/unchecked values.

```
<select role="switch" aria-checked="false">  
  <option>On</option>  
  <option selected>Off</option>  
</select>
```

Section 29.55: role="tab"

A grouping label providing a mechanism for selecting the tab content that is to be rendered to the user.

```
<ul role="tablist">  
  <li role="tab">Introduction</li>  
  <li role="tab">Chapter 1</li>  
  <li role="tab">Chapter 2</li>  
</ul>
```

Section 29.56: role="table"

A section containing data arranged in rows and columns. The table role is intended for tabular containers which are not interactive.

```
<table role="table">  
  <thead>  
    <!-- etc -->  
  </thead>  
  <tbody>  
    <!-- etc -->  
  </tbody>  
</table>
```

Section 29.57: role="tablist"

A list of tab elements, which are references to tabpanel elements.

```
<ul role="tablist">  
  <li role="tab">Introduction</li>  
  <li role="tab">Chapter 1</li>  
  <li role="tab">Chapter 2</li>  
</ul>
```

Section 29.58: role="tabpanel"

A container for the resources associated with a tab, where each tab is contained in a tablist.

```
<ul role="tablist">  
  <li role="tab">Introduction</li>  
  <li role="tab">Chapter 1</li>  
  <li role="tab">Chapter 2</li>
```

```

</ul>
<div role="tabpanel">
  <!-- etc -->
</div>

```

Section 29.59: role="textbox"

Input that allows free-form text as its value.

```
<textarea role="textbox"></textarea>
```

Section 29.60: role="timer"

A type of live region containing a numerical counter which indicates an amount of elapsed time from a start point, or the time remaining until an end point.

```

<p>
  <span role="timer">60</span> seconds remaining.
</p>

```

Section 29.61: role="toolbar"

A collection of commonly used function buttons represented in compact visual form.

```

<ul role="toolbar">
  <li></li>
  <li></li>
  <li></li>
  <li></li>
</ul>

```

Section 29.62: role="tooltip"

A contextual popup that displays a description for an element.

```

<span aria-describedby="slopedesc">Slope</span>
<div role="tooltip" id="slopedesc">y=mx+b</div>

```

Typically, the tooltip would be hidden. Using JavaScript, the tooltip would be displayed after a delay when the user hovers over the element that it describes.

Section 29.63: role="tree"

A type of list that may contain sub-level nested groups that can be collapsed and expanded.

```

<ul role="tree">
  <li role="treeitem">
    Part 1
    <ul>
      <li role="treeitem">Chapter 1</li>
      <li role="treeitem">Chapter 2</li>
      <li role="treeitem">Chapter 3</li>
    </ul>
  </li>
  <li role="treeitem">
    Part 2
    <ul>
      <li role="treeitem">Chapter 4</li>
      <li role="treeitem">Chapter 5</li>
      <li role="treeitem">Chapter 6</li>
    </ul>
  </li>
</ul>

```

```

</li>
<li role="treeitem">
  Part 3
  <ul>
    <li role="treeitem">Chapter 7</li>
    <li role="treeitem">Chapter 8</li>
    <li role="treeitem">Chapter 9</li>
  </ul>
</li>
</ul>

```

Section 29.64: role="treegrid"

A grid whose rows can be expanded and collapsed in the same manner as for a tree.

Section 29.65: role="treeitem"

An option item of a tree. This is an element within a tree that may be expanded or collapsed if it contains a sub-level group of treeitems.

```

<ul role="tree">
  <li role="treeitem">
    Part 1
    <ul>
      <li role="treeitem">Chapter 1</li>
      <li role="treeitem">Chapter 2</li>
      <li role="treeitem">Chapter 3</li>
    </ul>
  </li>
  <li role="treeitem">
    Part 2
    <ul>
      <li role="treeitem">Chapter 4</li>
      <li role="treeitem">Chapter 5</li>
      <li role="treeitem">Chapter 6</li>
    </ul>
  </li>
  <li role="treeitem">
    Part 3
    <ul>
      <li role="treeitem">Chapter 7</li>
      <li role="treeitem">Chapter 8</li>
      <li role="treeitem">Chapter 9</li>
    </ul>
  </li>
</ul>

```

Chapter 30: Global Attributes

Attribute	Description
<code>class</code>	Defines one or more class names for an element. See Classes and IDs .
<code>contenteditable</code>	Sets whether the content of an element can be edited.
<code>contextmenu</code>	Defines a context menu shown when a user right-clicks an element.
<code>dir</code>	Sets the text direction for text within an element.
<code>draggable</code>	Sets whether an element can be dragged.
<code>hidden</code>	Hides an element not currently in use on the page.
<code>id</code>	Defines a unique identifier for an element. See Classes and IDs .
<code>lang</code>	Defines the language of an element's content and its text attribute values. See Content Languages .
<code>spellcheck</code>	Sets whether to spell/grammar check the content of an element.

<code>style</code>	Defines a set of inline CSS styles for an element.
<code>tabindex</code>	Sets the order in which elements on a page are navigated by the tab keyboard shortcut.
<code>title</code>	Defines additional information about an element, generally in the form of tooltip text on mouseover.
<code>translate</code>	Defines whether to translate the content of an element.

Section 30.1: Contenteditable Attribute

```
<p contenteditable>This is an editable paragraph.</p>
```

Upon clicking on the paragraph, the content of it can be edited similar to an input text field.

When the `contenteditable` attribute is not set on an element, the element will inherit it from its parent. So all child text of a content editable element will also be editable, but you *can* turn it off for specific text, like so:

```
<p contenteditable>
  This is an editable paragraph.
  <span contenteditable="false">But not this.</span>
</p>
```

Note that an uneditable text element inside an editable element will still have a text cursor as inherited from its parent as well.

Chapter 31: Marking-up Quotes

Section 31.1: Inline with <q>

The **q element** can be used for a quote that is part of a sentence:

```
<p>She wrote <q>The answer is 42.</q> and everyone agreed.</p>
```

Quotation marks

Version≤4.01

Quotation marks should not be added. User agents should (in HTML 4.01) resp. must (in HTML 4.0) render them automatically.

Version=5

Quotation marks must not be added. User agents will render them automatically.

Source URL (cite attribute)

The **cite attribute** can be used to reference the URL of the quoted source:

```
<p>She wrote <q cite="http://example.com/blog/hello-world">The answer is 42.</q> and everyone agreed.</p>
```

Note that browsers typically don't show this URL, so if the source is relevant, you should add a hyperlink (a `a` element) in addition.

Section 31.2: Block with <blockquote>

The **blockquote element** can be used for a (block-level) quote:

```
<blockquote>
  <p>The answer is 42.</p>
</blockquote>
```

Source URL (cite attribute)

The **`cite` attribute** can be used to reference the URL of the quoted source:

```
<blockquote cite="http://example.com/blog/hello-world">
  <p>The answer is 42.</p>
</blockquote>
```

Note that browsers typically don't show this URL, so if the source is relevant, you should add a hyperlink (`a` element) in addition (see the section *Citation/Attribution* about where to place this link).

Citation/Attribution

Version≤4.01

The citation/attribution should not be part of the `blockquote` element:

```
<blockquote cite="http://example.com/blog/hello-world">
  <p>The answer is 42.</p>
</blockquote>
<p>Source: <cite><a href="http://example.com/blog/hello-world" rel="external">Hello
World</a></cite></p>
```

You can add a `div` element to group the quote and the citation, but it exists no way to associate them semantically.

The **`cite` element** can be used for the reference of the quoted source (but not for the author name).

Version=5

The citation/attribution (e.g., the hyperlink giving the source URL) can be inside the `blockquote`, but in that case it must be within a `cite` element (for in-text attributions) or a `footer` element:

```
<blockquote cite="http://example.com/blog/hello-world">
  <p>The answer is 42.</p>
  <footer>
    <p>Source: <cite><a href="http://example.com/blog/hello-world" rel="external">Hello
World</a></cite></p>
  </footer>
</blockquote>
```

The **`cite` element** can be used for the reference of the quoted source, or for the name of the quote's author.

Chapter 32: Include JavaScript Code in HTML

- `<script type="text/javascript"> //some code </script>`
- `<script type="text/javascript" src="URL"></script>`
- `<script type="text/javascript" src="URL" async> //async code</script>`

Attribute	Details
<code>src</code>	Specifies the path to a JavaScript file. Either a relative or absolute URL.
<code>type</code>	Specifies the MIME type. This attribute is required in HTML4, but optional in HTML5.
<code>async</code>	Specifies that the script shall be executed asynchronously (only for external scripts). This attribute does not require any value (except of XHTML).
<code>defer</code>	Specifies that the script shall be executed when the page has finished parsing (only for external scripts). This attribute does not require any value (except of XHTML).
<code>charset</code>	Specifies the character encoding used in an external script file, e.g. UTF-8
<code>crossorigin</code>	How the element handles crossorigin requests
<code>nonce</code>	Cryptographic nonce used in <i>Content Security Policy</i> checks CSP3

Section 32.1: Handling disabled Javascript

It is possible that the client browser does not support Javascript or have Javascript execution disabled, perhaps due to security reasons. To be able to tell users that a script is supposed to execute in the page, the `<noscript>` tag can be used. The content of `<noscript>` is displayed whenever Javascript is disabled for the current page.

```
<script>
  document.write("Hello, world!");
</script>
<noscript>This browser does not support Javascript.</noscript>
```

Section 32.2: Linking to an external JavaScript file

```
<script src="example.js"></script>
```

The `src` attribute works like the `href` attribute on anchors: you can either specify an absolute or relative URL. The example above links to a file inside the same directory of the HTML document. This is typically added inside the `<head>` tags at the top of the html document

Section 32.3: Directly including JavaScript code

Instead of linking to an external file, you can also include the JS code as-is in your HTML:

```
<script>
// JavaScript code
</script>
```

Section 32.4: Including a JavaScript file executing asynchronously

```
<script type="text/javascript" src="URL" async></script>
```

Chapter 33: Image Maps

- `<img usemap="#[map-name]">`
- `<map name="[map-name]"></map>`
- `<area>`

Tag/Attribute	Value
<code></code>	Below are the image map-specific attributes to use with <code></code> . Regular <code></code> attributes apply.
<code>usemap</code>	The <code>name</code> of the map with a hash symbol prepended to it. For example, for a map with <code>name="map"</code> , the image should have <code>usemap="#map"</code> .
<code><map></code>	
<code>name</code>	The name of the map to identify it. To be used with the image's <code>usemap</code> attribute.
<code><area></code>	Below are <code><area></code> -specific attributes. When <code>href</code> is specified, making the <code><area></code> a link, <code><area></code> also supports all of the attributes of the anchor tag (<code><a></code>) except <code>ping</code> . See them at the MDN docs .
<code>alt</code>	The alternate text to display if images are not supported. This is only necessary if <code>href</code> is also set on the <code><area></code> .
<code>coords</code>	The coordinates outlining the selectable area. When <code>shape="polygon"</code> , this should be set to a list of "x, y" pairs separated by commas (i.e., <code>shape="polygon" coords="x1, y1, x2, y2, x3, y3, ..."</code>). When <code>shape="rectangle"</code> , this should be set to <code>left, top, right, bottom</code> . When <code>shape="circle"</code> , this should be set to <code>centerX, centerY, radius</code> .
<code>href</code>	The URL of the hyperlink, if specified. If it is omitted, then the <code><area></code> will not represent a hyperlink.
<code>shape</code>	The shape of the <code><area></code> . Can be set to default to select the entire image (no <code>coords</code> attribute necessary), <code>circle</code> or <code>circ</code> for a circle, <code>rectangle</code> or <code>rect</code> for a rectangle, and <code>polygon</code> or <code>poly</code> for a polygonal area specified by corner points.

Section 33.1: Introduction to Image Maps


Description

An image map is an image with clickable areas that usually act as hyperlinks.

The image is defined by the `<img>` tag, and the map is defined by a `<map>` tag with `<area>` tags to denote each clickable area. Use the `usemap` and `name` attributes to bind the image and the map.

Basic Example

To create an image map so that each of the shapes in the image below are clickable:

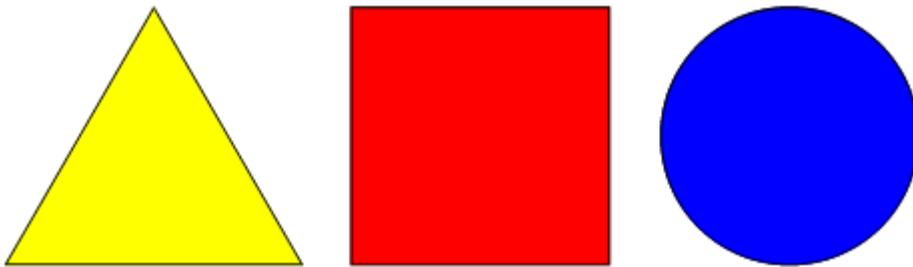


The code would be as follows:

```

<map name="shapes">
  <area shape="polygon" coords="79,6,5,134,153,134">
  <area shape="rectangle" coords="177,6,306,134">
  <area shape="circle" coords="397,71,65">
</map>
```

You should see that the browser recognizes the areas when the cursor becomes a pointer. See a [live demo](#) on JSFiddle, or see a demonstration below:

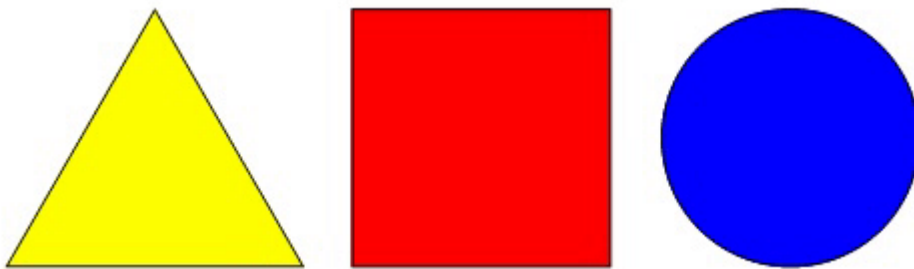

Chapter 34: Using HTML with CSS

- `<link rel="stylesheet" type="text/css" href="stylesheet.css">`
- `<style></style>`

[CSS](#) provides styles to HTML elements on the page. Inline styling involves usage of the `style` attribute in tags, and is highly discouraged. Internal stylesheets use the `<style>` tag and are used to declare rules for directed portions of the page. External stylesheets may be used through a `<link>` tag which takes an external file of CSS and applies the rules to the document. This topic covers usage of all three methods of attachment.

Section 34.1: External Stylesheet Use

Use the `link` attribute in the document's head:

```
<head>
  <link rel="stylesheet" type="text/css" href="stylesheet.css">
</head>
```

You can also use stylesheets provided from websites via a content delivery network, or CDN for short. (for example, Bootstrap):

```
<head>
  <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css" integrity="sha384-
BVYiISIFeK1dGmJRAKycuHAHRg320mUcww7on3RYdg4Va+PmSTsz/K68vbdEjh4u" crossorigin="anonymous">
</head>
```

Generally, you can find CDN support for a framework on its website.

Section 34.2: Internal Stylesheet

You can also include CSS elements internally by using the `<style>` tag:

```
<head>
  <style type="text/css">
    body {
      background-color: gray;
    }
  </style>
</head>
```

Multiple internal stylesheets can be included in a program as well.

```
<head>
  <style type="text/css">
    body {
      background-color: gray;
    }
  </style>

  <style type="text/css">
    p {
      background-color: blue;
    }
  </style>
</head>
```

Section 34.3: Inline Style

You can style a specific element by using the `style` attribute:

```
<span style="color: red">This text will appear in red.</span>
```

Note: Try to avoid this -- the point of CSS is to separate content from presentation.

Section 34.4: Multiple Stylesheets

It's possible to load multiple stylesheets:

```
<head>
  <link rel="stylesheet" type="text/css" href="general.css">
  <link rel="stylesheet" type="text/css" href="specific.css">
</head>
```

Note that **later files and declarations will override earlier ones**. So if `general.css` contains:

```
body {  
    background-color: red;  
}
```

and `specific.css` contains:

```
body {  
    background-color: blue;  
}
```

if both are used, the background of the document will be blue.

Chapter 35: Progress Element

Parameter	Value
max	How much work the task requires in total
value	How much of the work has been accomplished already
position	This attribute returns the current position of the <code><progress></code> element
labels	This attribute returns a list of <code><progress></code> element labels (if any)

Section 35.1: Progress

The `<progress>` element is new in HTML5 and is used to represent the progress of a task

```
<progress value="22" max="100"></progress>
```

This creates a bar filled 22%

Section 35.2: Changing the color of a progress bar

Progress bars can be styled with the `progress[value]` selector.

This example gives a progress bar a width of 250px and a height of 20px

```
progress[value] {  
    width: 250px;  
    height: 20px;  
}
```

Progress bars can be especially difficult to style.

Chrome / Safari / Opera

These browsers use the `-webkit-appearance` selector to style the progress tag. To override this, we can reset the appearance.

```
progress[value] {  
    -webkit-appearance: none;  
    appearance: none;  
}
```

Now, we can style the container itself

```
progress[value]::-webkit-progress-bar {  
    background-color: "green";  
}
```

Firefox

Firefox styles the progress bar a little differently. We have to use these styles

```
progress[value] {
  -moz-appearance: none;
  appearance: none;
  border: none;           /* Firefox also renders a border */
}
```

Internet Explorer

Internet Explorer 10+ supports the `progress` element. However, it does not support the `background-color` property. You'll need to use the `color` property instead.

```
progress[value] {
  -webkit-appearance: none;
  -moz-appearance: none;
  appearance: none;

  border: none;           /* Remove border from Firefox */

  width: 250px;
  height: 20px;

  color: blue;
}
```

Section 35.3: HTML Fallback

For browsers that do not support the `progress` element, you can use this as a workaround.

```
<progress max="100" value="20">
  <div class="progress-bar">
    <span style="width: 20%;">Progress: 20%</span>
  </div>
</progress>
```

Browsers that support the `progress` tag will ignore the `div` nested inside. Legacy browsers which cannot identify the `progress` tag will render the `div` instead.

Chapter 36: Character Entities

Section 36.1: Character Entities in HTML

Many symbols and special characters are required while developing a web page in html, but as we know that sometimes the use of characters directly may interfere with the actual html code which have certain characters reserved and also certain characters being not available on keyboard. Thus, to avoid the conflict and at same time to be able to use different symbols in our code w3 org provides us with 'Character Entities'.

Character Entities are predefined with 'Entity Name' - `&entity_name;` and 'Entity Number' - `&entity_number;` so we need to use either of the two for the required symbol to be rendered on our page.

The list of few Character Entities can be found at <https://dev.w3.org/html5/html-author/charref>

A simple example with the use of character entity for 'magnifying glass' :

```
<input type="text" placeholder=" 🔍 #128269; Search" />
```

which renders as



Section 36.2: Common Special Characters

Some character may be reserved for HTML and cannot be used directly as it may obstruct the actual HTML codes. For example, trying to display the left and right angle brackets (<>) in the source code may cause unexpected results in the output. Similarly, white spaces as written in the source code may not display as expected in the output HTML. Some, like ?, are not available in the ASCII character set.

For this purpose, character entities are created. These are of the form `&entity_name;` or `&#entity_number;`. The following are some of the available HTML entities.

Character	Description	Entity Name	Entity Number
" "	non-breaking space	<code>&nbsp;</code>	<code>&#160;</code>
"<"	less than	<code>&lt;</code>	<code>&#60;</code>
">"	greater than	<code>&gt;</code>	<code>&#62;</code>
"&"	ampersand	<code>&amp;</code>	<code>&#38;</code>
"—"	em dash	<code>&mdash;</code>	<code>&#8212;</code>
"—"	en dash	<code>&ndash;</code>	<code>&#8211;</code>
"©"	copyright	<code>&copy;</code>	<code>&#169;</code>
"®"	registered trademark	<code>&reg;</code>	<code>&#174;</code>
"™"	trademark	<code>&trade;</code>	<code>&#8482;</code>
"?"	phone	<code>&phone;</code>	<code>&#9742;</code>

Thus, to write

© 2016 Stack Exchange Inc.

the following HTML code is used:

```
<b>&copy; 2016 Stack Exchange Inc.</b>
```

Chapter 37: Paragraphs

Column	Column
<code><p></code>	Defines a paragraph
<code>
</code>	Inserts a single line break
<code><pre></code>	Defines pre-formatted text

Paragraphs are the most basic HTML element. This topic explains and demonstrates the usage of the paragraph element in HTML.

Section 37.1: HTML Paragraphs

The HTML `<p>` element defines a **paragraph**:

```
<p>This is a paragraph.</p>
<p>This is another paragraph.</p>
```

Display-

You cannot be sure how HTML will be displayed.

Large or small screens, and resized windows will create different results.

With HTML, you cannot change the output by adding extra spaces or extra lines in your HTML code.

The browser will remove any extra spaces and extra lines when the page is displayed:

<p>This is another paragraph, extra spaces will be removed by browsers</p>

Chapter 38: HTML 5 Cache

Section 38.1: Basic Example of Html 5 cache

this is our index.html file

```
<!DOCTYPE html>
<html manifest="index.appcache">
<body>
  <p>Content</p>
</body>
</html>
```

then we will create index.appcache file with below codes

```
CACHE MANIFEST
index.html
```

write those files that you want to be cached load index.html then go for offline mode and reload the tab

Note: The two files must be in the same folder in this example

Chapter 39: Embed

Parameters	Details
<code>src</code>	Address of the resource
<code>type</code>	Type of embedded resource
<code>width</code>	Horizontal dimension
<code>height</code>	Vertical dimension

Section 39.1: Basic usage

The `embed` tag is new in HTML5. This element provides an integration point for an external (typically non-HTML) application or interactive content.

```
<embed src="myflash.swf">
```

Section 39.2: Defining the MIME type

The [MIME](#) type must be defined using the `type` attribute.

```
<embed type="video/mp4" src="video.mp4" width="640" height="480">
```

Chapter 40: Navigation Bars

Section 40.1: Basic Navigation Bar

Navigation bars are essentially a list of links, so the `ul` and `li` elements are used to encase navigation links.

```
<ul>
  <li><a href="#">Home</a></li>
  <li><a href="#">About</a></li>
  <li><a href="#">Contact</a></li>
</ul>
```

Section 40.2: HTML5 Navigation Bar

To make a navigation bar using the HTML5 nav element, encase the links within the nav tag.

```
<nav>
  <a href="#">Home</a>
  <a href="#">About</a>
  <a href="#">Contact</a>
</nav>
```

Chapter 41: HTML Event Attributes

Section 41.1: HTML Form Events

Events triggered by actions inside a HTML form (applies to almost all HTML elements, but is most used in form elements):

Attribute	Description
onblur	Fires the moment that the element loses focus
onchange	Fires the moment when the value of the element is changed
oncontextmenu	Script to be run when a context menu is triggered
onfocus	Fires the moment when the element gets focus
oninput	Script to be run when an element gets user input
oninvalid	Script to be run when an element is invalid
onreset	Fires when the Reset button in a form is clicked
onsearch	Fires when the user writes something in a search field (for <input="search">)
onselect	Fires after some text has been selected in an element
onsubmit	Fires when a form is submitted

Section 41.2: Keyboard Events

Attribute	Description
onkeydown	Fires when a user is pressing a key
onkeypress	Fires when a user presses a key
onkeyup	Fires when a user releases a key

Credits

Thank you greatly to all the people from Stack Overflow Documentation who helped provide this content, more changes can be sent to web@petercv.com for new content to be published or updated

AA2992	Chapter 13
Abhishek Pandey	Chapters 5 and 22
Abrar Jahin	Chapter 37
Adjit	Chapter 9
ahmednawazbutt	Chapter 1
Akshit Soota	Chapter 22
Al.G.	Chapters 3, 5 and 17
albert	Chapter 4
Alex	Chapter 12
Alexander Wigmore	Chapter 22
Alexandre N.	Chapters 4, 9, 12, 32 and 39
Ali Almoullim	Chapters 14 and 18
Amanda Ahn	Chapter 1
amflare	Chapters 1 and 14
Amitay Stern	Chapters 1 and 5
andreaem	Chapter 32
andreas	Chapter 21
Andrew Brooke	Chapter 6
Angelos Chalaris	Chapters 5, 11, 17 and 22
Ani Menon	Chapters 2, 5, 8, 17, 18 and 22
Anil	Chapter 6
animuson	Chapters 1, 3, 4, 5, 7, 8, 9, 10, 12, 14, 17, 18, 22, 30 and 36
Anselm Urban	Chapters 3, 13 and 32
Anthony Pham	Chapter 3
Aown Muhammad	Chapter 18
Araknid	Chapter 24
Aravind Suresh	Chapter 13
Ashwin Ramaswami	Chapter 8
Bálint	Chapter 22
ban17	Chapter 3
bdkopen	Chapters 8, 22 and 34
Becca	Chapter 30
Ben Rhys	Chapter 10
bhansa	Chapter 5
Bhavya Singh	Chapter 29
Bookeater	Chapter 22
Boris	Chapter 22
Boysenb3rry	Chapter 12
brandaemon	Chapter 11
Caleb Kleveter	Chapters 11 and 12
Callan Heard	Chapters 1 and 13
Cedric Zoppolo	Chapter 4
Charles	Chapter 32
Chris	Chapters 17 and 24
Chris Rutherford	Chapter 13
ChrisD	Chapters 1, 8, 9, 21 and 23
Christian Ternus	Chapter 34
Christophe Strobbe	Chapter 5
cone56	Chapters 13 and 19

Content Solutions	Chapters 17, 24, 28, 31 and 35
Cullub	Chapter 18
C000000N00000	Chapter 5
D M	Chapter 24
Daniel	Chapter 5
Daniel Käfer	Chapter 7
Dave Everitt	Chapter 1
DawnPaladin	Chapters 3, 5 and 13
Dipen Shah	Chapter 5
dippas	Chapter 2
Domenic	Chapters 13 and 22
Druzion	Chapter 5
Edvin Tenovimas	Chapter 5
Emanuel Vintilă	Chapter 9
Emil	Chapters 3, 10 and 11
Evan	Chapter 2
Farhad	Chapter 38
feeela	Chapters 13 and 27
FelipeAls	Chapter 16
FlyingPiMonster	Chapter 3
gabe3886	Chapter 5
Gabriel Chi Hong Lee	Chapters 12 and 18
Gal Ratzkin	Chapter 24
geek1011	Chapters 1 and 22
geeksal	Chapter 5
Gerold Broser	Chapters 1 and 16
GoatsWearHats	Chapter 11
Grace Note	Chapter 7
Grant Palin	Chapter 4
gustavohenke	Chapter 10
H Mirza	Chapter 1
H. Pauwelyn	Chapter 1
Habel Philip	Chapter 22
Hafidz Permana	Chapter 22
Hanif Formoly	Chapter 6
heerfk	Chapter 17
Henrique Barcelos	Chapters 5 and 13
Huy Nguyen	Chapter 5
Infuzed guy	Chapters 2 and 13
insertusernamehere	Chapter 3
intboolstring	Chapter 1
Isak Combrinck	Chapters 16 and 27
ivn	Chapter 12
J F	Chapters 4 and 10
j08691	Chapters 4 and 18
jhnance	Chapter 11
jhoanna	Chapter 22
JHS	Chapters 3, 4, 8, 13 and 24
jkdev	Chapter 8
joe_young	Chapters 1, 2 and 4
John Slegers	Chapters 5 and 11
Jojodmo	Chapter 3
Jon Ericson	Chapter 7
Jones Joseph	Chapters 3 and 34
Kake_Fisk	Chapter 12

kcpike	Chapter 7
kelvinelove	Chapters 1 and 22
Kimmax	Chapter 18
Lahiru Ashan	Chapter 5
Lambda Ninja	Chapters 1, 3, 13 and 33
Leonidas Menendez	Chapter 1
Luca Iangella	Chapter 18
Luca Putzu	Chapter 11
Magisch	Chapter 5
Marjorie Pickard	Chapter 32
Marvin	Chapters 5 and 7
Matas Vaitkevicius	Chapters 3, 5, 7 and 13
Matt	Chapter 1
Maximillian Laumeister	Chapters 5 and 12
MervS	Chapters 32 and 36
Michael Moriarty	Chapter 22
Michael B	Chapter 11
mnoronha	Chapter 1
Mohd Samir Khan	Chapter 12
morewry	Chapter 5
Mosh Feu	Chapter 14
Mottie	Chapter 4
Mr Lister	Chapter 4
Mr. Alien	Chapter 22
Muntasir	Chapter 16
MySpeed	Chapter 24
m_callens	Chapters 22 and 25
nalply	Chapter 6
Natalie	Chapter 11
Nathan Tuggy	Chapter 3
Nhan	Chapters 12 and 13
Niek Brouwer	Chapter 18
Nijin22	Chapter 4
Nil Llisterri	Chapter 5
Nishchay	Chapters 1 and 22
NoobCoder	Chapter 5
Ojen	Chapter 9
Ortomala Lokni	Chapters 5 and 22
Paresh Maghodiya	Chapter Chapter 42
Paul Sweatte	Chapter 29
Persijn	Chapter 1
Peter L.	Chapter 10
Pi Programs	Chapter 5
pinjasaur	Chapter 17
platy11	Chapter 7
Pranav	Chapter 3
Prateek	Chapters 3, 4, 5 and 7
PrAtik Lochawala	Chapter 4
Praveen Kumar	Chapter 4
Psaniko	Chapters 5 and 28
Pseudonym Patel	Chapters 2 and 7
Racil Hilan	Chapter 20
rajarshig	Chapter 20
RamenChef	Chapters 5 and 33
Ranjit Singh	Chapter 5

Raystafarian	Chapters 3 and 10
Richard Hamilton	Chapters 7, 11, 19 and 35
Robert Columbia	Chapter 3
Roko C. Buljan	Chapters 5, 19, 25 and 32
Safoor Safdar	Chapter 22
sasha	Chapter 2
SeinopSys	Chapter 5
Senjuti Mahapatra	Chapter 22
Shannon Young	Chapters 6 and 29
Sharavnan Kv	Chapter 5
Shiva	Chapter 27
Shivangi Chaurasia	Chapters 5 and 12
Sildoreth	Chapters 4 and 32
Simone Carletti	Chapter 11
SJDS	Chapter 5
stack	Chapter 36
Stephen Leppik	Chapters 5 and 22
Stewartside	Chapters 5 and 7
Steyn van Esveld	Chapter 3
Sumner Evans	Chapter 17
Sunny R Gupta	Chapters 1 and 5
SuperStormer	Chapters 24, 26 and 32
sv3k	Chapter 5
svarog	Chapter 4
Ted Goas	Chapters 4 and 22
the12	Chapters 1 and 5
think123	Chapter 5
Thomas Gerot	Chapter 23
Thomas Landauer	Chapter 4
thouusten	Chapter 34
Timon	Chapter 5
Timothy Miller	Chapter 21
tmg	Chapters 5, 7 and 17
Tom Johnson	Chapter 7
tonethar	Chapter 19
Tot Zam	Chapters 5 and 14
Travis	Chapter 29
Trevor Clarke	Chapter 19
trungk18	Chapter 5
Tyler Zika	Chapter 11
Ulrich Schwarz	Chapter 8
Undo	Chapter 5
unor	Chapters 1, 3, 7, 10, 13, 16, 22, 26, 30 and 31
user3130333	Chapter 1
V	Chapter 2
V4karian	Chapter 13
Valor Naram	Chapters 1, 37 and 38
vladdobra	Chapters 5 and 13
w5m	Chapter 21
Wolfgang	Chapters 3, 8 and 12
xims	Chapter 22
Yasir T	Chapter 20
Yossi Aharon	Chapters 6 and 27
Zack	Chapter 7
Zange	Chapter 30

Zaz	Chapter 1
zer00ne	Chapters 4 and 15
zygimantus	Chapter 1
Zze	Chapter 1
zzzzBov	Chapter 5

You may also like

