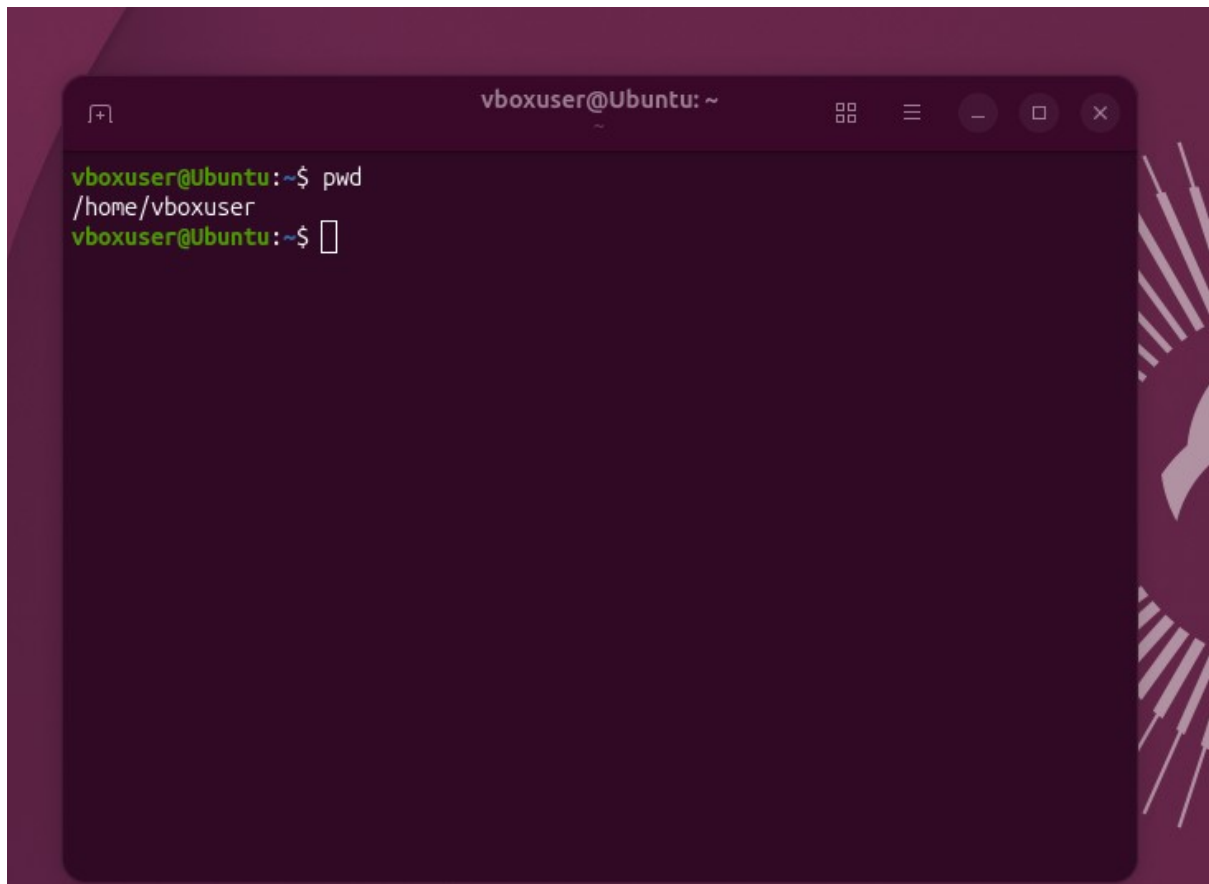



BASIC COMMANDS:

PWD :

A terminal window titled 'vboxuser@Ubuntu: ~' with standard window controls. The prompt is 'vboxuser@Ubuntu:~\$'. The command 'pwd' has been entered, and the output is '/home/vboxuser'. The prompt is now 'vboxuser@Ubuntu:~\$' with a cursor.

```
vboxuser@Ubuntu:~$ pwd
/home/vboxuser
vboxuser@Ubuntu:~$
```

LS:

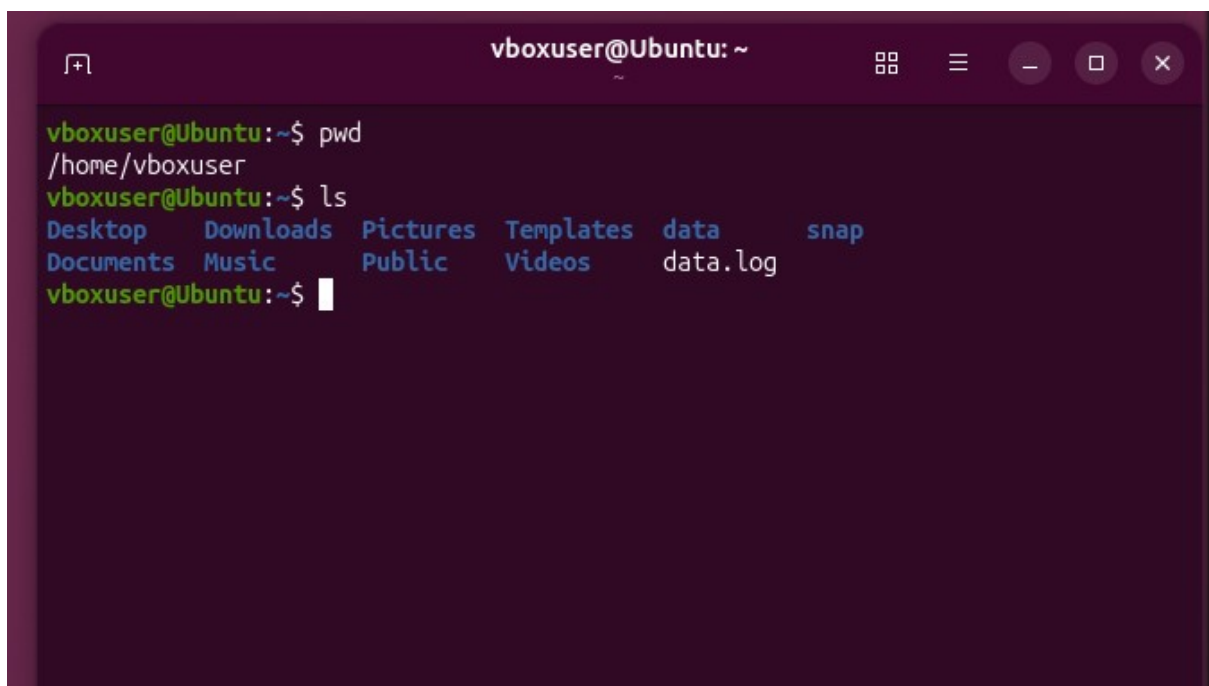A terminal window titled 'vboxuser@Ubuntu: ~' with standard window controls. The prompt is 'vboxuser@Ubuntu:~\$'. The command 'pwd' has been entered, and the output is '/home/vboxuser'. The prompt is now 'vboxuser@Ubuntu:~\$'. The command 'ls' has been entered, and the output is a list of files and directories: Desktop, Downloads, Pictures, Templates, data, snap, Documents, Music, Public, Videos, and data.log. The prompt is now 'vboxuser@Ubuntu:~\$' with a cursor.

```
vboxuser@Ubuntu:~$ pwd
/home/vboxuser
vboxuser@Ubuntu:~$ ls
Desktop  Downloads  Pictures  Templates  data      snap
Documents Music      Public    Videos    data.log
vboxuser@Ubuntu:~$
```

CD:

```
vboxuser@Ubuntu:~$ ls
Desktop  Downloads  Pictures  Templates  data      snap
Documents Music      Public    Videos    data.log
vboxuser@Ubuntu:~$ cd data
vboxuser@Ubuntu:~/data$
```

WILL HELP TO NAVIGATE TO THE SPECIFIC DIRECTORY

MKDIR:

```
vboxuser@Ubuntu:~$ mkdir servicedesk
vboxuser@Ubuntu:~$ ls
Desktop  Downloads  Pictures  Templates  data      servicedesk
Documents Music      Public    Videos    data.log  snap
vboxuser@Ubuntu:~$
```

HISTORY:

```
vboxuser@Ubuntu:~$ cd servicedesk
vboxuser@Ubuntu:~/servicedesk$ history
 1 pws
 2 clear
 3 pwd
 4 ls
 5 cd data
 6 cd
 7 mkdir servicedesk
 8 ls
 9 cd servicedesk
10 history
vboxuser@Ubuntu:~/servicedesk$
```


WHOAMI:

```
10 history
vboxuser@Ubuntu:~/servicedesk$ whoami
vboxuser
vboxuser@Ubuntu:~/servicedesk$
```

SUDO APT-GET INSTALL -VIM:

WILL HELP TO INSTALL ALL THE PACKAGES OF THE VI EDITOR

AFTER VI FILE NAME :

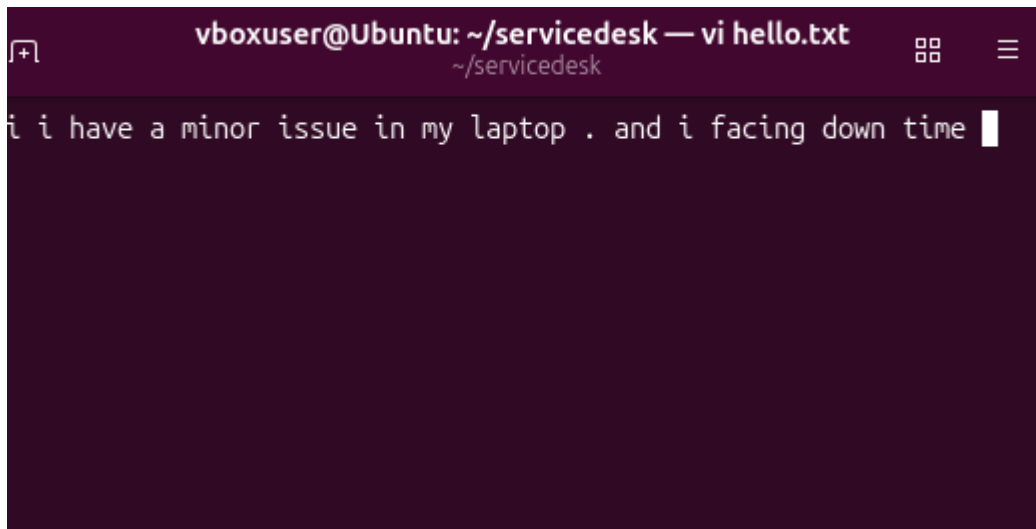


```
vboxuser@Ubuntu: ~/servicedesk — vi hello.txt
~/servicedesk
i i have a minor issue in my laptop . and i facing down time
```

INSERT I AND AFTER INSTER ESCAPE +: + WQ WILL SAVE THE CONTENT OF THE FILE

AFTER INSERT + : + Q +! WILL EXIT WITHOUT SAVING THE CONTENT


TOUCH :

WILL CREATE THE EMPTY FILE

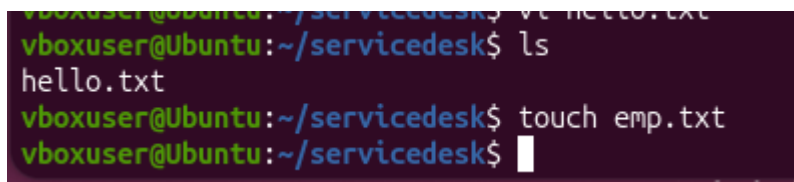

```
vboxuser@Ubuntu:~/servicedesk$ vi hello.txt
vboxuser@Ubuntu:~/servicedesk$ ls
hello.txt
vboxuser@Ubuntu:~/servicedesk$ touch emp.txt
vboxuser@Ubuntu:~/servicedesk$
```

NANO TEXT:

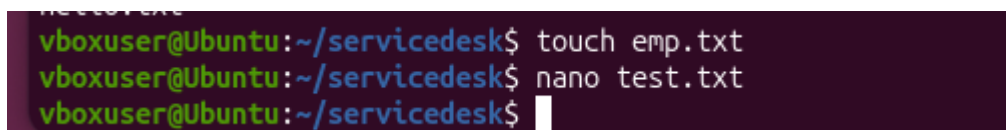

```
vboxuser@Ubuntu:~/servicedesk$ touch emp.txt
vboxuser@Ubuntu:~/servicedesk$ nano test.txt
vboxuser@Ubuntu:~/servicedesk$
```

BY USING THIS COMMAND WE CAN EDIT , COPY AND WRITE AND READ EASILY THE CONTENT OF THE FILE WITHOUT COMPLICATION

RM :

WILL REMOVE THE MENTIONED FILE FROM HE FOLDER :

```
vboxuser@Ubuntu:~/servicedesk$ ls
emp.txt  hello.txt
vboxuser@Ubuntu:~/servicedesk$ rm emp.txt
vboxuser@Ubuntu:~/servicedesk$ ls
hello.txt
vboxuser@Ubuntu:~/servicedesk$
```

RM *.TXT:

WILL HELP TO REMOVE ALL THE TEXT FILES FROM THE DIRECTORY

```
vboxuser@Ubuntu:~/servicedesk$ ls
hello.txt  new.java  new_data.txt
vboxuser@Ubuntu:~/servicedesk$ rm *.txt
vboxuser@Ubuntu:~/servicedesk$ ls
new.java
vboxuser@Ubuntu:~/servicedesk$
```

CAT WILL SHOW ALL THE CONTENT OF THE FILE WITHOUT OPENING THE FILE :

```
vboxuser@Ubuntu:~/servicedesk$ cat new.java
java language
vboxuser@Ubuntu:~/servicedesk$
```

ECHO :

ECHO USED ADD CONTENT EXTRA TO THE EXSISTING FILE

```
vboxuser@Ubuntu:~/servicedesk$ echo "import java.util.*;public class new {public
static void main(String args){ s.o.p("hi")}}" >> new.java
vboxuser@Ubuntu:~/servicedesk$ cat new.java
java language
import java.util.*;public class new {public static void main(String args){ s.o.p
(hi)}}
vboxuser@Ubuntu:~/servicedesk$
```

LS:

WILL SHOW ALL THE JAVA FILES IN THE DIRECTORY

```
vboxuser@Ubuntu:~/servicedesk$ ls *.java
new.java
vboxuser@Ubuntu:~/servicedesk$
```

CP :

WILL HELP TO COPY THE CONTENT OF THE FILE TO THE NEW FILE WITH EXSISTING FILE

```
vboxuser@Ubuntu:~/servicedesk$ cp new.java new_new.java
vboxuser@Ubuntu:~/servicedesk$ ls
new.java  new_new.java
vboxuser@Ubuntu:~/servicedesk$ cat new.java
java language
import java.util.*;public class new {public static void main(String args){ s.o.p
(hi)}}
vboxuser@Ubuntu:~/servicedesk$ cat new_new.java
java language
import java.util.*;public class new {public static void main(String args){ s.o.p
(hi)}}
vboxuser@Ubuntu:~/servicedesk$
```

MV:

WILL MOVE THE FILE TO NEW FILE BY DELETING EXSISTING FILE

```
vboxuser@Ubuntu:~/servicedesk$ mv new_new.java demo.java
vboxuser@Ubuntu:~/servicedesk$ lw
lw: command not found
vboxuser@Ubuntu:~/servicedesk$ ls
demo.java  new.java
vboxuser@Ubuntu:~/servicedesk$
```