
COMP2511 Tutorial 9

— Architectural Characteristics,
Architectural Styles —

Notices

- Assignment-ii (both parts) is due **next Friday 3pm**.
 - A reminder that no submissions are accepted past this time, including Special Considerations and ELPs.
 - Make sure you aren't pushing code right before the deadline!
- A sample exam environment will be running on the lab computers next week.
 - The aim is to get you comfortable with the **structure** and **layout** of the exam.
 - The difficulty of the exam is not indicative of the actual exam.

Software Architecture

- Suppose you've built an online banking app that looks great and has a bunch of features that all work correctly. However, it crashes if more than 100 users log on at the same time. Is this a successful system?
 - Not necessarily; the system is missing **scalability**, the ability to handle growth in workload or user traffic without compromising performance.
 - Even if all the features work perfectly, the application isn't going to be very useful if we can't serve many users concurrently.
 - For software to be considered 'good', it has to satisfy both functional *and* non-functional requirements.

Architectural Characteristics

- **Architectural characteristics** (*non-functional requirements*) define fundamental qualities that software architecture must support.
 - For example, we may consider the **maintainability** of a system: how easy is it to fix, update or extend the system?
- Unlike functional requirements, they are often not explicitly defined.
 - This adds another layer of complexity to designing software; these are considerations that we have to be aware of and account for accordingly, and are typically 'implicitly there'.

Architectural Characteristics


- More examples of some architectural characteristics, **not** exhaustive:
 - **Performance:** How fast does the system run?
 - **Availability:** How often is the system operational?
 - **Reliability:** How error-prone is the system?
 - **Security:** How protected is the system against threats? Are there any vulnerabilities?
 - **Testability:** How easy is it to test the system?
 - **Fault Tolerance:** How robust is the system against particular things not working?
- Characteristics such as these influence how we decide to design software. Some characteristics will be more important than others, depending on the context and specific requirements.
 - At the end of the day, there are always **trade-offs** across characteristics. For example, more security → lower performance (more robust checking) and vice versa.

Architectural Styles

- **Architectural styles** are predefined patterns and philosophies guiding how software systems are structured.
- Common architectural styles include:
 - **Layered** architectures (**monolithic** - deployed as a single unit)
 - **Modular monolithic** architectures (also monolithic)
 - **Microservice** architectures (**distributed** - deployed as many smaller services that communicate with each other)
 - **Event-driven** architectures (also distributed)
- Each style comes with trade-offs for specific architectural characteristics.
- The style of a system will influence how it behaves and evolves. It is **very** difficult to convert a system from one style to another!

Layered Architecture

- A layered architecture is a monolith where distinct responsibilities are separated into different technical layers, defining a clear separation of concerns.

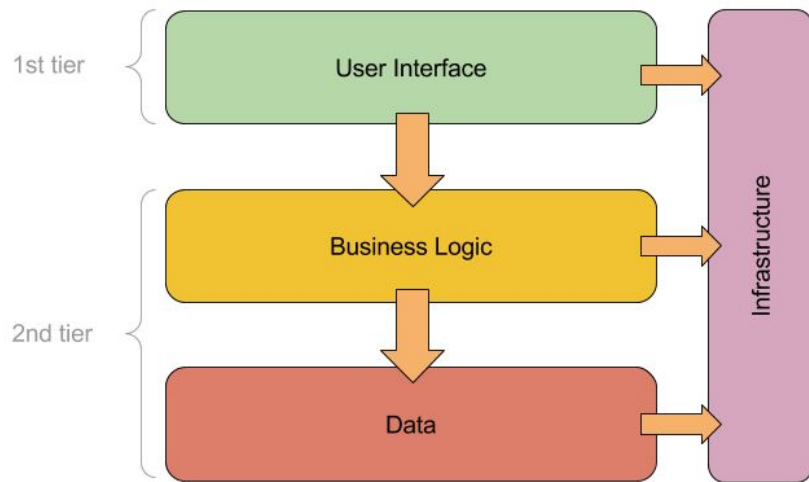


Layered Architecture

- Strengths of layered architectures:
 - **Simplicity** - layered architectures are very common and typically easily understood
 - **Maintainability** - you can affect one layer without affecting other layers
 - **Data Consistency** - all layers share a single database, so data is consistent throughout
 - **Security** - each layer can handle its own separate protocols and be responsible for specific types of threats
- Weaknesses of layered architectures:
 - **Performance** - messages throughout the system have to pass throughout each of the layers, which adds a considerable overhead
 - **Scalability** - individual layers are hard to scale without changing other layers as well
 - **Fault Tolerance** - if one part of a monolith breaks, then the rest of the monolith is likely to also break; also consideration for security

Modular Monolithic Architecture

- Modular monoliths are monoliths that are divided according to different business domains, rather than technical layers.
- Each module is responsible for a specific functional requirement.

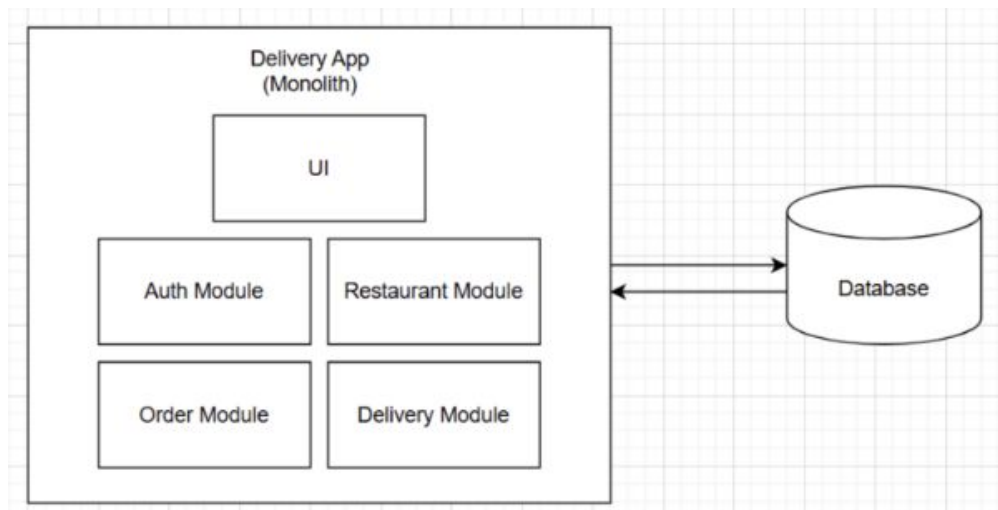


Modular Monolithic Architecture

- Strengths of modular monoliths:
 - **Maintainability** - code localised to a specific function/domain doesn't need to interact with other modules
 - **Performance** - likely more performant than layered, since data processing for a specific domain occurs in a 'localised' spot rather than having to cross several layers
 - **Data Consistency** - same as layered architecture (single shared database)
 - **Security** - can separate security handling into its own module, and highly sensitive operations can be isolated
- Weaknesses of modular monoliths:
 - **Scalability** - hard to scale individual modules independently of other modules
 - **Fault Tolerance** - same as layered architecture

Microservice Architecture

- Microservices are single-purpose, individually deployed units.
- Each microservice should manage its own data and perform one specific function very well.
- Microservice architectures organise systems around these microservices, which communicate with each other over a network (can be sync/async).

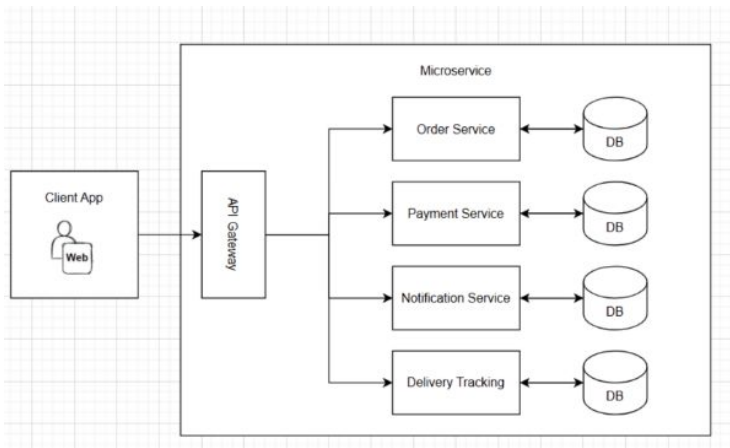


Microservice Architecture

- Strengths of microservice architectures:
 - **Scalability** - each microservice can be scaled independently
 - **Fault Isolation** - a fault in one microservice does not cascade onto other microservices
 - **Security** - a vulnerability in one microservice does not expose the whole system
 - **Maintainability** - easier to isolate specific issues due to separated responsibilities
- Weaknesses of microservice architectures:
 - **Cost** - a lot of infrastructure and networking is required compared to a monolith
 - **Data Consistency**: data within the same microservice is fine (each microservice manages its own data), but needs to be synchronised across different microservices
 - **Security** (again) - distributed systems have more 'access points' for attack - 'higher attack surface'

Event-Driven Architecture

- Event-driven architectures structure systems around components that respond to and broadcast particular *events*, which notify of significant changes in system state (somewhat similar to the Observer Pattern).
- Most communication inside of the system occurs *asynchronously* - system components send messages without waiting for responses.

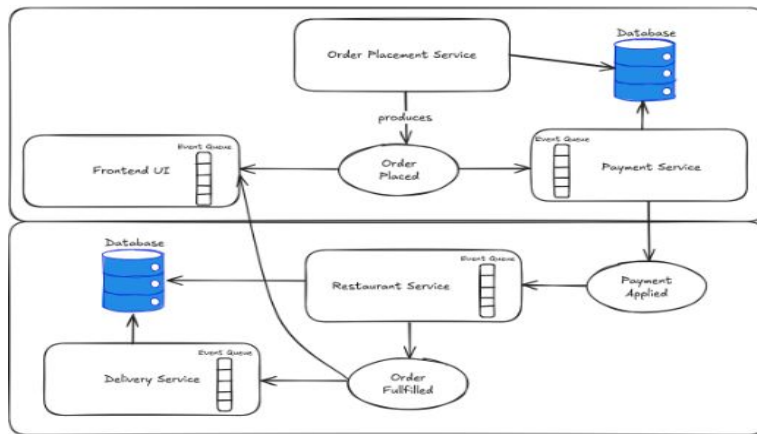

Event-Driven Architecture

- Strengths of event-driven architectures:
 - **Responsiveness:** reacts to real-time events very quickly
 - **Performance:** asynchronous messaging prevents services from having to 'wait' on each other
 - **Scalability:** individual components can be scaled independently
- Weaknesses of event-driven architectures:
 - **Complexity:** asynchronous messages can be difficult to understand and reason with, since actions don't necessarily occur in pre-defined orders
 - **Testability:** debugging asynchronous code is also complicated, as errors aren't immediate and it can be hard to localise particular problems.
 - **Data Consistency:** data across components is not necessarily consistent at a fixed point in time, and needs to be 'synchronised'