
COMP2511

Tutorial 3

Last Week's Tutorial

- Inheritance
- Method Overriding
- Abstract Classes and Interfaces

This Week's Tutorial

- Testing, Debugging and Exceptions
- Domain Modelling and UML Diagrams

Notices

- Assignment-i has been released on GitLab, and is due Week 5 Wednesday.
 - Please make sure that you give yourself ample time to plan out your the design for the assignment before jumping straight into coding!

Testing - JUnit

- JUnit is the main testing framework we use in this course, similar to what Jest is to COMP1531.
- Each testing suite is separated into its own class, and each of the methods defined in that class will be the individual unit tests.
 - For example, if you were making a test suite to test Task 1 of Assignment 1, this could be put in a file called `Task1Tests.java`, and a method in the class could be `testCreateTrain()`.
- Unit tests are identified using the `@Test` tag over method names, like the `@Override` tag for method overriding.
 - This tag is required to identify a block of code as a JUnit test.
- In each unit test, conditions are checked using **assertions**, such as `assertEquals()`, `assertTrue()` and `assertThrows()`. If any assertion in a unit test fails, the whole test fails.

Testing - JUnit Example (from Assignment 1)

```
21 public class TaskAExampleTests {
22     @Test
23     public void testCreateStations() {
24         TrainsController controller = new TrainsController();
25
26         controller.createStation("station1", "DepotStation", 1.0, 1.0);
27         assertEquals(new StationInfoResponse("station1", "DepotStation", new Position(1.0, 1.0)),
28             controller.getStationInfo("station1"));
29
30         controller.createStation("station2", "CargoStation", 10.0, 10.0);
31         assertEquals(new StationInfoResponse("station2", "CargoStation", new Position(10.0, 10.0)),
32             controller.getStationInfo("station2"));
33
34         controller.createStation("station3", "PassengerStation", 19.6, 15);
35         assertEquals(new StationInfoResponse("station3", "PassengerStation", new Position(19.6, 15)),
36             controller.getStationInfo("station3"));
37
38         assertListAreEqualIgnoringOrder(List.of("station1", "station2", "station3"), controller.listStationIds());
39     }
40 }
```

Testing - IDE Debugging

- At this point in the course, your main method of debugging has most likely been through using print statements.
- We have access to debugging techniques that allow us to step through the execution of the Java program (similar to GDB for C).
- A **breakpoint** is a specific spot in your code where you would like to intentionally pause execution.
 - In VS Code, they can be set on the *glyph margin*, which is the area to the left of each of the line numbers.
 - By running your code in **debug mode**, you can stop execution at breakpoints, allowing you to inspect the state of variables and step through lines of code to analyse the control flow of the program (if statements, while loops...).

Exceptions

- An **exception** is an event that occurs when an error is encountered during the execution of a program.
 - When the error occurs, an *exception object* containing information about the error is created and **thrown** to the Java runtime system to handle.
 - In simpler terms, think of an exception as a **flag** that something has gone wrong, such as dividing by zero or trying to dereference a null object.
- In Java, exceptions are classified into two categories:
 - **Checked exceptions** - methods that can throw these exceptions must explicitly declare so in the method signature, and handled in a *try-catch* block (eg. `IOException`).
 - **Unchecked exceptions** - these do *not* need to be included in a method's signature or caught in a try-catch block (eg. `ArithmeticException`, `IllegalArgumentException`).

Live Example: Debugging (Pt. 1)

- The Wondrous Sequence is generated by the simple rule:
 - If the current term is even, the next term is half the current term.
 - If the current term is odd, the next term is three times the current term, plus 1.
 - For example, the sequence generated by starting with 3 is [3, 10, 5, 16, 8, 4, 2, 1].
 - If the starting term is 1, then an empty list is returned.
- Inside **src/wondrous** there is an implementation of this algorithm, and a single test for the function which currently fails.
- Use the debug tools and the given algorithm to determine why the test is failing, and fix the bug.


Live Example: Debugging (Pt. 2)

- Are we confident that the implementation is completely bug-free now?
Create a new unit test for a potentially untested case.
- Alongside the above, modify the method such that if `start` is less than 1, an `IllegalArgumentException` is thrown. Write a corresponding test case for this.
 - In many cases when we throw an exception we need to update the method signature and existing tests but here we don't - why is this?

UML Class Diagrams



- **UML** (**U**nified **M**odeling **L**anguage) Class Diagrams are used to visually demonstrate the **structure** of a system in terms of its components (classes) and the **relationships** between each of the components.
- From a UML diagram, we should be able to tell a lot about the classes in the system, such as:
 - which classes are present in the system
 - what fields and methods each of the classes have
 - which classes are subclasses of other classes (**is-a** relationships)
 - which classes contain instances of other classes (**has-a** relationships) and the **cardinality** of the relationship (e.g. 1 car has 1 steering wheel, 1 class has many students, many students have 1 teacher)

UML Diagram Example

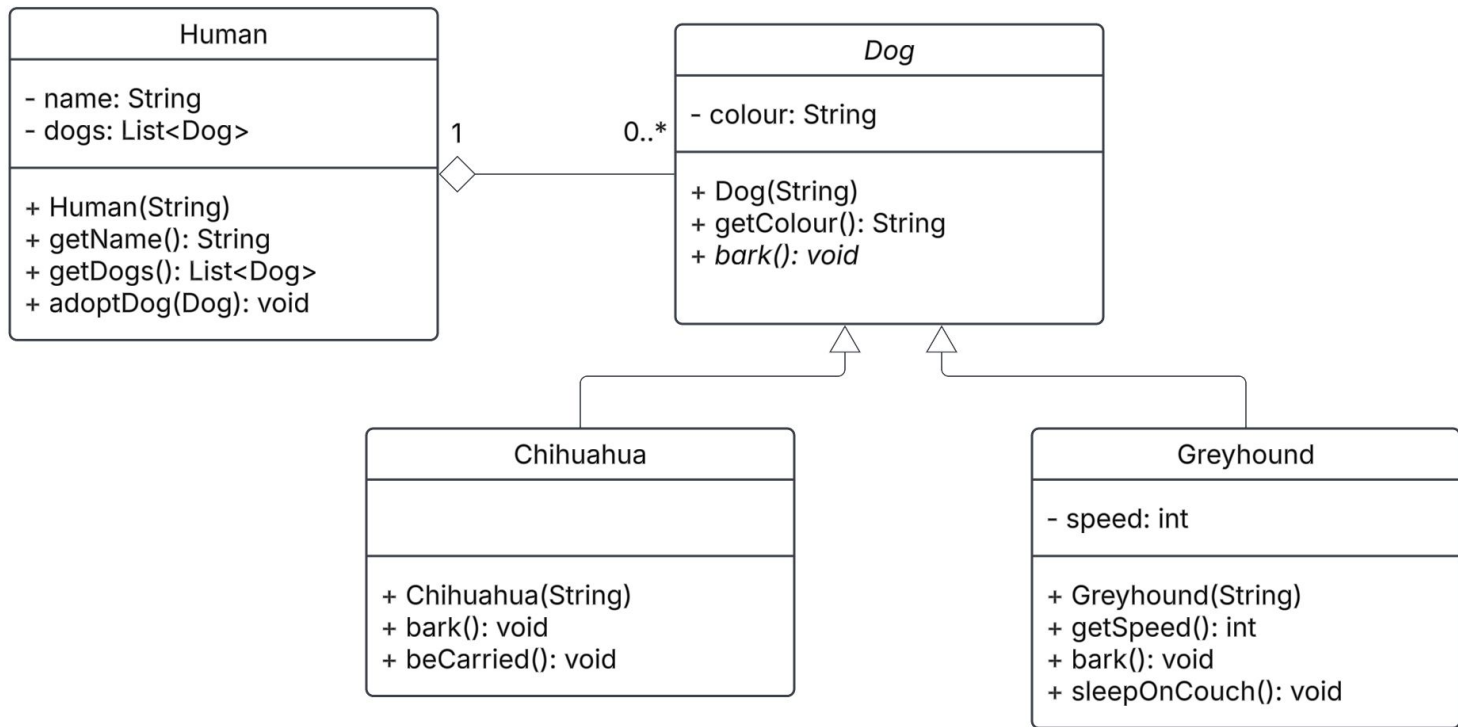

Relationships in UML Diagrams

- For inheritance/implementation, the arrow points to the parent class being inherited/interface being implemented.
- For 'has-a' relationships, the diamond is on the side of the container.
- There are two types of 'has-a' relationships:
 - **Aggregation:** A contains B. B *can* exist independently of A (i.e. the existence of B is not directly tied to A). For example, a classroom has students.
 - **Composition:** A contains B. B *cannot* exist independently of A (i.e. the existence of B is directly tied to A). For example, a person has thoughts.

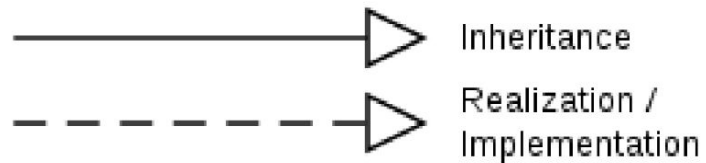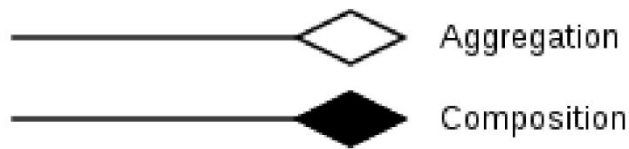

Live Example: Domain Modelling

- A Car has one or more engines and a producer.
 - Thermal Engines, which have a default max speed of 114, although they can be produced with a different max speed, and the max speed can change to any value between 100 and 250.
- Cars are able to drive to a particular location x, y.

Additionally, we want to model the behaviour of a time travelling car, as well as time travelling for any vehicle. A 'time travelling vehicle' stays in the same location but travels to a LocalDateTime.

Create a UML diagram which models the domain.