



Why connect

Copilot agents only know what's in Microsoft 365 or general knowledge. They can't see what's actually happening in your deals. Once Backstory is connected, your agent can:

- Look up any account and pull its status, open opportunities, and scorecards
- Summarize recent activity and show who's engaged on a deal
- Answer SalesAI questions inside Teams or any channel you publish to

Reps ask Copilot about a deal and get an answer built on real activity data.

At a glance

Server URL	https://mcp.backstory.ai/mcp
Authentication	OAuth 2.0, Dynamic
What you configure by hand	Just the URL. No client IDs, secrets, or scopes.
Who signs in	Each user, with their own Backstory login. Data is scoped to what the user can see in Backstory.

How auth works Backstory MCP uses OAuth 2.0 with dynamic discovery. Copilot Studio reads the authorization endpoints and scopes from the server itself, so there are no client IDs, secrets, or scope strings to configure by hand. You sign in once, and the connection is stored in the environment for reuse on other agents and flows.

Before you start


- A Copilot Studio agent you can edit, in an environment where you're allowed to create connections.
- Your Backstory sign-in. The connection authenticates as you, so the agent sees the data your Backstory user can see.
- The MCP server URL below — the only value you have to paste.

MCP server URL `https://mcp.backstory.ai/mcp`

The setup

1. Open your agent and find Tools


Open the agent in Copilot Studio and stay on the **Build** tab. The configuration panel on the right lists Model, Skills, Tools, Knowledge, Connected agents, and Memory. Select the **+** next to **Tools**.

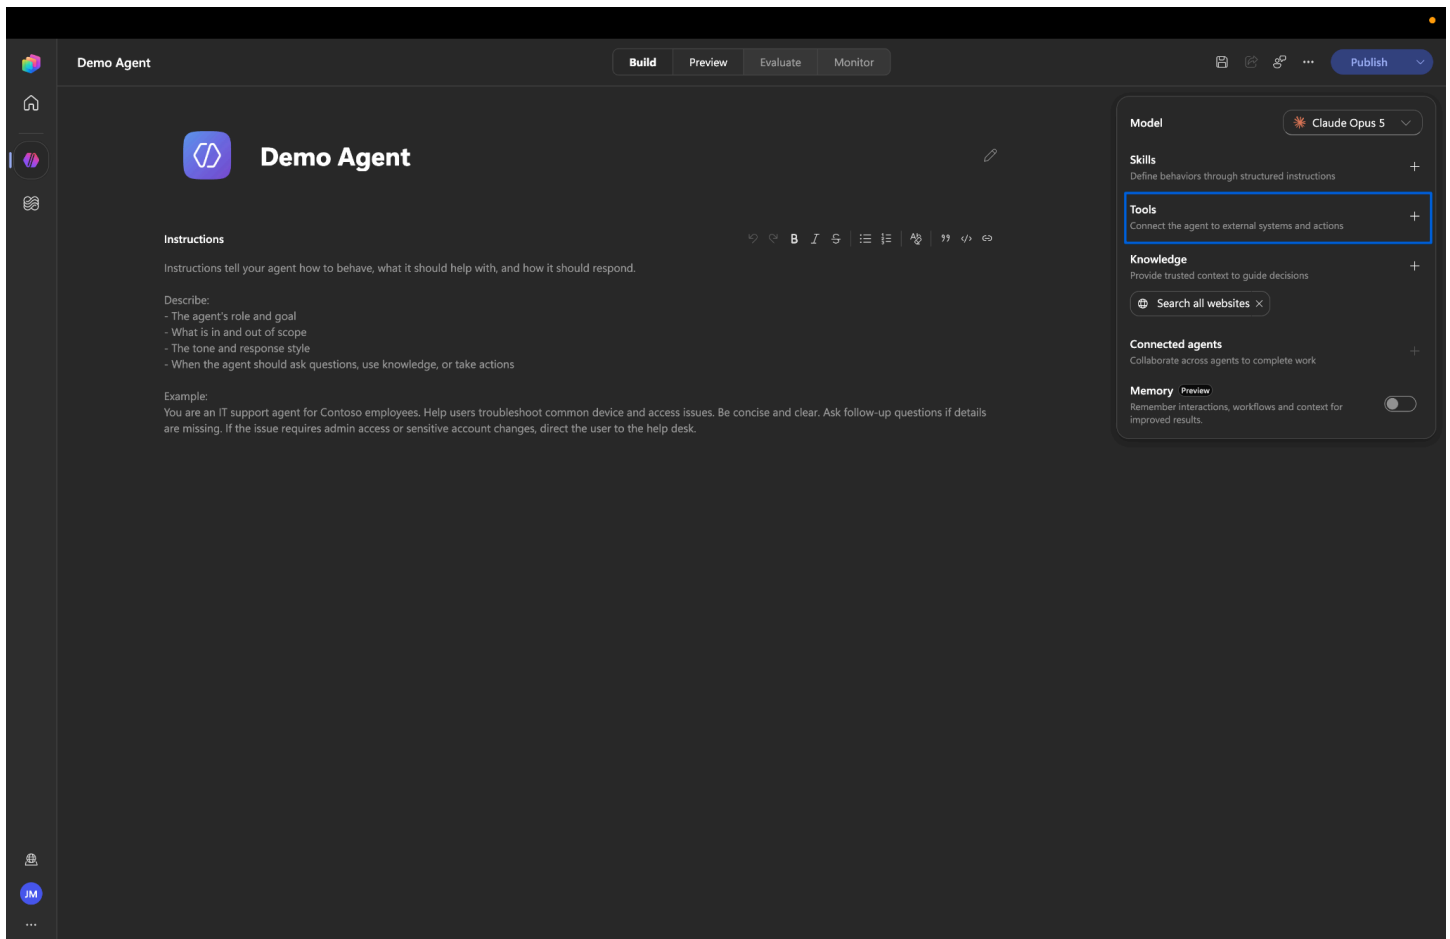

Select + next to tools in configuration Panel

2. Start a new tool instead of picking a featured one


The **Add a tool** dialog opens on the featured Microsoft connectors. Skip those and select **+ Add** to the right of the search box.

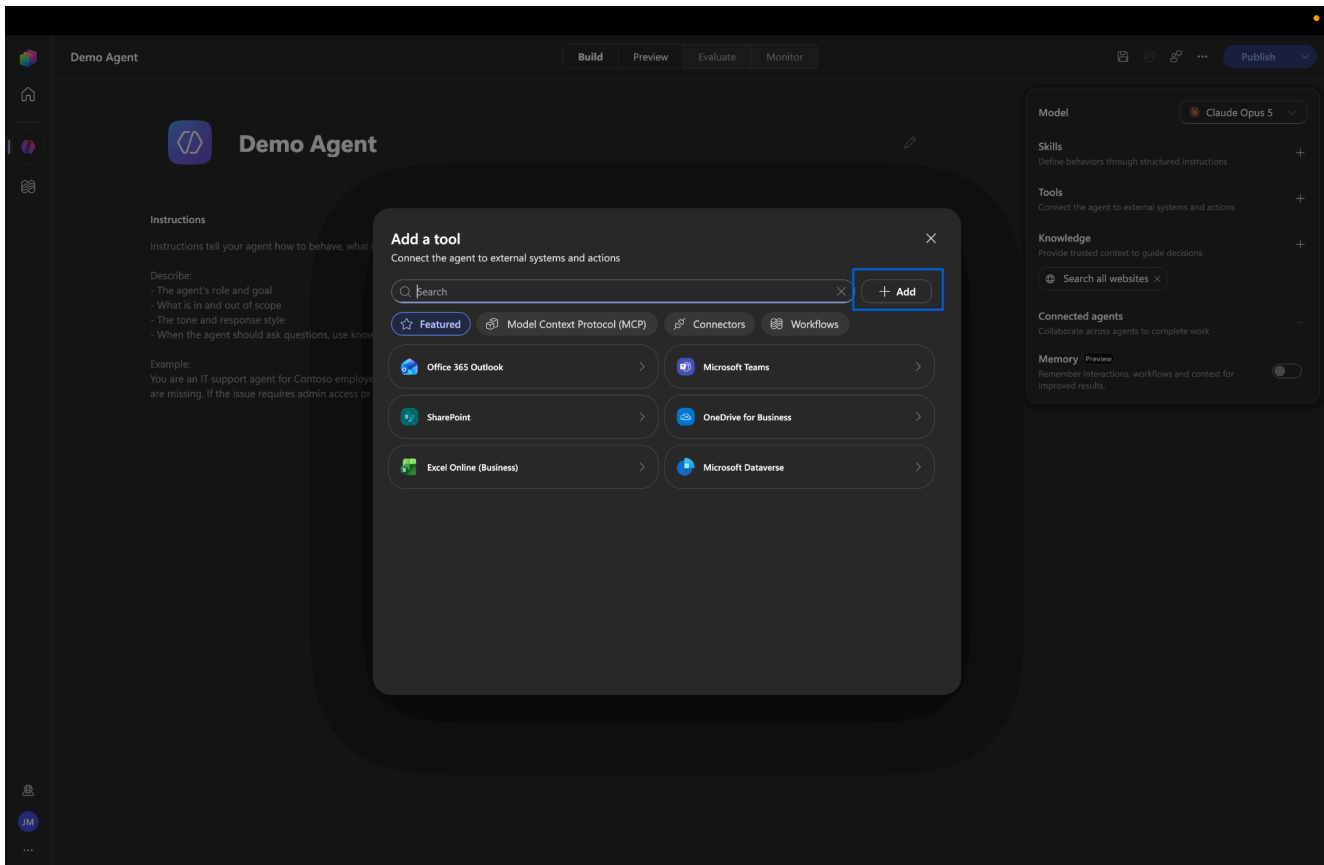

Add a tool → + Add

3. Choose Model Context Protocol (MCP)

Pick **Model Context Protocol (MCP)** from the menu. **Workflow** is for Power Automate flows and won't work here.

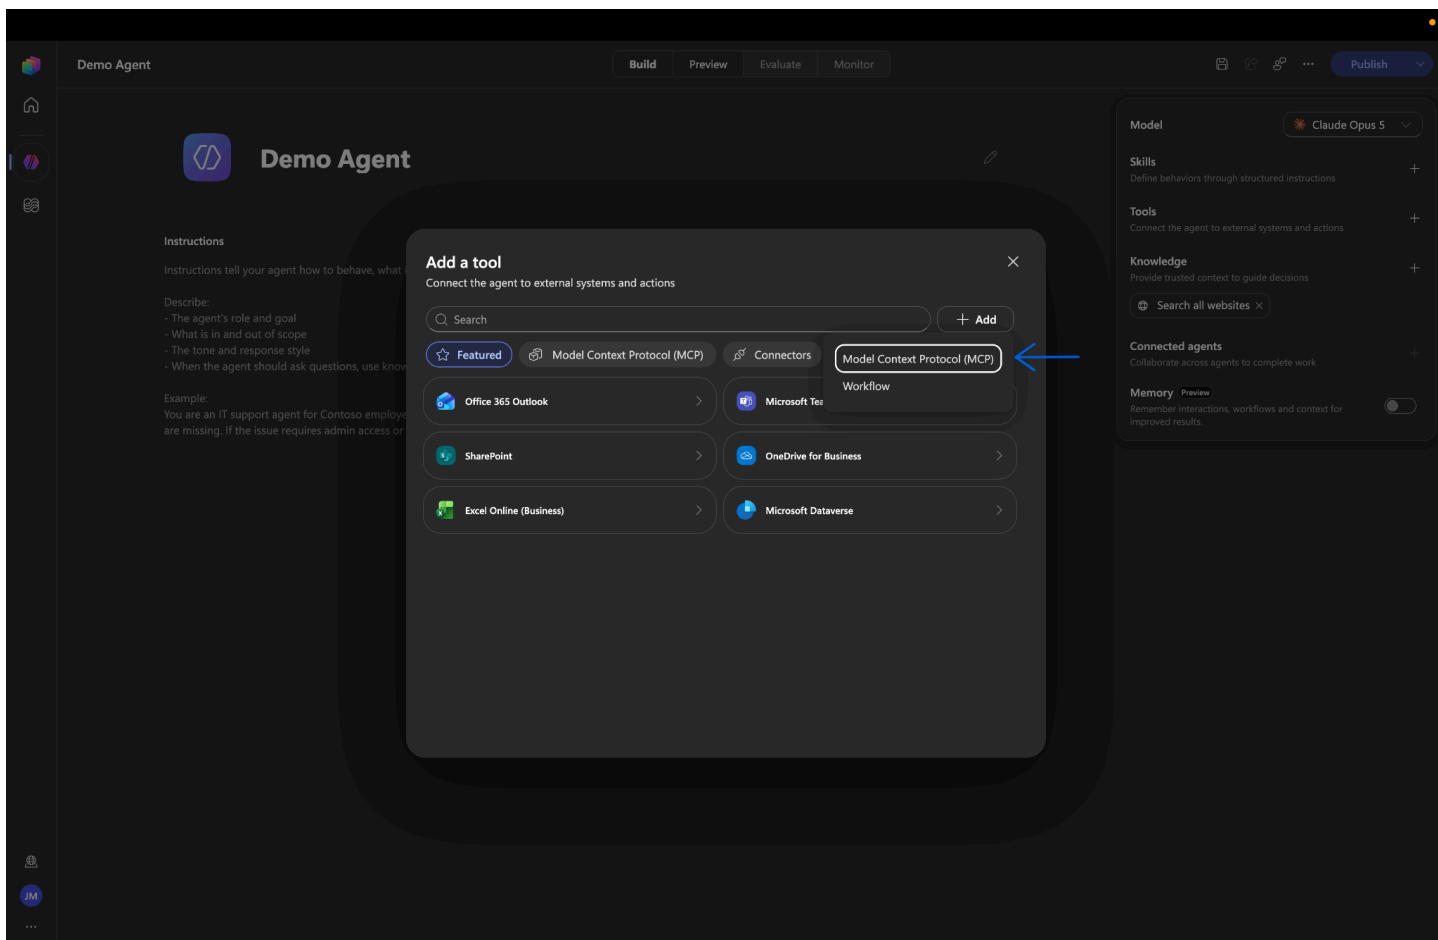


Click Add → Model Context Protocol (MCP)

4. Enter the server details

Fill in the Add MCP server form:

Server name	Backstory
Server description	Describe the data the server provides, for example: account, opportunity, activity, and scorecard intelligence from Backstory. The model reads this text to decide when to use the server.
Server URL	https://mcp.backstory.ai/mcp
Authentication	OAuth 2.0
Configuration type	Dynamic (with discovery)

Select **Add**.

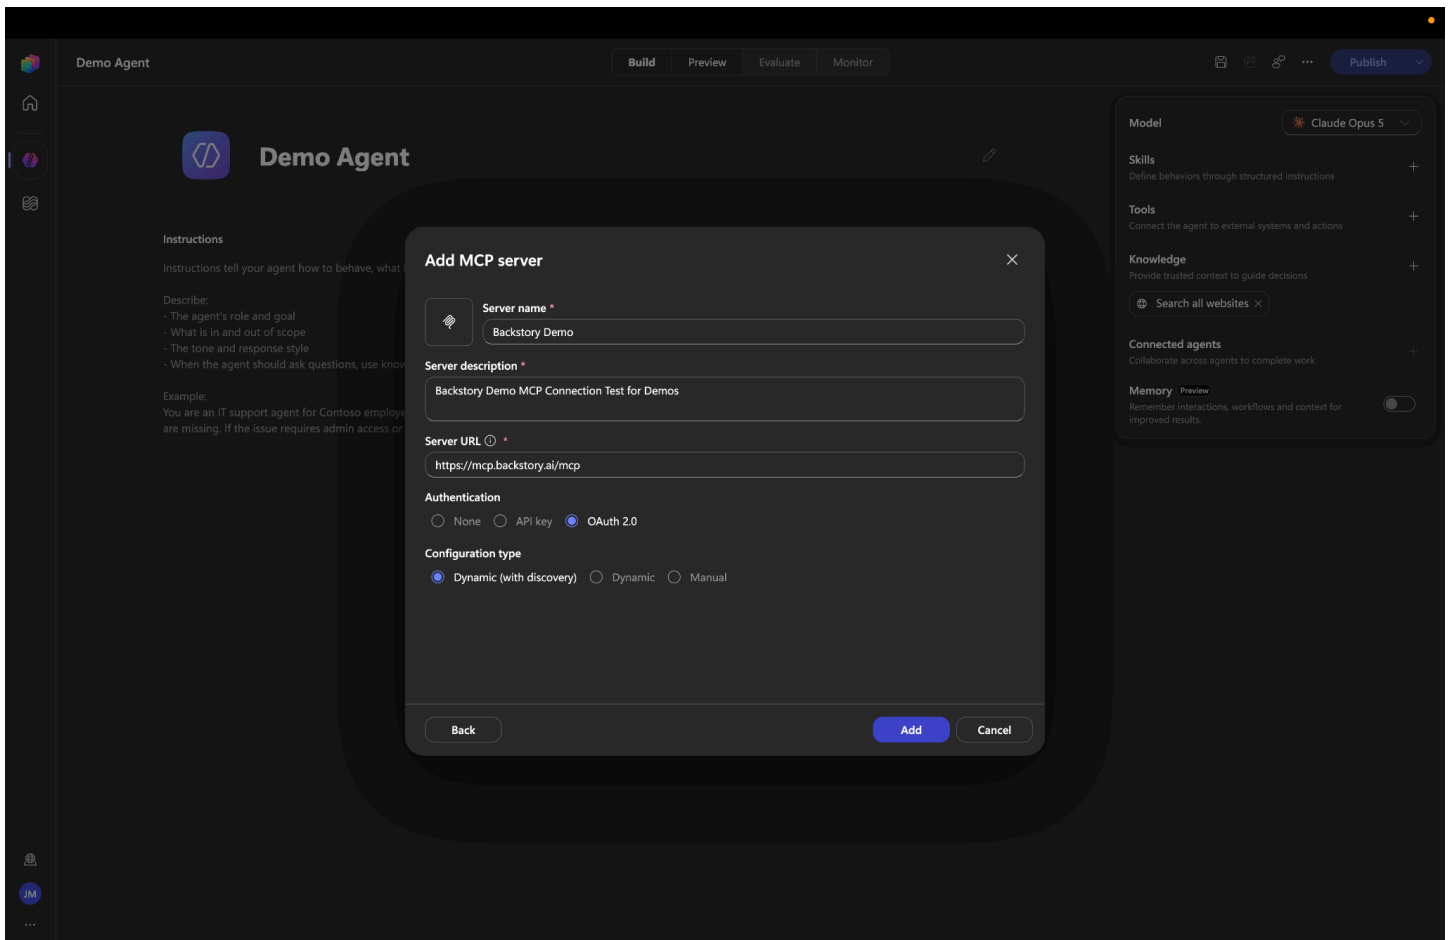


Add MCP server → Click Add

Watch the URL The path matters: the URL ends in /mcp. A trailing slash or a missing path is the most common reason discovery fails and no tools appear later.

5. Open the connection picker


Copilot Studio saves the server and asks which connection to use. The first time, it shows **Not connected**. Open the dropdown next to it.

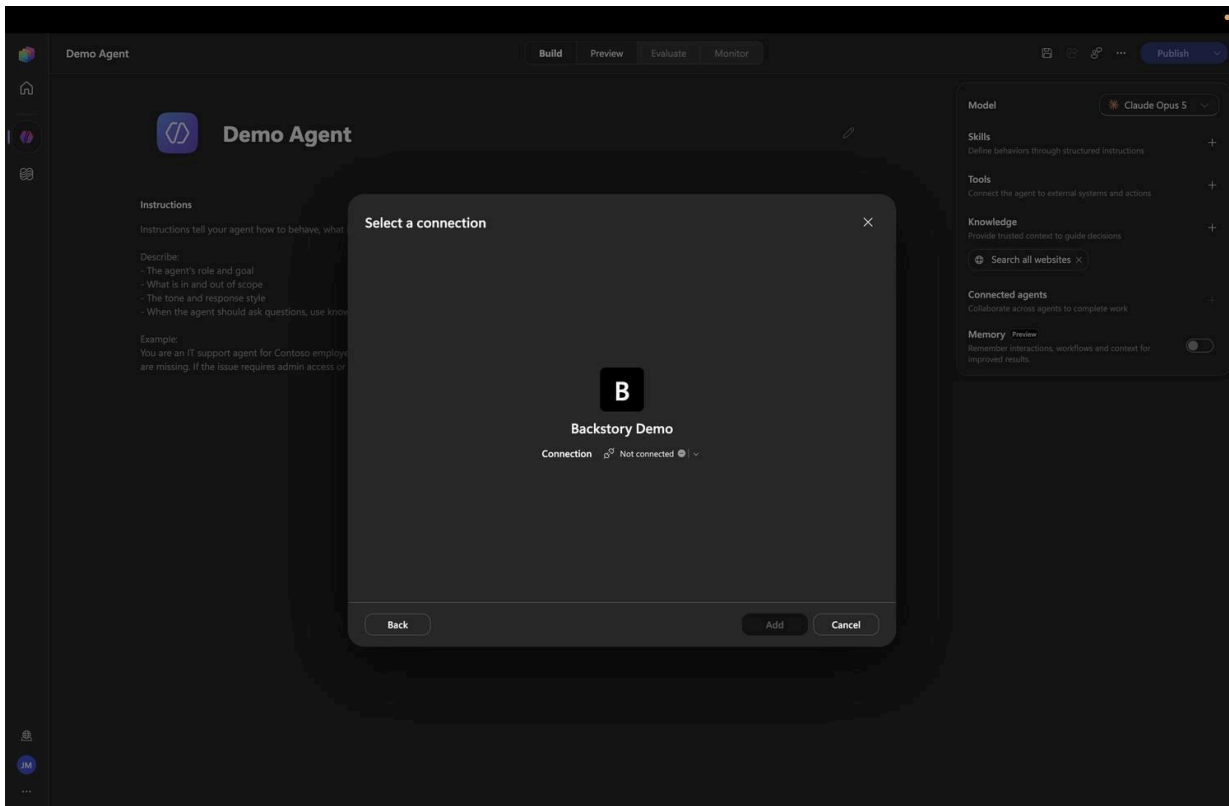

Select a connection → Not connected

6. Create a new connection


With no connection in the environment yet, the list reads **No connections available**. Select **Create new connection**.

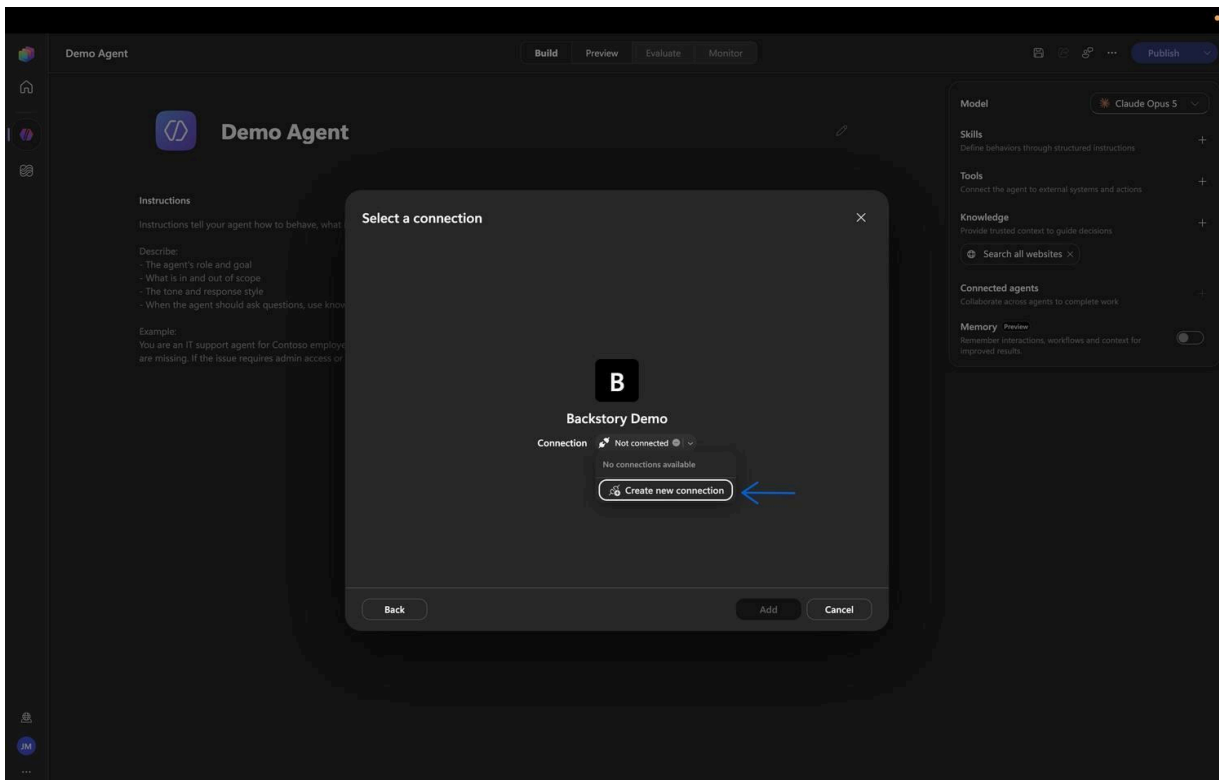

Create new connection

7. Name the connection and create it

Give the connection a display name you'll recognise later — **Backstory MCP** works well, since the environment may end up holding several. Select **Create**. A Backstory sign-in window opens.

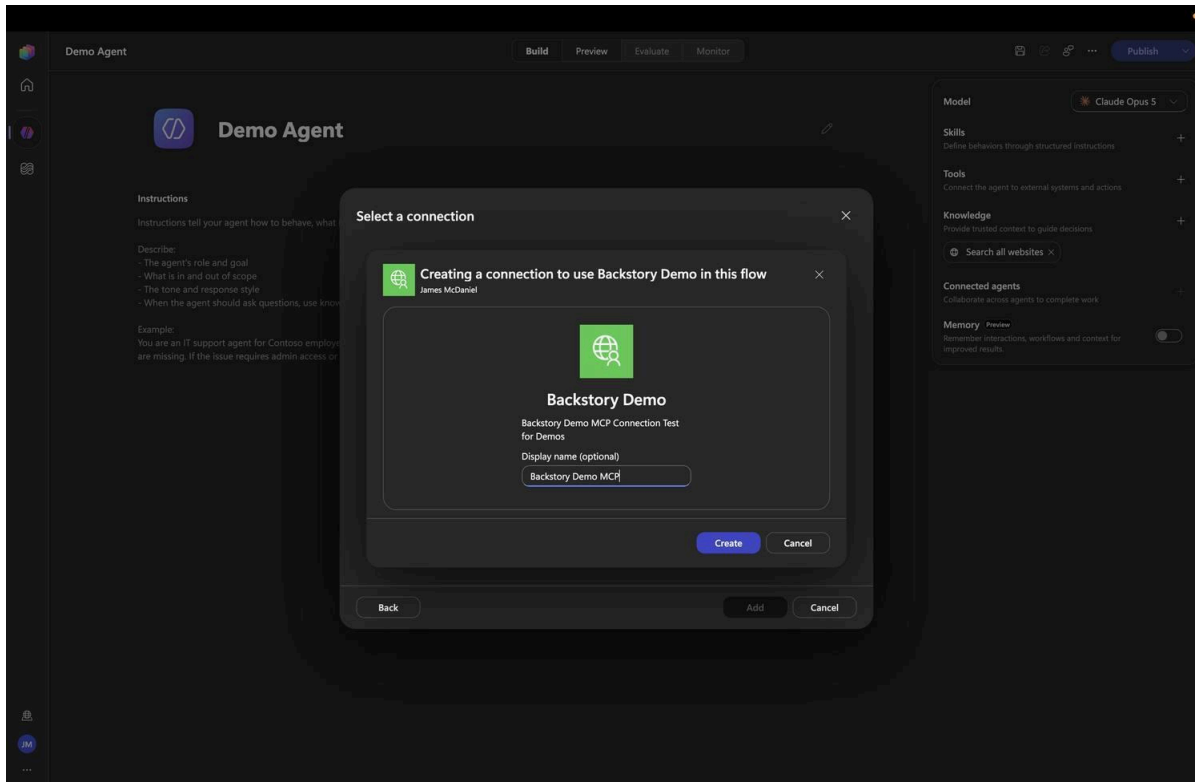

Display name → Create

8. Sign in to Backstory

Enter your Backstory email and your company identification and select **Sign In**, or use **Sign in with only an email address** to get a link instead. Approve the consent prompt if one appears; the window closes on its own when authentication succeeds.

Sign In

Unlock your complete story with Backstory


Sign In

Sign in with only an email address

[TERMS OF SERVICE](#) [PRIVACY POLICY](#) [SECURITY & TRUST](#)

Finally, forecast with facts

Confidently call your number with real data and AI-driven analysis—not guesswork.

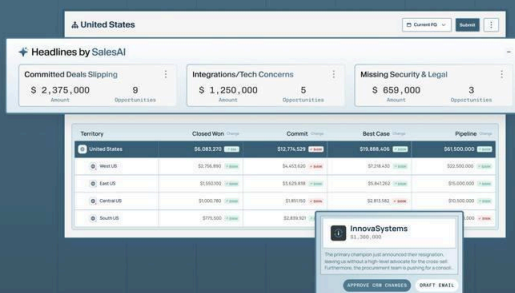


Backstory sign-in — credentials redacted

Popups If nothing happens after Create, the sign-in window was blocked. Allow popups for the Copilot Studio maker portal and try again.

9. Add the server to the agent

Back in **Select a connection**, the connection now shows its name with a green check. Select **Add**.

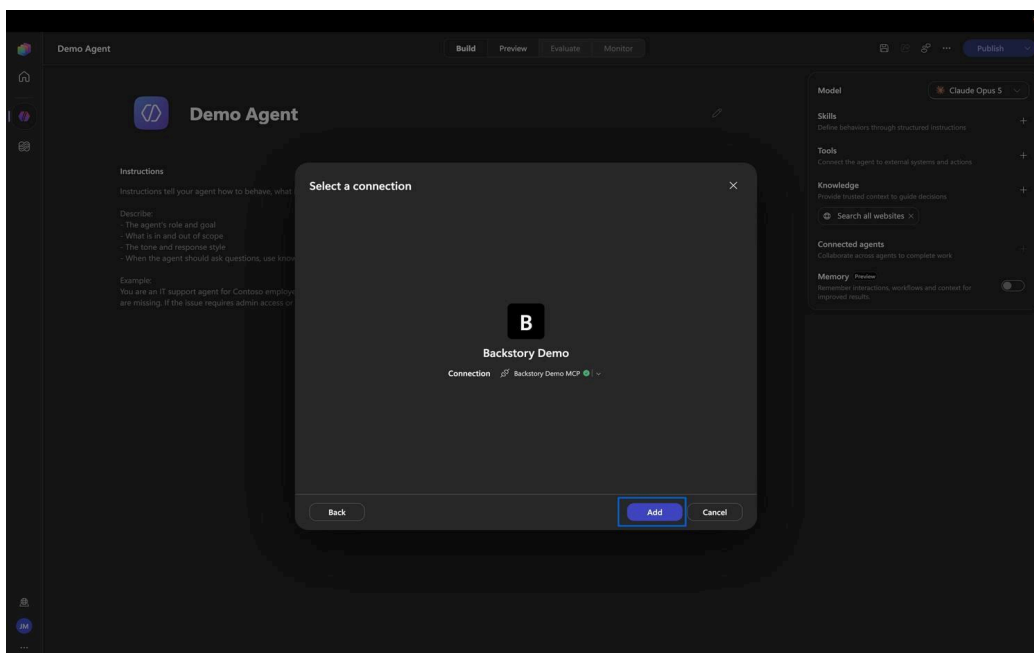


Connected → Add

Verify and publish

The Backstory server now appears under Tools on the agent, with its tools discovered automatically — account lookup, account and opportunity status, recent activity, engaged people, scorecards, and the SalesAI questions. Open the server entry if you want to review the list or turn individual tools off.

- Save the agent, then switch to Preview and ask something that can only come from Backstory, such as “What’s the current status of [one of your accounts]?”

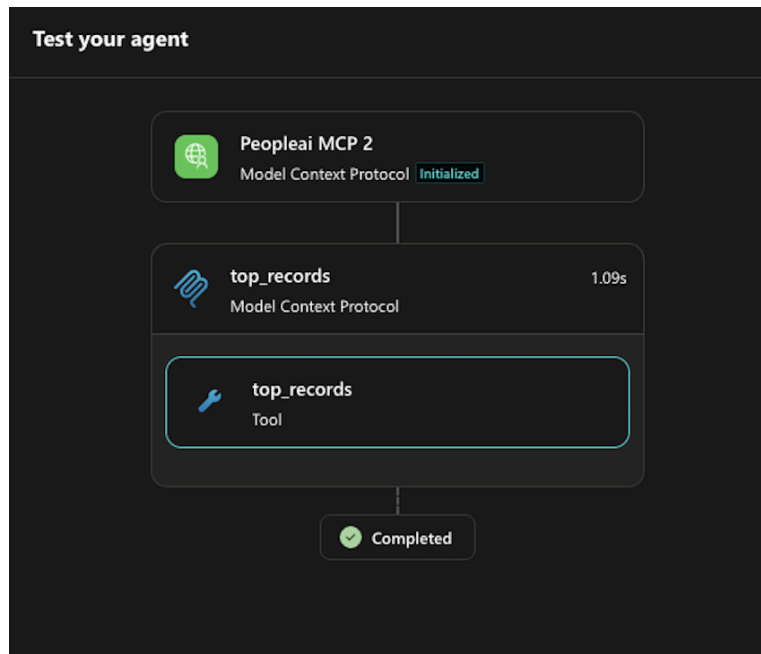

- Watch the activity map in the test pane to confirm the agent called a Backstory tool rather than answering from general knowledge.
- Publish when the response looks right. If you publish to Teams or another channel, each user signs in with their own Backstory credentials the first time they trigger the tool.

Troubleshooting

No tools listed under the server. Discovery didn’t complete. Check the URL ends in /mcp and that the configuration type is Dynamic (with discovery), then remove and re-add the server.

The connection keeps showing “Not connected.” Open the server under Tools, reselect the connection from the dropdown, save, and refresh the maker portal. A stale editor session is a common cause of connector binding errors.

Sign-in window never opens. Popups are blocked, or a previous Backstory session in the same browser is interfering. Allow popups, or retry in a private window.

The agent answers without calling Backstory. The server description doubles as tool routing guidance. Make it specific about the data it serves, and reference Backstory explicitly in the agent instructions — for example: use the Backstory tools for anything about accounts, opportunities, activity, or contacts.

Wrong or empty data. Results are scoped to the Backstory user who authenticated. Confirm you signed in with the account that owns the records you expect.