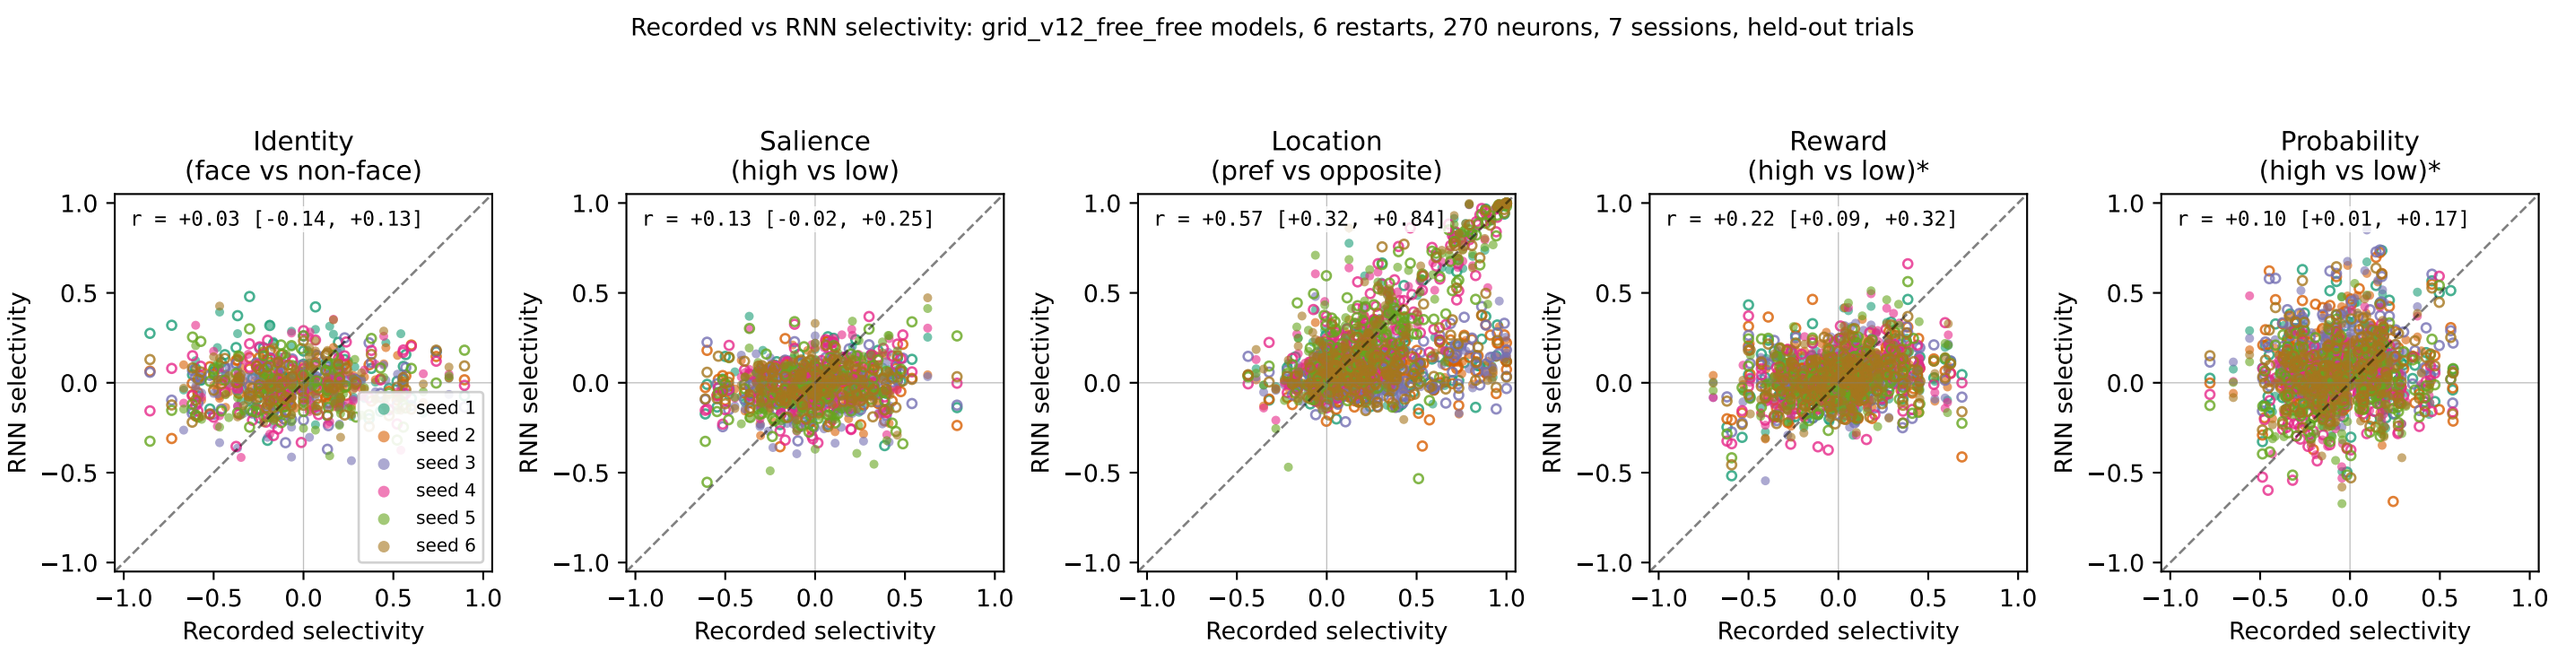

Recorded vs RNN selectivity: grid_v12_free_free models, 6 restarts, 270 neurons, 7 sessions, held-out trials
Identity
(face vs non-face)
r = +0.03 [-0.14, +0.13]
Salience
(high vs low)
r = +0.13 [-0.02, +0.25]
Location
(pref vs opposite)
r = +0.57 [+0.32, +0.84]
Reward
(high vs low)*
r = +0.22 [+0.09, +0.32]
Probability
(high vs low)*
r = +0.10 [+0.01, +0.17]
RNN selectivity
Recorded selectivity
seed 1
seed 2
seed 3
seed 4
seed 5
seed 6
Selectivity = 2 x (ROC area - 0.5), 50-250 ms after target onset, at each neuron's preferred location. Filled: E, open: I. r per seed in legend order (mean [min, max] for more than 3). RNN: training noise, Poisson spikes, mean of 10 draws.
* Trial reward and probability are not model inputs; context models receive the block reward map and probability context.