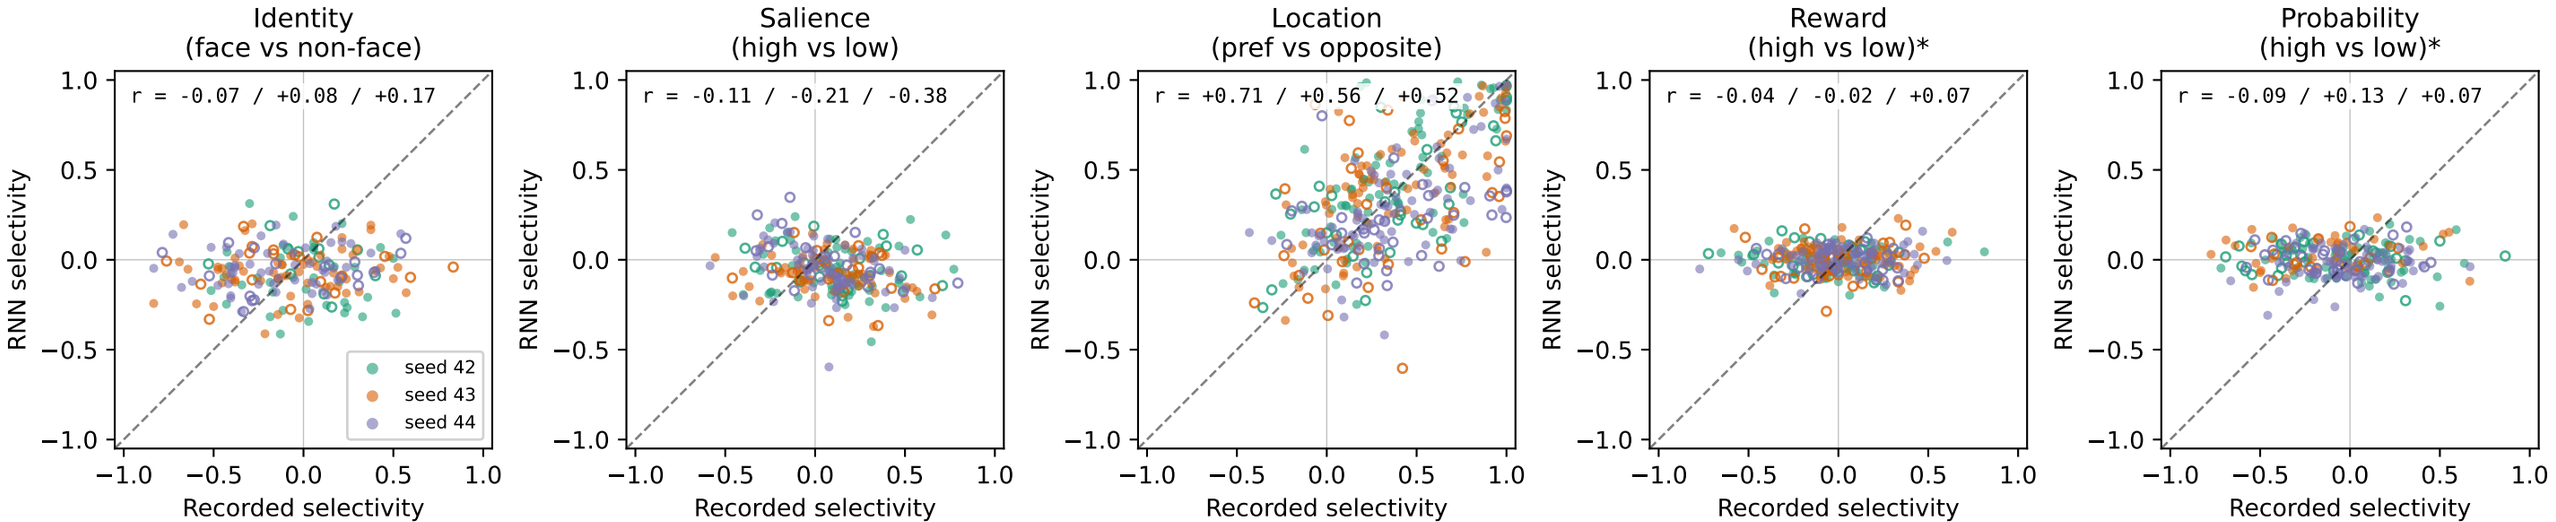

Recorded vs RNN selectivity: cond_target models, 3 seeds, 109 neurons, 3 sessions, held-out trials
Identity
(face vs non-face)
r = -0.07 / +0.08 / +0.17
Salience
(high vs low)
r = -0.11 / -0.21 / -0.38
Location
(pref vs opposite)
r = +0.71 / +0.56 / +0.52
Reward
(high vs low)*
r = -0.04 / -0.02 / +0.07
Probability
(high vs low)*
r = -0.09 / +0.13 / +0.07
seed 42
seed 43
seed 44
RNN selectivity
Recorded selectivity
1.0
0.5
0.0
−0.5
−1.0
Selectivity = 2 x (ROC area - 0.5), 50-250 ms after target onset, at each neuron's preferred location. Filled: E, open: I. r per seed in legend order. RNN: training noise, Poisson spikes, mean of 10 draws.
* Not available in model inputs before reward.