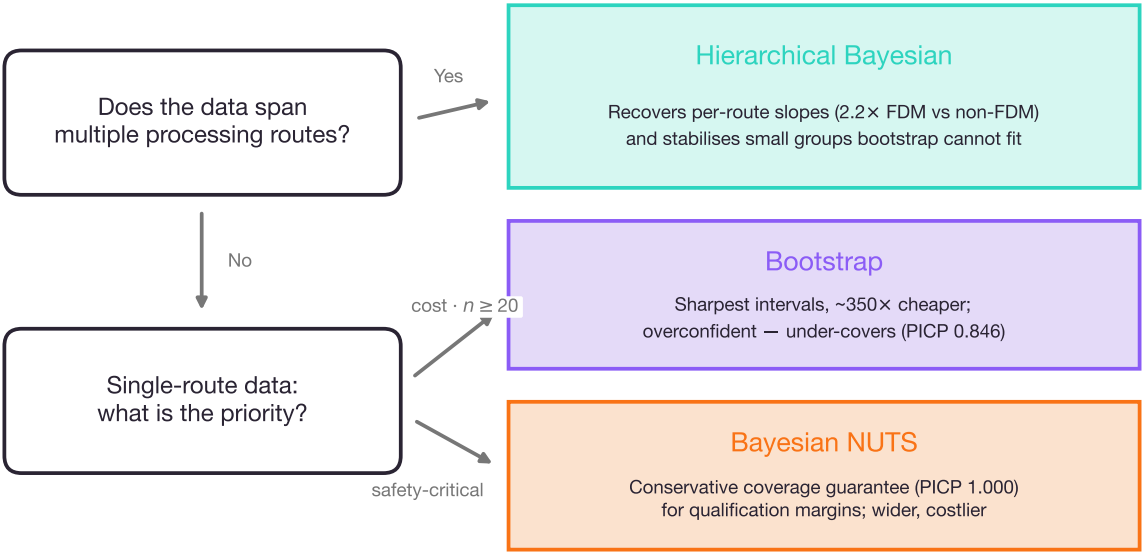
Does the data span multiple processing routes?
Yes
Hierarchical Bayesian
Recovers per-route slopes (2.2× FDM vs non-FDM) and stabilises small groups bootstrap cannot fit
No
Single-route data: what is the priority?
cost · n ≥ 20
Bootstrap
Sharpest intervals, ~350× cheaper; overconfident — under-covers (PICP 0.846)
safety-critical
Bayesian NUTS
Conservative coverage guarantee (PICP 1.000) for qualification margins; wider, costlier