


Buy a link by laying a marker on it and putting as many counters in the tray as the link has dots. A network is a set of bought links that lets the pawn walk on markers between every two circled places. A network may go through a place in a square, or leave it out.

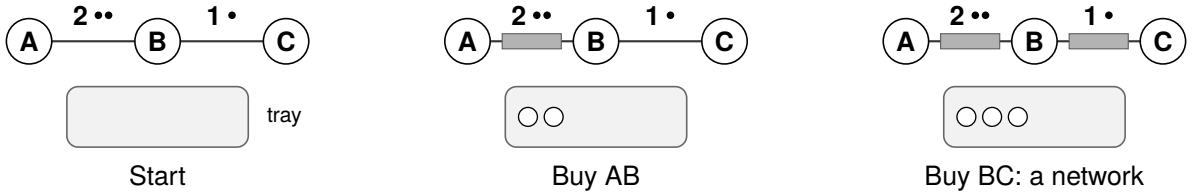


Problem 1: Buy a network that costs as few counters as you can. How many different networks cost just that much? Draw each one.

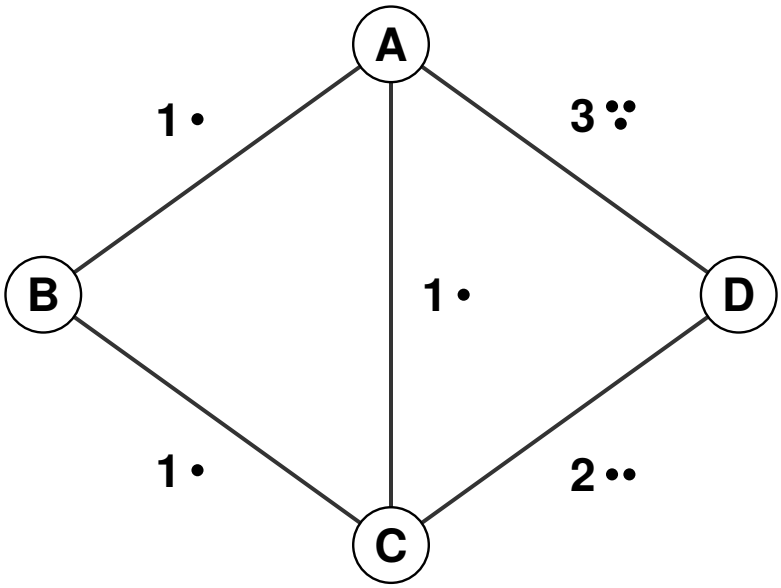


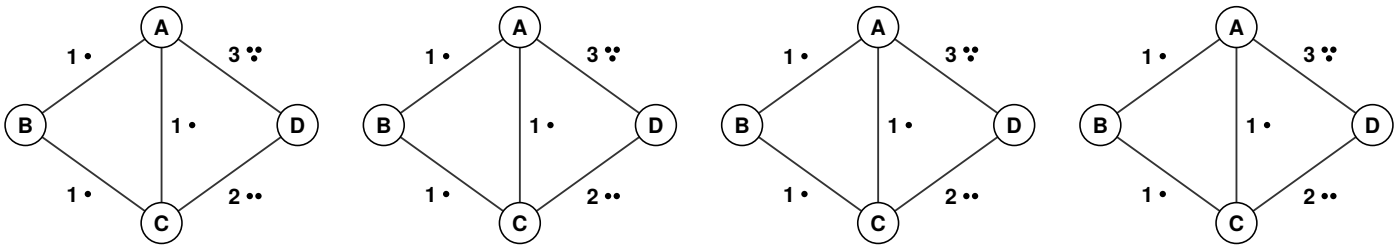


Problem 2: On the big map, lay markers on the 1-dot links, then the 2-dot, 3-dot and 4-dot links, and each time ring the groups of places the pawn can walk between, as in the pictures. When can the pawn first walk from A to F?

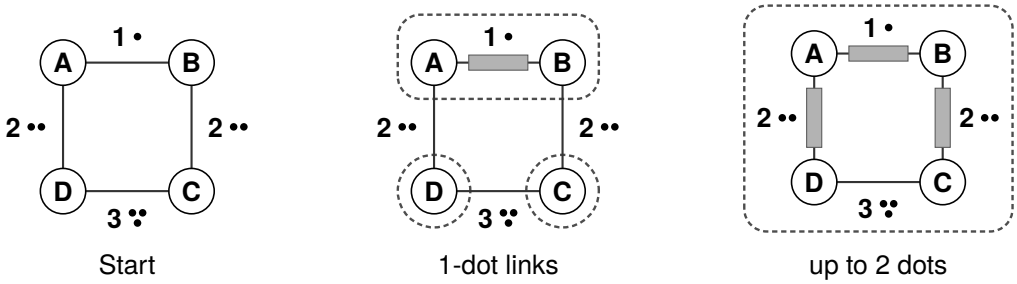


Start 1-dot links up to 2 dots

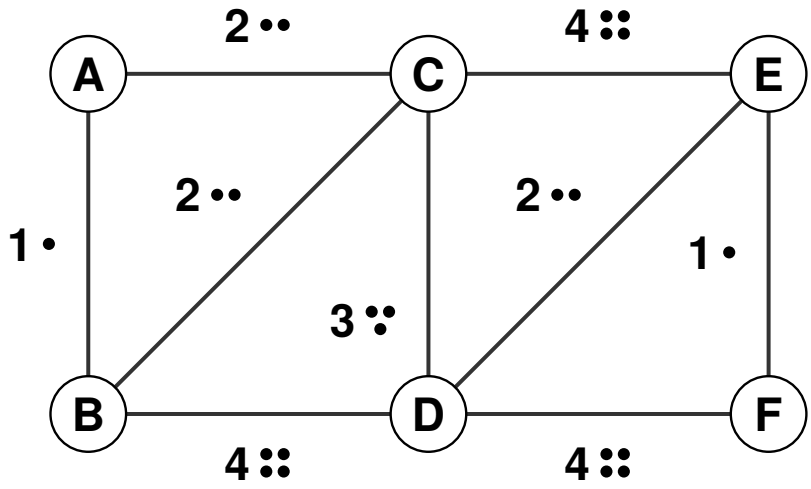


1-dot links

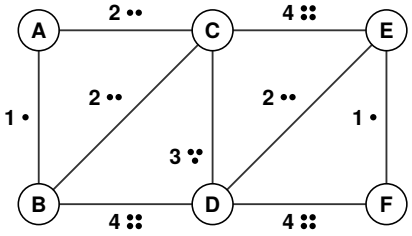


up to 2 dots

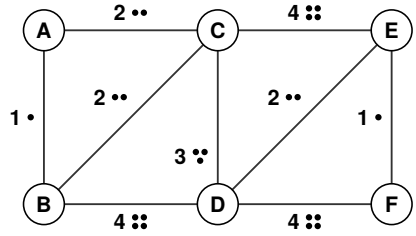


up to 3 dots

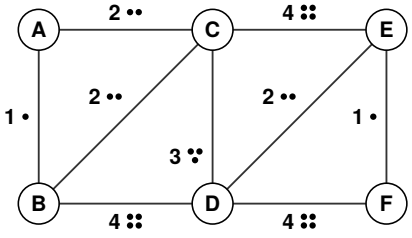



up to 4 dots

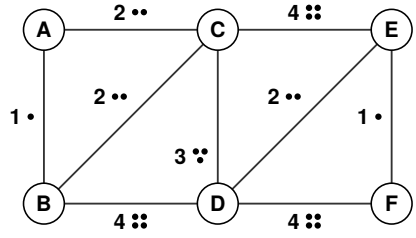


Problem 3: Buy the cheapest network you can on this map. Can you buy a network that has no link with 3 or 4 dots?

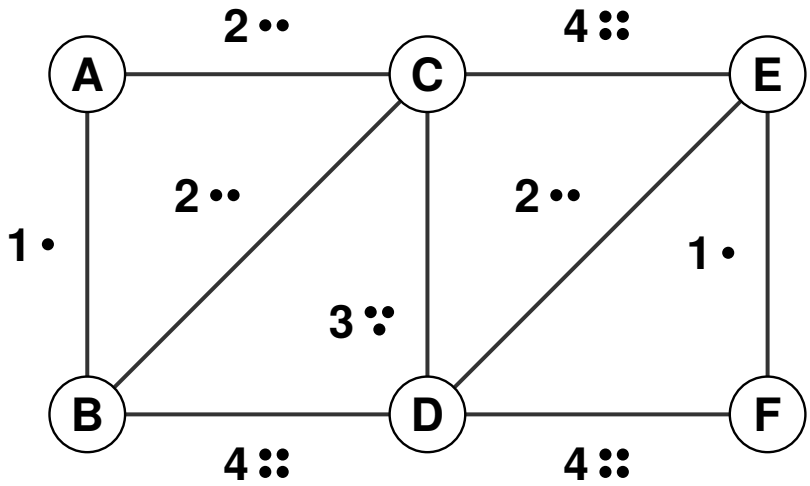

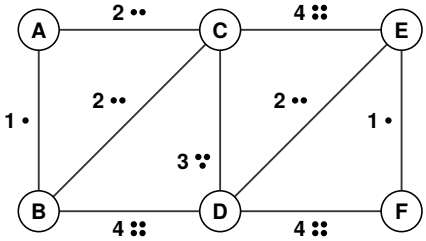


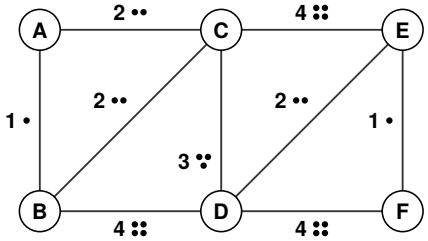


Problem 4: Join A, B and C as cheaply as you can, once without the square and once using it. Pay for each in its own pile.




Start




Buy AS



Buy SB




Or buy only AB

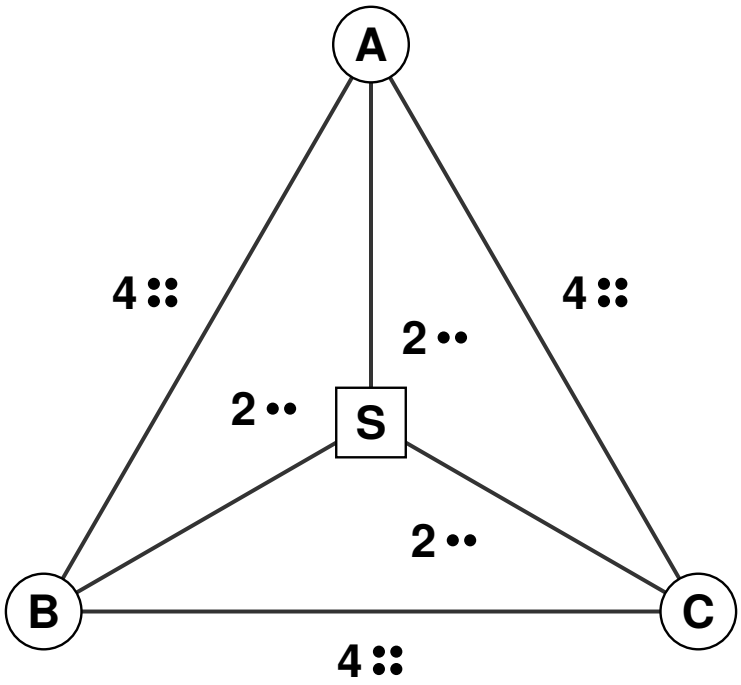


without the square ☐ using the square ☐

Problem 5: On each map, join the circles as cheaply as you can, once without the square and once using it. Does the square save counters?

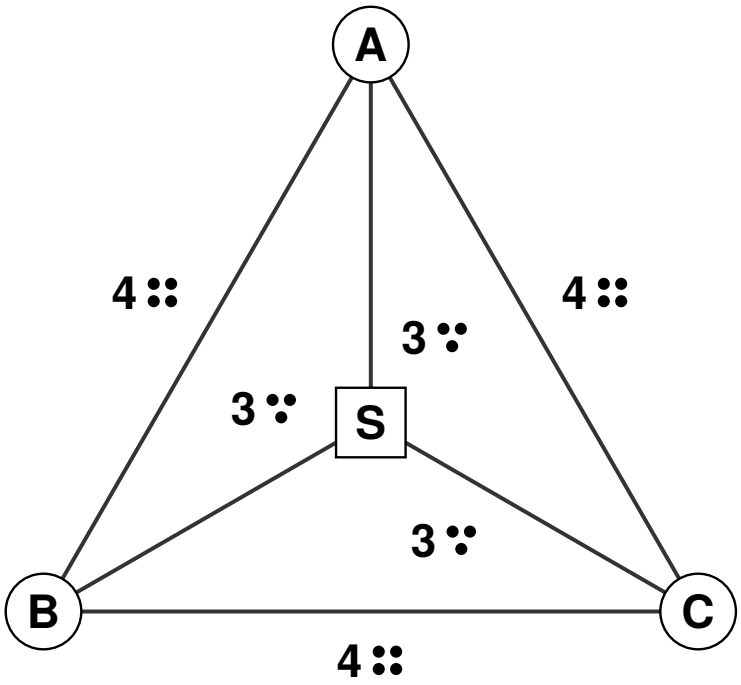

without ☐


using ☐

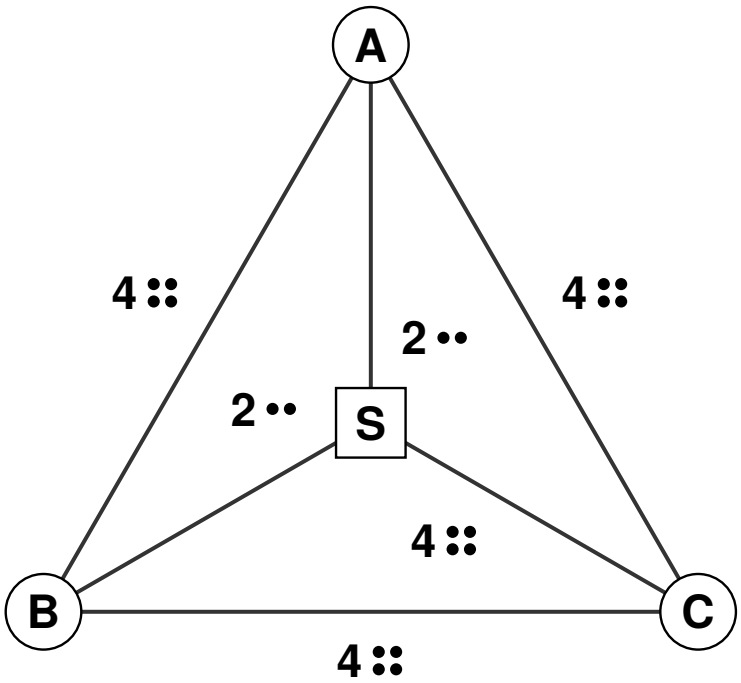

without ☐


using ☐


Problem 6: Join the circles as cheaply as you can, once without the square and once using it. Does the square save counters?

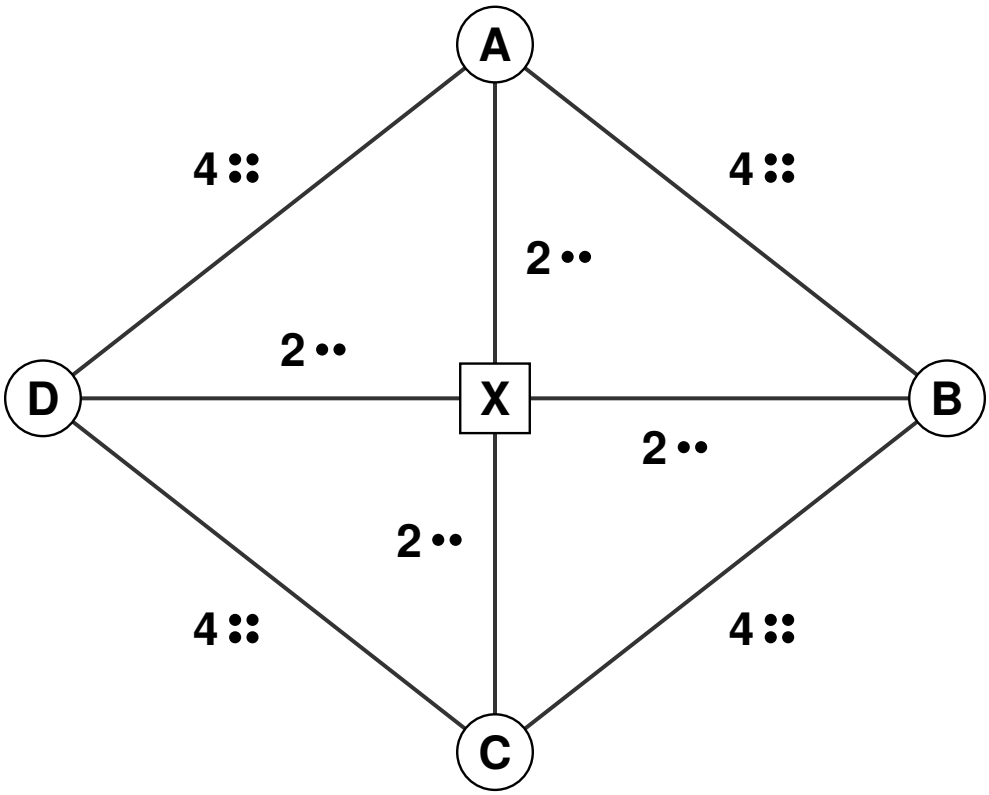

without ☐ using ☐

Problem 7: Join A, B, C and D as cheaply as you can.

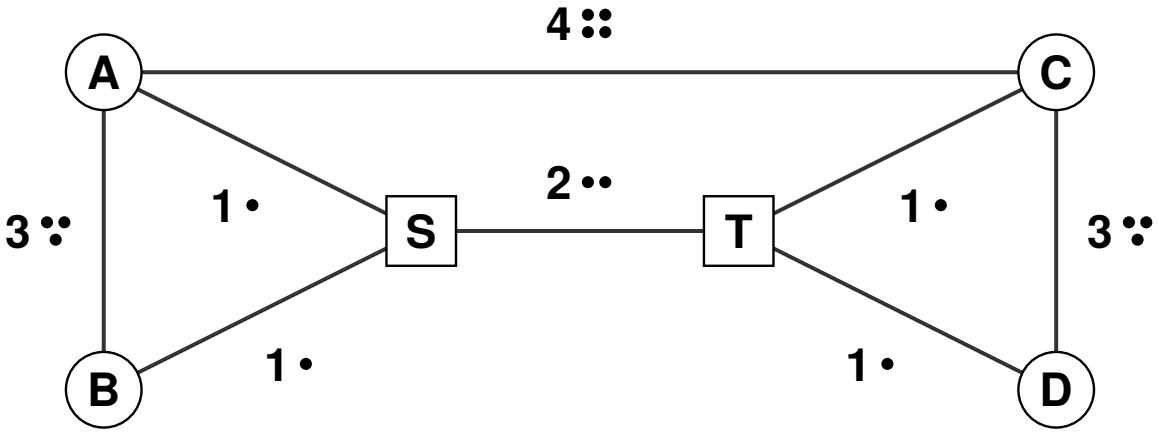

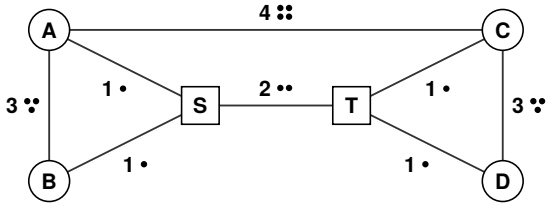

Problem 8: Draw dots on the links to the square so that joining A, B and C as cheaply as you can costs the same using the square as without it.

