

Anura: A manual

Anura is a GUI debugger with most basic and some advanced features to help you develop and debug your programs.

Startup

Anura will open very blank, don't worry this just leaves room for your wonderful program to fit. To launch a new process use the file drop-down in the top left, and select 'open'. Anura can open any Linux-x64 ELF binary.

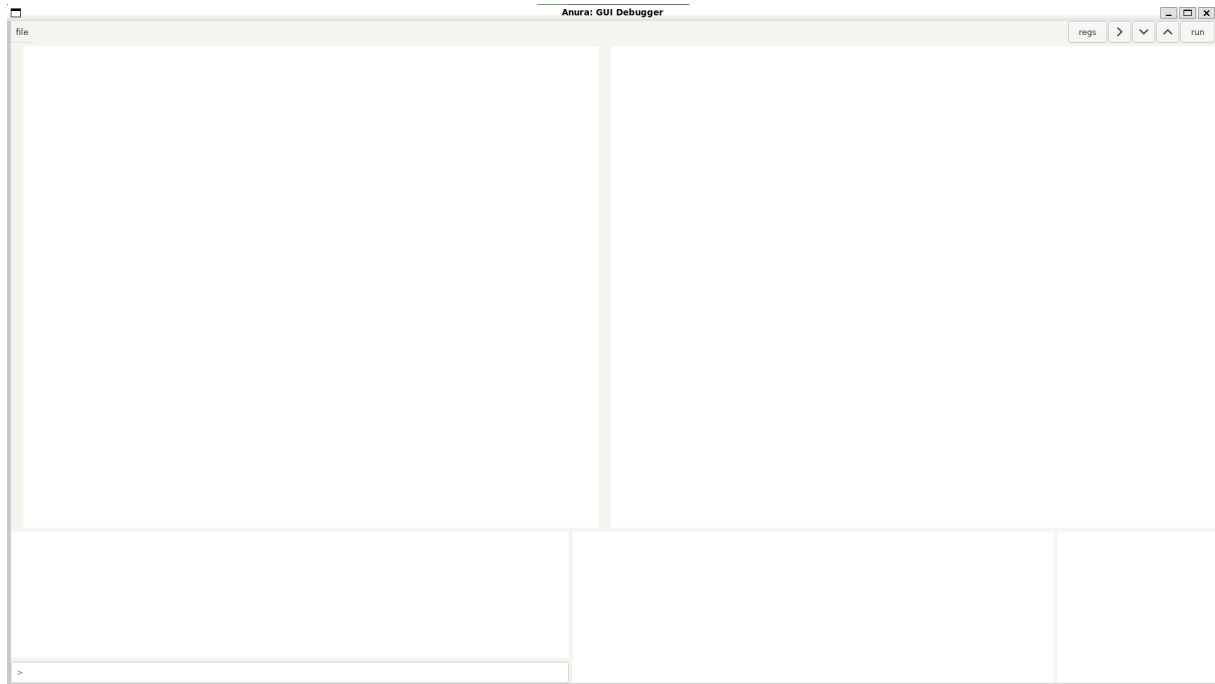


Figure 1: View on launch of Anura

Basic view

After opening a file much of the space will now have content. All the way on the left is the file explore dropper, this will contain a tree of the source files within your project. Next to this is the source code of the file that contains the main function, this scrollable view is not editable. On the right side is the disassembly of the current file, this follows Intel's syntax. Along side the disassembly is the current byte values at the addresses.

Below all of these are the terminals. The left terminal is the output of Anura, this includes logging information for parsing the files, this terminal also includes input which allows you to enter commands for Anura. The right terminal shows the output of your program as it executes, specifically the standard output.

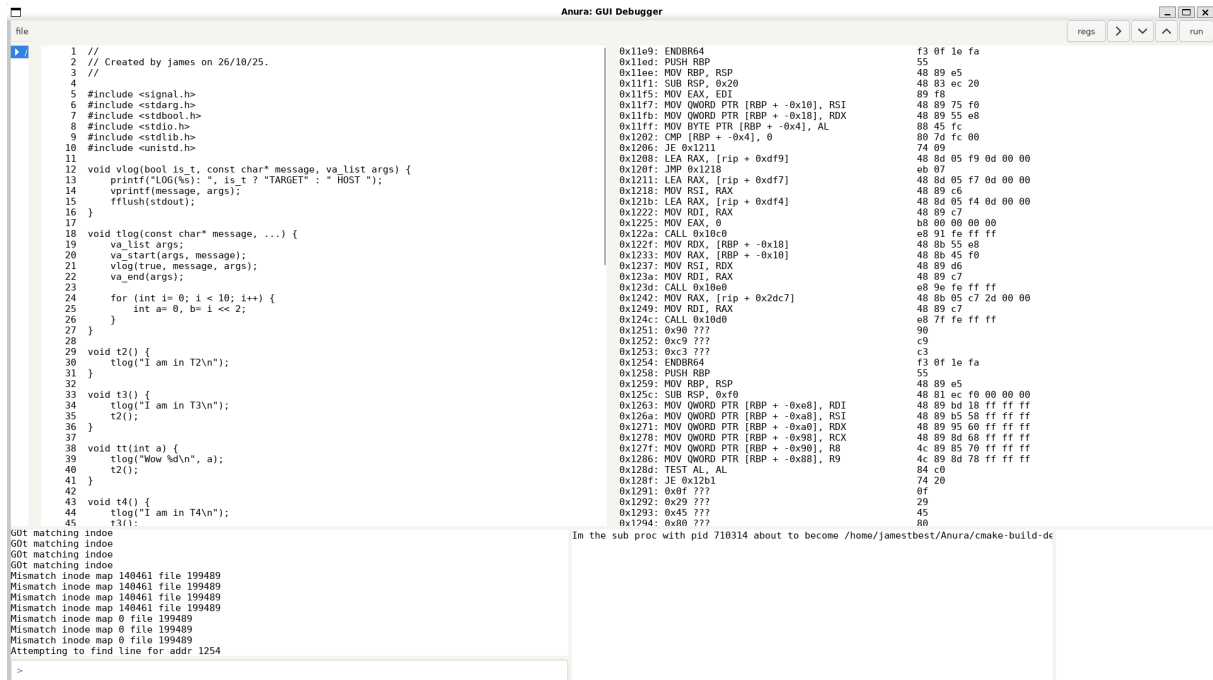


Figure 2: View after opening program

Breakpoints

The first interacting feature of Anura is placing breakpoints, this is done either through the terminal or by clicking in the gutter between the file view and source view. After adding a breakpoint a red circle will appear in both the source view on the line, and in the disassembly on the address.

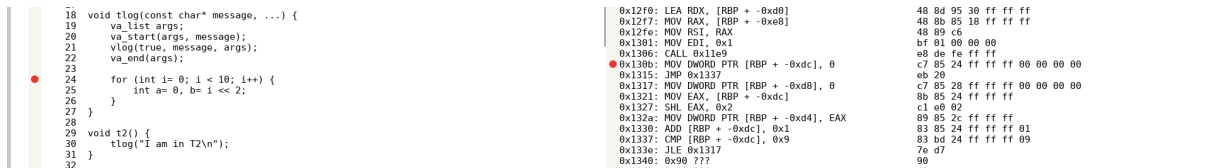


Figure 3: View after placing breakpoint