

Introduction ○○○○	Motivation ○○○○	Time Series ○○○○○○○○○○○○	Modeling Methodology ○○○○	Data Methodology ○○○○○○○○	Results ○○○○○○○○○○○○○○○○	Conclusions ○○	References
----------------------	--------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	-------------------	------------

# Using Time Series Models for Defect Prediction in Software Release Planning

James Tunnell  
Central Washington University  
Computational Science Program

March 30, 2015

Introduction ○○○○	Motivation ○○○○	Time Series ○○○○○○○○○○○○	Modeling Methodology ○○○○	Data Methodology ○○○○○○○○	Results ○○○○○○○○○○○○○○○○	Conclusions ○○	References
----------------------	--------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	-------------------	------------

# Outline

- 1 Introduction
- 2 Motivation
- 3 Time Series
- 4 Modeling Methodology
- 5 Data Methodology
- 6 Results
- 7 Conclusions
- 8 References

Introduction ●○○○	Motivation ○○○○	Time Series ○○○○○○○○○○○○	Modeling Methodology ○○○○	Data Methodology ○○○○○○○○	Results ○○○○○○○○○○○○○○○○	Conclusions ○○	References
----------------------	--------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	-------------------	------------

# Introduction

Introduction ●○○○	Motivation ○○○○	Time Series ○○○○○○○○○○○○	Modeling Methodology ○○○○	Data Methodology ○○○○○○○○	Results ○○○○○○○○○○○○○○○○	Conclusions ○○	References
----------------------	--------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	-------------------	------------

# Release Planning Objectives

- Two primary objectives of software release planning are:
  - Improving functionality
  - Maintaining quality
- Both of these objectives are constrained by limits on development time and cost.

Introduction ●○○○	Motivation ○○○○	Time Series ○○○○○○○○○○○○	Modeling Methodology ○○○○	Data Methodology ○○○○○○○○	Results ○○○○○○○○○○○○○○○○	Conclusions ○○	References
----------------------	--------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	-------------------	------------

# Quality Control

- Software defects (bugs) are inevitable
- Sufficient time should be available to ensure good quality (by testing and bug-fixing)
- Otherwise, there is a risk of
  - Low quality (failure to meet objective)
  - Schedule slip (failure to respect constraint)
- This quality control (QC) time can be allowed for by limiting the scope of work in the planned release

Introduction ●○○○	Motivation ○○○○	Time Series ○○○○○○○○○○○○	Modeling Methodology ○○○○	Data Methodology ○○○○○○○○	Results ○○○○○○○○○○○○○○○○	Conclusions ○○	References
----------------------	--------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	-------------------	------------

# Quality Control (cont'd)

- To support release planning, QC time can be estimated
- Assumption: QC time depends (at least partly) on the number of software defects introduced
- Then, a basis for estimating QC time would be the predicted number of defects

Introduction ● Motivation ○○ Time Series ○○○○○○○○○○ Modeling Methodology ○○○○○○ Data Methodology ○○○○○○ Results ○○○○○○○○○○ ○○ Conclusions References

## Defect Prediction

- Approaches to defect prediction tend to focus on either
  - Code analysis
    - Lines of code
    - Number of decisions
    - Code churn
  - Historical information
    - Regression analysis
    - Time series modeling
- A multivariate time series model with exogenous inputs was chosen

Navigation icons: back, forward, search, etc.

Introduction ○○○○ Motivation ●○○○ Time Series ○○○○○○○○○○ Modeling Methodology ○○○○○○ Data Methodology ○○○○○○ Results ○○○○○○○○○○ ○○ Conclusions References

## Motivation

Navigation icons: back, forward, search, etc.

Introduction ○○○○ Motivation ●○○○ Time Series ○○○○○○○○○○ Modeling Methodology ○○○○○○ Data Methodology ○○○○○○ Results ○○○○○○○○○○ ○○ Conclusions References

## Release Plan Optimization

- A release plan is formed by selecting features and improvements to work on
- Release plans can be compared by the expected revenue they will generate
- This optimization problem is posed as The Next Release Problem (NRP)

Navigation icons: back, forward, search, etc.

Introduction ○○○○ Motivation ●○○○ Time Series ○○○○○○○○○○ Modeling Methodology ○○○○○○ Data Methodology ○○○○○○ Results ○○○○○○○○○○ ○○ Conclusions References

## Release Plan Optimization (cont'd)

- The NRP is an abstract optimization problem
- In practice, QC time should be considered to ensure constraints are respected
- With the help of a defect prediction model, QC time can be estimated
- In this context, release plans are being compared
- For a defect prediction model to be useful, it should depend in some way on the basic elements of the release plan (planned new features and improvements)

Navigation icons: back, forward, search, etc.

Introduction ○○○○ Motivation ●○○○ Time Series ○○○○○○○○○○ Modeling Methodology ○○○○○○ Data Methodology ○○○○○○ Results ○○○○○○○○○○ ○○ Conclusions References

## Explanatory Model

- Assumption: the number of defects in the future depends on more than just the number of defects in the past
- A defect prediction model that depends only on previous numbers of defects is not explanatory
- Such a non-explanatory model would always predict the same number of defects

Figure : A non-explanatory model.

Navigation icons: back, forward, search, etc.

Introduction ○○○○ Motivation ●○○○ Time Series ○○○○○○○○○○ Modeling Methodology ○○○○○○ Data Methodology ○○○○○○ Results ○○○○○○○○○○ ○○ Conclusions References

## Explanatory Model (cont'd)

- A model could also depend on the key factors of a release plan
- This would be an explanatory model structure
- Such a model can potentially predict a different number of defects for every release plan

Figure : An explanatory model.

Navigation icons: back, forward, search, etc.

Introduction 0000	Motivation 0000	<b>Time Series</b> 0000000000 0000	Modeling Methodology 0000	Data Methodology 00000000	Results 000000000000 00	Conclusions	References
----------------------	--------------------	---------------------------------------	------------------------------	------------------------------	----------------------------	-------------	------------

# Time Series Modeling

Introduction 0000	Motivation 0000	<b>Time Series</b> ●00000000 0000	Modeling Methodology 0000	Data Methodology 00000000	Results 000000000000 00	Conclusions	References
----------------------	--------------------	--------------------------------------	------------------------------	------------------------------	----------------------------	-------------	------------

# Time Series

- A time series is a collection of observations that occur in order
- The process underlying a time series is assumed to be stochastic (non-deterministic)
- Each observation might depend on one or more previous observations
- This dependence is termed *autocorrelation*

Introduction 0000	Motivation 0000	<b>Time Series</b> ●00000000 0000	Modeling Methodology 0000	Data Methodology 00000000	Results 000000000000 00	Conclusions	References
----------------------	--------------------	--------------------------------------	------------------------------	------------------------------	----------------------------	-------------	------------

# Autoregressive Models

- A basic autoregressive (AR) model is a linear combination of previous values
- A white noise term accounts for stochastic fluctuation
- An  $AR(p)$  model for predicting a value  $X$  at time  $t$  is

$$X_t = c + \sum_{i=1}^p \phi_i X_{t-i} + \epsilon_t \quad (1)$$

where  $\phi_1, \phi_2, \dots, \phi_p$  are the  $p$  parameters,  $c$  is a constant, and  $\epsilon_t$  is the white noise term

Introduction 0000	Motivation 0000	<b>Time Series</b> ●00000000 0000	Modeling Methodology 0000	Data Methodology 00000000	Results 000000000000 00	Conclusions	References
----------------------	--------------------	--------------------------------------	------------------------------	------------------------------	----------------------------	-------------	------------

# Autoregressive Models (cont'd)

- Extending the AR model to be multivariate results in a Vector AR (VAR) model
- This model can support time series for defect count, improvements, and new features

Introduction 0000	Motivation 0000	<b>Time Series</b> 000●000000 0000	Modeling Methodology 0000	Data Methodology 00000000	Results 000000000000 00	Conclusions	References
----------------------	--------------------	---------------------------------------	------------------------------	------------------------------	----------------------------	-------------	------------

# Endogeneity and Exogeneity

Endogeneity

- Under a VAR model, the behavior of each time series is explained by both its own past values and the past values of the other time series
- This makes the variables *endogenous*

Exogeneity

- An alternative to this is when a variable is not explained at all by a model
- Rather, the variable is used to explain other time series
- This type of explanatory variable is called *exogenous*

Introduction 0000	Motivation 0000	<b>Time Series</b> 000●000000 0000	Modeling Methodology 0000	Data Methodology 00000000	Results 000000000000 00	Conclusions	References
----------------------	--------------------	---------------------------------------	------------------------------	------------------------------	----------------------------	-------------	------------

# Endogeneity and Exogeneity (cont'd)

- The desired model does not need to explain features and improvements
- Instead, these are used to explain defects
- Planned features and improvements can be made exogenous
- By also considering exogenous variables, a VAR model would become a VARX model

## Stationarity

- A stationary time series has time-invariant statistics
- The time series models so far require time series to be stationary
- Differencing a non-stationary series may produce a stationary series
- Stationary can be determined by testing for trends

## Deterministic Trends

- A time series with a deterministic trend has a non-constant mean
- The time series movements will generally follow the deterministic function
- Fluctuations above or below this function are non-permanent
- Such a time series is said to be stationary around a deterministic trend

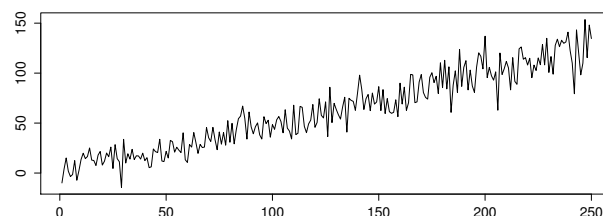


Figure : Time series with a deterministic trend.

## Stochastic Trends

- A stochastic trend shows permanent effects due to random variations
- A series with stochastic trend will not necessarily fluctuate only close to the area of a deterministic function
- A time series with stochastic trend is non-stationary
- Differencing can be used to remove a stochastic trend

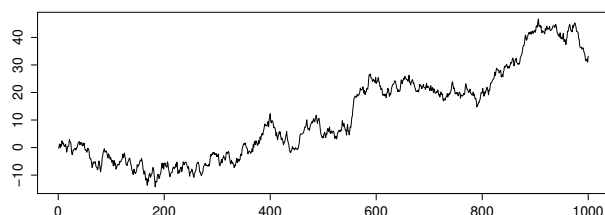


Figure : Time series with a stochastic trend.

## Stationarity Testing

- A pure AR model of a time series with stochastic trend contains a unit root [4]
- Testing for the presence of a unit root can therefore be used to test for non-stationarity
- A unit-root test starts with the null hypothesis that an AR model has a unit root
- The alternative hypothesis is that an AR model of the time series does not have a unit root
- Next, a test statistic is measured
- If the test statistic is below the chosen significance level, the null hypothesis is rejected
- Rejecting the null hypothesis provides reason to accept the alternative hypothesis
- The Augmented Dickey Fuller (ADF) test is commonly used for unit root testing

## Stationarity Testing (cont'd)

- On the other hand is a stationarity test
- This test starts with the null hypothesis that a time series is stationary around a deterministic trend
- If the test statistic is above some significance level, this shows that the null hypothesis can be accepted
- Then the time series should be considered stationary
- The Kwiatkowski-Phillips-Schmidt-Shin (KPSS) test can be applied for testing stationarity.

## Modeling Methodology



Introduction
Motivation
Time Series
Modeling Methodology
Data Methodology
Results
Conclusions
References

0000
0000
0000000000
0000
00000000
0000000000
00

## Data Collection

- *MongoDB* uses *JIRA* for issue tracking and project management
- Issue data was exported from the project's JIRA web interface as XML data
- Issue data was extracted from the XML, and the following fields were kept:
  - Creation date
  - Resolution date
  - Type
  - Priority

Introduction
Motivation
Time Series
Modeling Methodology
Data Methodology
Results
Conclusions
References

0000
0000
0000000000
0000
00000000
0000000000
00

## Data Cleansing

- Not all of the data was preserved for modeling
- No-change issues
  - Only issues with resolution *fixed*, *complete*, or *done* were kept
  - Other issues did not result in any change, and were not included
- Orphan sub-tasks
  - Issues that are sub-tasks are first converted to be the same type as the parent issue
  - Sub-tasks whose parent issue is not in the dataset are considered orphans, and discarded
  - Orphan sub-tasks can not be identified as improvement or new feature
  - 20 (0.28%) orphaned sub-tasks were in the dataset

Introduction
Motivation
Time Series
Modeling Methodology
Data Methodology
Results
Conclusions
References

0000
0000
0000000000
0000
00000000
0000000000
00

## Data Sampling

- The dataset was operated on to prepare it for time series modeling
- First, data was sampled at regular intervals, measuring
  - Number of bugs created
  - Number of improvements resolved
  - Number of new features resolved
- A 7-day sampling period was used

Introduction
Motivation
Time Series
Modeling Methodology
Data Methodology
Results
Conclusions
References

0000
0000
0000000000
0000
00000000
0000000000
00

## Data Sampling (cont'd)

Figure : Sampling example issue data.

Period	Improvements Resolved	New Features Resolved	Bugs Created
1	0	0	1
2	1	1	1
3	1	0	1

Table : Results of sampling example issues.

Introduction
Motivation
Time Series
Modeling Methodology
Data Methodology
Results
Conclusions
References

0000
0000
0000000000
0000
00000000
0000000000
00

## Establishing Stationarity

- Establish stationarity by testing
  - ADF unit root test
  - KPSS stationarity test
- If test results agree, then no differencing is necessary
- Otherwise, difference data and retest

Introduction
Motivation
Time Series
Modeling Methodology
Data Methodology
Results
Conclusions
References

0000
0000
0000000000
0000
00000000
0000000000
00

## Time Windowing

- Assumption: the software development process underlying a given project might change over time
- The VARX model does not accommodate a changing process
- To account for a changing process, data will be time windowed
- Data will be used for modeling only if it occurs within the time window
- This should limit the amount of process change the model is exposed to

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

○○○○ ○○○○ ○○○○○○○○○ ○○○○ ○○○○○○○○ ○○○○○○○○○○○ ○○

## Results

◀ ▶ 🔍 ↺ ↻ ⌂

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

○○○○ ○○○○ ○○○○○○○○○ ○○○○ ○○○○○○○○ ○○○○○○○○○○○ ○○

## MongoDB Time Series Data

Time series data was obtained by sampling the *MongoDB* dataset with a 7-day sample period

Figure : MongoDB time series data

◀ ▶ 🔍 ↺ ↻ ⌂

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

○○○○ ○○○○ ○○○○○○○○○ ○○○○ ○○○○○○○○ ○○○○○○○○○○○ ○○

## Stationarity & Differencing

- At first, ADF and KPSS test results disagreed
- After differencing, test results agreed

Figure : MongoDB time series data after differencing

◀ ▶ 🔍 ↺ ↻ ⌂

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

○○○○ ○○○○ ○○○○○○○○○ ○○○○ ○○○○○○○○ ○○○○○○○○○○○ ○○

## Time Windowing

- A 78-week time window (approximately 18 months) was chosen
- Three of these windowed periods, non-overlapping, were used for modeling
- Since the data is being differenced, the first sample (week) is skipped
- These windowed periods are denoted  $W_{2-79}$ ,  $W_{80-157}$ , and  $W_{158-235}$
- Modeling methodology is applied to each

◀ ▶ 🔍 ↺ ↻ ⌂

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

○○○○ ○○○○ ○○○○○○○○○ ○○○○ ○○○○○○○○ ○○○○○○○○○○○ ○○

## Model Specification, Estimation, and Diagnostic Checking

- Using  $K_{min} = 4$ , maximum model order is obtained by
 
$$p_{max} = \left\lfloor \frac{78}{(3)(4)} \right\rfloor = \lfloor 6.5 \rfloor = 6 \quad (3)$$
- Models of order 1 through  $p_{max} = 6$  were estimated for diagnostic checking
- All models were found to be stable
- Several model orders were found to be inadequate by the Ljung-Box test:
  - Orders 1-2 for period  $W_{2-79}$
  - Order 5 for period  $W_{158-235}$

◀ ▶ 🔍 ↺ ↻ ⌂

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

○○○○ ○○○○ ○○○○○○○○○ ○○○○ ○○○○○○○○ ○○○○○○○○○○○ ○○

## Model Selection

- Models found to be stable and not inadequate were considered for selection
- A different model was selected for each windowed period
- Lower AIC score is better

Model order	AIC score		
	$W_{2-79}$	$W_{80-157}$	$W_{158-235}$
1	N/A	<b>429.8</b>	<b>477.9</b>
2	N/A	439.3	482.4
3	400.8	440.9	489.7
4	<b>400.3</b>	450.2	499.9
5	404.0	456.7	N/A
6	414.9	461.7	508.8

Table : Results of model selection, using AIC score to compare models of different order.

◀ ▶ 🔍 ↺ ↻ ⌂

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

## One-step Predictions

The fit for each selected model is demonstrated by plotting one-step predictions along with actual values.

Figure : Actual values (solid) vs. one-step predictions (dotted), for each model selected by AIC score.

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

## Forecasting Results

- A range of hypothetical future values for improvements and new features were used to make defect predictions
- This simulates the use of defect prediction for release planning
- Single-step, out-of-sample forecast
- Inputs were differenced, and difference was removed from output
- Results include 75% and 90% confidence intervals
- Forecast results are shown only for the first time window,  $W_{2-79}$

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

## Forecasting Results (cont'd)

- The actual number of improvements and features was 4 and 0
- Actual number of bugs was 18
- For the actual input values, the 90% confidence interval does not include 18

Table : Forecasting at the end of the first time window,  $W_{2-79}$ .

Improvements	Features	90% low	75% low	Mean	75% high	90% high
2	0	5.61	6.72	9.31	11.89	13.00
2	1	5.54	6.66	9.24	11.82	12.93
2	2	5.48	6.59	9.17	11.75	12.86
2	3	5.41	6.52	9.1	11.69	12.8
4	0	6.4	7.51	10.09	12.68	13.79
4	1	6.33	7.44	10.03	12.61	13.72
4	2	6.27	7.38	9.96	12.54	13.65
4	3	6.2	7.31	9.89	12.48	13.59

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

## Forecasting Results (cont'd)

- Low accuracy for the predictions is concerning
- For the next window,  $W_{80-157}$ , the actual number of future bugs was 17
- This was inside the 90% confidence interval, which spanned from 13.38 to 18.00
- This result conflicts with that of the previous window

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

## Sliding Window Forecasts

- How useful is the VARX model in general, considering these conflicting results?
- To find out, a sliding 78-week window was used
- The sliding window started at the first sample period, and was shifted by one sample period after modeling
- Only the actual number of improvements and features were used in this forecasting

Introduction Motivation Time Series Modeling Methodology Data Methodology **Results** Conclusions References

## Sliding Window Forecasts (cont'd)

- Errors between the mean forecasted and actual number of bugs is shown as a histogram
- The histogram appears to be normally distributed (good)
- The variability is quite large (bad)
- The actual number of bugs was inside the 90% confidence interval for 23.87% of the sliding window ranges

Figure : Histogram of errors in forecast mean obtained using a 78-week sliding window.







## Conclusions



- ## Future Work

## References I

## References I

-  F. Akiyama.  
An example of software system debugging.  
In *IFIP Congress (1)*, volume 71, pages 353–359, 1971.
-  S. Bisgaard and M. Kulahci.  
*Time series analysis and forecasting by example*.  
John Wiley & Sons, 2011.
-  G. E. P. Box, G. M. Jenkins, and G. C. Reinsel.  
*Time Series Analysis*.  
John Wiley, 2008.
-  P. H. Franses.  
*Time series models for business and economic forecasting*.  
Cambridge university press, 1998.

## References III

-  N. Nagappan and T. Ball.  
Use of relative code churn measures to predict system defect density.  
In *Software Engineering, 2005. ICSE 2005. Proceedings. 27th International Conference on*, pages 284–292. IEEE, 2005.
-  L. L. Singh, A. M. Abbas, F. Ahmad, and S. Ramaswamy.  
Predicting software bugs using arima model.  
In *Proceedings of the 48th Annual Southeast Regional Conference*, page 27. ACM, 2010.