


Milestone 4

Data Model:

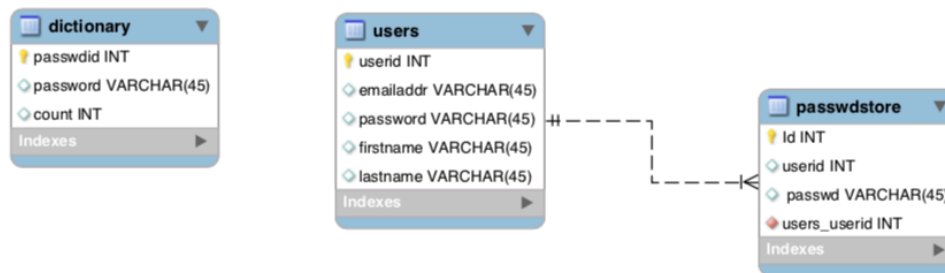

Instructions to populate DB for local deployment:

- To populate the database for local deployment, go to the `DevProjSrc` and run the config.sh file
 - To run our initialization, we are assuming you are using Postgres 10.5 and you have the `pip` command installed.
 - `config.sh` will install all python dependencies and then run the necessary scripts to fill the database.
 - This script will take a long time because it uploads ~14,000,000 records into the database but you can `^C` whenever you feel you have filled the database enough.
 - The python script that loads the database is written in python 2.7.x and most likely won't work with python3 due to small syntax errors.