

The title

Your name

Supervisor: Dr. A Anon

Submitted in partial fulfilment of the requirements for the degree of BSc Creative Computing of the University of London.

Department of Computing Goldsmiths, University of London

March 2020

I certify that this dissertation, and the research to which it refers, are the result of my own work.

Abstract

Aim for around 200–300 words to highlight the main points and contributions of your project.

Acknowledgements

Contents

1	Intro	oduction	8
	1.1	Motivation	8
	1.2	Aim	8
	1.3	Thesis structure	9
	1.4	Contributions	9
2	Back	ground	10
	2.1	Background	10
	2.2	Literature review	10
3	Spec	ification and design	11
	3.1	System design	11
4	Impl	ementation	12
	4.1	System architecture	12
	4.2	Software implementation	12
5	Softv	ware testing	14
	5.1	Unit testing	14
		5.1.1 Results	14
	5.2	Load testing	14
		5.2.1 Results	14
6	Eval	uation	15
	6.1	User testing	15
	6.2	Results	15
7	Con	clusions and further work	16
	7.1	Summary of contributions	16
	7.2	Further work	16
Α	Nota	ational conventions	17

List of Tables

5.1	This is some example data																																	1	4
-----	---------------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---	---

List of Figures

6.1 User ratings			1.
------------------	--	--	----

List of abbreviations

XXX something

Introduction

- 1.1 Motivation
- 1.2 Aim

1.3 Thesis structure

Chapter 7

1.4 Contributions

Contributions of this thesis are:

• Blah

Background

- 2.1 Background
- 2.2 Literature review

Foo (2017) propose...

Specification and design

3.1 System design

Diagrams would be good here.

Implementation

4.1 System architecture

4.2 Software implementation

Only include code where it's essential to make a point, e.g. a clever optimisation trick you implemented. Don't copy and paste lots of boilerplate code in your report, refer to your git repository.

Listing 1 Example of typesetting code. Keep code snippets short!

```
# Generate example data.
np.random.seed(13)
                                 # Seed the random number generator.
                                 # Number of observations.
n=50
happiness_levels = ['very sad', 'sad', 'neutral', 'happy',
                     'very happy']
happiness_prob = [0.05, 0.2, 0.3, 0.35, 0.1]
s = pd.Series(np.random.choice(happiness_levels, n,
                                p=happiness_prob),
              name='happiness')
# Set correct data type.
s = s.astype(
    pd.api.types.CategoricalDtype(
        ordered=True,
        categories=happiness_levels))
# Compute percentages.
pc = s.value_counts(sort=False, normalize=True) * 100
# Plot.
ax = pc.plot.bar(rot=0)
ax.yaxis.set_major_formatter(
    mpl.ticker.PercentFormatter(decimals=0))
ax.set_xlabel('happiness raitings')
plt.show()
```

Software testing

- 5.1 Unit testing
- 5.1.1 Results

Table 5.1: This is some example data

id	a	b
0	1	2
1	3	4
total	4	6

- 5.2 Load testing
- 5.2.1 Results

Evaluation

6.1 User testing

6.2 Results

Figure 6.1 shows...

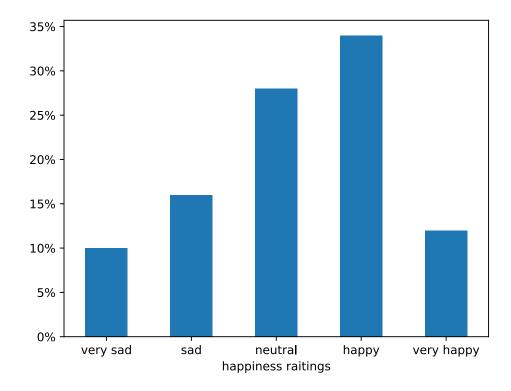


Figure 6.1: User ratings

Conclusions and further work

- 7.1 Summary of contributions
- 7.2 Further work

Appendix A

Notational conventions

```
S = {...}
                               the set S
S \times S'
                               the Cartesian product of S and S'
|S|
                               the cardinality of S
                               the empty set
\mathbb{R}
                               real numbers
\mathbb{R}^+
                               positive real numbers
\mathbb{R}^k
                               k-dimensional real vector space
\mathbb{Z}
                               integer numbers
\mathbb{Z}^+
                               positive integer numbers
\mathbb{N}
                               non-negative integer numbers
                               inclusive real-number interval between x and y
[x, y]
                               inclusive integer-number interval between \boldsymbol{x} and \boldsymbol{y}
[x..y]
\mathbf{v} = \langle ... \rangle
                               the vector \mathbf{v}
\mathbf{M} = [m_{ij}]
                               the matrix M
\mathbf{m}_{i}^{j} = \left\langle e_{1}, e_{2}, \dots, e_{j} \right\rangle
                              the ordered sequence of length j \in \mathbb{Z}^+, indexed by i \leq j
                               tuple concatenation: \langle 0, 1 \rangle \| \langle 2, 3 \rangle \rightarrow \langle 0, 1, 2, 3 \rangle
                               the symbol denoting undefined
```

Bibliography