


Figure 2. Fixed-Mass Fingerprint

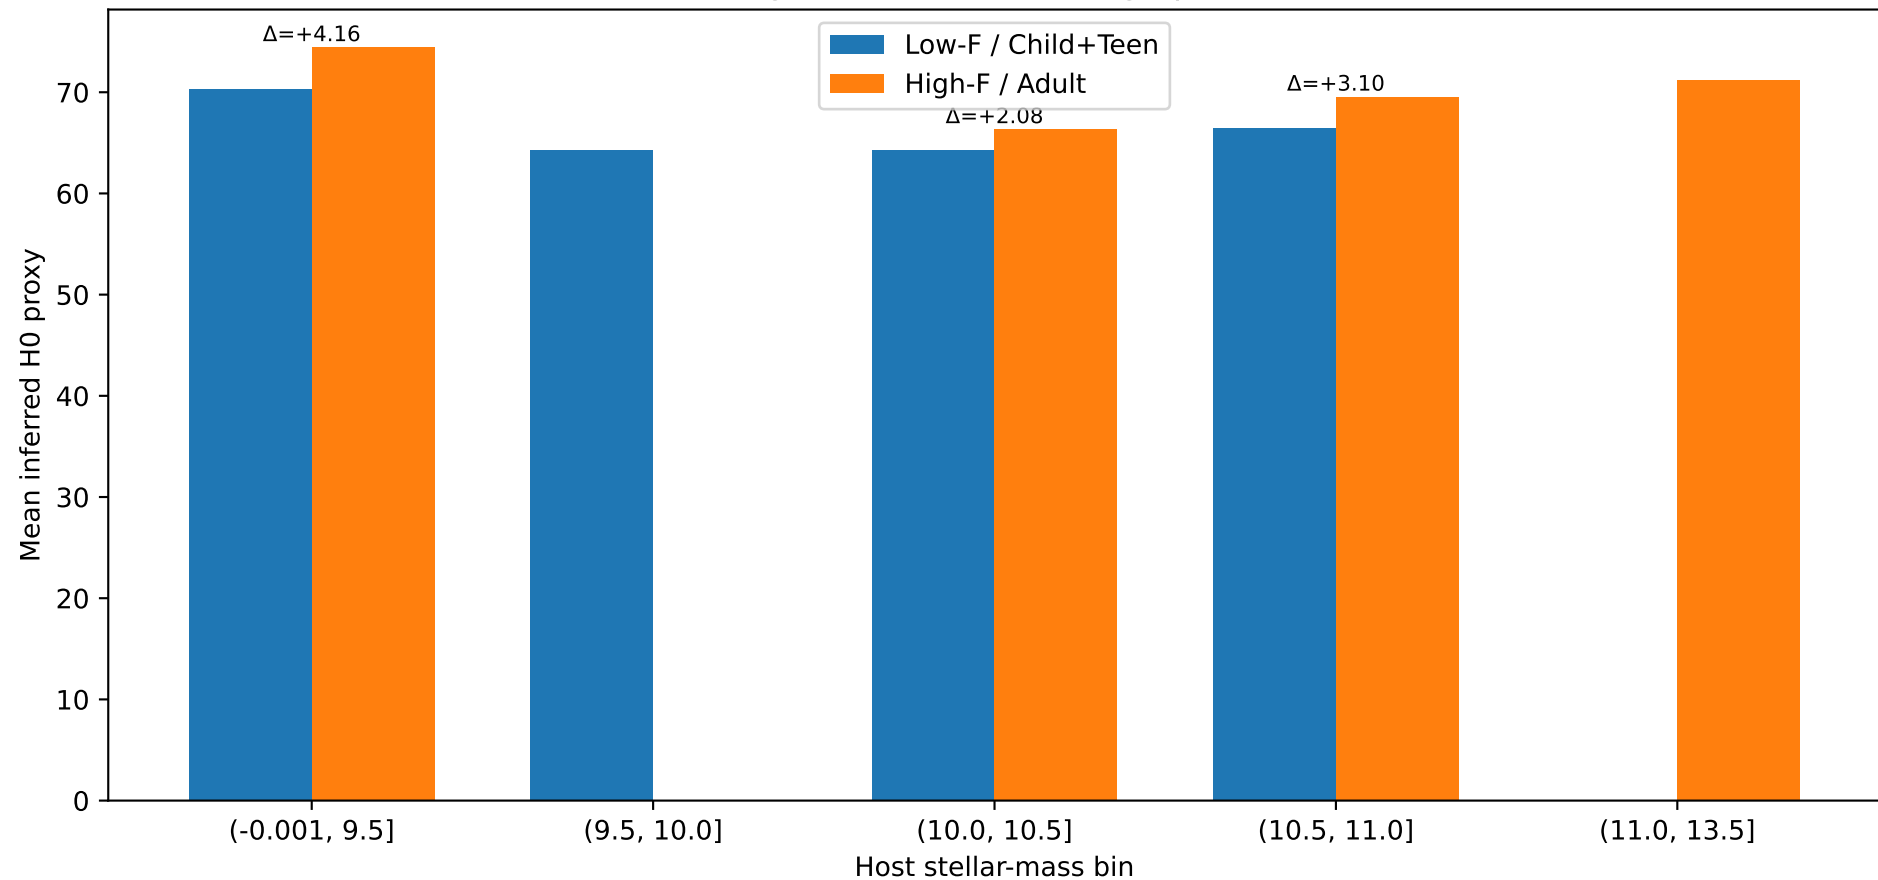

Within fixed mass bins, High-F hosts generally return higher H0 proxies than Low-F hosts.