

ARROW FUNCTIONS

Umumiy sintaksis: (arg1, arg2) => { ... }

argumentsiz/parametrsiz

Bir juft bo'sh qavslar talab qilinadi

faqatgina bitta argument/parametr

Qavslar unutilishi mumkin


faqatgina bitta expression bo'lsa script da

$$(a, b) => a + b$$

Curly braces'lar unutishi mumkin va javob return qilinadi

birdan ortiq expression'lar bo'lsa

Curly braces va return statement talab qilinadi

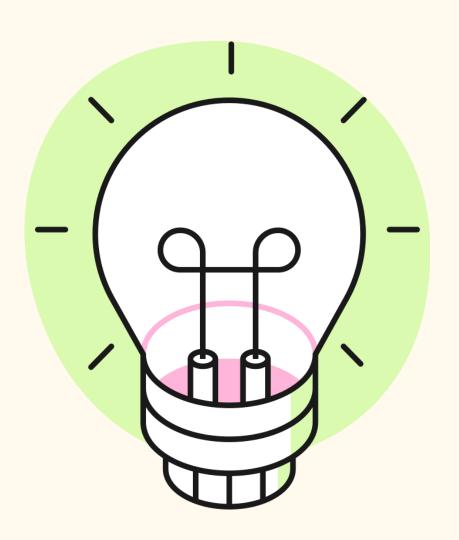

XULOSA

- 1. Arrow Functions
- 2. Standard argumentlar
- 3. Rest Operator
- 4. Funksiya ichida funksiya yaratish
- 5. Callback funksiyalarni tushunish
- 6.bind()