

HTTP

My Collection > Post data

POST

▼

http://localhost:3100/students

☰ Docs

● Params

Authorization

Headers 8

Body ●

Scripts ●

Settings

Query Params

Key	Value	Description
Key	Value	Description

Body

Cookies

Headers 7

Test Results 3/3

🕒

201 Created



• 53 ms • 436 B • 🌐

{ } JSON ▼


▶ Preview

🔗 Visualize ▼

```
1  {
2    "name": "ARUN",
3    "age": 21,
4    "course": "AI&DS",
5    "email": "thodetiarun@klh.edu.in",
6    "_id": "6ac26194ac315154738c2ca3",
7    "createdAt": "2026-10-04T14:24:20.057Z",
8    "updatedAt": "2026-10-04T14:24:20.057Z",
9    "__v": 0
10 }
```

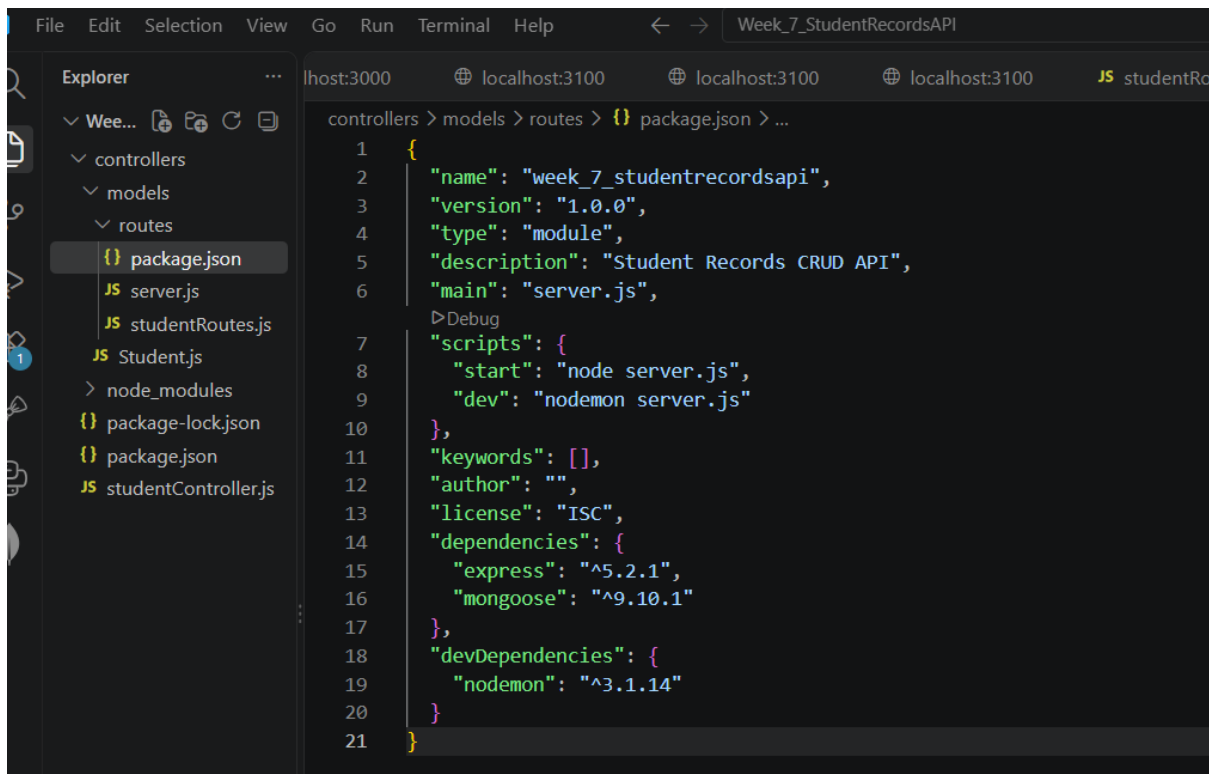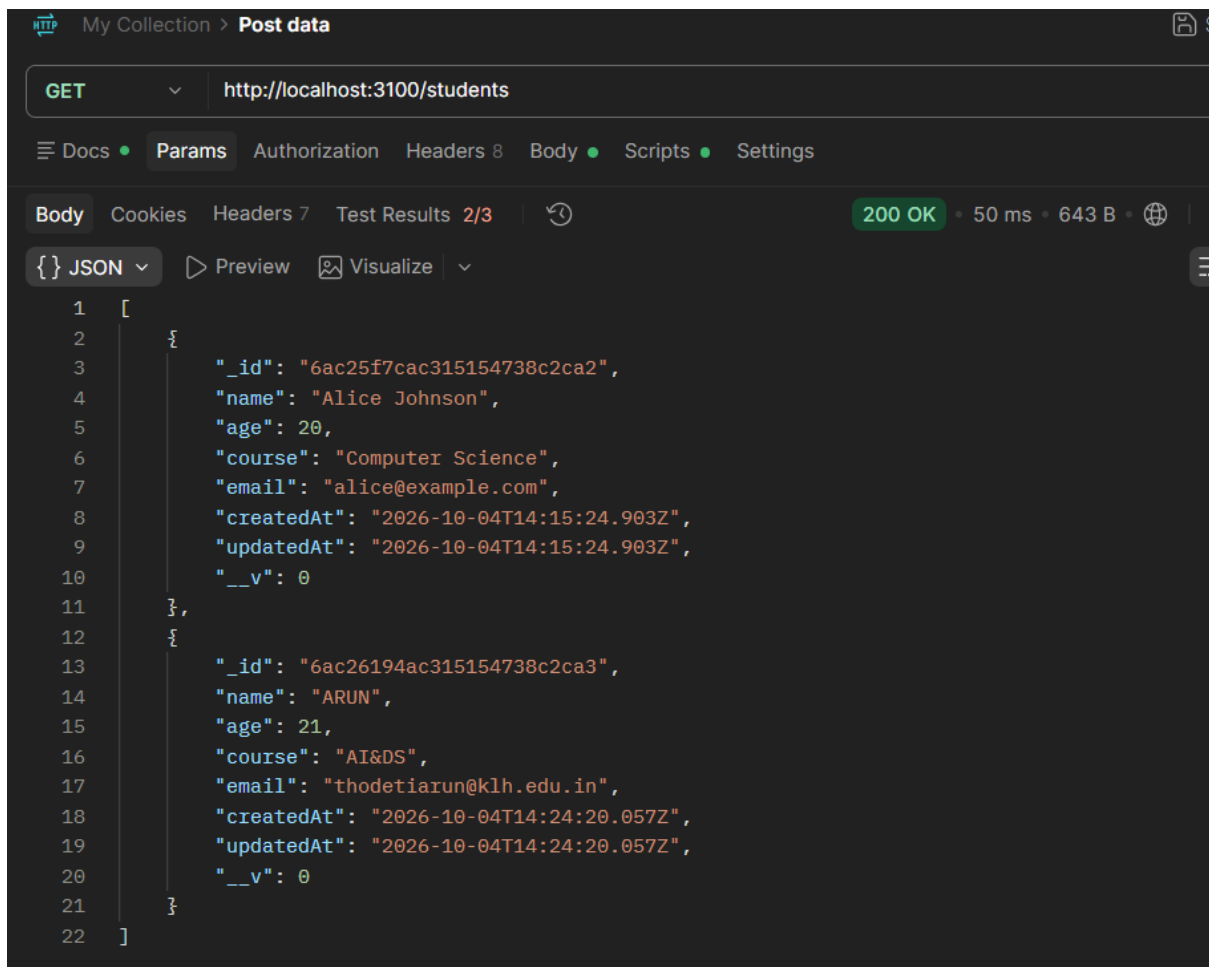


```
File Edit Selection View Go Run Terminal Help Week_7_StudentRecordsAPI
localhost:3100 localhost:3100 localhost:3100 JS studentRoutes.js package.
Explorers
  Wee...
  controllers
  models
  routes
    {} package.json
    JS server.js
    JS studentRoutes.js
    JS Student.js
  > node_modules
  {} package-lock.json
  {} package.json
  JS studentController.js
controllers > models > routes > JS server.js > then() callback > app.listen() callback
1 import express from 'express';
2 import mongoose from 'mongoose';
3 import studentRoutes from './studentRoutes.js';
4
5 mongoose.set('bufferCommands', false);
6
7 const app = express();
8 const PORT = process.env.PORT || 3000;
9
10 app.use(express.json());
11
12 app.get('/', (req, res) => {
13   res.json({
14     message: 'Student Records API is running'
15   });
16 });
17
18 app.use('/students', studentRoutes);
19
20 mongoose.connect('mongodb://127.0.0.1:27017/student_records', {
21   serverSelectionTimeoutMS: 5000,
22   maxPoolSize: 10
23 })
24 .then(() => {
25   console.log('MongoDB connected');
26   app.listen(PORT, () => {
27     console.log(`Server running on http://localhost:${PORT}`);
28   });
29 })
30 .catch((error) => {
31   console.error('MongoDB connection failed:', error.message);
32 });
```

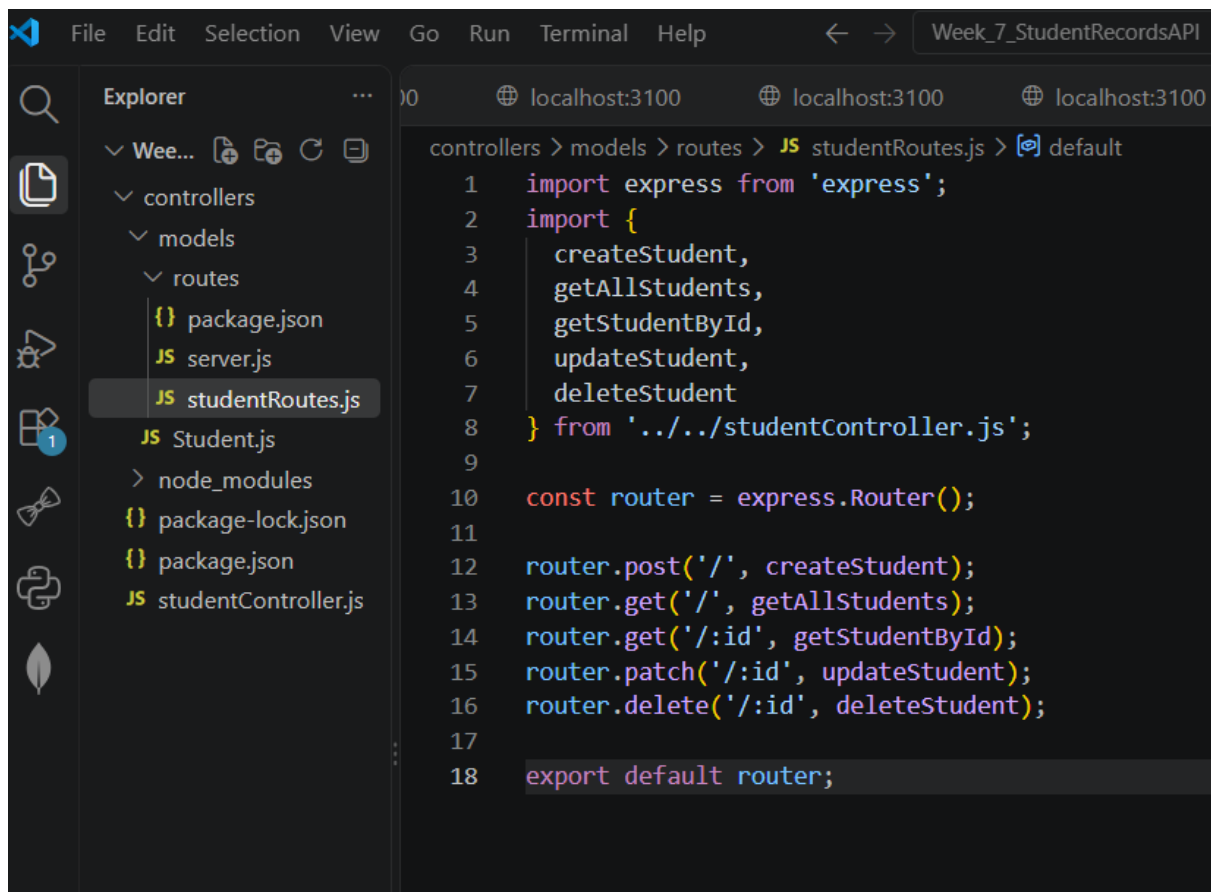


```
1 import mongoose from 'mongoose';
2
3 const studentSchema = new mongoose.Schema({
4   name: {
5     type: String,
6     required: true,
7     trim: true
8   },
9   age: {
10    type: Number,
11    required: true,
12    min: 16,
13    max: 100
14  },
15  course: {
16    type: String,
17    required: true,
18    trim: true
19  },
20  email: {
21    type: String,
22    required: true,
23    unique: true,
24    lowercase: true
25  }
26 }, {
27   timestamps: true
28 });
29
30 const Student = mongoose.model('Student', studentSchema);
31 export default Student;
```

```
6   "packages": {
1082     "node_modules/whatwg-url": {
1087       "dependencies": {
1090       },
1091       "engines": {
1092         "node": ">=18"
1093       }
1094     },
1095     "node_modules/wrappy": {
1096       "version": "1.0.2",
1097       "resolved": "https://registry.npmjs.org/wrappy/-/wrappy-1.0.2.tgz",
1098       "integrity": "sha512-DRseor9wL6EvV2+TuQn63dMkPjZ/sp9XkgghTEbv9K1PS1xUsZ3u7/IQ04wxtcFB4bgpQPRcR
1099       "license": "ISC"
1100     }
1101   }
1102 }
1103
```

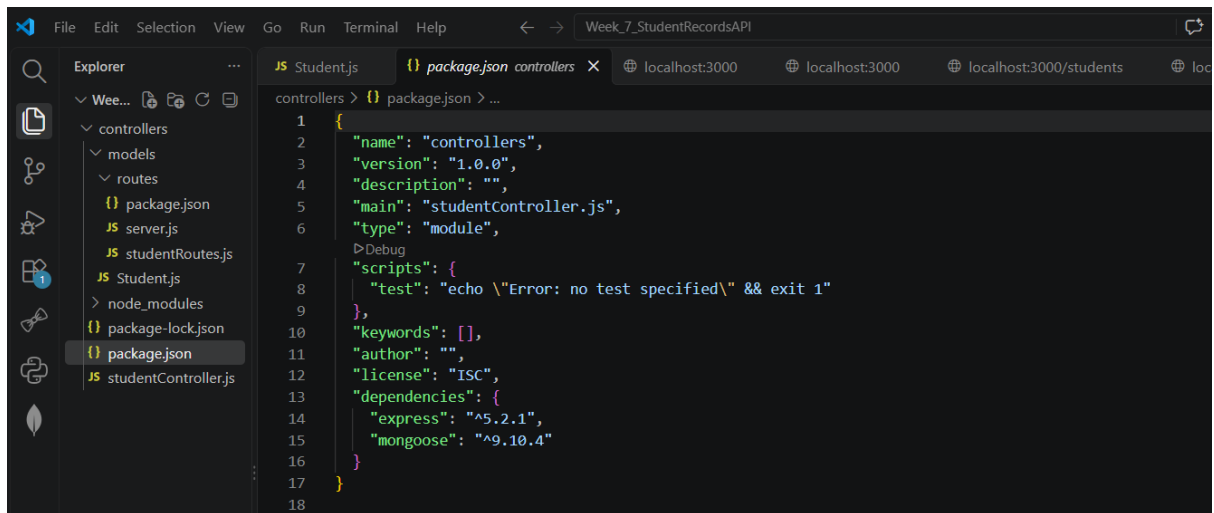

This screenshot shows the Visual Studio Code editor with the Explorer sidebar on the left. The Explorer shows a project structure with folders 'controllers', 'models', and 'routes'. Inside 'controllers', there are files 'package.json', 'server.js', 'studentRoutes.js', 'Student.js', 'package-lock.json', and 'studentController.js'. The main editor displays the 'package.json' file for the 'controllers' directory. The file contains the following JSON:

```
1 {
2   "name": "controllers",
3   "version": "1.0.0",
4   "description": "",
5   "main": "studentController.js",
6   "type": "module",
7   "scripts": {
8     "test": "echo \\\"Error: no test specified\\\" && exit 1"
9   },
10  "keywords": [],
11  "author": "",
12  "license": "ISC",
13  "dependencies": {
14    "express": "^5.2.1",
15    "mongoose": "^9.10.4"
16  }
17 }
```

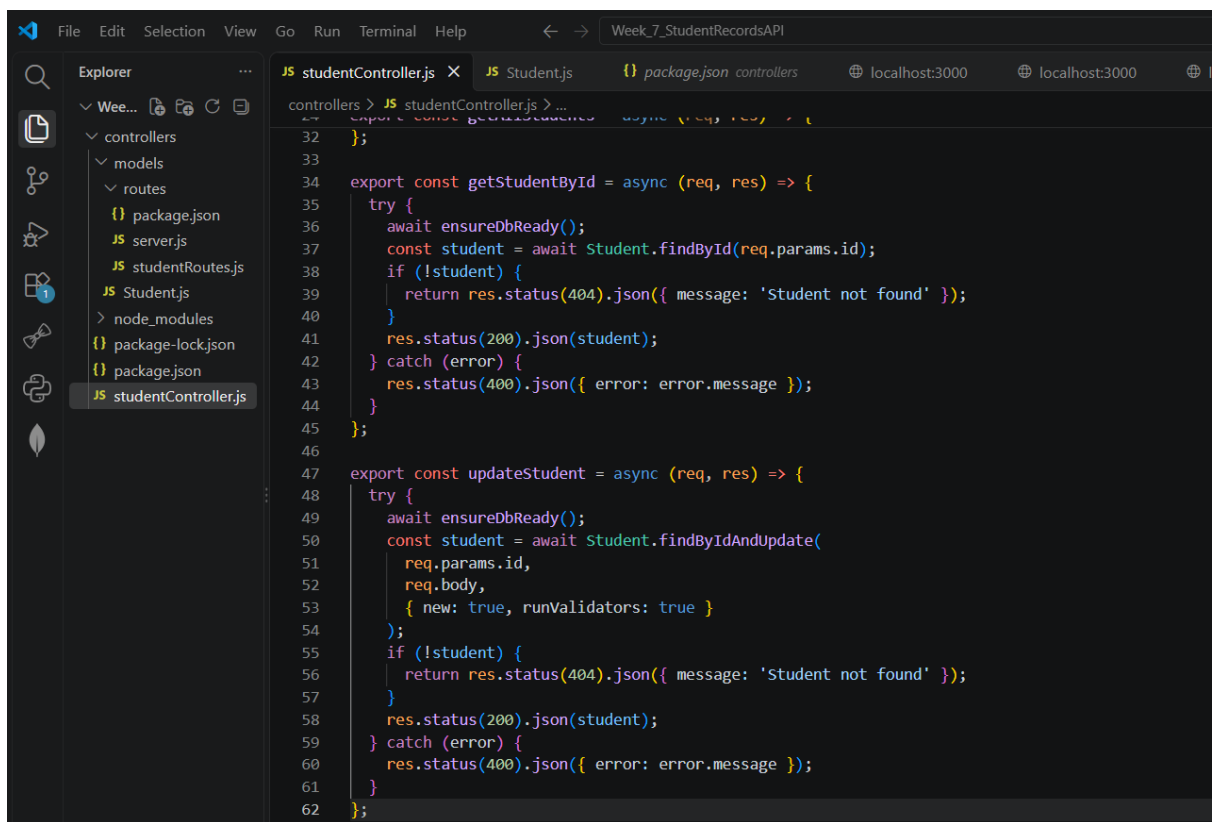

This screenshot shows the Visual Studio Code editor with the Explorer sidebar on the left. The Explorer shows the same project structure as the first screenshot, but now 'studentController.js' is selected. The main editor displays the 'studentController.js' file. The file contains the following JavaScript code:

```
32 }
33
34 export const getStudentById = async (req, res) => {
35   try {
36     await ensureDbReady();
37     const student = await Student.findById(req.params.id);
38     if (!student) {
39       return res.status(404).json({ message: 'Student not found' });
40     }
41     res.status(200).json(student);
42   } catch (error) {
43     res.status(400).json({ error: error.message });
44   }
45 };
46
47 export const updateStudent = async (req, res) => {
48   try {
49     await ensureDbReady();
50     const student = await Student.findByIdAndUpdate(
51       req.params.id,
52       req.body,
53       { new: true, runValidators: true }
54     );
55     if (!student) {
56       return res.status(404).json({ message: 'Student not found' });
57     }
58     res.status(200).json(student);
59   } catch (error) {
60     res.status(400).json({ error: error.message });
61   }
62 };
```